AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE OF PAGES
	1 78

2. AMENDMENT/MODIFICATION NO.	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQ. NO.	5. PROJECT NO. *(If applicable)*
0003	10/13/2026		

6. ISSUED BY CODE OCON

SMITHSONIAN INSTITUTION
MRC 1200
PO Box 37012
Washington DC 20013-7012

7. ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(No., street, county, State and ZIP Code)*

CODE FACILITY CODE

(x) 9A. AMENDMENT OF SOLICITATION NO.
33330226RT0010015

x 9B. DATED *(SEE ITEM 11)*
09/14/2026

10A. MODIFICATION OF CONTRACT/ORDER NO.

10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

☒ The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers ☐ is extended, ☒ is not extended.
Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended , by one of the following methods: (a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted ; or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted , such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM ONLY APPLIES TO MODIFICATION OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

CHECK ONE	
	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: *(Specify authority)* THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
	B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).
	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
	D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor ☐ is not ☐ is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION *(Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

A. The Solicitation Number cited above, NZP-DC: Construct Arabian Leopard Exhibit, located in Washington, DC, is hereby amended as follows:

A.1. Attached hereto and incorporated into this Amendment No. 3 are the following:
1. SI's responses to RFIs Nos. 53-224; and
2. The revised Bid Schedule dated October 9, 2026.

B. The 100% final documents are currently anticipated to be issued on October 19, 2026.

C. The 2nd site visit is scheduled for Friday, October 23, 2026, at 9 AM.

Continued ...

Except as provided herein, all terms and conditions of the document referenced in Item 9 A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF CONTRACTING OFFICER *(Type or print)*	
		Thomas Dempsey	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
_____ *(Signature of person authorized to sign)*		_____ *(Signature of Contracting Officer)*	

ITEM NO. (A)	SUPPLIES/SERVICES (B)	QUANTITY (C)	UNIT (D)	UNIT PRICE (E)	AMOUNT (F)
	The starting point will be Bus Lot Entrance, National Zoological Park, 3001 Connecticut Ave, NW, Washington, DC 20008. D. Offerors shall acknowledge receipt of all amendments to this solicitation signed and dated and submit with proposal. E. THE BID DUE DATE IS FRIDAY, NOVEMBER 13, 2026, AT 3:00 PM EST. F. Except as provided herein, all other provisions, terms and conditions of the Solicitation remain unchanged. END OF AMENDMENT THREE				

Bid Schedule (Firm Fixed Price)
Construct Arabian Leopard Facility (ALF)
Construction Services Phase 2 – Habitats & Animal Care Building

All work associated with Phase 2 – Habitats & Animal Care Bldg. as described in the 100% Final specifications and drawings.

Div	Description	Material	Labor	Equipment	OH & Profit	TOTAL
01	General Reqs / General Conditions	$ -	$ -	$ -	$ -	$ -
02	Existing Conditions	$ -	$ -	$ -	$ -	$ -
	HAZMAT	$ -	$ -	$ -	$ -	$ -
03	Concrete	$ -	$ -	$ -	$ -	$ -
04	Masonry	$ -	$ -	$ -	$ -	$ -
05	Metals	$ -	$ -	$ -	$ -	$ -
06	Wood, Plastics, and Composites	$ -	$ -	$ -	$ -	$ -
07	Thermal and Moisture Protection	$ -	$ -	$ -	$ -	$ -
08	Openings	$ -	$ -	$ -	$ -	$ -
09	Finishes	$ -	$ -	$ -	$ -	$ -
10	Specialties	$ -	$ -	$ -	$ -	$ -
11	Equipment	$ -	$ -	$ -	$ -	$ -
12	Furnishings	$ -	$ -	$ -	$ -	$ -
13	Special Construction	$ -	$ -	$ -	$ -	$ -
14	Conveying Systems	$ -	$ -	$ -	$ -	$ -
21	Fire Suppression	$ -	$ -	$ -	$ -	$ -
22	Plumbing	$ -	$ -	$ -	$ -	$ -
23	Heating, Ventilating and Air Conditioning	$ -	$ -	$ -	$ -	$ -
25	Integrated Automation	$ -	$ -	$ -	$ -	$ -
26	Electrical	$ -	$ -	$ -	$ -	$ -
27	Communications	$ -	$ -	$ -	$ -	$ -
28	Electronic Safety and Security	$ -	$ -	$ -	$ -	$ -
31	Earthwork	$ -	$ -	$ -	$ -	$ -
32	Exterior Improvements	$ -	$ -	$ -	$ -	$ -
33	Utilities	$ -	$ -	$ -	$ -	$ -
SUBTOTAL OF DIRECT COSTS:						$ -
					Home Office Overhead:	$ -
					Profit / Fee:	$ -
					Bonds and Insurance:	$ -
					TOTAL FIRM FIXED PRICE:	$ -

Prepared by: _____ Company: _____

Date: _____

PLEASE DO NOT ALTER THE FORM

Micropile Unit Prices - NOT INCLUDED IN TOTAL FIRM FIXED PRICE

Construct Arabian Leopard Facility (ALF)

Construction Services Phase 2 – Habitats & Animal Care Building

Reference Phase 2 – Habitats & Animal Care Bldg. 100% Final submission. Unit prices shall be provided for the items listed below in accordance with Specification Section 31 6333 – Micropiles. The unit prices shall be based on pricing assumptions consistent with those used to develop the micropile portion of the Total Firm Fixed Price on Page 1. These unit prices are provided solely for pricing authorized additions or deductions to the base contract work and shall not be added to the Total Firm Fixed Price. Unit prices shall be incorporated into the awarded Contract and applied to authorized changes in accordance with the measurement and payment provisions of Section 31 6333.

Item No.	Description	Unit of Issue	Unit Price
31 6333-1	Additional micropile length beyond the contract-required length	Linear foot	$ _____/ LF
31 6333-2	Deduction for reduced micropile length below the contract-required length	Linear foot	$ _____/ LF
31 6333-3	Additional sacrificial micropile and load test for compression and tension allowable loads	Each	$ _____
31 6333-4	Additional sacrificial micropile and load test for lateral allowable loads	Each	$ _____

Prepared by: _____ Company: _____

Date: _____

PLEASE DO NOT ALTER THE FORM

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
1	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139	I know that RFIs are due on 9/30 but considering we only have the 65% design set of documents, will there be another opportunity for RFIs once the 100% bid docs are released in October? Any feedback you can give me on this will be appreciated.	The 100% Final bid documents are forthcoming via an amendment, anticipated to be issued on October 13, 2026 due to 10/12/25 being a federal holiday. A second, two-week period for pre-bid RFIs has been accounted for in the procurement schedule and will take place from 10/12/26 thru 10/23/26. However, as noted in the SF 1442 request for proposal, Offerors are strongly encouraged to begin preparation of their Technical Proposal in advance of receiving the 100% Final CDs and to submit any administrative or technical pre-bid RFIs sooner rather than later. THE DATE AND TIME ESTABLISHED FOR SUBMISSION OF BOTH THE TECHNICAL PROPOSAL AND THE PRICING PROPOSAL ARE FIRM --- NOVEMBER 13, 2026 AT 3:00 PM EST. OFFERORS SHOULD NOT ANTICIPATE AN EXTENSION OF THE PROPOSAL DUE DATE.	9/23/2026	9/25/2026
2	EO 14603	Executive Order (EO) 14603 indicates that all federal projects valued at $35 million and above will require a project labor agreement (PLA) unless a federal contracting agency expressly grants an exception. As the expected project value is under this limit, please confirm if a project labor agreement will be required on this project.	PLA is not required.	9/23/2026	9/25/2026
3	NA	Please clarify if CAD/Revit files, or the project model can be shared for use in the RFP submission.	Yes, both 2D AutoCAD and the Revit model files will be provided with the forthcoming Addendum that issues the 100% Final dwgs. and specs on 10/13/26.	9/23/2026	9/25/2026
4	RFP, Section I: FAR 52.236-1 (page 52 of 139)	Please clarify if self performance requirements outlined in 52.236-1 of the Solicitation will be required for the project or if a reduction may be granted.	The self-performance requirement outlined in FAR 52.236-1 will apply to this project. The Contractor shall perform on the site, and with its own organization, work equivalent to at least 12% percent of the total amount of work to be performed under the contract. No reduction to the 12% self performance requirement will be granted.	9/23/2026	9/25/2026
5	65% Specifications Section 01 3200, Paragraph 1.3.B	Please confirm a cost loaded schedule is required per 1.3.B of specification section 013200.	The cost loaded schedule will be required at the beginning of the project and a "normal" CPM schedule will be deemed acceptable for updates at the COTR's descretion.	9/23/2026	9/25/2026
6	NA	Due to the aggressive period of performance timeframe, and long lead items on many materials and equipment, Saturdays will be needed to maintain the schedule. Please confirm Saturday's will be made available for construction outside of holidays and special events.	The current project timeline does not include weekend or night work. Special cases can be accomodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/23/2026	9/29/2026
7	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139.	Per the RFP, the deadline for RFI's is 9/30/26. However, 100% CD's will not be issued until 10/12/26. Will there be a second round of RFI's to address any questions with the final bid documents? If so, please outline the timing for round 2 RFI's.	Please see response to pre-bid RFI no. 1 above.	9/23/2026	9/25/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
8	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139.	Per the RFP, the deadline for RFI's is 9/30/26. However, 100% CD's will not be issued until 10/12/26. Will there be a second round of RFI's to address any questions with the final bid documents? If so, please outline the timing for round 2 RFI's	Duplicate of pre-bid RFI no. 6	9/23/2026	9/25/2026
9	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	Requirements outlined under FACTOR 2, Section d) of the RFP (Page 104 of 139) notes reference requirements for key Subcontractor packages. Section e) notes resumes needed. Please clarify if the resumes are for the General Contractor, or for the key Subcontractors.	For each of the eight subcontractors listed in FACTOR 2, paragraph d), provide the name of the company and three referances. Resumes for subcontractors are not required. In accordance with FACTOR2 paragraph c) provide a resume for each proposed team member for Construction Services. The Construction Services team is defined at the bottom of page 104 of 139. It consists of a Senior Project Manager, the Superintendent, a Senior Cost Estimator, and a Project Engineer and is hereby ammended to remove the Cost Estimator requirement and include the Site Safety Manager and the Quality Control Manager. Therefore, a total of five resumes are required to be submitted in Tab No. 09 - Resumes of the Technical Proposal.	9/23/2026	9/28/2026
10	65% Specifications Section 01 1000, Paragraph 1.2.3.b AND 65% Drawings Sheet S-001	Specification Section 01 1000-2, 1.2, 3, b and notes on S-001 reference a Geotech report dated 3/13/26 as related documents. This document does not appear to have been provided as part of the RFP documents, and is critical to the subsurface pricing, including micropiles, dewatering, etc. Please provide as quickly as possible.	The Geotech report dated 3/13/26 was provided with Step 1 QSP of this Phase 2 solicitation originally uploaded to SAM.gov on 6/22/2026. A second copy is uploaded with this set of responses for ready reference.	9/23/2026	9/28/2026
11	65% Drawings Sheet S-001, Note 10	Referencing Note 10 on S-001, there appears to be SOE drawings to identity the support of excavation work which has not been provided. This information is critical to pricing for the trade package and is being requested as soon as possible.	Support of Excavation (SOE) drawings will not be provided. This is to be addressed as means and methods by the contractor.	9/23/2026	9/29/2026
12	65% Specifications Section 01 1000, Paragraph 1.2.3.b	Specification Section 01 1000-2, 1.2, 3, b notes a series of drawings which have not been provided as part of the current RFP. Please clarify if these documents are relevant to the current bid, and submit accordingly.	With the exception of the Acoustic and Geotech reports, the documents listed in Section 01 1000, Paragraph 1.2.3.b are relevant to Phase 1 - Early Site package only and are not part of the current bid. A conformed set of Phase 1 - Early Site drawings and specs are uploaded with this response FOR REFERENCE ONLY.	9/23/2026	9/25/2026
13	65% Drawings Sheet G-003CS	Grading plans identified on G-003CS do not appear to address the Phase 1 construction which is not within the current RFP. Please clarify site conditions and grades which will be turned over to the successful Phase 2 contractor.	All grading will be done by the Phase 2 contractor. The Phase 1 contractor will be responsible for demolition and utility bypass installations. The Phase 1 contractor will backfill their utility installations and they will also backfill the utilities they remove.	9/23/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
14	65% Drawings C-160SP thru C-166UP	Utility plans identified on the Civil documents (C-160SP – C-166UP) do not appear to address work which may be completed during the Phase 1 construction. Please clarify what work is to be completed in Phase 1, including any temporary systems and tie-ins not included in the current documents.	The Phase 1 contractor is responsible for the utility bypass work for storm, sewer, water, and electric. Work by the Phase 1 contractor will be denoted as such on the Phase 2 100% Final drawings to be issued 10/13/26.	9/23/2026	9/29/2026
15	NA	Perimeter controls including fencing and sediment and erosion control that are to be performed under Phase 1 of the project and turned over to the Phase 2 contractor are not provided in the GC. Please provide plans, and clarify these systems will be turned over to the Phase 2 contractor in functional condition.	The sound wall and security fence will be turned over to the Phase 2 contractor. The rental fence contract will be turned over to the Phase 2 contractor for continuation. The sediment and erosion control will remain in place to be turned over to the Phase 2 contractor, but the controls will need to be modified, as needed. These should be included in general conditions.	9/23/2026	9/29/2026
16	NA	Please verify any turned over work from Phase 1 to the Phase 2 contactor is not under rent. If it is under rent, please clarify all rental costs or provide an allowance for this work.	The chain link fence is under rental and the rental cost for fence should be included in the general conditions. The sound partition was purchased in Phase 1. The Phase 2 contractor shall remove the sound wall at the completion of Phase 2 work.	9/23/2026	9/30/2026
17	65% Specifications Section 01 1000, Paragraph 1.6.C AND Section 01 1000, Paragraph 4.2.E	In Specification Section 01 1000, 1.6., C work hours are listed as 6:00 AM – 3:30 PM. In Specification Section 01 1000 4.2 E, normal work hours are referenced at 6:00 AM-3:00 PM. Given the aggressive schedule of the project, we would request the project is able to work hours per DOB allowable working hours. Please clarify the work hours on the project.	For clarification, normal work hours will be from 6:00 AM to 3:30 PM. This will be corrected for consistency in the 100% Final Specifications. Unfortunately, we cannot extend the normal work hours to be in alignment with DOB allowable working hours due to restrictions agreed to with adjacent neighborhood organizations. Special cases can be accomodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/23/2026	9/25/2026
18	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139	Per page 4 of 139 of the RFP the Small Business Subcontracting Plan is outlined. Please clarify if the Small Business and Small Disadvantaged Business Subcontracting Plan shall be submitted as part of the overall proposal, or submitted by the successful bidder following subcontractor naming.	Please submit the Subcontracting Plan as part of the overall proposal. Submit separate PDF files for the Technical Proposal, Pricing Proposal, and Subcontracting Plan.	9/23/2026	9/25/2026
19	65% Specifications Section 01 1000, Paragraph 1.7.A.3	Specification section 01 1000 1.7.A.3 notes onsite contractor parking may be arranged in off-season operations. Can timing and costs of this option be shared for bid purposes?	Specification Section 01 1000 1.7.A.3 does not exist in the 65% specifications uploaded to SAM.gov with this solicitation. It also does not exist in the Phase 1 Early Site specifications provided previously with Phase 2 Step 1 QSP process. Further, a word search of those specifications does not find reference to off-season operations. Contractor parking is covered in 01 1000 4.2 Use of Premises Paragraphs C. (2) thru (5).	9/23/2026	9/29/2026
20	NA	The RFP documents do not appear to have a hazardous material report. Please confirm hazardous materials do not exist, or will be addressed in Phase 1 of the project and should be excluded by the Phase 2 Contractor.	To our knowledge hazardous materials do not exist on the site. If discovered, this will be treated as an unforseen condition.	9/23/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
21	RFP, Section B.4 Multi-Year Funding Form (page 9 of 139)	Per B.4 of the solicitation, the FY 27 funding is set to be $4,000,000. As FY 27 is approximately 40% of the period of performance, it is not believed $4,000,000 will accurately fund this portion of work. Please clarify if additional funds will be made available if needed, or what would happen in the event the FY 27 funding is not adequate to fund the project during that timeframe.	Yes, additional funds will be made available in FY27, if needed and applications for payment are validated by the COTR.	9/23/2026	9/28/2026
22	RFP, Attachment 9, Page 130 of 139	Attachment 9 of the Solicitation (page 130/139) includes a Request for Authorization of Additional Classification SF 1444. Please verify this form is to be utilized post-award and any missing classifications are to be requested via the RFI process.	Yes, that is correct. SF-1444 is used post award and should be requested through the RFI process.	9/23/2026	9/25/2026
23	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND RFP Section L.26 (page 93 of 139)	Page 4 of the RFP notes the subcontracting plan is a “goal” for the project. Per L.26 (page 93 of 139) the Small Business Subcontracting Plan does not list this as a goal. Please confirm the small business plan is a goal on the project.	The Small Business Subcontracting Goal is a minimum of 40% of the planned subcontracting dollars to be placed with small business concerns.	9/25/2026	9/29/2026
24	RFP, Section J (page 81 of 139) AND Attachment 6 (page 110 of 139) AND Section L.26 (page 93 of 139)	J-List of Documents, Exhibits and Other Attachments (page 81 of 139) Notes documents provided as part of the RFP. Attachment 6 provided on page 110 of 139 does not provide the form, but references Section L, L.28. We believe this is supposed to be L.26 referenced on page 93 of 139). A form has not been provided in L.26. Please provide the form for submission (if required for the RFP)	No specific form is provided for the Subcontracting Plan. The Plan shall include all information required by FAR 52.219-9 (d), as stated on page 32 of 139 of the solicitation.	9/25/2026	9/29/2026
25	RFP, Section F: 52.211-S0025 (d)(1) Page 17 of 139	Referencing 52.211-S0025, (d), (1) (page 17 of 139) schedule acceleration means including night shifts, overtime, Sundays and holidays. Please confirm these times are available for construction.	The current project timeline does not include weekend or night work. Special cases can be accompodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/25/2026	9/29/2026
26	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND RFP Section C.1 (page 11 of 139)	Regarding the 578 calendar days for period of performance, Page 4 notes this is from Notice to Proceed to substantial completion, while C.1 (page 11 of 139) notes it is to final completion. Please clarify if the period of performance is to substantial, or final completion.	The period of Performance is through final completion. The term substantial completion will not be used.	9/25/2026	9/29/2026
27	65% Specifications: Section 01 3200, Paragraph 2.2.D.5	Specification Section 01 3200, 2.2, D, 5 notes requirements for a cost loaded schedule. Based on the tight schedule timeframe, we would strongly recommend a tradition schedule be utilized be utilized to allow the schedule to be 100% on project scheduling efforts vs. invoicing. We believe a robust schedule of values, with detailed site verification walks will be most effective for the cost verification portion of the project. Please clarify if the cost loaded schedule requirements may be waived.	The cost loaded schedulle will be required at the beginning of the project and a "normal" CPM schedule will be deemed acceptable for updates at the COTR's descretion.	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
28	RFP, Section I: 52.225-11 (page 40 of 139) AND 52.225-11 (b)(3) Page 43 of 139	Clause 52.225-11 of the RFP (Page 40 of 139) notes Buy American requirements for the project, but does not appear to be updated to include any exceptions (see (b), (3) on page 43 of 139). Please clarify if the project has Buy American requirements. If this is the case, please verify that the project products outlined in the specifications have been coordinated with Buy American requirements.	Buy American requirement will apply to this project. No exceptions to the applicable Buy American requirements are provided under this solicitation. The contractor is responsible for ensuring that proposed products and materials comply with the applicable Buy American requirement set forth in FAR 52.225-11 and FAR 52.225-12, as included in the solicitation. Any request for an exception shall be submitted in accordance with the applicable FAR provisions and the requirements of the solicitation.	9/25/2026	9/29/2026
29	RFP, Section F: 52.211-S0025 (b)(4)(iii) Page 16 of 139	Section F, (b), (4), (iii) notes abnormal weather days are determined based on National Oceanic and Atmospheric Administration (NOAA) using the 10 year average. a. NOAA keeps data based on 30 years (1991-2020) or 15 years (2006-2020). Please clarify which is to be utilized b. In order to determine this value, clarification on the average rainfall value (1'', 2,", 3'', etc) is required. c. Please also clarify how the allowance is to be disclosed in the final pursuit for transparency.	According to Clause 52.211-S0025 (c)(4)(iii) on page 16 of the solicitation, the contractor is responsible for substantiating any claim of greater-than-normal inclement weather. The solicitation does not establish a specific rainfall threshold or a separate weather-day allowance.	9/25/2026	9/29/2026
30	65% Specifications Section 01 8113	Per specification section 01 8113 and other portions of the contract documents, this project is seeking certification of LEED certification. Please provide a LEED score card.	It has recently been determined this project does not have a formal LEED certification level requirement. However, waste demolition tracking will be required. The 100% Final Specification 01 8113 to be provided with 10/13/26 submission will be modified accordingly.	9/25/2026	9/29/2026
31	65% Specifications Section 01 8113 1.2.A and 15	Please clarify if this project is seeking LEED V4 BD+C per the Table of Contents (TOC-1) of the specifications (see SECTION 01 8113.15 – SUSTANABLE DEISIGN REQUIEMTNDS – LEED V4 BD+C) , or LEED 2029 per 01 8113, 1.2, A. Please verify the level of certification (Silver, Gold, Platinum, etc.)	Please see response to pre-bid RFI no. 30 above.	9/25/2026	9/29/2026
32	65% Specifications Section 01 8113	Per specification section 01 8113 and other portions of the contract documents, this project may be seeking certification of LEED V4 BD+C. In order to maintain waste management requirements, multiple dumpsters will need to be utilized to maintain waste streams. Please provide a location for multiple dumpsters which is acceptable to Smithsonian.	Please see response to pre-bid RFI no. 30 above.	9/25/2026	9/29/2026
33	RFP, Section H: 52.236-S0030 (page 26 of 139)	Referencing the solicitation, Section H, 52.236-S0030 Availability and Use of Utility Services (Page 26 of 183) confirm utility consumption on the project will be by Smithsonian.	Confirmed, utility consumption on the project will be by Smithsonian.	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
34	NA	As a site logistics plan has not been provided, please verify the access point for the project, include moving of workers, equipment and services, should be from the Bus Lot and across Olmsted Walk. Please clarify if there are any restrictions including scheduling, hours, duration, etc.	Traffic control to be provided per specification section 01 1000 1.6.G. The Phase 2 contractor shall have all deliveries flagged and cross the bus lot into the project entrance along Olmsted walk during non visitor hours. Limited exceptions will be considered upon request and approval by COTR.	9/25/2026	9/29/2026
35	NA	Based on site constraints and accessibility, dumpster locations will need to be provided by Smithsonian to ensure they meet facility and operation requirements. Please clarify if dumpsters are to be placed within the project site, and that pulls across Olmsted will be allowed, or if debris will have to be transported across Olmsted. If the latter, please clarify an offsite location for dumpsters.	Dumpsters to be placed within project site and dump loads to come in or out before or after zoo operating hours.	9/25/2026	9/29/2026
36	NA	Please verify rock excavation is not to be presumed on the site. If so, please provide an allowance to be carried on the project.	Rock excavation is not anticipated.	9/25/2026	9/29/2026
37	NA	Please verify dewatering of ground water is not expected on the project. If so, please provide a Geotech report outlining the groundwater conditions so a removal system can be engineered.	No dewatering system is required. The groundwater conditions were provided in the geotech report with the Phase 2, Step 1 QSP documents. A second copy is uploaded with this set of responses for ready reference.	9/25/2026	9/29/2026
38	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139	Please confirm if the RFI deadline will be extended until after the 100% Bid Set issuance scheduled for October as the new document set may incur additional clarifying questions from the market.	Please see response to pre-bid RFI no. 1 above.	9/25/2026	9/28/2026
39	NA	Please provide any CAD files and/or design models that SI has related to this document set for use during the technical proposal preparation. We'd appreciate if this could be sent as soon as possible.	Please see response to pre-bid RFI no. 3 above.	9/25/2026	9/28/2026
40	RFP, Factor 2, Section h) Page 104 of 139	Please confirm if an employee with the title Project Manager is acceptable as the Senior Project Manager as long as they meet the years of experience and similar project history requirements. (Please note that different companies have different org structures / title structures).	Acceptable as long as the years of experience and project history experience is met.	9/25/2026	9/29/2026
41	RFP, Factor 2, Section h) Page 104 of 139	Please clarify the intent of the Cost Estimator as part of the Construction Services Team throughout the duration of the project and if this is required or if their full time involvement can be reduced to the GC's discretion.	Per RFI No. 9 the requirement for a separate Cost Estimator has been removed.	9/25/2026	9/29/2026
42	RFP, Factor 2, Section h) Page 105 of 139	Per the RFP, the Site Safety Manager will manage a Site Safety Team and will directly report to the Senior Project Manager. Please confirm if there is flexibility in the reporting structure as long as all named roles are involved.	Flexibility in reporting structure is confirmed	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
43	RFP, Factor 2, Section h) Page 105 of 139	Per the RFP, the Quality Control Manager will manage a quality control team and will directly report to the Office of the Firm. Please confirm if there is flexibility in the team and reporting structure as long as all named roles are involved.	Flexibility in reporting structure is confirmed	9/25/2026	9/29/2026
44	RFP, Section B.4 Multi-year Funding Form (page 9 of 139)	Per the RFP and Multiyear Funding form, only $4M is secured for FY 2027. Please confirm this value is correct. If so, please confirm that the line item "TOTAL FY2027" for all bidders must equal $4M and the remainder of the project costs should be reflected in line item "TOTAL FY2028". Please also confirm that in turn, the schedule should only include activities in FY2027 that would total up to $4M.	Yes for the purposes of the Pricing Proposal, $4M for FY2027 is correct and the remainder of the project costs should be reflected in the line item "TOTAL FY 2028". However, if needed and applications for payment are validated by the COTR additional funding will be made available in FY2027. The cost loaded schedule should be developed independent of current funding allotments and reflect what is practical and necessary to meet the period of performance end date of September 2028.	9/25/2026	9/29/2026
45	65% Dwgs, Sheet C-110DP	Ref. C-110DP demolition note #2. Demolition note calls for contractor to conduct a thorough survey before time of bid to locate any additional existing site electric not shown on plan that would need to be rerouted. Please confirm if an allowance should instead be carried by all bidders in lieu of performing surveys and please provide a dollar amount.	Underground electric will be removed in Phase 1. Any underground electric in Phase 2 that needs to be removed will be handled as an unforeseen condition.	9/25/2026	9/29/2026
46	RFP, Section B.3.1 Base Cost Proposal Submission Form	The bid form states "If there are any assumptions, exclusions or qualifications that affect the firm fixed price, a separate detailed breakdown sheet must be provided"; however, this sheet is not mentioned elsewhere in the proposal guidelines. Please confirm assumptions, exclusions and qualifications can be submitted as part of the pricing submission and, if so, please provide a template for bidders to use to submit.	Offerors may NOT submit assumptions, exclusions, or qualifications that affect the firm fixed price as part of their pricing submission. The firm fixed price must be all inclusive. The bid form has been revised accordingly, dated 9/29/2026, and uploaded with this set of responses. Pricing package submissions shall not modify or take exception to the requirements of the solicitation.	9/25/2026	9/29/2026
47	NA	Please provide any schedules related to the adjacent animals' activities, feeding, sleeping, etc.during which construction activities cannot occur.	This will be coordinated with the awarded contractor.	9/25/2026	9/29/2026
48	NA	Please provide any known public events scheduled during the project duration during which construction avtivities cannot occur.	This will be coordinated with the awarded contractor.	9/25/2026	9/29/2026
49	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND Section I: 52.219-8R (page 29 of 129)	Please confirm the required SDVOSB subgoal as part of the 40% small business goal as the RFP does not indicate. This was originally indicated as 7% in the Phase 1 documents.	The subcontracting goal is 40% with small business concerns. No separate SDVOSB subcontracting subgoal is required.	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
50	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND Section I: 52.219-8R (page 30 of 129)	Please confirm if there is a required HUBZone subgoal as part of the 40% small business goal as the RFP does not indicate.	The subcontracting goal is 40% with small business concerns. No separate HUBZone subcontracting subgoal is required.	9/25/2026	9/29/2026
51	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 5 of 139	The RFP states "Offerors should not anticipate an extension of the proposal due date"; however, it is likely that bidders will be out Wednesday 11/11 for Veteran's Day as well as the latter half of the week. Please consider adjusting the bid date to allow for bids to be prepared and reviewed before submission.	As stated in the RFP, no extension of the proposal due date (Friday, November 13, 2026 at 3:00 pm EST) is anticipated. Please plan accordingly.	9/25/2026	9/29/2026
52	RFP, Section I: 52.229-S0043 (page 60 of 139)	The RFP states that bidders should include federal, state and local taxes unless the Contractor can obtain a tax exempt certificate. Please confirm if SI will provide tax exemption certificates and if bidders can assume the project is tax exempt for the purposes of this bid.	Offerors shall include applicable Federal, State, and local taxes in their proposed pricing unless the Contractor obtains applicable tax-exempt certificates. In accordance with FAR 52.229-S0043, SI will cooperate with the Contractor in obtaining such certificates.	9/25/2026	9/29/2026
53	NA	Please clarify where power and water sources will be located for construction needs (provided by Smithsonian).	This will be coordinated with the awarded contractor.	9/29/2026	10/9/2026
54	65% Specifications Section 31 6333	Regarding the micropile work as specified under Section 31 6333, please clarify if the micropile design will need to be submitted, reviewed and approved by DOB, or if Smithsonian's own AJH will review. If required to be submitted to DOB, please include an allowance for the permit fees.	No. Smithsonian Institution is its own Authority Having Jurisdiction (AHJ). The micropile design will not be submitted to, reviewed by, nor approved by DOB.	9/29/2026	10/9/2026
55	NA	A hollow metal door/frame specification has not been provided. Please issue.	A hollow metal door / frame specification will be provided in the forthcoming 100% Final submission and locations indicated on the door schedule in the drawings.	9/29/2026	10/9/2026
56	65% Drawings Structural Series	Regarding the support of excavation work referenced in the structural drawings, but not specified in the project specifications, please clarify if the design will need to be submitted, reviewed and approved by DOB, or if Smithsonian's own AJH will review. If required to be submitted to DOB, please include an allowance for the permit fees.	As acknowledged in this pre-bid RFI, Smithsonian Institution is its own Authority Having Jurisdiction (AHJ). Therefore, support of excavation (SOE) work will not be submitted to, reviewed by, nor approved by DOB. NOTE: SOE is to be addressed as means and methods by the contractor.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
57	65% Specifications Section 07 3116	The current 65% specifications for Section 07 3116 identify multiple manufacturers for the copper individual metal shingles, including ATAS International, Reinke Shakes, and Zappone Manufacturing. The documents do not appear to identify a single Basis-of-Design product to align with the design intent. Please confirm whether any of the listed manufacturers may be used for bidding without a substitution request and identify the intended Basis-of-Design manufacturer/product, shingle size and exposure, if applicable. This information is required to obtain accurate manufacturer takeoff, system pricing and warranty requirements.	Further refinement of the Pre-Patinated Copper Shingle Roof Assembly has taken place. The forthcoming 100% Final specifications call out the basis of design for the shingles as Spengler Industries, Size 16, 16oz, 72 degree diamond shingles. Clip and Rail support system shall be delegated design. Alternate Manufacturer is Coppercraft.	9/29/2026	10/9/2026
58	65% Drawings Sheet A-503DT AND 65% Specifications Section 07 3116	Drawing A-503DT identifies the R614 roof assembly as a pre-patinated copper metal shingle roofing system and references 074113.19 Metal Shingle Roofing Panels. The current project specifications provided for bidding include Section 07 3116 – Metal Shingles. Please confirm which specification section and system requirements are to govern the R614 copper roofing assembly for bidding.	Further refinement of the Pre-Patinated Copper Shingle Roof Assembly has taken place. The forthcoming 100% Final drawings reference the correct specification section 07 3116 Metal Shingles. See response to pre-bid RFI No. 57 for additional information.	9/29/2026	10/9/2026
59	65% Drawings AND 65% Specifications Section 07 7253	The roof section details indicate copper snow guards approximately 12 inches from the eave edge as required. Section 07 7253 lists multiple available snow-guard manufacturers; however, a final manufacturer / product, quantity and layout do not appear to be established. Please confirm: 1. Required snow-guard manufacturer/product, if designated; 2. Whether one of the listed manufacturers may be selected by the roofing contractor; 3. Whether the roofing contractor should carry a manufacturer-engineered snow-retention layout and attachment system; and 4. Whether final quantity and spacing are to be determined by the selected snow-guard manufacturer based on project design loads and roof conditions.	1. Manufacturer's integrated snow hooks shall be utilized. Basis of Design, Spengler Industries, includes this. 2. Manufacturer of snow hooks shall match shingle manufacturer. 3. Snow hooks shall be placed at two locations, one roughly half way up and one at the eave (12" from eave). Each strip should be three rows that are staggered. 100% Final Drawings will indicate layout. 4. Quantity and spacing will be provided in the 100% Final drawings. Refer to item 3 response above.	9/29/2026	10/9/2026
60	65% Specifications Section 07 3116	The current documents indicate a pre-patinated dark-brown copper finish for the metal shingles. Please confirm the required finish / color standard and advise whether a specific manufacturer finish, sample or approved color standard is required for bidding. Please also confirm whether associated exposed copper components—including flashing / trim, fascia, soffit, gutters and related sheet metal—are intended to match the metal-shingle roof finish.	The forthcoming 100% Final specifications call for pre-patinated copper verdigris as the required finish for the shingles. All exposed elements shall also be pre-patinated to match.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
61	65% Drawings Sheets A-432 & A432A AND 65% Specifications Section 07 2726	The current architectural documents identify a vapor-permeable fluid-applied membrane air barrier at the A432/A432A exterior wall assemblies. Section 07 2726 also includes requirements for a vapor-retarding fluid-applied membrane air barrier. Please identify the drawings/details and locations where the vapor-retarding system is required and confirm the limits of each air-barrier system to be included in the Division 07 scope.	Vapor-permeable fluid-applied membrane air barrier will be located at the Care Building as noted in the details. Specification will be updated with the forthcoming 100% Final submission to remove vapor-retarding flue-applied membrane air barrier.	9/29/2026	10/9/2026
62	65% Specifications Section 01 3250, Paragraph 1.3.J.	Regarding Data Capture requirements per specification section 01 3250, 1.3, J, requirements note the need to laser scan both site and building facilities during post-demo, rough-in open trenches, close-in and project completion. Please confirm the following: a. Post-demo – Please clarify this is not required as the demo is Phase 1 work, and there's no useful data following site clearing. b. As has been done on past Smithsonian projects, please confirm it is acceptable to as-build the sitework via GPS device layout. c. Please clarify is software capture systems such as OpenSpace (360 Reality Capture Software for Construction | OpenSpace Capture) is acceptable to meet these requirements.	a. Post-demo - laser scan is not required. b. Confirmed, it is acceptable to as-build the sitework via GPS device layout. c. No, software capture systems such as OpenSpace is not acceptable to meet Data Capture (Laser Scan) requirements in spec section 013250. Refer to full section for complete deliverable requirements.	9/29/2026	10/9/2026
63	65% Specifications Section 01 3250, Paragraph 3.5	Specification section 013250, 3.5 notes the need to include "equipment and furnishings" in the BIM model. This level is outside the typical LOD 350. Please clarify what specific equipment and furnishings should be included in the model. Please confirm these elements will exist in the model provided by the design team.	Equipment and Furnishing are not required as part of the As-Built Model(s)	9/29/2026	10/9/2026
64	65% Specifications Section 01 3250, Paragraph 1.1.E.	Specification section 013250, 1.1, E references the Smithsonian BIM execution plan, but does not provide the document. Please provide the document as part of the bid/contract package.	The current BIM Execution Plan document is uploaded with this set of pre-bid RFI responses.	9/29/2026	10/9/2026
65	65% Specifications	The 65% Specifications do not appear to include a structural steel specification. Please provide.	The forthcoming 100% Final specifications include specification section 05 1200 Structural Steel Framing.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
66	Architect-Engineering Information Center	In reviewing Smithsonian's Architect-Engineering Information Center (Architect-Engineer Information Center | Planning, Design, & Construction) one can find the Smithsonian's BIM Project Execution Plan (PxP). Page 9 of 30 notes the need for Asset Management, 4D modeling, and 5D cost estimating in both the "Construct" and "Operate" columns. These requirements are not outlined in the specifications. Please clarify there are no asset management, 4D or 5D construction BIM requirements as they have not been included in the project specifications.	Confirmed, 4D or 5D construction BIM requirements are not required. Asset Management is required. Refer to 2.4 of specification section 01 3250 and paragraph 2.8 of spec section 01 7823.	9/29/2026	10/9/2026
67	Architect-Engineering Information Center	In reviewing Smithsonian's Architect-Engineering Information Center (Architect-Engineer Information Center | Planning, Design, & Construction) one can find the Smithsonian's BIM Project Execution Plan (PxP). Page 18 of 30 of this plan calls for the Fire Protection subcontractor to utilize MEP CAD AutoSprink. Please verify it is acceptable to utilize other software's provided the contractor is able to provide full coordination and turn over a fully accessible model.	Alternate fire protection modeling software may be utilized. Refer to paragraph 1.3.D of specification section 01 3250. It must meet the BIM requirements of the Contract Documents, supports full coordination with the project BIM model and other trades, and allows delivery of the required final model in a fully accessible and compatible format. Use of alternate software shall not relieve the Contractor or Fire Protection Subcontractor of responsibility for BIM coordination, clash detection, or compliance with the Contract Documents. Any costs associated with software compatibility, file conversion, or coordination shall be the Contractor's responsibility.	9/29/2026	10/9/2026
68	65% Specifications Section 26 3650, Paragraph 2.2.N	Spec Section 26 36 50, Paragraph 2.2.N includes a large list of accessories including, but not limited to, auto-start, battery charger receptacle, block heater receptacle, strip heater, surge protection device, utility light, load dump receptacle, and Kirk key interlock. Please confirm which accessories are required for this project and identify any items that may be omitted due to enclosure space limitations within the Trystar docking station.	Yes, all these features are required with the docking station.	9/29/2026	10/9/2026
69	65% Specifications Section 26 3213, Paragraph 1.7.A.1.	Spec Section 26 32 13, Paragraph 1.7.A: The generator warranty period is blank. Please confirm the required warranty period.	These selections will be clarified in the forthcoming 100% Final specifications. Five (5) years will be required.	9/29/2026	10/9/2026
70	65% Specifications Section 26 3213, Paragraph 2.3.A.	The drawings identify the proposed unit as a 200kW Natural Gas Generator; however, Section 26 32 13, Paragraph 2.3.A references "Natural Gas with automatic LP-Gas standby / Natural Gas". Please confirm whether the generator shall be Natural Gas only or dual-fuel Natural Gas / LP.	These selections will be clarified in the forthcoming 100% Final specifications. Natural Gas is the only fuel source.	9/29/2026	10/9/2026
71	65% Specifications Section 26 3213, Paragraph 2.3.I.	Spec section 26 32 13, Paragraph 2.3.I appears unfinished and contains selectable specification language. Please clarify the intended project requirements	These selections will be clarified in the 100% Final specification..	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
72	65% Specifications Section 26 3213, Paragraph 2.3.A.	Section 26 32 13, Paragraph 2.7 specifies a permanent outdoor load bank; however, the drawings indicate a 100kW integrated top-mounted load bank on the 200kW generator enclosure. Please confirm that a 1.0 power factor load bank is acceptable, as this is the standard configuration available for top-mounted load banks.	1.0 PF Resistive load bank is acceptable and will be clarified in the forthcoming 100% Final specifications.	9/29/2026	10/9/2026
73	65% Specifications Section 26 3213, Paragraph 2.7.G.	Spec Section 26 32 13, Paragraph 2.7.G references load bank louvers. Integrated top-mounted load banks are self-contained and do not require separate louvers. Please confirm that separate louvers are not required.	Separate louvers should not be required as long as the integrated load bank have required rain ingress protection.	9/29/2026	10/9/2026
74	65% Specifications Section 26 3213, Paragraph 2.8.A.	Spec Section 26 32 13, Paragraph 2.8.A specifies a walk-in enclosure. Based on the indicated 200kW generator size and site layout, a walk-in enclosure does not appear applicable. Please confirm that a standard skintight enclosure is acceptable.	Skintight enclosure is acceptable and will be clarified in the forthcoming 100% Final specifications.	9/29/2026	10/9/2026
75	65% Specifications Section 26 3213, Paragraph 2.8.A.	Spec Section 26 32 13, Paragraph 2.8.A requires the enclosure to maintain a minimum internal temperature of 40°F. Please confirm enclosure heating is required.	If generator manufacturer can confirm generator block heaters maintain minimum internal temperature requirements per specifications, then supplemental heating is not anticipated.	9/29/2026	10/9/2026
76	65% Specifications Section 26 3213, Paragraph 2.8.E.	Spec Section 26 32 13, Paragraph 2.8.E references a generator load center. Drawing E105 states that the generator load center will be integral to the enclosure. Please confirm an integral generator-mounted load center is acceptable and that a separate load center is not required.	A generator factory provided load center integrated in the enclosure is what is required.	9/29/2026	10/9/2026
77	65% Drawings Sheet E-602SH	Drawing E-602SH indicates a 100kW integrated permanent load bank. Please provide the required generator-mounted circuit breaker size and feeder requirements associated with the integrated load bank.	Circuit breaker and feeder sizing will be shown in 100% Final documents. The specification calls for the load bank to be factory provided and installed by the generator vendor.	9/29/2026	10/9/2026
78	65% Drawings AND 65% Specifications Section 26 3213	The contract drawings indicate a 200 kW natural gas generator with an integrated top-mounted 100 kW load bank. Several requirements in Section 26 32 13 appear inconsistent with this configuration. Please confirm the requirements and advise whether the generator shall be provided in accordance with the drawings or the specifications.	100 kW radiator mounted load bank is required. In addition, a roll up load bank will be accommodated by a permanent docking station. This will be clarified in the forthcoming 100% Final submission	9/29/2026	10/9/2026
79	65% Specifications Section 26 3213	Spec Section 26 32 13 contains multiple unfinished sections, blank values, and selectable specification options. Please provide a complete generator specification.	Updated specifications with selections will be provided in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
80	65% Specifications Section 26 3213, Paragraph 2.1.A	Section 26 32 13, Paragraph 2.1.A identifies Caterpillar, Generac, Cummins, and MTU as acceptable manufacturers. Please confirm that Rehlko is also an acceptable manufacturer for this project.	Rehlko is an acceptable alternate and will be added to the specifications in the forthcoming 100% Final submission.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
81	65% Specifications Section 03 3713, Paragraph 2.1.A.2 AND Section 08 3453, Paragraph 2.1.C	Specification section 033713 - Shotcrete, subsection 2.1-A-2 specifically outlines that bidders wishing to use a fabricator or installer that is not identified in this section must have the proposed fabricator comply with qualification requirements listed herein and submit a letter of qualification. There is similar language in specification section 083453 – Animal Enclosure Caging and Doors, subsection 2.1-C. Please confirm that this qualification package is to be submitted as an RFI, or provide direction on how this package is to be submitted for approval.	NOTE: The forthcoming 100% FINAL specification section 02 2713 will add Cemrock Landscapes Inc. to the approved list. Please submit, as a pre-bid RFI, any other shotcrete fabricators not listed in the specification 03 22713 and request that they be added to the list of accepted fabricators. Please include with the pre-bid RFI a complete PDF qualifications package demonstrating their experience and capability as outlined in specification section 03 2713, paragraphs 2.1.A.2.a. as a attachment to the RFI submitted. Final acceptance of any proposed company as an approved fabricator or installer is subject to review and approval of the required qualifications package. However, Offeror should not wait to submit a complete qualifications package, if they would like other companies, not currently listed in the 65% specifications, to be considered besides Cemrock Landscapes Inc. Offerors will be notified of a proposed company's acceptance status at least 10 days before Offerors' bids are due. Specific to fabricators and installers applicable to section 08 3453 Animal Enclosures Caging and Doors please see response to both pre-bid RFI no. 91 and 199 below. Follow same procedure outlined therein for other proposed companies.	9/29/2026	10/9/2026
82	65% Drawings Sheets A-903IN & A-904IN & A-904IN	Sheets A-903IN: Basement Finish Floor Plan and A-904IN: Level 1 Finish Floor Plan do not specify a finish for the interior CMU walls. Will these walls remain unfinished, or will a finish be specified?	All interior walls shall receive a finish. Further clarification on type of finish and location to be provided in forthcoming 100% Final submission.	9/29/2026	10/9/2026
83	65% Drawings Sheet E-103SP	Drawing ES-103SP, Note E303 references SHR drawings for fixture mounting details. SHR drawings are not included in the contract drawing set or drawing index. Please provide mounting details for Fixture XL5	Please see 65% drawings, sheet SS-500DT for XL5 mounting details. Note E303 will be updated in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
84	65% Drawings Sheet E-102SP	Please provide mounting details, support details, and wiring pathway details for the site lighting fixtures indicated on Drawing ES-102SP, including Fixtures XL1, XL4A, XL4B, XL6, and XL7.	References to mounting details to be provided in forthcoming 100% Final Submission.	9/29/2026	10/9/2026
85	65% Drawings Sheets TN-601DG & TN-020SP	Drawing TN-601DG indicates a 24-strand single-mode fiber tie-in to the existing network. Drawing TN-020SP references an existing telecommunications pull box and notes to coordinate with the civil plans. Please provide the exact location of the existing telecommunications handhole/pull box on the civil plans.	The existing telecommunications pull box/vault is identified on TN-020SP with Keynote 1. This same existing telecommunications vault is shown on the Civil Utility Plan, drawing 1/C-166UP, at the end of the telecommunications conduit run. On the Civil drawings, the associated telecommunications work is identified by Keynotes T1 and T2. Please coordinate with these drawings and keynotes for the existing telecommunications pull box/vault location.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
86	65% Drawings Sheet TN-020SP	On drawing TN-020SP, some of the camera locations may exceed the 295' threshold. In these cases, should gamechanger cabling be provided or 4-strand single mode fiber with converters?	For camera locations where the cable distance exceeds the 295-foot limit, provide Gamechanger cabling as an acceptable alternative to 4-strand single-mode fiber with media converters. Contractor should coordinate the final cable distances and provide the appropriate cabling solution based on the actual field conditions and manufacturer requirements.	9/29/2026	10/9/2026
87	65% Drawings Sheets A-920DT & A-921DT	Sheet A-920DT includes references to Sheet A-921DT. Sheet A-921DT has not yet been issued. Please issue.	A-921DT are typical head of wall details and will be included in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
88	NA	Please confirm what type of connectors are required for any single mode fiber? LC? SC?	Provide SC connectors for all single-mode fiber connections. Coordinate fiber termination with the specified fiber converters and associated equipment to ensure compatibility.	9/29/2026	10/9/2026
89	NA	Please identify the basis-of-design manufacturer and/or acceptable manufacturers for the specified single-mode fiber optic cabling.	Corning: Corning MIC and Unitized MIC Corning: Armored Corning MIC and Unitized MIC Corning: FREEDM	9/29/2026	10/9/2026
90	RFP, Section L: Paragraph L.26 (page 93 of 129)	Page 93 of the solicitation states "The successful Offeror shall submit with their proposal a Small Business and Small Disadvantaged Business Subcontracting Plan which will be evaluated for compliance with FAR 19.7, statutory requirements and approval must be granted by the Office of Equal Opportunity (OEO)" Please confirm that Offerors are required to submit a Small Business Subcontracting Plan with the proposal and NOT after notification of successful award.	Please see response to pre-bid RFI no. 18 above. Confirmed, Offerors are required to submit a Small Business Subcontracting Plan with the proposal and NOT after notification of successful award. This requirement as a separate document with the proposal is made clear in several locations within the RFP (pages 4, 93 and 102 of 139).	9/30/2026	10/9/2026
91	65% Specifications Sections 08 3453 & 32 3100	Ref. specification 323100 and 083453.Please confirm if Otto Environmental Inc.can be approved as an equal to the listed manufacturers and installers for both the metal fences and gates and animal enclosure caging and doors. Please refer to attached product data for more information.	Otto Environmental, Inc. may be proposed as an acceptable fabricator and installer for the work specified under Sections 08 34 53 – Animal Enclosure Caging & Doors and 32 31 00 – Metal Fences and Gates, subject to: 1) compliance with all requirements of the Contract Documents, and; 2) receipt of Otto Environmental's response to the attached questionnaire titled "Animal Containment Door & Gate Manufacturer Questionnaire". NOTE: this questionnaire was also sent, via email, directly to Islam & Iryna at Otto Environmental. Final acceptance of Otto Envronmental as a fabricator / installer is subject to review and approval of the required completed questionnaire. Offerors will be notified of Otto Environmental's acceptance status at least 10 days before Offerors' bids are due. Approval of Otto Environmental as an acceptable fabricator / installer does not relieve the Contractor of responsibility for full compliance with the Contract Documents.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
92	NA	Please confirm if there is a page limit to the proposal submission.	Please limit proposal submission to no more than 250 pages.	9/30/2026	10/9/2026
93	65% Drawings Sheet A-503DT AND 65% Specifications Section 07 4113.19	A-503DT shows "07413.19 clip and rail support system", but the specifications do not contain this section. Please clarify is this item should apply.	Please see response to pre-bid RFI no. 58 above.	9/30/2026	10/9/2026
94	65% Specifications Section 07 3116 Paragraph 2.3.A.5	Should all roofing related copper items (snowguards, gutters/gutter screens, fascia, soffit, etc.) have a pre-patinated dark brown finish?	Please see response to pre-bid RFI no. 60 above.	9/30/2026	10/9/2026
95	65% Specifications Section 28 1000	Please confirm if there is an existing PACS? If so, please confirm what platform.	This is a new building. Therefore, Contractor will be installing new panels that tie into an existing SoftwareHouse head end.	9/30/2026	10/9/2026
96	65% Specifications Section 28 1000	Please confirm how many online and offline readers are required.	Not sure what this pre-bid RFI is asking. All required readers should be installed and online. Online status should be a programming issue not a installation issue.	9/30/2026	10/9/2026
97	65% Specifications Section 28 1000	Please confirm existing controllers and I/O capacity.	This is a new building. Therefore, Contractor will be installing new panels that tie into an existing SoftwareHouse head end.	9/30/2026	10/9/2026
98	65% Specifications Section 28 1000	Please confirm if a credential database migration is required.	Not required / Not applicable.	9/30/2026	10/9/2026
99	65% Specifications Section 28 1000	Please clarify visitor management requirements.	Not required / Not applicable.	9/30/2026	10/9/2026
100	65% Specifications Section 28 1000	Please confirm which version of C•Cure 9000 is required.	There is an existing C-Cure system that new panels and equipment will be tied into.	9/30/2026	10/9/2026
101	65% Specifications Section 28 1000	Please clarify how many workstation/client licenses are needed.	None	9/30/2026	10/9/2026
102	65% Specifications Section 28 1000	Please clarify if varying access levels and credential policies are required.	Not required / Not applicable.	9/30/2026	10/9/2026
103	65% Specifications Section 28 1000	Please confirm if a database backup/disaster recovery is required.	Not required / Not applicable.	9/30/2026	10/9/2026
104	65% Specifications Section 28 2000	Please clarify the desired video retention period.	Minimum of 30 days	9/30/2026	10/9/2026
105	65% Specifications Section 28 2000	Please confirm the existing network infrastructure as it relates to VMS.	Contractor should be installing new network infrastructure into the new building.	9/30/2026	10/9/2026
106	65% Specifications Section 28 2000	Please confirm the required recording profile as it related to VMS. Please confirm whether continuous or event-triggered recording is desired.	Both continuous and event-triggered recording is required, along with a minimum of 30 days storage is required.	9/30/2026	10/9/2026
107	65% Specifications Section 28 2000	Please confirm the size and quantity of video wall displays required for VMS.	Not applicable for OPS. Animal Care will have two video management displays. These devices are shown on Security/IT/AV sheets on the 1st Floor.	9/30/2026	10/9/2026
108	65% Specifications Section 28 2000	Please confirm if any operator workstations are required for VMS.	Not applicable for OPS. Animal Care will have two video management displays. These devices are shown on Security /IT/AV sheets on the 1st Floor.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
109	NA	Please confirm if the existing fiber or conduit can be reused for new security scope required as part of this project.	This is a new structure. Therefore, there is no existing fiber or conduit.	9/30/2026	10/9/2026
110	NA	Please confirm if the PoE power budget is sufficient for new security scope required as part of this project.	This is a new structure. Therefore, Contractors should be installing all new equipment	9/30/2026	10/9/2026
111	NA	Please confirm if there are any security requirements for network/IT?	This is a new structure. Therefore, this room doesn't exist yet and will be built as part of the project	9/30/2026	10/9/2026
112	NA	Please clarify the environmental conditions of the room where the Cisco cabinet will be installed as well as if there will be a rack for attachment.	The space is new and will be environmentally conditioned. The contractor shall provide the rack.	9/30/2026	10/9/2026
113	65% Specifications Section 28 1523	Please confirm if there is an existing intercom system.	There is an existing intercom head end system that the new intercoms will be tied into, but no existing intercoms on this project	9/30/2026	10/9/2026
114	65% Specifications Section 28 1523	Please confirm if the intercom must be integrated with PACS/VMS/IDS?	Confirmed.	9/30/2026	10/9/2026
115	RFP, Attachment 7, Page 111 of 139	Please confirm that the animal mesh installers shall use the skilled laborer classification for wage rates or if this scope falls under a difference classification.	Animal mesh installers may be classified as Skilled Laborers, provided the work performed is consistent with the duties and work activities covered under the Skilled Laborer classification in the applicable wage determination. The Contractor remains responsible for complying with all applicable labor classifications and prevailing wage requirements.	9/30/2026	10/9/2026
116	65% Drawings Sheet LS-504DT	Please provide the required cable diameter as the documents indicate 2" mesh, but not a diameter.	This is noted under 2.4 Woven Wire Mesh within Specification 32 3100 Metal Fences and Gates.	9/30/2026	10/9/2026
117	65% Drawings Sheet SS-110DG	Please confirm if the animal neetting is required to be laced directly to the struts where struts are in place of cable.	No lacing is permitted at struts. However, mesh will be directly laced to rails where there is no cable. and is reflected in the Final CD Set.	9/30/2026	10/9/2026
118	65% Drawings Sheet SS-110DG	Please confirm connection at rockwork as the details indicate both rail and cable. If desired connection is cable, please clarify required diameter and finish.	All connections at the enclosure's perimeter have been modeled and shown as rails for purposes of analysis / engineering. Note 5 on drawing SS-100FP indicates the Specialty Fabricator / Installer (SF) to "refer to EX-531DT for alternate mesh connections with cable in place of rail at all faux Rockwork locations." This accounts for the delegated design of the rockwork's geometry which cannot be defined prior to installation. The SF shall determine which detail to proceed with based on build conditions in the field.	9/30/2026	10/9/2026
119	65% Specifications Section 26 3650, Paragraph 2.2.N.	Reference section 263650, 2.2 N. This specification section has a long list of accessories. Please confirm if all are needed or some can be eliminated as not enough space inside Trystar cabinet? If so, please list which accessories are not required.	Please see response to pre-bid RFI no. 68 above.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
120	65% Specifications Section 26 3213	Reference section 263213. This section is unedited in spots. Please advise if newer, updated generator specs will be provided.	Specification Section 26 3213 will be edited further in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
121	65% Specifications Section 26 3213, Paragraph 1.7.A.1.	Reference section 263213, 1.7 A. 1. Please provide required warranty period number of years as it is blank.	Please see response to pre-bid RFI no. 69 above.	9/30/2026	10/9/2026
122	65% Specifications Section 26 3213, Paragraph 2.1.A.	Reference section 263213, 2.1 A. Rehlko is not listed as an approved manufacturer, it only lists Caterpillar, Generac, Cummins, and MTU. Please confirm if a Rehlko generator is acceptable for this project.	Please see response to pre-bid RFI no. 80 above.	9/30/2026	10/9/2026
123	65% Specifications Section 26 3213, Paragraph 2.3.A.	Reference section 263213, 2.3 A. Please confirm if unit is natural gas only or if dual fuel needed NG/LP backup unit	Please see response to pre-bid RFI no. 70 above.	9/30/2026	10/9/2026
124	65% Specifications Section 26 3213, Paragraph 2.3.I.	Reference section 263213, 2.3 I. This section is not edited. Please advise if this section will be reissued.	Please see response to pre-bid RFI no. 120 above.	9/30/2026	10/9/2026
125	65% Specifications Section 26 3213, Paragraph 2.7.	Reference section 263213, 2.7. This section specifies a permanent outdoor load bank with language that does not apply for top/roof mounted load bank on top of the 200 KW generator enclosure. Please confirm 1.0 power factor is acceptable as that is all that is available for "top mounted" 100 KW load banks.	Please see response to pre-bid RFI no. 72 above.	9/30/2026	10/9/2026
126	65% Specifications Section 26 3213, Paragraph 2.7.G.	Reference section 263213, 2.7 G. Louvers are not applicable for a top mounted load bank. Please confirm not required and revise specs.	Please see response to pre-bid RFI no. 73 above.	9/30/2026	10/9/2026
127	65% Specifications Section 26 3213, Paragraph 2.8.A.	Reference section 263213, 2.8 A. This section specifies a "walk-in" enclosure. This is not applicable to small 200 KW unit based on the site plan dimensions. Please confirm standard skintight enclosure is acceptable.	Please see response to pre-bid RFI no. 74 above.	9/30/2026	10/9/2026
128	65% Specifications Section 26 3213, Paragraph 2.8.A.1.	Reference section 263213, 2.8 A.1. Please confirm if an enclosure that maintains minimum 40 degree F inside generator required.	Please see response to pre-bid RFI no. 75 above.	9/30/2026	10/9/2026
129	65% Specifications Section 26 3213, Paragraph 2.8.E.	Reference section 263213, 2.8 E. Please confirm if a generator load center required.	Please see response to pre-bid RFI no. 76 above.	9/30/2026	10/9/2026
130	65% Drawings Sheet E-602SH	Reference drawing E-602SH. A 100 KW top mounted load bank requires a 2nd breaker at the generator. Please provide amperage of circuit breaker to feed 100 KW integrated load bank at generator.	Circuit breaker and feeder sizing will be shown. The specification calls for the load bank to be factory provided and installed by the generator vendor.	9/30/2026	10/9/2026
131	65% Drawings Sheets C200 thru C230	Please confirm horizontal and vertical scales on Site Utility profile sheets C200 thru C230. Callout of depths do not match vertical graphic scale.	The vertical scale on the profiles is 1" = 4'. The minimum cover depth callouts provide the minimum cover, even when the design cover may be greater.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
132	RFP, Attachment 4, FACTOR 6 (page 106 of 139) AND	Page 106 of the RFP asks for the contractor's plan for use of innovative technologies; however, page 27 of the RFP prohibits the use of GenAI. Due to new AI technologies being at the forefront of construction innovation, are descriptions of use of GenAI or AI allowable in this section of the proposal and are they allowed throughout the duration of the project?	Offerors may propose innovative and creative approaches using any permissible means, methods, or construction practices that are responsive to the requirements of the RFP and specific to the project. Any use of AI or GenAI remains subject to the applicable solicitation and contract clauses, including any requirement for prior SI approval.	9/30/2026	10/9/2026
133	NA	Advise if it is acceptable to value engineer the deep foundation system with battered micro-piles. Advise it is acceptable to suggest a design-built solution to reduce project cost and schedule.	No, it is not acceptable. The Offerors shall base their proposals on the foundation system shown in the forthcoming 100% Final documents (specs & dwgs). This is critical path item and alternate pile approaches introduce potential unknowns and risk such as unforeseen impacts on site utility layouts..	9/30/2026	10/9/2026
134	NA	Please provide louver schedules for all Architectural and Mechanical louvers.	This information is forthcoming in the 100% Final Submission.	9/30/2026	10/9/2026
135	65% Drawings Sheets MP-101PP & MP-102PP	Per drawing MP-101PP, Sheet Keynote # M146 and drawing MP-102PP, Sheet Keynote #M120, please provide a detail showing all required cage enclosures with the access panels for all required equipment plus thermostats / sensors.	Heaters shown previously within animal enclosures, have been moved outside the enclosure, eliminating the need for protective cages. This will be clarified in the forthcoming 100% Final submission. Sensor enclosures shall be provided by exhibit discipline.	9/30/2026	10/9/2026
136	65% Drawings Sheet M-808CP	M-808CP, shows two options for Plant Controls (A & B) - are both of these options supposed to be priced separately on a bid form?	Scope has been updated, and only show a singular control strategy in the forthcoming 100% Final submission. The issued sequences no longer apply, since the entirety of the system was revised per owner direction.	9/30/2026	10/9/2026
137	65% Drawings Sheet M-100CP	Per drawing MI-100CP, Sheet Keynote #M141, are all loose HVAC VFD's furnished and installed by the Electrical Subcontractor?	All VFDs that drive equipment by division 23 shall be provided by division 26 subcontractor.	9/30/2026	10/9/2026
138	65% Drawings Sheets MI-100CP & MI-100HP	Per drawing MI-100CP, Sheet Keynote #M134, plus drawing MH-100HP, there are two heaters shown within the hallway, please provide what type of heaters are required at this location.	Referenced heaters are no longer part of scope in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
139	65% Drawings Sheets MP-100PP & M-502DT	Per drawing MP-100PP and drawing M-502DT, detail #5, is AHU #1 supposed be elevated off the floor or does AHU-1 sit on a housekeeping pad? If AHU-1 needs to sit on a housekeeping pad, the detail shown on M-502DT will need to be corrected, since the humidifier condensate line says it requires four feet of drop from the AHU to the humidifier.	AHU-1 is intended to sit on housekeeping pad. Detail will be updated in the forthcoming 100% Final submission..	9/30/2026	10/9/2026
140	65% Drawings Sheet MP-100PP	Per drawing MP-100PP, Sheet Keynote #118 (regarding FCU #1,#2 & #3, please show condensate piping to the new floor drains. And please show condensate piping associated with FCU-4, to the nearest floor drain.	Condensate piping will be shown in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
141	65% Drawings Sheet EX-601DT	Sheet EX-601DT, Detail 3 Shows a CDF Filled Boulder, where does this condition exist on this project?	This occurs at the habitat and guest pools where we want to prevent water, insects or pests from getting into shotcrete voids and becoming stagnant.	9/30/2026	10/9/2026
142	65% Specifications Section 12 3553.13 & 12 3553	Section 123553.13 Metal Laboratory Casework references Section 123553 "General Requirements for Laboratory Casework and Fume Hoods" for all References, Approved Manufacturers, Materials, Hardware, Finishes, Installation, etc." This specification was not provided, please provide the specification.	Section 12 3553 has been removed from the forthcoming 100% Final specifications	9/30/2026	10/9/2026
143	65% Drawings Sheets A-903IN & A-904IN	A-903IN and A-904IN indicate that SS-01 is to be used at window sills, reference the Finish and Material Schedules on both pages. Confirm and identify which windows are to receive window sills and provide a cross section for depth and thickness of sill.	This scope will be clarified in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
144	65% Specifications Section 23 3113 Paragraph 3.9	Per specification 233113-12, 3.9, Duct Cleaning, please confirm all new HVAC equipment, coils, ductwork, grilles, registers, diffusers and louvers will require certified cleaning.	Confirmed.	9/30/2026	10/9/2026
145	65% Drawings Sheet MP-100PP	Per drawing MP-100PP, there are two piping lines (with Heat Tracing) between columns D&E and close to column #3. Where are these two lines feeding and coming from? Is this piping supposed to be feeding the two 4" HHWS&R and the two 4" CHWS&R lines as shown on M-301SC, Detail #4 - loading dock area? Do all four of these lines also require shutoff valves? Do the four separate lines just stop inside of the basement with caps or do they need to tie-into the hydronic system?	Scope will be clarified in forthcoming 100% final submission. The four lines tie into a valve box at loading dock. The intent is for the Owner to tie emergency portable chiller/boilers to the building plant at locations as shown.	9/30/2026	10/9/2026
146	65% Drawings Sheets A-102FP & A-601SH	A102 FP references details B1 and B3 on A-601SH for the Kitchen Prep Area. These details are not listed on A601SH, please provide.	This was a reference error, see A-400 series. This will be corrected in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
147	65% Drawings	Within the Electrical rooms B1EL1 & B1EL2, will we be required to provide drain pans with leak detection under the HVAC equipment and piping or just the HVAC Equipment. If yes, please provide a detail showing all scope of work.	Requirements will be clarified in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
148	65% Drawings Sheets TN-020SP, TN-001CS, TN-501DT & TN-502DT	Sheets: TN-020SP – Telecommunication Site Plan, TN-001CS – Telecommunication Symbols & Notes, and TN-501DT / TN-502DT – Telecommunication Details. a. Telecommunications devices are indicated in the outdoor animal habitat area; however, TN-020SP does not identify a complete outside-plant conduit pathway from the building/telecommunications room to each indicated outdoor device location. While Keynote 3 on TN-020SP calls for a 1-inch conduit and exterior-rated back box for the interpretive display, the drawings do not show the routing, quantity, sizing, or intermediate access points needed to support the other outdoor telecommunications outlets. Additionally, TN-001CS identifies the device symbols, and TN-501DT/TN-502DT provide typical duct-bank and pull-box details, but the details do not establish their required site locations or routes. b. Please provide coordinated site/civil and telecommunications drawings showing the complete outside-plant infrastructure for all outdoor animal habitat telecommunications outlets, including conduit routing from the facility, conduit quantity and sizes, duct-bank configuration, burial depth, pull-box/handhole locations, building penetrations, and final device stub-up/termination requirements. c. TN-020SP currently directs coordination of the telecom service route with other disciplines, and TN-501DT/TN-502DT provide typical communication duct-bank and pull-box construction requirements."	A. Telecom Devices show on serviced by direct buy 1" conduit to each location. Those conduits will be coordinated in the field by contractors and verified by Telecom Consultant before covered. Intermediate Pull boxes are described in the Division 27 specifications and shall be submitted to the A/E through the shop drawing process. B. Security Civil and Telecom drawings have been coordinated. The civil engineer is aware of the direct burial conduit and the data drops match the security drawings. C. TN Series cover the Telecom infrastructure while the civil plans are fully coordinated with other utilities.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
149	65% Drawings Sheets TY-100SP, TY-501DT & TY-502DT	TY-100SP identifies numerous outdoor zoo cameras, including pole-mounted, building-mounted, structure-mounted, and tunnel-mounted camera locations within and around the animal habitat area. The sheet requires all zoo camera cabling to route to the telecommunications rack and states that a separate conduit is required for security work; however, it does not show the complete outside-plant conduit routing, handholes/pull boxes, conduit quantities, or connection points from the facility to the individual camera locations. a.Further, TY-501DT and TY-502DT provide typical camera installation details, including 1-inch conduit and 2-inch fiber conduit at pole-mounted cameras, but do not identify where these conduits originate or how they are routed through the site to each habitat camera. b. Please provide coordinated security, telecommunications, and civil drawings showing the complete dedicated outside-plant conduit system serving all outdoor animal habitat cameras. Include conduit routes from the telecommunications rack/facility to each camera, conduit quantity and sizing, fiber and Category 6 pathway requirements, duct-bank and burial details, handhole/pull-box locations, pole/camera stub-up details, building-entry points, and required separation from power and non-security telecommunications pathways. c. TY-100SP explicitly requires a separate security conduit and routing of zoo camera cabling to the telecom rack, while TY-501DT/TY-502DT establish the typical camera-pole conduit requirements."	There are two camera systems, one for Animal Care and one for OPS (Office of Protection Services). The Animal Care cameras are primarily located in the animal care areas. OPS cameras are primarily public and staff spaces. While there is some overlap, the camera systems are managed by two different parties for disparate reasons and must use separate pathways. a: Please refer to the entire forthcoming 100% Final submission. The floorplans illustrate device and equipment locations, details illustrate layout and mounting variations, and diagrams illustrate the two disparate systems. Use the drawings with specifications to understand the project. b: Power, telecom, civil, architecture, and habitat designs have been coordinated to show device locations and mounting conditions. The project requires coordination of the various trades to provide the required pathways throughout. c: Please use the package entirely. Sheets TY501 DT and TY502 DT are details that illustrate mounting conditions. Refer to Diagrams on Sheet TY601 DG for differences with Animal Care and OPS cameras (they are two disparate systems). Schedules shown on Sheets TY701 SH are for Animal Care Cameras, and TY 702 SH are for OPS cameras. Each schedule identifies the camera type, location that's coordinated to the plans and routing to including which rack they should be routed to.	9/30/2026	10/9/2026
150	NA	GWB assemblies indicate all walls are to be non-combustible, but the Door schedule does not indicate doors are to be Fire Rated. Confirm all FRP door openings shown on the door schedule are non-fire rated.	Confirmed, all FRP door openings are not fire rated. However, there will be some hollow metal doors shown in the forthcoming 100% Final drawings with any required fire ratings indicated.	9/30/2026	10/9/2026
151	NA	Are any custom colors or textures anticipated beyond manufacturer standard selection for FRP doors and frames?	No. Custom colors are not expected.	9/30/2026	10/9/2026
152	NA	Are grout filled FRP frames required at masonry openings or will bolt in frames be acceptable (since modifications to the frame in field is not acceptable per specifications).	Bolted frames are acceptable.	9/30/2026	10/9/2026
153	65% Specifications Section 08 1613	081613 FRP Doors and Frames. Tiger Doors are no longer manufactured by Overly. Will Chen Pruf (which Tiger Doors is now affiliated with) be acceptable. CECO no longer has FRP solutions. Will other products that meet the specifications be acceptable?	Specification will be modified to reflect updated available manufacturers in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
154	65% Specifications Section 09 2900	Section 092900 Gypsum Board reference SAFB and STC Rated Assemblies but partition schedule does not list any walls requiring STC. Confirm STC is not required at GWB Partitions.	Specific STC ratings are not required. However, acoustic batt insulation at Restroom 1WC1 and at the entry wall into VIP / Keeper Workspace 101 will be indicated in the forthcoming 100% Final submission..	9/30/2026	10/9/2026
155	65% Specifications Section 09 2900	Per Section 092900 Gypsum Board, are control joints required above every door opening regardless of partition length?	Yes, per specification 092900 control joints are required above every door opening.	9/30/2026	10/9/2026
156	65% Drawings Sheet S-002 AND 65% Specifications Section 01 4000 Paragraph 1.2.B	Sheet S-002 indicates testing and special inspections are Owner-provided; however, Section 01 40 00 (1.2.B) requires the Contractor to furnish all testing and inspections, including those otherwise assigned to the Owner. Please clarify which party is responsible for procuring and paying for these services. In the event of a conflict between the drawings and specifications, please identify the governing requirement and provide direction for determining responsibility by trade.	Specification section 01 4000, paragraph 1.2.B overrides drawings and all other specification sections. The contractor is responsible for obtaining and paying for all testing and inspections. Note S-002 has been corrected in the forthcoming 100% Final submission	9/30/2026	10/9/2026
157	65% Specifications Sections 08 3453 & 32 3100	Please see the attached Animal Caging Fabricator/Installer substitution request for Sections 08 3453 and 32 3100 and advise if Otto Environmental is an approved Fabricator/Installer. (See Substitution Request Otto Environmental Folder created under RFI Folder along with proposal package and relevant project experience of previous work as a prequalification package)	Please see response to pre-bid RFI no. 91 above.	9/30/2026	10/9/2026
158	NA	Within the existing Bison Building, is there any HVAC or Fire Suppression demolition required? If yes, please provide a description or show the scope of work.	The existing Bison Building will be demolished in its entirety during Phase 1 - Early Sitework. There is no Bison Building scope of work in this RFP for Phase 2.- Habitats & Animal Care Building.	9/30/2026	10/9/2026
159	65% Drawings Sheet P-100PP	Per drawing P-100PP, Sheet Keynote P309 calls for 4" Gas piping, however on the drawing, near the generator location, the piping says it should be 1". Which pipe size is correct?	The 2 psi line to the generator should be 1 inch and the keynote will be revised in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
160	65% Drawings Sheet P-101PP	Per drawing P-101PP, please confirm all work associated with Sheet Keynote #210 (two separate locations) will be performed by the Civil Subcontractor, including the trench drains (TD-B) and all piping as shown.	All drains and associated work outside the building shall be performed by the Civil Subcontractor including area drains and trench drains. Work by Civil has removed / clarified from the plumbing drawings in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
161	65% Drawings Sheet P-601SH	Per drawing P-601SH, PE-Plumbing Animal Drinking Schedule, please indicate where the manufacture and model numbers are shown on the "EX" drawings. Also, who owns furnishing and installing the animal drinkers?	The plumbing series will provide the information on the piping until the connection of the drinker. The information on the drinkers is provided within the forthcoming 100% Final Exhibit drawings.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
162	65% Specifications Section 26 0519 Paragraph 3.1.0	26 05 19-3.1.O restricts the use of MC Cable to 1.8m (6ft) maximum whip length for lighting fixtures and 28 31 11-3.3.F-2 allows MC Cable to be used in concealed spaces for fire alarm raceway except for smoke control system wiring. Please confirm all allowable circuitry that can utilize the more cost-effective MC Cable.	MC cable to be used as recommended per specification. Specs 26 series refers to all electrical requirements line voltage 120/208V, 480/277V and Specs 28 series refers to low voltage which provides different requirements from the Specs 26 series.	9/30/2026	10/9/2026
163	65% Specifications Section 08 4400	In Section 084400 Glazed Curtain Walls, the following specification sections are referenced but are not provided: 019119.43 "Exterior Enclosure Commissioning", 054000 Cold Formed Metal Framing, 078443 Joint Firestopping, 084433 Sloped Glazing Assemblies. Confirm they are not required for this project. If required, please provide and identify locations as needed on drawings.	References in this specification will be clarified in the forthcoming 100% Final submission. The following references will be removed: 019119.42 (refer to 019113) and 084433. Sections 078443 and 054000 will be added.	9/30/2026	10/9/2026
164	65% Specifications Section 23 3113 Paragraph 3.9.G.7	Per specification 233113, page 13, G, 7, can you please strike out the word "EPA" and insert ASHREA 62.1?	Specification will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
165	65% Specifications Section 07 8413	Specification Section 07 8413 Penetration Firestopping is referenced in multiple specification sections and needs added to next set. Please include specification section 07 8413 Penetration Firestopping or provide direction for penetration firestopping requirements to be included.	Specification will be added in forthcoming 100% Final submission.	9/30/2026	10/9/2026
166	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, offerors are instructed to identify the subcontractors proposed for eight specific trades and provide three references for each. The evaluation criteria also give greater consideration for specific demonstrated experience for the Animal Containment / Transfer Chutes & Doors and Shotcrete Faux Rock and Faux Trees subcontractors. Please confirm whether the Smithsonian Institution expects offerors to provide key personnel resumes and/or relevant experience information for each of the eight subcontractors.	Please see response to pre-bid RFI no. 9 above.	9/30/2026	10/9/2026
167	RFP, Factor 2, Section h) Page 104 of 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, offerors are instructed to include a resume for the Project Engineer. Specific qualifications or additional consideration criteria are not included for this position. Please confirm whether the Smithsonian Institution will be evaluating the Project Engineer Resume based on specific qualifications and/or additional consideration criteria. If yes, please outline these qualifications and/or additional consideration criteria.	The solicitation does not require the proposed Project Engineer to have a minimum of five years of experience. The resume should document the individual's relevant experience for the past five years, to the extent applicable, or the individual's last five projects.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
168	RFP, Factor 2, Section h) Page 104 of 139	A Project Engineer resume is required in Section Tab 9, but the instructions require that resumes cover five years of experience or the last five projects. Project Engineers are generally promoted to other positions well before they reach five years of experience. Please indicate if you prefer a resume for a Project Engineer with less time (i.e. 2-3 years) or if five years is specifically required.	See response to pre-bid RFI No. 167 above.	9/30/2026	10/9/2026
169	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, the Senior Cost Estimator is listed as a member of the Construction Services Team. Please confirm whether the Smithsonian expects offerors to submit a resume for this position. If yes, please outline any qualifications and/or additional consideration criteria	Please see response to pre-bid RFI no. 9 above. Requirement for submitting information on the Senior Cost Estimator has been removed.	9/30/2026	10/9/2026
170	RFP, Attach. No. 4 FACTOR 1, Section b) Page 103 0f 139	In Factor 1: Contractor's Ability to Provide Construction Services in the RFP, offerors are instructed to describe their plan for managing and coordinating major subcontractors during construction, including continuity of key subcontractors throughout the project. Please confirm that the terms "major subcontractors" and "key subcontractors" used here are in reference to the subcontractor trades included in the list identified in Factor 2: Contractor's Key Personnel and Support Team Qualifications.	Confirmed, but expect the process for managing and coordinating all subcontractors would be the same.	9/30/2026	10/9/2026
171	65% Drawings Sheet LS-504DT	Drawing LS-504DT and the specifications indicate 2-inch mesh for the pedestrian barrier but do not specify the cable diameter. Please provide the required cable diameter.	Please see response to pre-bin RFI no 116	9/30/2026	10/9/2026
172	65% Drawings Sheet SS-110DG	Drawing SS-110DG shows struts in place of cables. Is it acceptable to lace the netting directly to the struts? Please provide connection details.	Please see response to pre-bin RFI no 117	9/30/2026	10/9/2026
173	65% Drawings Sheet SS-110DG	Drawing SS-110DG shows conflicting rockwork connection details: some sheets indicate a rail, while others show a cable routed through eyebolts. Please clarify the required connection. If a cable is required, provide its diameter and finish, including whether it should be black-oxide stainless steel to match adjacent components.	All connections at the enclosure's perimeter have been modeled and shown as rails for purposes of analysis / engineering. Note 5 on drawing SS-100FP indicates the Specialty Fabricator / Installer (SF) to "refer to EX-531DT for alternate mesh connections with cable in place of rail at all faux Rockwork locations." This accounts for the delegated design of the rockwork's geometry which cannot be defined prior to installation. The SF to determine which detail to proceed with based on build conditions in the field.	9/30/2026	10/9/2026
174	65% Specifications Section 13 3100 Paragraph 3.1.D	Specification Section 13 31 00, Paragraph 3.1.D, requires TyLin to provide a 3D model of the exhibit. Will the model be available before bidding?	See response to pre-bid RFI no. 3 above, NOTE: 100% Final dwgs and specs will be provided on 10/19/26 per pre-bid RFI no. 178.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
175	65% Drawings Sheets EX-205SC & EX-303SC	Drawing EX-205SC references details 1 and 2 on EX-303SC. Drawing EX-303SC was not provided. Please provide this page with these details regarding the animal transfer bridge.	Please refer to details 1&2 on sheet EX-302SC. This will be corrected in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
176	NA	Please provide more details on the desired look for the ceilings for the tunnels.	This information is clarified within the forthcoming 100% Final submission. There is rockwork and acoustical treatment (Sonaspray - basis of design) on the ceiling.	9/30/2026	10/9/2026
177	65% Specifications Sections 01 4000; 084313, Paragraph 1.7.A and 084400, Paragraphs 1.9.B & 1.10.G.3	Specifications 01 40 00, 08 43 13 (1.7.A), and 08 44 00 (1.9.B, 1.10.G.3) require preconstruction testing of laboratory mockups. Please confirm the scope of the laboratory mockup, including whether it is to consist of the curtainwall and window assemblies identified on Sheet A-601SH and/or specific wall assemblies. Also confirm that the Owner will retain and contract directly with the testing agency to perform the required laboratory mockup testing.	Per specification section 01 4000, paragraph 1.2.B the Contractor is responsible for providing an independent, approved subcontractor for all tests and inspections required in the contract documents. This paragraph specifically notes the Contractor must provide such independent approved agency even if there are ones explicitly assigned to the Owner elsewhere in the contract documents. Additional language will be added to this specification section paragraph to make this even clearer.	9/30/2026	10/9/2026
178	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 3 of 139	Please consider a revised RFI deadline when the 100% design documents are released in October.	The 100% Final bid documents are forthcoming via an amendment to be issued on Monday, October 19, 2026. A second, two-week period for pre-bid RFIs has been accounted for in the procurement schedule and will take place from 10/19/26 thru 10/30/26. However, as noted in the SF 1442 request for proposal, Offerors are strongly encouraged to begin preparation of their Technical Proposal in advance of receiving the 100% Final CDs and to submit any administrative or technical pre-bid RFIs sooner rather than later. The new date and time established for submission of both the technical proposal and the pricing proposal are November 20, 2026 at 3:00 pm est. Given the unchanged construction period of performance with final completion still September 2028, Offerors should not anticipate another extension of the proposal due date. NOTE: this response supersedes the response to pre-bid RFI no. 1 and 3 above.	9/30/2026	10/9/2026
179	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 3 of 139	Please consider scheduling another site visit when the 100% design documents are released in October.	A second site visit is scheduled for Friday, October 23, 2026 at 9:00am.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
180	RFP, FACTOR 2 Paragraph d) Page 104 of 139	For Factor 2 Part d of the RFP, the key trade elements of work. Please clarify if subcontractor resumes are required along with the references or will only (3) references with contact information be required for this portion of the technical proposal.	Please see response to pre-bid RFI no. 9 above. In addition, as stated in the RFP, those Animal Containment / Caging subcontractors that have five years of experience with projects at zoological facilities, specifically for large carnivores and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration. Similarly, the Shotcrete Faux Rock and Faux Trees subcontractors that have five years of experience and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration,	9/30/2026	10/9/2026
181	RFP, Section B.4 and B.4.1 (Pages 9 & 10 of 139)	For the fiscal year funding breakdown indicated on Part B4 of the RFP, it states that $4 million is obligated at award of FY2027 which is to cover a 9-month period of construction and the balance to be funded in FY2028 which is a 10 month duration. Considering this project could exceed $10 million and nearly half of the construction duration is in FY2027, please consider increasing the funding increment in FY2027 to accommodate the construction costs that will be incurred that fiscal year.	Please see response to pre-bid RFI no. 24 above.	9/30/2026	10/9/2026
182	65% Specifications Section 01 8113.15	The Table of Contents identifies Section 01 8113.15, "Sustainable Design Requirements – LEED v4 BD+C"; however, the body of the specification references "LEED 2009 for New Construction & Major Renovations" in the sustainability requirements section on page 179. Please confirm which LEED rating system controls the project requirements.	Please see response to pre-bid RFI no. 30 above.	9/30/2026	10/9/2026
183	65% Drawings Sheet TY-001	Sheet TY-001/Removal Note# 7 states "Provide Mock-Up of Temporary Security System…." Please provide requirements for a temporary security system.	This note has been removed on the forthcoming 100% Final drawings.	9/30/2026	10/9/2026
184	NA	Referring to existing Electronic Safety and Security, will any existing credential database migration be needed as part of this contract? If so, please provide requirements to be included.	Not required / Not applicable.	9/30/2026	10/9/2026
185	NA	Referencing existing Electronic Safety and Security, is there an existing intercom system?	Please see response to pre-bid RFI no. 113 above	9/30/2026	10/9/2026
186	NA	Will the new intercom system need to integrate with PACS/VMS/IDS and if so please provide requirements.	Please see response to pre-bid RFI no. 114 above	9/30/2026	10/9/2026
187	65% Specifications Section 01 3233, Paragraph 1.2.A	Section 013233 para (1.2.A) references preconstruction, periodic video recordings, and Web-Based Construction photographic documentation. However, it does not include further directions. Please confirm scope for these services if to be provided by contractor.	The Contractor shall provide construction photographic and video documentation in accordance with Section 01 32 33.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	Reference / Source	Question	Response	Date In	Date Out
188	65% Specifications Section 08 3453, Paragraph 1.3.B.2 AND Section 08 3456	Section 08 3453 para (1.3.B.2) references section 08 34 56. Please provide section 08 34 56 if applicable.	References to 08 3456 will be removed in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
189	65% Specifications Section 08 3453 Paragraph 1.5.B	Section 08 3453 para (1.5.B) calls for "Animal caging" bidders to submit resumes for key personnel and photographic documentation of previous projects. Is it assumed these can be provided after award and not required with bid.	Please see response to pre-bid RFI no. 9 above. The name of the Animal caging subcontractor and three of their references are required with the Offeror's proposal. In addition, as stated those Animal Containment / Caging subcontractors that have five years of experience with projects at zoological facilities, specifically for large carnivores and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration. Similarly, the Shotcrete Faux Rock and Faux Trees subcontractors that have five years of experience and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration	9/30/2026	10/9/2026
190	65% Drawings Sheets C-151, C-156SP and LS-503DT	Please confirm the type of Fence/Rail required at locations shown on Drawings C-151-C-156SP - Keynote #12 is this "Olmstead Rail" (4,5/LS-503DT)	Refer to the Landscape Plans for the specific rail types. The Civil Plan will be updated in the forthcoming 100% Final submission to better coordinate with Landscape regarding this scope, However, the Landscape Plans will continue to be the set that documents the rail types along the site's perimeter.	9/30/2026	10/9/2026
191	65% Drawings Sheets LS-102SP, LS-504, C-155SP & C-156SP	Drawing LS-102SP identifies a "Bamboo Landscape Rail" (Detail 3/LS-504) at locations where Drawings C-155SP and C-156SP indicate "New Landscape Fence / Handrail / Feature" under Keynote 12. Please clarify the design intent and confirm the required fence, handrail, or rail system at these locations.	Bamboo Landscape Rail (detail 3/ LS-504) is the correct detail for these locations, per drawing LS-102SP. The #12 label on sheet C-156SP near the middle of the sheet, by the gates, refers to the decorative vertical slat fence, as shown on LS-102 SP and detail 2/LS-501	9/30/2026	10/9/2026
192	65% Drawings Sheets C-153SP, C-156SP, LS-102SP & LS-200EL	C-153SP & C-156SP show the Decorative Vertical Slat Fence in the Caderock Wall (Keynote #10). LS-102SP & LS-200EL show a slightly difference path of the fence. Please confirm which layout view is accurate.	Sheet LS-102SP has the correct horizontal layout of the fence. This has been updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
193	65% Drawings Sheet EX-301SC	Can additional details such as plan/elevation views be provided for Glass Viewing Panel (4/EX-301SC)?	These details will be eliminated in the forthcoming 100% Final submission. Refer to sheet A-403EP for scope of work at glazing within tunnel.	9/30/2026	10/9/2026
194	65% Drawings Sheets EX-111SP thru 116SP and C-151SP thru C-156SP	Guest Barrier (B1) & Guest Handrail (B2) layouts on EX-111-116SP are different than shown on C-151-156SP - Keynote #7. Please confirm which layout view is accurate.	The layout shown on the exhibit drawings take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
195	65% Drawings Sheets LS-101SP, LS-504DT & C-151SP	Pedestrian Barrier (1,2/LS-504DT) shown on C-151SP G6 are different than shown LS-101SP K6 Gridlines. Please confirm which layout view is accurate.	Sheet LS-101SP has the correct horizontal layout of the fence. This has been updated in forthcoming 100% final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
196	65% Specifications Section 05 5213 Paragraph 1.1.B & Section 05 7300	Section 055213 para (1.1.B) references Section 05 7300 Decorative Metal Railings. Please provide section 057300 if applicable.	This reference and section (057300) is not applicable and will be removed in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
197	65% Specifications Section 32 3100 Paragraphs 2.6 thru 2.11	Specifications 32 3100 para (2.9) is noted as painted Bronze. Will Smithsonian allow these items to be powder coated like items referenced in paragraphs (2.6), (2.7), (2.10), and (2.11)?	All handrails shall be shop-primed and painted. Specification will be clarified in the forcoming 100% Final submission.	9/30/2026	10/9/2026
198	NA	Please provide a written scope of work with inclusions / exclusions associated with the Phase 1 work contract that will occur on this project site prior to the start of this project.	The Phase 1 – Early Site work is being performed under a separate contract, and the Phase 1 contract documents have been made available for reference and for review and coordination. Offerors shall base their proposals on the forthcoming 100% Final Phase 2 solicitation documents. Work specifically included in the Phase 1 contract should not be duplicated in the Phase 2 Contractor's proposal. In brief, Phase 1 includes installation of site perimeter temporary fencing, sound barrier, tree protection measures, and erosion and sediment controls. Upon completion of Phase 1, these items will be turned over and become the responsibility of the Phase 2 Contractor to properly maintain, adjust, or modify as necessary, and ultimately remove upon completion of the project. Phase 1 also includes selective site demolition work and storm/water/sanitary, and electrical bypass / infrastructure work necessary to reroute existing utilities outside the limits of the new exhibit area. Following completion and connection of the new or rerouted utilities, the Phase 1 Contractor shall remove abandoned utilities within the new exhibit area as required by the Phase 1 contract documents.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
199	65% Specifications Sections 08 3453 & 32 3100	Please confirm if Hercules Custom Iron is an acceptable fabricator / installer for the Animal Enclosure Caging & Doors (Spec 083453) and Metal Fences & Gates.	Hercules Custom Iron may be proposed as an acceptable fabricator and installer for the work specified under Sections 08 34 53 – Animal Enclosure Caging & Doors and 32 31 00 – Metal Fences and Gates, subject to: 1) compliance with all requirements of the Contract Documents, and; 2) receipt of Hercules Custom Iron's response to the attached questionnaire titled "Animal Containment Door & Gate Manufacturer Questionnaire". NOTE: this questionnaire was also sent, via email, directly to Nick and Evan. Final acceptance of Hercules Custom Iron as a fabricator / installer is subject to review and approval of the required completed questionnaire. Offerors will be notified of Hercules Custom Iron's acceptance status at least 10 days before Offerors' bids are due.. Acceptance of Hercules Custom Iron as a proposed equal does not relieve the Contractor of responsibility for full compliance with the Contract Documents. NOTE: Please see response to pre-bid RFI no. 91 above for similar requirements.	9/30/2026	10/9/2026
200	65% Drawings Sheet E-604SH	Sheet E-604SH states that light fixture XL1 is to be recessed in handrail. Please identify which handrails are to receive this fixture and provide detailed installation and wiring pathways information.	All handrails along pathways will have lights recessed. Handrail lighting is a custom product and wiring pathway to and between handrails to be within conduit. However, the handrail manufacturer shall provide shop drawings indicating wiring pathways and additional installation details for review and approval. Additional detailing and clarifications can be found within the forthcoming 100% Final submission in the EX series (where handrails are scoped), specifically, EX402DT and EX-403DT.	9/30/2026	10/9/2026
201	NA	Please clarify quantity and position/spacing of the bumpers on the loading dock.	Spacing and quantity of loading dock bumpers will be clarified in the forthcoming 100% Final drawings.	9/30/2026	10/9/2026
202	RFP, Attach. No. 4 FACTOR 2, Section h) Page 105 0f 139	The RFP notes the Quality Control Manager must be a full time position once construction starts. May that role be filled by a full time field representative in a dual hat rule, under the guidance of a part-time corporate quality representative?	No. The Quality Control Manager (QCM) shall be a full-time position during construction as required by the RFP. The QCM shall be responsible for implementation and administration of the project Quality Control Program and shall meet the qualifications and requirements identified in the solicitation documents.	9/30/2026	10/9/2026
203	RFP, Attach. No. 4 FACTOR 2, Section h) Page 104 0f 139	Regarding the Superintendent position, the RFP requires 10+ years of construction experience. Provided the Superintendent demonstrations qualifications for the position and project, may the requirement be reduced to 8+ years?	Yes, a minimum of 8 years is acceptable provided the individual has relevant experience with projects that are at AZA accredited facilities as evidenced by their resume.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
204	NA	Please confirm the following about the PACS - Software & Configuration a. What version of C•CURE 9000 is being used? b. How many workstations/client licenses are needed? c. What are the access levels and credential policies? d. Is Database backup/disaster recovery required?	a. Please see response to pre-bid RFI no.100 above b. Please see response to pre-bid RFI no.101 above c. Please see response to pre-bid RFI no.102 above d. Please see response to pre-bid RFI no.103 above	9/30/2026	10/9/2026
205	NA	Please confirm the video retention period for the VASS system	Please see response to pre-bid RFI no. 104 above	9/30/2026	10/9/2026
206	NA	Please confirm the recording profiles (continuous vs. event-triggered)?	Please see response to pre-bid RFI no. 106 above	9/30/2026	10/9/2026
207	NA	No video wall displays are shown on the contract drawings. Please confirm if these are required. If yes, please provide specifications.	Please see response to pre-bid RFI no. 107 above	9/30/2026	10/9/2026
208	NA	Please confirm if any operator workstations are required.	Please see response to pre-bid RFI no. 108 above	9/30/2026	10/9/2026
209	NA	Please confirm any network/ IT requirements for PACS, VASS, etc.	Please refer to security drawings and specifications for network requirements.	9/30/2026	10/9/2026
210	NA	Please confirm if there are any visitor management requirements	Please see response to pre-bid RFI no. 99 above	9/30/2026	10/9/2026
211	65% Drawings Sheet LS-504DT	Landscape drawing LS-504DT calls out details for the Pedestrian Railing, and calls out a 2”x2” woven wire mesh that weaves around a cable. Please confirm the mesh diameter and the cable diameter for the Pedestrian Railing.	Please see response to pre-bid RFI no. 116 above	9/30/2026	10/9/2026
212	65% Drawings Sheet SS-110DG	Drawing SS-110DG showcases the general layout of the enclosure steel, with a number of struts called out between the arches. In regard to netting installation, please confirm if the netting is to be laced directly the struts, or if additional details will be provided.	Please see response to pre-bid RFI no. 117 above	9/30/2026	10/9/2026
213	65% Drawings	The drawings reference that all animal containment netting is to be laced to railings around the site. Please confirm if there are locations where the netting is to be terminated and laced to eye bolts by utilizing a cable, and verify the cable diameter and finish.	Please see response to pre-bid RFI no. 118 above.	9/30/2026	10/9/2026
214	65% Drawings Sheet AL-001F	Sheet AL-001F states that design includes fire extinguishers, fire extinguisher cabinets, and code-required signage. There are currently no details specifying quantity, type, or locations of any of the above elements. Please provide approximate details to be able quote these accessories. Please also provide specifications for fire extinguishers, fire extinguisher cabinets and code-required signage.	Specification Section 10 4416 - Fire Extinguishers will be provided in forthcoming 100% Final submission. Signage drawings are included in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
215	65% Specifications Section 13 3100 Paragraph 3.1.d.1	Specification section 133100 – Special Structure, subsection 3.1D-1, notes that TYLin will be providing a 3D design intent model. Please confirm if this is going to be made available with the release of the 100% CD drawings.	See response to pre-bid RFI no. 174 above.	9/30/2026	10/9/2026
216	RFP, Amendment 2 - Geotech Report	The Geotech report was issued as part of Amendment 0002 but noted as “for reference purposes only”. This information will be critical to delegated design elements such as micropiles and support of excavation. Please confirm this information will be part of the contract documents for the successful bidder.	Confirmed. The Geotech report will be part of the contract documents for the successful bidder.	9/30/2026	10/9/2026
217	RFP, Amendment 2 - Geotech Report	Based on the Geotech report issued through Amendment 002, please confirm rock excavation is not expected on the project, or provide an allowance to carry in bidding.	Please see response to pre-bid RFI no 36	9/30/2026	10/9/2026
218	65% Drawings Sheets A-111CP & A-112CP	Architectural Reflected Ceiling Plans do not specify a finish for exposed concrete ceilings. Please provide specifications or details on how exposed concrete ceilings should be finished.	Sheets A-111CP and A112CP note within the legend that all exposed concrete shall be painted unless otherwise noted. Further clarification on finishes to be provided in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
219	65% Drawings Sheets C-153SP, C-155SP & LS-102SP	Drawing C153SP and C155SP show the Decorative Vertical Slat Fence at the same location as the Caderock Wall; reference keynote #10 for the Caderock Wall and key #12 for the Decorative Vertical Slat Fence. Landscape drawing LS-102SP shows a slightly different layout for the Decorative Vertical Slat Fence. Please confirm which layout is to be used for this fence.	The layout shown on landscape drawings should take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
220	65% Specifications Section 05 5213 Paragraph 1.1.B & Section 05 7300	Specification section 055213 – Pipe and Tube Railings, subsection 1.1-B “Related Requirements”, specifically calls out specification section 057300 – Decorative Metal Railings. There is no specification section 057300 in the bid documents. Please issue this specification section, or confirm it does not apply.	Referenced specifications listed in paragraph 1.1.B are not applicable. This paragraph has been removed in the updated specification section 05 5213 in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
221	65% Specifications Section 32 3100 Paragraphs 2.7 thru 2.11	Specification section 323100, subsection 2.8 and 2.9, call for the Service Handrail and the On Habitat Handrail to be painted black and bronze, respectively. Please confirm if these are to be painted, or if they are to be powder coated like the rest of the items listed in 2.6, 2.7, 2.10, and 2.11.	The Service Handrail and the On Habitat Handrail are to be shop primed and painted.	9/30/2026	10/9/2026
222	65% Drawings Civil Series & Landscape Series	The layout for the Pedestrian Barrier shown on the Civil Drawings versus the Landscape Drawings do not match. Please confirm which layout is correct.	The layout shown on landscape drawings should take precedence. These layouts will be updated in forthcoming the 100% Final submission.	9/30/2026	10/9/2026
223	65% Drawings Civil Series & Exhibit Series	The layout for the Guest Barrier shown on the Civil Drawings versus the Exhibit Drawings do not match. Please confirm which layout is correct.	The layout shown on the exhibit drawings should take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
224	65% Specifications Section 31 6333, Paragraphs 4.2.B	Please confirm if changes to the extent of micropiles shown on the drawings will be addressed via unit prices.	Confirmed. Unit prices have been removed from specification section 31 6333 in the forthcoming 100% Final submission. Offerors are required to provide their unit prices associated with micropiles in advance with their Pricing proposal. See revised Bid Schedule uploaded with this set of pre-bid RFIs.	9/30/2026	10/9/2026

Smithsonian Institution

Construct Arabian Leopard Facility (ALF)

BIM Project Execution Plan (PxP)

September 10, 2026 – Phase 2: 100% Construction Documents

November 2024 Edition

TABLE OF CONTENTS

1.BIM PROJECT EXECUTION PLAN OVERVIEW 5
1.1 Document Revision History 6
2.PROJECT INFORMATION 7
2.1 Basic Project Information 7
2.2 Project Schedule 7
2.3 BIM Execution Plan Timeline 9
2.4 Key Project Contacts 9
2.5 BIM Roles and Responsibilities 10
2.6 BIM Use Staffing 12
3.PROJECT SPECIFIC DELIVERABLES 12
3.1 BIM Goals 12
3.2 BIM Uses 14
3.2.1 Detailed BIM Use Requirements 17
3.3 Project Deliverables 19
3.3.1 Design Deliverables 19
3.3.2 Construction Deliverables 21
3.3.3 SI Deliverables for Design and Construction 21
4.ELECTRONIC COMMUNICATIONS 21
4.1 Software Requirements 21
4.2 Electronic File Storage 22
4.3 Project Folder Structure 23
4.4 Information Exchange Schedule 23
4.5 SI Asset Management 27
4.6 Space Naming 27
4.7 Model File Naming 27
4.8 Sheet View Naming 27
4.9 Trade Contractor Coordination File Naming 27
4.10Reference Points 27
5.COLLABORATION PROCEDURES 28
5.1 Meetings 28
5.1.1 Project Meetings 28
5.1.2 BIM Coordination Meetings 28
5.2 Coordination Schedules 29
5.2.1 Design 29

5.2.2 Construction 29
5.3 BIM Coordination 29
5.3.1 Model Element Color Coding 29
5.3.2 Hierarchy of Systems Coordination 30
5.4 Quality Control 31
5.5 Model Accuracy and Tolerances 31
6.MODEL CONTENT REQUIREMENTS 33
6.1 Model Content LOD 33
6.2 Revit Worksets 34
7.APPENDICES 36
Appendix A - Definitions 36
Appendix B - References 37

1. BIM PROJECT EXECUTION PLAN OVERVIEW

As the world's largest museum and research complex, the Smithsonian Institution (SI), through the Office of Planning, Design and Construction (OPDC) is responsible for the planning, design, construction, and revitalization of all Smithsonian facilities, across eight states, the District of Columbia, and in Panama.

The purpose of this manual is to provide a standardized document template, with which, AEC consultant teams can outline the information, procedures, and responsibilities relevant to a Building Information Model (.rvt, .dwg, .xlsx, etc.) development effort for Smithsonian projects. The goal of the OPDC BIM PxP framework is to assure accurate and consistent work within, and across SI projects.

The *OPDC BIM Project Execution Plan (PxP)* works in concert with the OPDC BIM Guidelines, *SI Revit Template Users Guide, SI Space Naming Guidelines and SI Facility Asset Data Spreadsheet*. Those documents describes the type and level of information required by the OPDC for BIM deliverables.

Each project's BIM PxP will be a living document, revised and updated as necessary by the project team to reflect changes in BIM development that occur during project execution.

The BIM PxP will clearly detail the responsibilities for developing all components in the project BIM, and their level of detail. Any changes made in the approach to BIM development during project execution should be reflected in the BIM PxP, approved by the project team, and reviewed by the SI's COTR (Contracting Officer's Technical Representative).

SI BIM MISSION STATEMENT

The Smithsonian Institution (SI) BIM mission statement is to obtain a well-documented BIM deliverable that not only provides required design submittals but also caters easy transition from BIM to SI's Facility Center applications.

1.1 Document Revision History

At a minimum, updates in the BIM PxP are required at the beginning of the project, start of SD, start of DD, and hiring of Construction Manager.

Rev	Date	Section	Description of Updates
1st Issuance	03/16/2026	(all)	(all)
2nd Issuance	6/15/2026	(all)	(all)
3rd Issuance	9/10/2026	(various)	(various)

2. PROJECT INFORMATION

2.1 Basic Project Information

Confirm official SI project name and project number

Project Name	Construct Arabian Leopard Facility (CALF)
Project Numbers	OPDC Project No. 2533105
Project Owner	National Zoological Conservation Biology Institute (NZCBI)
Project Location and Address	3001 Connecticut Ave NW, Washington, DC 20008
Contract Type / Delivery Method	Design Bid Build (DBB)
Brief Project Description	The Construct Arabian Leopard Facility is located at the existing animal habitat sites of Zoo in Your Backyard and American Bison Habitat. The project will consist of the demolition of existing structures on-site to allow for the construction of a new care building and full enclosure for the leopards that encompasses 3 habitats (West habitat, East habitat, and Off-View Habitat).
Additional Project Information	Project has an atypical delivery schedule for documentation including an early release package for below grade.

2.2 Project Schedule

Include BIM milestones, design activities, and any other major activities during the project.

Project Phase / Milestone	Estimated Start Date	Estimated Completion Date	Revise BIM Plan	Project Stakeholders Involved
Pre-Concept Design	4/14/2025	7/17/25	NO	
Concept Design	9/23/25	10/31/25	NO	
Phase 1: 100% Construction Documents & Phase 2: 35% Design Development	11/3/25	3/16/26	YES	All A/E Teams
Phase 1: Final Construction Documents/Backcheck	3/17/26	3/30/26	No	All A/E Teams
Phase 2: 65% Construction Documents	3/17/26	6/15/26	YES	All A/E Teams
Interpretive Design	TBD	TBD	YES	

Project Phase / Milestone	Estimated Start Date	Estimated Completion Date	Revise BIM Plan	Project Stakeholders Involved
Phase 2: 100% Construction Documents	6/16/26	9/10/26	YES	All A/E Teams
Phase 2: Final Construction Documents/Backcheck	9/11/26	10/9/26	YES	All A/E Teams
Project Closeout	Date TBD	Date TBD	N/A	

2.3 BIM Execution Plan Timeline

The timeline for implementation of BIM over the life cycle of the project.

This table is pre-populated with recommendations on which phase each activity will take place. *Adjust as needed specific to project needs.*

BIM Activity	Schematic Design	Design Development	Construction Documents	Construction	Facility Turnover
Division 1 BIM & O&M Spec Creation			X		
BIM / GIS Kickoff Meeting				X	
Revit standards and templates		X		X	
BIM Execution Plan updates		X	X	X	X
BIM collaboration meetings		X	X	X	X
Model progression table (LOD Matrix)		X	X	X	
SI GIS Exports			X	X	X
SI Facility Asset Data Spreadsheet			X	X	X
Record Model(s)			X	X	X

2.4 Key Project Contacts

List of lead BIM contacts for each organization on the project team.

Role	Organization	Contact Name	Location	E-Mail	Phone
Project Manager(s)	SmithGroup	Matthew Reiskin	DC	Matthew.Reiskin@smithgroup.com	+12029744606
BIM Manager(s)	SmithGroup	Olivia Morgan	DC	Olivia.Morgan@smithgroup.com	+12029744511
Architectural Lead	SmithGroup	Kristina Jardis	DC	Kristina.Jardis@smithgroup.com	+12029745187
Structural Lead	TYLin	Tim Bowden	DC	tim.bowden@tylin.com	+12024496331
Landscape Lead	SmithGroup	Matthew Johnston	DC	Matthew.Johnston@smithgroup.com	+12029744600

Role	Organization	Contact Name	Location	E-Mail	Phone
Exhibit Lead	SHR Studios	Delaney Ford	WA	DFord@shrstudios.com	+12068428332
Civil Lead	Sorba	Scott Miller	VA	Scott.Miller@sorbaeng.com	+17033917618
MEP/FP Lead	SmithGroup	Kenz Meliani	DC	Kenz.Meliani@smithgroup.com	+12029740804
Irrigation Lead	Hines Inc	Matt Hall	CO	mhall@hines.com	+17147242474
Telecomm Lead	BrightTree Studios	David Vargo	PA	dvargo@brighttreestudios.com	+14126000995
Electronic Security Lead	M2H Protection, Consulting & Design	Mark Hankewycz	MD	Mhankewycz@m2hprotection.com	+13013716047

2.5 BIM Roles and Responsibilities

Describe BIM roles and responsibilities such as BIM Managers, Project Managers, Drafts persons, etc.

- **BIM Manager:** Develops a BIM Project Execution Plan (PXP) and determines whether the project team would benefit from using cloud-based model hosting. Our projects are frequently staffed by project team members that are in different offices and/or different organizations. All Revit work is hosted in the Autodesk Construction Cloud which is inherently conducive to project teams with distributed team members.
- **Project Architect/ Task Leader**: The Task Leader/ Project Architect assure that BIM and other e-deliverable requirements that are requested by owners are specifically defined and agreed upon by all members of the project team including the owners. Assures the following best practices are followed when collaborating with Autodesk Construction Cloud (ACC):
    - Do not open or modify any other team's model without permission.
    - Do not rename or move Revit models without the team's agreement.
    - Do not publish other teams' models unless agreed upon.
    - When linking models, always link from the ACC project directly if the model is a live, collaborated model in the ACC project. Otherwise, link from the ACC project using the Autodesk Docs Desktop Connector location.
    - When linking CAD files, always link from Autodesk Docs Desktop Connector, never from a network or local drive.

- **Data Champions:** Every project team has one member, the Data Champion, that takes responsibility for coordinating clear, consistent data about the project for internal reference and external reporting requirements. Prepares the model for sharing for collaboration or as part of a final deliverable, taking the following steps:
    - Save a detached copy of the model to prep
    - Purge unused elements.
    - Delete views that are not on sheets.
    - Accept primary design options and remove others.
    - Upload the prepped model to the Record folder on ACC Using CTC Project Cleaner can help expedite this process, but the model must be saved as a copy before cleaning.

2.6 BIM Use Staffing

For each BIM Use noted, identify the team within the organization (or organizations) who will staff and perform that Use, and estimate the personal time required. (Optional)

BIM Use	Organization	Number of Total Staff for BIM Use	Lead Contact
BIM Creation & 3D coordination	SmithGroup (Architectural, Landscape MEP/FDFA)	10	Kristina Jardis Kristina.Jardis@smithgroup.com
	TYLin (Structural)	3	Tim Bowden Tim.bowden@tylin.com
	SHR Studios (Exhibit)	2	Delaney Ford DFord@shrstudios.com
	Sorba (Civil)	2	Scott Miller Scott.Miller@sorbaeng.com
	Hines (Irrigation)	1	Mike Temple mtemple@hines.com
	BrighTree Studios (Telecom)	1	David Vargo dvargo@brighttreestudios.com
	M2H Protection, Consulting & Design (Security)	1	Mark Hankewycz mhankewycz@m2hprotection.com

3. PROJECT SPECIFIC DELIVERABLES

3.1 BIM Goals

The project team will document BIM goals for each project phase in order to assist in populating the table in Section 3.2. Examples have been provided in gray below. These should be edited/replaced with project specific information.

Project Phase	Priority (High/ Med/ Low/ Not Pursued)	Goal Description	Potential BIM Uses
Schematic Design	High	Preliminary Energy Analyses	Efficient design decision making
Design	High	Address conflicts in design	3D Design coordination

Project Phase	Priority (High/ Med/ Low/ Not Pursued)	Goal Description	Potential BIM Uses
Construction	High	Identify concerns with construction sequences	4D modeling
Turnover	Medium	As-built model	Turnover to model

3.2 BIM Uses

*Note BIM uses that will be implemented on this project by placing a mark next to the **BIM Use** item (Reference the BIM Goals identified previously in the Section 3.1). Insert any additional uses, as applicable, in the empty cells in the table below.*

X	Plan	X	Design	X	Construct	X	Operate
x	Programming	x	Design Authoring	x	Site Utilization Planning		Building Maintenance Scheduling
x	Site Analysis (3D Field Positioning and QC)	x	Design Reviews / Model Reviews	x	Construction System Design		Building System Analysis
	3D Safety and Logistics Planning	x	Asset Management	x	Asset Management	x	Asset Management
		x	3D Coordination / Clash Detection	x	3D Coordination / Clash Detection	x	Space Management / Tracking
		x	Structural Analysis	x	Digital Fabrication		Disaster Planning
		x	Lighting Analysis		3D Control and Planning		Record Modeling
		x	Energy Analysis	x	Record Modeling		
		x	Mechanical Analysis				
		x	Other Eng. Analysis				
		x	Sustainability (LEED) Evaluation				
			Code Validation				
	Phase Planning (4D Modeling)		Phase Planning (4D Modeling)		Phase Planning (4D Modeling)		Phase Planning (4D Modeling)
	5D Cost Estimation		5D Cost Estimation		5D Cost Estimation		5D Cost Estimation
	Existing Conditions Modeling	x	Existing Conditions Modeling	x	Existing Conditions Modeling	x	Existing Conditions Modeling
Legend: X = *Confirmed Use*; O = *Potential Use*							

BIM Uses that are specific to the project should be noted in this table. Include ranking values - High (Mandatory), Medium (Significant), Low (Minimal). Examples are shown in the table below.

BIM Use	Value to Project	Responsible Party	Value to Resp. Party	Additional Resources/ Skills Req'd to Implement	Notes	Proceed with Use
	High/ Med/ Low		**High/ Med/ Low**			**Yes/No/ Maybe**
Record Modeling	HIGH	Contractor	MED	Req. training and software		**YES**
		Facility Manager	HIGH	Req. training and software		
		Designer	MED			
Cost Estimation	MED	Contractor	HIGH			**NO**
4D Modeling	HIGH	Contractor	HIGH	Need training on latest software	High value to owner due to phasing issues	**YES**
				Infrastructure needs	Use for Phasing & Construction	
3D Coordination (Construction)	HIGH	Contractor	HIGH			**YES**
		Sub-contractors	HIGH	Conversion to Digital Fab. Required	Modeling learning curve possible	
		Designer	MED			
Engineering Analysis	HIGH	MEP Engineer	HIGH			**MAYBE**
		Architect	MED			
Design Reviews	MED	Arch	LOW	Federated model views in the native design model	Reviews from design model no additional detail req.	**YES**

BIM Use	Value to Project	Responsible Party	Value to Resp. Party	Additional Resources/ Skills Req'd to Implement	Notes	Proceed with Use
	High/ Med/ Low		**High/ Med/ Low**			**Yes/No/ Maybe**
3D Coordination (Design)	HIGH	Architect	HIGH	Coordination software req.	Contractor to facilitate coordination	**YES**
		MEP Engineer	MED			
		Structural Engineer	HIGH			
Design Authoring	HIGH	Architect	HIGH			**YES**
		MEP Engineer	MED			
		Structural Engineer	HIGH			
		Civil Engineer	LOW	Large learning curve	Civil not required	
Programming	MED				Planning phase Complete	**NO**
Code Evaluation	LOW	Contractor	MED	Software req.	Streamline code review	**NO**
		Architect	LOW	Software req.		

3.2.1 Detailed BIM Use Requirements

1. Existing Conditions Modeling

Description: A process in which a project team develops a 3D model of the existing conditions for a site, facilities on a site, or a specific area within a facility. This model can be developed in multiple ways and may include laser scanning and/or conventional surveying techniques, depending on project goals and efficiencies.

Existing Conditions elements within the scope of work were modeled to LOD 200. The modeling was support by drawings and site survey.

2. Site Analysis [NOT APPLICABLE FOR CONTRACTED SCOPE OF SERVICES]

3. Design Authoring

Design Authoring is a process in which 3D software is used to develop a Building Information Model based on criteria that is important to the translation of the building's design. Revit will be the primary Design Authoring tool used on this project. Design authoring is the first step towards BIM and the key is connecting the 3D model with a powerful database of properties, quantities, means and methods, costs and schedules. The design authoring tools creates building information model and construction documents. It helps monitor quality control of design, cost and schedule. As a powerful visualization tool, it helps document and present the design intent to the client, consultants and other stakeholders. And most importantly, it helps coordination between various disciplines facilitated through interference detection.

Commented [OM1]: Addition for review from Olivia

Two groups of applications are at the core of BIM-based design processes which are design authoring tools and audit and analysis tools. Authoring tools create models while audit and analysis tools study or add to the richness of information in a model. Most of the audit and analysis tools can be used for Design Review and Engineering Analysis BIM Uses.

4. Design / Model Review

Design/Model Review is a review process in which the project BIM is evaluated based on a set of criteria, which can include: alignment with the project program, compliance with project standards, visual review of space aesthetics and layout in a virtual environment, and specific requirements such as layout, sightlines, lighting, security, ergonomics, acoustics, textures and colors, among many others. This BIM Use Requirement may be executed via computer software, such as virtual reality applications. Virtual mock-ups can be performed at various levels of detail depending on project needs.

5. 3D Coordination / Clash Detection

3D Coordination/Clash Detection is a process in which Clash Detection software is used during the coordination process to determine field conflicts by comparing 3D models of building systems. The goal of clash detection is to eliminate the major system conflicts prior to installation. The Model Coordination module built into Autodesk Construction Cloud will be the primary tool used for 3D Coordination/Clash Detection.

Commented [OM2]: Addition by Olivia. @Nick Martinazzi @Kamille Hampton lets discuss what this looks likes. Its a look we should use two weeks out from model submission.

For clash detection to work properly the project models need to be coordinated through aligned internal origin point that is associated with levels and gridlines. This information will be useful to review and identify obstacles to revise before a project is built to reduce, and prevent errors, delays and/or cost overruns.

6. 4D Scheduling [NOT APPLICABLE FOR CONTRACTED SCOPE OF SERVICES]

7. 5D Cost Estimation [NOT APPLICABLE FOR CONTRACTED SCOPE OF SERVICES]

8. Sustainability Analysis

A process in which a BIM project is evaluated based on LEED or other sustainable criteria. This process should occur during all stages of a facilities life including planning, design, construction, and operation. Applying sustainable features to a project in the planning and early design phases is more effective (ability to impact design) and efficient (cost and schedule of decisions). This comprehensive process requires more disciplines to interact earlier by providing valuable insights. This integration may require contractual integration in planning phase.

All projects must comply with the Federal Energy Management Guidelines, Smithsonian's Climate Change Action Plan, and all other relevant standards and guidelines and incorporate in the design all pre-requisites needed to obtain certification for the project type under the nationally recognized criteria for sustainability established by the U.S. Green Building Council's (USGBC) initiative for Leadership in Energy and Environmental Design (LEED).

The proposed renovation of the Auditorium and surrounding support spaces will pursue the following specific objective, consistent with the LEED rating systems for interior renovation projects, inclusive of all credits that correspond to the Federal Guiding Principles for Federal Leadership in High-Performance and Sustainable Buildings: LEED Gold certification for Projects with construction budgets greater than or equal to $5 million. The LEED scorecard checklist will be provided as part of the deliverables at every phase.

9. Energy Analysis

The BIM Use of Energy Analysis is a process in the design phase which one or more building energy simulation programs use a properly adjusted BIM to conduct energy assessments for the current building design. The core goal of this BIM use is to inspect building energy standard compatibility and seek opportunities to optimize proposed design to reduce structure's life-cycle costs.

To support the Energy Analysis and the accompanying Energy Analysis software, the project BIM model shall be constructed such that all geometry, materials, and envelope construction details are accurate and representative of the existing and/or new work. In addition, the project BIM model shall be accurately located and oriented with respect to real world geographical conditions as to properly represent the site to the Energy Analysis process.

10. Record Modeling [NOT APPLICABLE FOR CONTRACTED SCOPE OF SERVICES]

Record Modeling is the process used to depict an accurate representation of the physical conditions, environment, and assets of a facility. The record model should, at a minimum, contain information relating to the main architectural, structural, and MEP elements. Additional information including equipment and space planning systems may be necessary if the owner intends to utilize the information for maintenance and operations. The record model also contains information linking pre-build specifications to as-built specifications. This allows the owner to monitor the project relative to the specifications provided.

11. Asset Management

Asset Management is a process in which an organized management system is linked to a record model to efficiently aid in the maintenance and operation of a facility and its assets. Asset Management utilizes the SF Facility Asset Data Spreadsheet to populate an asset management system which is then used to determine cost implications of changing or upgrading building assets, segregate costs of assets for financial tax purposes, and maintain a current comprehensive database that can produce the value of a company's assets. Asset Data is then input into the As-Built Model(s) to allow users to visualize the asset in the model before servicing it potentially reducing service time.

3.3 Project Deliverables

At each phase of the Design and Construction process, OPDC requires the delivery of the model, along with electronic versions of hardcopy submissions and other files that support the intent of the project.

As a guide, the table below lists typical file types for electronic deliverables.

3.3.1 Design Deliverables

Phase	Submission Requirements	Format
Pre-Concept Design	Narrative	.pdf
Concept Design	Narrative	.pdf
Interim Cost Progress Print (2/20/26)	Narrative Drawings	.pdf .pdf
Phase 1: 100% Construction Documents and Phase 2: 35% Design Development	Narrative Project Execution Plan Drawings	.pdf .pdf .pdf

Phase	Submission Requirements	Format
	Design Intent Model(s)	.rvt, .ifc, .nwc, .nwd, .dwg
Phase 1: Final Construction Documents and Phase 2: 35% Design Development	Narrative Project Execution Plan Drawings Design Intent Model(s)	.pdf .pdf .pdf .rvt, .ifc, .nwc, .nwd, .dwg
Phase 2: 65% Construction Documents	Project Execution Plan LOD Matrix Specifications Drawings Design Intent Model(s) SI GIS Exports SI Facility Asset Data Spreadsheet	.pdf, .docx .pdf .pdf, .docx .pdf .rvt, .ifc, .nwd, .nwd, .dwg .dwg, .xlsx .xlsx
Phase 2: 100% Construction Documents	Project Execution Plan LOD Matrix Drawings Specifications Design Intent Model(s) SI-GIS Exports SI Facility Asset Data Spreadsheet	.pdf, .docx .pdf .pdf, .dwg .pdf, .docx .rvt, .ifc, .nwc, .nwd, .dwg .dwg, xlsx .xlsx
Phase 2: Final Construction Documents/Backcheck	Project Execution Plan LOD Matrix Drawings Specifications Design Intent Model(s) SI-GIS Exports SI Facility Asset Data Spreadsheet	.pdf, .docx .pdf, .xlsx .pdf, .dwg .pdf, .docx .rvt, .ifc, .nwc, .nwd, .dwg .dwg, xlsx .xlxs
Bid Process	Addenda	.pdf, .rvt, .dwg, .ifc
Construction	Bulletins	.pdf, .rvt, .ifc, .nwc, .nwd, .dwg
Record Documents	Project Execution Plan LOD Matrix Specifications Conformed Model(s) SI-GIS Exports Drawings	.pdf, .docx .pdf, .xlsx .pdf, .docx .rvt, .ifc, nwc, .nwd, .dwg .dwg, .xlsx .pdf, .dwg

3.3.2 Construction Deliverables

Phase	Submission Requirements	Format
Construction (Monthly)	Coordination Model(s) SI Facility Asset Data Spreadsheet	.rvt, .ifc,. nwc, .nwd, .dwg .xlsx
Construction (Quarterly)	Construction Model(s) SI Facility Asset Data Spreadsheet	.rvt, .ifc, .nwc, .nwd, .dwg .xlsx
At project completion – with submittals, O&M's and warranties attached	As-Built Model(s) – Final Project Execution Plan LOD Matrix O&M and Warranty Documents SI-GIS Exports SI Facility Asset Data Spreadsheet	.rvt, .dwg, .ifc, .nwc, .nwd .pdf, .docs .pdf, .xlsx .pdf, .docx .dwg, .xlsx

3.3.3 SI Deliverables for Design and Construction

All BIM deliverables to follow the schedule and requirement as indicated in the A/E Scope of Work / Construction Contract, OPDC BIM Guidelines and OPDC Revit Template User Guide.

4. ELECTRONIC COMMUNICATIONS

4.1 Software Requirements

This table will detail the software applications employed on SI projects. If a team member has any deviations, this needs to be discussed with SI to understand potential impact to final deliverables.

BIM Use	Discipline	Software	Version
Architecture Design	Architecture	Revit 2025	Agreed upon by SI and Contractor at the PI (Project Initiation)
Zoo Specialist Design	Zoo Specialist	Revit 2025 and AutoCAD	Agreed upon by SI and Contractor at the PI
Structure Design	Structure	Civil 3D 2024	Agreed upon by SI and Contractor at the PI
Structure Design	Enclosure	Rhino V8 and AutoCAD	Agreed upon by SI and Contractor at the PI
HVAC Design	HVAC	Revit 2025	Agreed upon by SI and Contractor at the PI
Plumbing Design	Plumbing	Revit 2025	Agreed upon by SI and Contractor at the PI

BIM Use	Discipline	Software	Version
Electrical Design	Electrical	Revit 2025	Agreed upon by SI and Contractor at the PI
Civil Design	Civil	Civil 3D 2024	Agreed upon by SI and Contractor at the PI
Fire Protection Design	Fire Protection	Revit 2025 and Revit Plugin AutoSprink	Agreed upon by SI and Contractor at the PI
Irrigation Design	Irrigation	Revit 2025 and AutoCAD	Agreed upon by SI and Contractor at the PI
Electronic Security Design	Electronic Security	Revit 2025	Agreed upon by SI and Contractor at the PI
Audio Visual and Telecommunications Design	AV/IT	Revit 2025	Agreed upon by SI and Contractor at the PI
Coordination	CM Coordination	TBD	
Design Review	All disciplines	Bluebeam, Revizto	Agreed upon by SI and Contractor at the PI

4.2 Electronic File Storage

Any electronic storage location (such an FTP site, Drop Box, etc.) used for the regular exchange of files from project consultants and the SI will be identified in the following table.

File Location	File Path /Directory	File Type	Password Protect	File Maintainer	Updated
Autodesk Construction Cloud (acc.autodesk.com)	Project Files BIM: /Civil /Landscape /Structural /Arch /Exhibits /MEP /FP FA /Security /Irrigation /Common Links	.rvt	Yes ********	Tao Blair	Weekly

* Refer to Model File Naming Section for filing naming conventions

4.3 Project Folder Structure

OPDC recommends the folder structure illustrated with the blue highlight in the Figure 5.1. This taxonomy will facilitate the delivery of federated Revit project files while maintaining links to external files (the linked files must be defined using "relative path" within the Revit model).

Using relative paths for links assures that when those files are moved together to a new directory (such as at the SI), links will be maintained. Revit locates the linked files by their relative position to the working directory.

Any deviations to the recommended folder structure should be discussed and approved by the SI project COTR. Additional files and folders can be added to this structure as long as the level 1, 2 and 3 hierarchy and contents are maintained.




Figure 4-1: Project Folder Structure

4.4 Information Exchange Schedule

Use this table to describe standard information exchanges and file transfers that will occur on the project. Project files will be transferred at regular intervals to the locations identified above (Electronic File Storage). Files shall be transferred according to the frequency listed below by the project BIM team's individuals responsible for coordination and data exchange (often identified as Discipline Model Managers or Trade Model Managers). Additional uploads may be required as requested by the A/E or CM BIM Manager.

Information Exchange	File Sender	File Receiver	One-Time or Frequency	Due Date or Start Date
Authoring – 3D Coordination	All Teams	ACC (Forma)	Weekly	Project Start

The final deliverables will be delivered in the following folder structure:

Consultants are expected to share BIM data with SmithGroup and other members of the design team.

To create a highly collaborative environment and extend BIM access to the entire multi-firm team, SG will be utilizing a cloud-based solution. Autodesk Construction Cloud (ACC) Docs centralizes our workspace and gives us a real-time collaborative environment with live, in context coordination workflows.

Autodesk Construction Cloud – ACC Docs


ACC is a cloud work-sharing, design collaboration, and data management platform for project delivery, it allows all invited participants to work on live linked Revit models, view, comment, and markup published 2D drawings and 3D views and to share them with the team. The design team, contractors, trade partners and owners will have access to the latest models to view and download. Invited Team Members will have access to data management and collaboration functionality like 2D & 3D viewer and markup tools accessible via web, phone, and tablet.

SmithGroup has created a BIM ACC Project and folder structure on our Hub. All participating team members will be invited to the project by email address and set up with the appropriate access permissions. All Team members will be given permissions for View+Upload+Download and markup for all files. Consultants working in Revit are expected to collaborate their Revit models up to the ACC project.

ACC Docs centralizes the project workspace and provides a real-time collaborative environment with “live” in context coordination workflows. Teams will utilize each discipline’s live model for linking to provide the most up to date information for coordination.

All “live” Revit models will be published nightly to ACC to the appropriate discipline project folders by SmithGroup’s automated Clarity Publish task.

ACC Docs Folder Structure (SmithGroup):

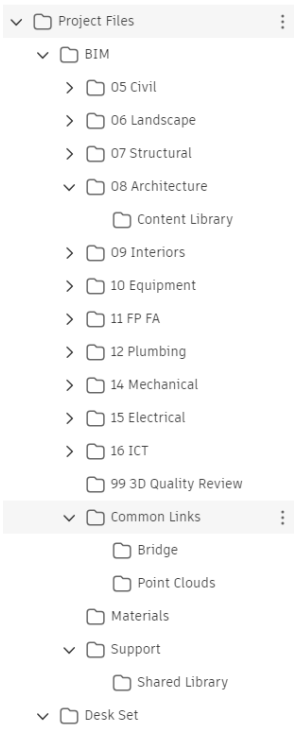

Folder	Description
05 Civil	Civil 3D CAD files via Desktop Connector
06 Landscape	Revit file for zoo landscape design
07 Structural	Structural Revit models
08 Architectural	Architecture Revit models
11 FP FA	Fire Protection/Fire Alarm Revit models
12 Plumbing	Plumbing Revit model
14 Mechanical	Mechanical Revit models
15 Electrical	Electrical Revit models
16 ICT	Low Voltage Revit models
99 3D Quality Review	Quality Review models
Common Links	Non-Revit files for linking or xref-ing. CAD files linked to Revit models via Desktop Connector. Included Point Clouds and site survey CAD
Materials	Revit material/asset library
Support	BEP, Shared Library, Shared Parameter file
Project Information	Any shared Office 360 files

ACC Docs Folder Permissions (SmithGroup):

SmithGroup team members (with the role assignment SG Design Team) will have permissions to view, download, and edit files in all folders based on the standard folder permissions.

External Design team members (with a role assignment Design - [Discipline]) will have permissions to View and Download from all folders. They'll be able to Upload to the Desk Set > Upload folder and to work in their own discipline's BIM folder.

Owner / General Contractor members (with a respective role assignment of “Owner” or “Contractor”) will have permissions to View and Download from specific folders.

ACC Linking Strategies

It is preferable to have the Revit models set to be "live" linked for efficient coordination and will also be expected to be published for use in ACC Docs. Each discipline is to produce Published models on a regular schedule, at minimum weekly.

All Revit and Civil3D/CAD files are hosted in the same ACC project and linked to the most current version on ACC. Live Linking displays the working, linked model as it is updated in real time by the design team. As models are updated, design teams can see these changes via a reload action.

Commented [OM3]: Additions by Olivia for review

ACC Data Exchanges

The Design Team will be using SmithGroup's ACC project website to transfer all BIM files - taking advantage of ACC's versioning features. Upload and publish all drawings and design files including RVTs, PDFs, IFCs, DWFs, and DWGs with xrefs. The site will offer secure access to invited project team members and maintain an archive of all uploaded/published files. The cloud-based Revit models are backed up regularly to protect against any event. The project website will be managed by the Design team BIM Lead.

Autodesk Desktop Connector

All team members will install and use Autodesk Desktop Connector for connecting desktop environments to the projects ACC Docs folders. Download and install the free App here: https://www.autodesk.com/bim-360/desktop-connector/

This will allow the team to have common folders for linking and xref-ing consultant CAD files into BIM 360 based Revit models and a common repository for exported CAD backgrounds from ACC Revit models.

ACC Revit Model Publishing

When syncing with Central in Revit on a ACC project, it does not automatically update models you see in the ACC Docs project website. Everyone who has a BIM Collaborate Pro entitlement and is a member of the project sees changes when accessing and linking models through Revit. But for those team members who are not Revit users or are only members of ACC Docs, they do not see the latest version of "live" model. **The models seen in the ACC Docs folders on the web are only as up to date as the last "Publish".**

SmithGroup will be utilizing IMAGINiT Clarity to automate nightly publish tasks for all SmithGroup models. Outside consultants may opt-in to have their models included in SmithGroup's Clarity task. Teams are expected to publish at the designated frequency indicated in this BEP.

Commented [OM4]: Additions by Olivia for Review

4.5 SI Asset Management

Refer to SI Asset Management section in the Smithsonian OPDC BIM Guidelines for requirements.

Add detail specific plan/process/requirements associated with utilizing and updating the spreadsheet.

4.6 Space Naming

Refer to SI Space Naming Guidelines for naming and space requirements.

Add details to this section in case of any deviations from the Smithsonian Institution standards with the approval of SI's Project COTR.

4.7 Model File Naming

Refer model file naming sections in the *Smithsonian OPDC BIM Guidelines* for naming conventions.

Add details to this section in case of any deviations from the Smithsonian OPDC standards with the approval of SI's Project COTR.

4.8 Sheet View Naming

Refer sheet view naming sections in the *Smithsonian OPDC BIM Guidelines* for naming conventions.

4.9 Trade Contractor Coordination File Naming

Files generated during the coordination process should follow the same naming conventions as described in the model file naming and sheet file naming sections in the *Smithsonian OPDC BIM Guidelines*.

4.10 Reference Points

Refer to reference points sections in the *Smithsonian OPDC BIM Guidelines* for project origin locations.

5. COLLABORATION PROCEDURES

5.1 Meetings

5.1.1 Project Meetings

In the table below, define the type of meetings held during the project, including coordination meetings, owner updates, progress meetings, etc. Indicate the required attendees and scope of the meeting.

Meeting Type	Phase	Frequency	Participants	Location
Weekly A/E Team Coordination Meeting	All	Weekly	Representatives(s) from each A/E Discipline/Firm	Virtual via MS Teams

5.1.2 BIM Coordination Meetings

In the table below, define the type and frequency of meetings related to BIM Coordination. Indicate the required attendees and scope of the meetings.

Meeting Type	Phase	Frequency	Participants	Location
Weekly A/E Team Coordination Meeting	All	Weekly	Representatives(s) from each A/E Discipline/Firm	Virtual via MS Teams

5.2 Coordination Schedules

Outline the deliverables required and the anticipated date for completion.

5.2.1 Design

Deliverable	Date
Pre-Concept Design	7/17/2025
Concept Design	10/31/2025
Phase 1: 100% Construction Documents and Phase 2: 35% Design Development	3/16/2026
Phase 1: Final Construction Documents/Backcheck	3/30/2026
Phase 2: 65% Construction Documents	6/15/2026
Phase 2: 100% Construction Documents	9/10/2026
Phase 2: Final Construction Documents/Backcheck	10/6/2026

5.2.2 Construction

Deliverable	Date
TBD	TBD

5.3 BIM Coordination

5.3.1 Model Element Color Coding

All engineering consultant BIMs will contain a 3D view titled 'Arch Coordination'. This view will have filters applied to color code systems for coordination through the BIM links. The following colors, or an alternative color scheme as agreed to by the architect and consultants, will be applied to differentiate systems:

System	Color	RGB Color Index
Outside Air (Pressurization)		128,255,255
Supply Air		0,128,192
Return Air		0,64,128

Exhaust Air	128,0,128
Mechanical Equipment	220,220,220
Mechanical Piping (Wet)	224,196,95
Mechanical Piping (Dry) Vent	255,128,64
Kitchen Exhaust	255,128,128
Plumbing Equipment	118,146,60
Plumbing (Domestic)	0,128,0
Plumbing (Sanitary Storm)	200,140,255
Plumbing (Sanitary Waste)	64,0,128
Lighting	254,159,106
Electrical	255,255,0
Telecommunications	128,128,64
Fire Protection	255,0,0
Fuel Supply	0,0,0
Irrigation	182,205,189
Structural	146,205,220

Integrated (Federated) Model/ Integration Processing accordance with the Project Schedule the Project BIM Manager will be responsible for performing clash detection with the design and/ or trade models. The clashes will be organized for review by the Project Team. Once clashes have been reviewed, a potential resolution has been assigned to a specific team member it is expected that the clash be resolved in a timely manner, preferably prior to the next scheduled meeting time.

5.3.2 Hierarchy of Systems Coordination

In the event that any system has interference or clash with a differing system, A/E will agree upon following a discipline hierarchy for resolutions based on the consensus of the project team.

1. Structure
2. Architecture (must follow RFI process for changes as required)
3. Equipment location and Access (must follow RFI process for changes as required)
4. Sloped Piping – vent, storm, sanitary
5. High and Medium pressure ductwork and devices
6. Large diameter pressurized pipe mains, valves and devices (50mm (2”) and larger), fire protection mains
7. Plumbing (other than systems utilizing gravity)
8. Conduit 50mm (2”) and greater, power feeds to equipment and all switch gear
9. HVAC Piping (other than systems utilizing gravity)
10. Fire Protection Distribution (Branch lines)

11. Low pressure ductwork, grilles, registers, diffusers and associated equipment (location changes must be approved by designers)
12. Electrical Distribution Equipment
13. Sleeves through rated partitions
14. Access panels

5.4 Quality Control

The following checks should be performed in the models to assure quality:

Check	Definition	Responsible Party	Software Program(s)	Frequency
Visual Check	Ensure there are no unintended model components and the design intent has been followed	All Model Author(s)	Revit	Each milestone deliverable
Interference Check	Detect programs in the model where any building components are clashing including hard and soft	All Model Author(s)	Revit	65% CD, 100% CD
Standards Check	Ensure that the BIM standards have been followed (Refer to the OPDC *Revit Template Users Guide*)	All Model Author(s)	Revit	Continuous
Model Integrity Checks	Describe the QC validation process used to ensure that the Project Facility Data set has no undefined, incorrectly defined, or duplicated elements and the reporting process on non-compliant elements and corrective action plans	All Model Author(s)	Revit	Weekly

5.5 Model Accuracy and Tolerances

Models should include dimensioning as needed for design intent, analysis, and construction. Level of Accuracy (LOA) of the model shall be minimal 12mm (½") for existing and align with construction tolerances for all new construction (minimal 24mm (1").

Complete the table below to fill the modeling accuracy and tolerances.

Phase	Discipline	Tolerance
Design documents	Arch	Accurate to +/- [#] of actual size and location

Phase	Discipline	Tolerance
Shop drawings	Mech contractor	Accurate to +/- [#] of actual size and location
As-builts		

6. MODEL CONTENT REQUIREMENTS

6.1 Model Content LOD

Refer to *OPDC Revit Template Users Guide* for minimum model element requirement standards, under *Revit Modeling Requirements* section. This guidance describes the minimum standards required for project deliverables along with *Modeling Level of Development* definitions.

The project team shall develop a BIM Content LOD matrix utilizing the template illustrated below and provided as a Microsoft Excel attachment.

BIM Content LOD Matrix has also been provided in a Microsoft Excel format for editing in Appendix B. Attach a version of this spreadsheet to the BIM Project Execution Plan.

Project Stage			Design Model			Design Intent Model (to) Integration with SI		
BIM Use Title			Model Element (3D)	Model Element (2D)	Data Only (Specs)	Existing Conditions (to) As-Built & Record Model		O&M Criteria
Time of Exchange (SD, DD, CD, Construction)								
Responsible Party (Information Receiver)								
Receiver File Format								
Application & Version								
			Yes (Y) / No (N)			Level of Development (LOD) and Model Element Author (MEA)		
Model Element (ASTM Uniformat II) Classification			Y/N	Y/N	Y/N	LOD	MEA	
A	SUBSTRUCTURE							
	A10	Foundations						
	A20	Basement Construction						
B	SHELL							
	B10	Superstructure						
	B20	Exterior Enclosure						
	B30	Roofing						
C	INTERIORS							
	C10	Interior Construction						
	C20	Stairs						
	C30	Interior Finishes						
D	SERVICES							
	D10	Conveying						
	D20	Plumbing						
	D30	HVAC						
	D40	Fire Protection						
	D50	Electrical						
E	EQUPMENT AND FURNISHINGS							
	E10	Equipment						
	E20	Furnishings						
F	SPECIAL CONSTRUCATION AND DEMOLITION							
	F10	Special Construction						
	F20	Selective Bldg Demo						
G	SITEWORK							
	G10	Site Preparation						
	G20	Site Improvements						
	G30	Site Civil/Mech Utilities						
	G40	Site Electrical Utilities						
	G50	Other Site Construction						
*	Additional Information							
	1	Construction Systems						
	2	Space						
	3	Information						
	4	Datum						
		Additional						
ALL EXISTING CONDITIONS TO BE MODELED TO A 200 LEVEL UNLESS DIRECTLY AFFECTED BY NEW CONSTRUCTION. THEN MODELED/DETAILED TO A 300 LEVEL TO ALLOW FOR DEMOLITION DRAWINGS AND TIE IN INFORMATION								

6.2 Revit Worksets

Revit Worksets are a way to separate a set of elements in the Revit project model into subsets for "worksharing". The Revit model contains a *Workset Table* which lists references to all worksets contained in that project model.

During project BIM development, Revit users should be aware of the active workset. There may be one or many worksets in a project. Each new model element added to the project will be placed in the active workset. For OPDC BIM development purposes, the following will be the essential worksets in a work shared project for architectural models:

For projects where disciplines are modeled in separate Revit models:

Workset Name	Purpose
Exterior Shell	Include all exterior shell elements of the building(s)
Interior	Include all interior elements of the building(s) except furniture and equipment
Core	Include core structure and core elements of the building(s)
Furniture	Include all interior furniture and equipment elements of the building(s)
Exhibits Walls	Include exhibit walls/partitions different from interior walls and exhibits
Exhibits	Include exhibits
Grid and Levels	Include grids and levels
Links	Include linked discipline Revit models
Architectural Lighting	Include light locations as per the architect so that they can be turned off or removed easily when lighting from MEP is finalized
Security/Surveillance and Access	Include locations for CCTVs, motion detectors, screening devices, push button mounts, etc.

These worksets are mandated for project BIMs to structure consistent models for the SI BIM inventory, and follow on use by the Smithsonian Institution.

Detail specific plan/process/requirements associated with utilizing embedding FM related data into the As-Building models. Include data requirements, data storage location, linkage requirements, etc.

7. APPENDICES

Appendix A - Definitions

As-Built Drawings	Physical mark-up of a printed set of Construction Documents that captures changes and updates throughout the construction process, including RFIs, bulletins, and field conditions. This does not involve the updating of any models.
As-Built Record Model	Design Model that has incorporated changes and updates throughout the construction process, including RFIs, bulletins, and field conditions.
Asset	Individual items incorporated into the construction of a project. For the SI, information is collected by this for use as facility data.
BIM Project Execution Plan (PxP)	A document created utilizing the OPDC's provided template to define procedures and roles for the preparation of electronic media during the project.
Closeout Documents	Consist of approved submittals, operating and maintenance manuals, as-builts, warranties, and other documentation and paperwork that is prepared by either the Contractor or Architect for the Owner's information and use, and is provided as a condition precedent to Final Payment.
Conformed Model	Updates the Design Intent Model for those aspects maintained by the designer to record authorized design changes during construction.
Contractor	The firm serving as lead builder for the project, working in the capacity of either General Contractor or Contractor.
Construction Model	BIM that demonstrates and communicates the facility data necessary to procure, fabricate, schedule or construct the Project.
Coordination Model	BIM prepared by Contractors to further develop the Design Model for use in system fabrication or field construction.
Design Intent Model	BIM prepared by the design team to communicate aspects of the design. It may consist of sub-models prepared by each of the discipline designers, such as Architecture, Mechanical, Electrical, and Structural.
Designer	The firm serving as developer of the project documents, working in the capacity of Architect, Engineer, or Consultant.
.DWG	File type associated with a native AutoCAD file.
Facility Center	SI wide database used to manage and maintain facilities data information for work orders and asset management.
GIS	Geographic Information Systems
Level of Development (LOD)	A way to define the level of detail of elements within a BIM.
Level of Accuracy (LOA)	A way to define the level of accuracy of elements within a BIM.
Master Format	A numbering system developed by CSI to organize specifications. Additional information may be found at: http://www.csinet.org/Home-Page-Category/Formats/MasterFormat/MF-use.aspx
.NWC, .NWD	File type associated with a native Navisworks file.

OmniClass	A numbering system developed by International Organization for Standardization (ISO) to provide structure for electronic databases. It is helpful for categorizing assets in a BIM or facilities management system.
OmniClass Table 23	Spreadsheet that contains the corresponding codes utilized in the BIM to categorize assets within the facility management system.
Project Closeout	The managed and orderly transition of the work from Substantial Completion to Final Payment, including the finalization of final paperwork.
Project Team	The collective group of representatives from the SI, the Designer, and Contractor.
.RVT	File type associated with a native Autodesk Revit file. It is the deliverable file format for all projects.
SI Explorer	The SI's geospatial information system (GIS). Web viewer of joined ArcGIS and Facility Center data.
Substantial Completion	Establishes a date that the Work can be used for the purpose intended, and involves the formal transition of property management from the Contractor to the SI

Appendix B - References

Autodesk Model Performance Technical Note White Paper
http://images.autodesk.com/adsk/files/autodesk_revit_2014_model_performance_technical_note.pdf

Autodesk Revit 2016 Help Wiki http://help.autodesk.com/view/RVT/2016/ENU/

Construction Industry Institute https://www.construction-institute.org/scriptcontent/more/res_cpf_2010_2_v2_more.cfm

National CAD Standard Version 5.0 http://www.nationalcadstandard.org/ncs5/

National BIM Standard-US Version 2 http://www.nationalbimstandard.org/references.php

Penn State Computer Integrated Construction http://bim.psu.edu/

USACE CAD and BIM Drawing Standards https://cadbim.usace.army.mil/BIM

ANIMAL CONTAINMENT DOOR AND GATE SYSTEMS
MANUFACTURER / SYSTEM PROVIDER QUALIFICATION QUESTIONNAIRE

Purpose. The Smithsonian is conducting preliminary market research to identify firms capable of providing complete engineered zoological animal containment door and gate systems. Responses will be used to evaluate potential inclusion as an acceptable manufacturer/system provider under Section 11 90 13.13. This questionnaire is for qualification and market-research purposes only and does not constitute a solicitation, award, or approval for a specific project, although we are looking to list acceptable manufacture/system providers in an upcoming solicitation for a project that has already received widespread publicity --- Arabian Leopard Facility at the Smithsonian National Zoological Park in Washington, DC.

Response Instructions. Please answer each item completely. If a question is not applicable, state "N/A." Please feel free to attach supplemental project lists, photographs, organization charts, technical data, or references where helpful. Clearly identify any portions of the proposed system that would be performed by affiliated firms, subcontractors, specialty engineers, or installers.

A. COMPANY INFORMATION

Company legal name: _____

Primary contact / title: _____

Address: _____

Telephone: _____

Email: _____

Website: _____

Year established: _____

Number and locations of offices/fabrication facilities:

_____

Number of full-time employees: _____

Brief description any ongoing animal containment door and gate system projects (Client, location, size):

1.

2.

3.

4.

5.

B. QUALIFICATION QUESTIONS

1. Relevant Zoological Experience

Describe your company's experience designing, fabricating, furnishing, installing, and/or commissioning zoological animal containment door and gate systems. Confirm whether the company has at least five years of relevant experience and identify not fewer than five comparable projects completed within the previous 10 years. For each project, provide facility, location, completion date, species, door/gate type, approximate size or weight where known, operating method, your scope of work, and owner/design-team reference contact.

Response:

2. Dangerous-Animal Experience

Identify projects involving dangerous animals, including large felids or other species requiring comparable containment reliability. Describe the containment risk, operating arrangement, redundant locking or safety features, and your company's responsibility for the completed system.

Response:

3. System Types and Capabilities

Identify the animal containment door/gate systems your company can provide, including as applicable: horizontal sliding, vertical/guillotine, swing, manual, mechanically assisted, counterweighted, gear-reduced/crank, hydraulic, pneumatic, electric powered, remotely operated, and interlocked systems. Identify any system types that your company does not provide.

Response:

4. Engineering and Delegated Design

Describe your in-house or regularly retained engineering capability for zoological containment systems. Identify who is responsible for structural design, door weight, track/hanger selection, operating-force calculations, mechanical-assistance design, powered-operator selection, controls, and safety features. Confirm whether delegated-design drawings and calculations can be prepared, signed, and sealed by a professional engineer.

Response:

5. Operating-Force Design

Describe your method for predicting and verifying manual operating force, including treatment of breakaway force, sustained operating force, rolling resistance/friction, mechanical advantage, counterweighting, and actual door weight. Can your systems be engineered and field verified to meet a maximum 40-lb breakaway force and 30-lb sustained operating force at the keeper operating handle?

Response:

6. Structural, Durability, and Environmental Design

Describe how you establish design loads, safety factors, duty/cycle life, corrosion resistance, washdown compatibility, animal-contact durability, and serviceability for zoological door/gate systems. Describe experience designing systems for frequent daily operation and long-term use in humid, corrosive, washdown, or exterior animal environments.

Response:

7. Vertical Door / Anti-Drop Experience

For vertical or guillotine systems, describe the lifting/balancing method and the independent anti-drop or load-holding protection typically provided. Identify completed zoo projects using these systems and describe how loss of power, lifting media, hydraulic/pneumatic pressure, or operator function is addressed.

Response:

8. Powered Operators, Controls, and Monitoring

Describe experience with powered animal containment doors, local controls, emergency stops, position sensing, lock-status indication, safety interlocks, manual emergency operation, and BAS/security supervisory contacts. Identify who designs and commissions these controls and how unsafe or incompatible door operations are prevented.

Response:

9. Locking and Animal-Containment Safety

Describe your standard approach to positive mechanical locking, redundant keeper-safety features, anti-lift/anti-derail protection, animal-inaccessible release mechanisms, guarding of moving/stored-energy components, and other measures used to prevent animal manipulation or unintended movement.

Response:

10. Installation Responsibility and Approach

Does your company routinely provide installation of the animal containment door and gate systems it manufactures or supplies? If so, is installation performed by your own employees, a dedicated installation division, factory-authorized/approved installers, or subcontractors? Describe your typical approach for projects.

Response:

11. Installation Experience

Describe your experience installing and commissioning animal containment door and gate systems. Identify at least three comparable zoological projects completed within the previous 5 years and indicate the installer used for each. Include dangerous-animal applications where available and identify whether installation was self-performed or performed by another firm.

Response:

12. Manufacturer/Installer Prior Working Relationship

If installation would be performed by a separate entity, identify installers with whom your company has previously completed comparable zoological animal containment door/gate installations. For the installer(s) you would propose, identify at least three comparable projects completed jointly by the manufacturer/system provider and installer within the previous 10 years, including project, completion date, system type, species, and each party's role.

Response:

13. Installer Qualifications, Authorization, and Training

Where installation is performed by others, describe the qualifications, experience, factory authorization/approval, and training required for the installer and its key personnel. Can your company provide written confirmation that the proposed installer is qualified to install, adjust, test, and commission the proposed system?

Response:

14. Single Point of Responsibility

Regardless of whether portions of the work are performed by your own personnel, component suppliers, specialty subcontractors, engineers, or a separate installer, is your company willing to serve as the single responsible entity for the complete animal containment door and gate system? Responsibility would include system design and engineering; component compatibility; fabrication; coordination and oversight of installation; adjustment; functional and operating-force testing; commissioning; and correction of deficiencies necessary to achieve specified performance. Describe how you would structure this responsibility.

Response:

15. Allocation of Project Responsibilities

For each comparable project identified, describe which portions of the animal containment door/gate system your company designed or engineered, fabricated, furnished, installed, adjusted, tested, and commissioned. Identify any other firms responsible for operating hardware, tracks/hangers, mechanical-assistance systems, powered operators, controls, structural engineering, operating-force calculations, installation, testing, or commissioning.

Response:

16. Complete-System Contractual Responsibility

Identify zoological animal containment door/gate projects on which your company served as the contractual entity responsible for the complete functioning system. Describe how responsibility was allocated among your company, manufacturers, fabricators, installers, engineers, and component suppliers, and how system deficiencies were resolved.

Response:

17. Field Services, Testing, Commissioning, and Training

Describe the field services your company normally provides after fabrication, including installation review, final adjustment, operating-force testing, functional cycling, vertical-door anti-drop/load-holding demonstrations, powered-system testing, keeper demonstrations, commissioning, and staff training. Identify who performs these services and whether the same trained personnel can be retained through final acceptance.

Response:

18. Service, Warranty, Spare Parts, and Lead Time

Describe standard warranty terms, availability of replacement/wear parts, technical support and emergency service, recommended spare parts, and typical current lead times for engineering, fabrication, delivery, installation, and commissioning of a project of comparable complexity. Identify any geographic limitations on installation or service in the Washington, DC region.

Response:

C. CERTIFICATION

The undersigned certifies that the information provided is accurate to the best of the company's knowledge and that the company is willing to provide supporting documentation and project references upon request.

Name / Title: _____

Signature: _____

Date: _____