AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE OF PAGES
	1 2

2. AMENDMENT/MODIFICATION NO.	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQ. NO.	5. PROJECT NO. *(If applicable)*
0006	11/10/2026		

6. ISSUED BY CODE OCON

SMITHSONIAN INSTITUTION
MRC 1200
PO Box 37012
Washington DC 20013-7012

7. ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(No., street, county, State and ZIP Code)*

CODE FACILITY CODE

(x) 9A. AMENDMENT OF SOLICITATION NO.
33330226RT0010015

x 9B. DATED *(SEE ITEM 11)*
09/14/2026

10A. MODIFICATION OF CONTRACT/ORDER NO.

10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

☒ The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers ☐ is extended, ☒ is not extended.
Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended , by one of the following methods: (a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted ; or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted , such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM ONLY APPLIES TO MODIFICATION OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

CHECK ONE	
	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: *(Specify authority)* THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
	B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).
	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
	D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor ☐ is not ☐ is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION *(Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

A. The Solicitation Number cited above, NZP-DC: Construct Arabian Leopard Exhibit, located in Washington, DC, is hereby amended as follows:

A.1. Attached hereto and made part of this Amendment Six are the SI Responses to RFI's for Questions Number 227-552.

B. Attached is the combined Sign-In sheet from the Preproposal Meeting held on 09/18/2026 and 10/23/2026.

C. Offerors shall acknowledge receipt of all amendments to this solicitation signed and dated and submit with proposal.

Continued ...

Except as provided herein, all terms and conditions of the document referenced in Item 9 A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF CONTRACTING OFFICER *(Type or print)*	
		Thomas Dempsey	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		*(Signature of Contracting Officer)*	

ITEM NO. (A)	SUPPLIES/SERVICES (B)	QUANTITY (C)	UNIT (D)	UNIT PRICE (E)	AMOUNT (F)
	D. THE BID DUE DATE REMAINS FRIDAY, NOVEMBER 20, 2026, AT 3:00 PM EST. D. Except as provided herein, all other provisions, terms and conditions of the Solicitation remain unchanged. END OF AMENDMENT SIX				

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
1	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139	I know that RFIs are due on 9/30 but considering we only have the 65% design set of documents, will there be another opportunity for RFIs once the 100% bid docs are released in October? Any feedback you can give me on this will be appreciated.	The 100% Final bid documents are forthcoming via an amendment, anticipated to be issued on October 13, 2026 due to 10/12/25 being a federal holiday. A second, two-week period for pre-bid RFIs has been accounted for in the procurement schedule and will take place from 10/12/26 thru 10/23/26. However, as noted in the SF 1442 request for proposal, Offerors are strongly encouraged to begin preparation of their Technical Proposal in advance of receiving the 100% Final CDs and to submit any administrative or technical pre-bid RFIs sooner rather than later. THE DATE AND TIME ESTABLISHED FOR SUBMISSION OF BOTH THE TECHNICAL PROPOSAL AND THE PRICING PROPOSAL ARE FIRM --- NOVEMBER 13, 2026 AT 3:00 PM EST. OFFERORS SHOULD NOT ANTICIPATE AN EXTENSION OF THE PROPOSAL DUE DATE.	9/23/2026	9/25/2026
2	EO 14603	Executive Order (EO) 14603 indicates that all federal projects valued at $35 million and above will require a project labor agreement (PLA) unless a federal contracting agency expressly grants an exception. As the expected project value is under this limit, please confirm if a project labor agreement will be required on this project.	PLA is not required.	9/23/2026	9/25/2026
3	NA	Please clarify if CAD/Revit files, or the project model can be shared for use in the RFP submission.	Yes, both 2D AutoCAD and the Revit model files will be provided with the forthcoming Addendum that issues the 100% Final dwgs. and specs on 10/13/26.	9/23/2026	9/25/2026
4	RFP, Section I: FAR 52.236-1 (page 52 of 139)	Please clarify if self performance requirements outlined in 52.236-1 of the Solicitation will be required for the project or if a reduction may be granted.	The self-performance requirement outlined in FAR 52.236-1 will apply to this project. The Contractor shall perform on the site, and with its own organization, work equivalent to at least 12% percent of the total amount of work to be performed under the contract. No reduction to the 12% self performance requirement will be granted.	9/23/2026	9/25/2026
5	65% Specifications Section 01 3200, Paragraph 1.3.B	Please confirm a cost loaded schedule is required per 1.3.B of specification section 013200.	The cost loaded schedule will be required at the beginning of the project and a "normal" CPM schedule will be deemed acceptable for updates at the COTR's descretion.	9/23/2026	9/25/2026
6	NA	Due to the aggressive period of performance timeframe, and long lead items on many materials and equipment, Saturdays will be needed to maintain the schedule. Please confirm Saturday's will be made available for construction outside of holidays and special events.	The current project timeline does not include weekend or night work. Special cases can be accomodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/23/2026	9/29/2026
7	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139.	Per the RFP, the deadline for RFI's is 9/30/26. However, 100% CD's will not be issued until 10/12/26. Will there be a second round of RFI's to address any questions with the final bid documents? If so, please outline the timing for round 2 RFI's.	Please see response to pre-bid RFI no. 1 above.	9/23/2026	9/25/2026
8	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139.	Per the RFP, the deadline for RFI's is 9/30/26. However, 100% CD's will not be issued until 10/12/26. Will there be a second round of RFI's to address any questions with the final bid documents? If so, please outline the timing for round 2 RFI's	Duplicate of pre-bid RFI no. 6	9/23/2026	9/25/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
9	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	Requirements outlined under FACTOR 2, Section d) of the RFP (Page 104 of 139) notes reference requirements for key Subcontractor packages. Section e) notes resumes needed. Please clarify if the resumes are for the General Contractor, or for the key Subcontractors.	For each of the eight subcontractors listed in FACTOR 2, paragraph d), provide the name of the company and three referances. Resumes for subcontractors are not required. In accordance with FACTOR2 paragraph c) provide a resume for each proposed team member for Construction Services. The Construction Services team is defined at the bottom of page 104 of 139. It consists of a Senior Project Manager, the Superintendent, a Senior Cost Estimator, and a Project Engineer and is hereby ammended to remove the Cost Estimator requirement and include the Site Safety Manager and the Quality Control Manager. Therefore, a total of five resumes are required to be submitted in Tab No. 09 - Resumes of the Technical Proposal.	9/23/2026	9/28/2026
10	65% Specifications Section 01 1000, Paragraph 1.2.3.b AND 65% Drawings Sheet S-001	Specification Section 01 1000-2, 1.2, 3, b and notes on S-001 reference a Geotech report dated 3/13/26 as related documents. This document does not appear to have been provided as part of the RFP documents, and is critical to the subsurface pricing, including micropiles, dewatering, etc. Please provide as quickly as possible.	The Geotech report dated 3/13/26 was provided with Step 1 QSP of this Phase 2 solicitation originally uploaded to SAM.gov on 6/22/2026. A second copy is uploaded with this set of responses for ready reference.	9/23/2026	9/28/2026
11	65% Drawings Sheet S-001, Note 10	Referencing Note 10 on S-001, there appears to be SOE drawings to identity the support of excavation work which has not been provided. This information is critical to pricing for the trade package and is being requested as soon as possible.	Support of Excavation (SOE) drawings will not be provided. This is to be addressed as means and methods by the contractor.	9/23/2026	9/29/2026
12	65% Specifications Section 01 1000, Paragraph 1.2.3.b	Specification Section 01 1000-2, 1.2, 3, b notes a series of drawings which have not been provided as part of the current RFP. Please clarify if these documents are relevant to the current bid, and submit accordingly.	With the exception of the Acoustic and Geotech reports, the documents listed in Section 01 1000, Paragraph 1.2.3.b are relevant to Phase 1 - Early Site package only and are not part of the current bid. A conformed set of Phase 1 - Early Site drawings and specs are uploaded with this response FOR REFERENCE ONLY.	9/23/2026	9/25/2026
13	65% Drawings Sheet G-003CS	Grading plans identified on G-003CS do not appear to address the Phase 1 construction which is not within the current RFP. Please clarify site conditions and grades which will be turned over to the successful Phase 2 contractor.	All grading will be done by the Phase 2 contractor. The Phase 1 contractor will be responsible for demolition and utility bypass installations. The Phase 1 contractor will backfill their utility installations and they will also backfill the utilities they remove.	9/23/2026	9/29/2026
14	65% Drawings C-160SP thru C-166UP	Utility plans identified on the Civil documents (C-160SP – C-166UP) do not appear to address work which may be completed during the Phase 1 construction. Please clarify what work is to be completed in Phase 1, including any temporary systems and tie-ins not included in the current documents.	The Phase 1 contractor is responsible for the utility bypass work for storm, sewer, water, and electric. Work by the Phase 1 contractor will be denoted as such on the Phase 2 100% Final drawings to be issued 10/13/26.	9/23/2026	9/29/2026
15	NA	Perimeter controls including fencing and sediment and erosion control that are to be performed under Phase 1 of the project and turned over to the Phase 2 contractor are not provided in the GC. Please provide plans, and clarify these systems will be turned over to the Phase 2 contractor in functional condition.	The sound wall and security fence will be turned over to the Phase 2 contractor. The rental fence contract will be turned over to the Phase 2 contractor for continuation. The sediment and erosion control will remain in place to be turned over to the Phase 2 contractor, but the controls will need to be modified, as needed. These should be included in general conditions.	9/23/2026	9/29/2026
16	NA	Please verify any turned over work from Phase 1 to the Phase 2 contactor is not under rent. If it is under rent, please clarify all rental costs or provide an allowance for this work.	The chain link fence is under rental and the rental cost for fence should be included in the general conditions. The sound partition was purchased in Phase 1. The Phase 2 contractor shall remove the sound wall at the completion of Phase 2 work.	9/23/2026	9/30/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
17	65% Specifications Section 01 1000, Paragraph 1.6.C AND Section 01 1000, Paragraph 4.2.E	In Specification Section 01 1000, 1.6., C work hours are listed as 6:00 AM – 3:30 PM. In Specification Section 01 1000 4.2 E, normal work hours are referenced at 6:00 AM-3:00 PM. Given the aggressive schedule of the project, we would request the project is able to work hours per DOB allowable working hours. Please clarify the work hours on the project.	For clarification, normal work hours will be from 6:00 AM to 3:30 PM. This will be corrected for consistency in the 100% Final Specifications. Unfortunately, we cannot extend the normal work hours to be in alignment with DOB allowable working hours due to restrictions agreed to with adjacent neighborhood organizations. Special cases can be accomodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/23/2026	9/25/2026
18	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139	Per page 4 of 139 of the RFP the Small Business Subcontracting Plan is outlined. Please clarify if the Small Business and Small Disadvantaged Business Subcontracting Plan shall be submitted as part of the overall proposal, or submitted by the successful bidder following subcontractor naming.	Please submit the Subcontracting Plan as part of the overall proposal. Submit separate PDF files for the Technical Proposal, Pricing Proposal, and Subcontracting Plan.	9/23/2026	9/25/2026
19	65% Specifications Section 01 1000, Paragraph 1.7.A.3	Specification section 01 1000 1.7.A.3 notes onsite contractor parking may be arranged in off-season operations. Can timing and costs of this option be shared for bid purposes?	Specification Section 01 1000 1.7.A.3 does not exist in the 65% specifications uploaded to SAM.gov with this solicitation. It also does not exist in the Phase 1 Early Site specifications provided previously with Phase 2 Step 1 QSP process. Further, a word search of those specifications does not find reference to off-season operations. Contractor parking is covered in 01 1000 4.2 Use of Premises Paragraphs C. (2) thru (5).	9/23/2026	9/29/2026
20	NA	The RFP documents do not appear to have a hazardous material report. Please confirm hazardous materials do not exist, or will be addressed in Phase 1 of the project and should be excluded by the Phase 2 Contractor.	To our knowledge hazardous materials do not exist on the site. If discovered, this will be treated as an unforseen condition.	9/23/2026	9/29/2026
21	RFP, Section B.4 Multi-Year Funding Form (page 9 of 139)	Per B.4 of the solicitation, the FY 27 funding is set to be $4,000,000. As FY 27 is approximately 40% of the period of performance, it is not believed $4,000,000 will accurately fund this portion of work. Please clarify if additional funds will be made available if needed, or what would happen in the event the FY 27 funding is not adequate to fund the project during that timeframe.	Yes, additional funds will be made available in FY27, if needed and applications for payment are validated by the COTR.	9/23/2026	9/28/2026
22	RFP, Attachment 9, Page 130 of 139	Attachment 9 of the Solicitation (page 130/139) includes a Request for Authorization of Additional Classification SF 1444. Please verify this form is to be utilized post-award and any missing classifications are to be requested via the RFI process.	Yes, that is correct. SF-1444 is used post award and should be requested through the RFI process.	9/23/2026	9/25/2026
23	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND RFP Section L.26 (page 93 of 139)	Page 4 of the RFP notes the subcontracting plan is a “goal” for the project. Per L.26 (page 93 of 139) the Small Business Subcontracting Plan does not list this as a goal. Please confirm the small business plan is a goal on the project.	The Small Business Subcontracting Goal is a minimum of 40% of the planned subcontracting dollars to be placed with small business concerns.	9/25/2026	9/29/2026
24	RFP, Section J (page 81 of 139) AND Attachment 6 (page 110 of 139) AND Section L.26 (page 93 of 139)	J-List of Documents, Exhibits and Other Attachments (page 81 of 139) Notes documents provided as part of the RFP. Attachment 6 provided on page 110 of 139 does not provide the form, but references Section L, L.28. We believe this is supposed to be L.26 referenced on page 93 of 139). A form has not been provided in L.26. Please provide the form for submission (if required for the RFP)	No specific form is provided for the Subcontracting Plan. The Plan shall include all information required by FAR 52.219-9 (d), as stated on page 32 of 139 of the solicitation.	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
25	RFP, Section F: 52.211-S0025 (d)(1) Page 17 of 139	Referencing 52.211-S0025, (d), (1) (page 17 of 139) schedule acceleration means including night shifts, overtime, Sundays and holidays. Please confirm these times are available for construction.	The current project timeline does not include weekend or night work. Special cases can be accompodated upon request and as deemed necessary by the COTR and coordinated with Animal Care Staff.	9/25/2026	9/29/2026
26	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND RFP Section C.1 (page 11 of 139)	Regarding the 578 calendar days for period of performance, Page 4 notes this is from Notice to Proceed to substantial completion, while C.1 (page 11 of 139) notes it is to final completion. Please clarify if the period of performance is to substantial, or final completion.	The period of Performance is through final completion. The term substantial completion will not be used.	9/25/2026	9/29/2026
27	65% Specifications: Section 01 3200, Paragraph 2.2.D.5	Specification Section 01 3200, 2.2, D, 5 notes requirements for a cost loaded schedule. Based on the tight schedule timeframe, we would strongly recommend a tradition schedule be utilized be utilized to allow the schedule to be 100% on project scheduling efforts vs. invoicing. We believe a robust schedule of values, with detailed site verification walks will be most effective for the cost verification portion of the project. Please clarify if the cost loaded schedule requirements may be waived.	The cost loaded schedulle will be required at the beginning of the project and a "normal" CPM schedule will be deemed acceptable for updates at the COTR's descretion.	9/25/2026	9/29/2026
28	RFP, Section I: 52.225-11 (page 40 of 139) AND 52.225-11 (b)(3) Page 43 of 139	Clause 52.225-11 of the RFP (Page 40 of 139) notes Buy American requirements for the project, but does not appear to be updated to include any exceptions (see (b), (3) on page 43 of 139). Please clarify if the project has Buy American requirements. If this is the case, please verify that the project products outlined in the specifications have been coordinated with Buy American requirements.	Buy American requirement will apply to this project. No exceptions to the applicable Buy American requirements are provided under this solicitation. The contractor is responsible for ensuring that proposed products and materials comply with the applicable Buy American requirement set forth in FAR 52.225-11 and FAR 52.225-12, as included in the solicitation. Any request for an exception shall be submitted in accordance with the applicable FAR provisions and the requirements of the solicitation.	9/25/2026	9/29/2026
29	RFP, Section F: 52.211-S0025 (b)(4)(iii) Page 16 of 139	Section F, (b), (4), (iii) notes abnormal weather days are determined based on National Oceanic and Atmospheric Administration (NOAA) using the 10 year average. a. NOAA keeps data based on 30 years (1991-2020) or 15 years (2006-2020). Please clarify which is to be utilized b. In order to determine this value, clarification on the average rainfall value (1'', 2,", 3'', etc) is required. c. Please also clarify how the allowance is to be disclosed in the final pursuit for transparency.	According to Clause 52.211-S0025 (c)(4)(iii) on page 16 of the solicitation, the contractor is responsible for substantiating any claim of greater-than-normal inclement weather. The solicitation does not establish a specific rainfall threshold or a separate weather-day allowance.	9/25/2026	9/29/2026
30	65% Specifications Section 01 8113	Per specification section 01 8113 and other portions of the contract documents, this project is seeking certification of LEED certification. Please provide a LEED score card.	It has recently been determined this project does not have a formal LEED certification level requirement. However, waste demolition tracking will be required. The 100% Final Specification 01 8113 to be provided with 10/13/26 submission will be modified accordingly.	9/25/2026	9/29/2026
31	65% Specifications Section 01 8113 1.2.A and 15	Please clarify if this project is seeking LEED V4 BD+C per the Table of Contents (TOC-1) of the specifications (see SECTION 01 8113.15 – SUSTANABLE DEISIGN REQUIEMTNDS – LEED V4 BD+C) , or LEED 2029 per 01 8113, 1.2, A. Please verify the level of certification (Silver, Gold, Platinum, etc.)	Please see response to pre-bid RFI no. 30 above.	9/25/2026	9/29/2026
32	65% Specifications Section 01 8113	Per specification section 01 8113 and other portions of the contract documents, this project may be seeking certification of LEED V4 BD+C. In order to maintain waste management requirements, multiple dumpsters will need to be utilized to maintain waste streams. Please provide a location for multiple dumpsters which is acceptable to Smithsonian.	Please see response to pre-bid RFI no. 30 above.	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
33	RFP, Section H: 52.236-S0030 (page 26 of 139)	Referencing the solicitation, Section H, 52.236-S0030 Availability and Use of Utility Services (Page 26 of 183) confirm utility consumption on the project will be by Smithsonian.	Confirmed, utility consumption on the project will be by Smithsonian.	9/25/2026	9/29/2026
34	NA	As a site logistics plan has not been provided, please verify the access point for the project, include moving of workers, equipment and services, should be from the Bus Lot and across Olmsted Walk. Please clarify if there are any restrictions including scheduling, hours, duration, etc.	Traffic control to be provided per specification section 01 1000 1.6.G. The Phase 2 contractor shall have all deliveries flagged and cross the bus lot into the project entrance along Olmsted walk during non visitor hours. Limited exceptions will be considered upon request and approval by COTR.	9/25/2026	9/29/2026
35	NA	Based on site constraints and accessibility, dumpster locations will need to be provided by Smithsonian to ensure they meet facility and operation requirements. Please clarify if dumpsters are to be placed within the project site, and that pulls across Olmsted will be allowed, or if debris will have to be transported across Olmsted. If the latter, please clarify an offsite location for dumpsters.	Dumpsters to be placed within project site and dump loads to come in or out before or after zoo operating hours.	9/25/2026	9/29/2026
36	NA	Please verify rock excavation is not to be presumed on the site. If so, please provide an allowance to be carried on the project.	Rock excavation is not anticipated.	9/25/2026	9/29/2026
37	NA	Please verify dewatering of ground water is not expected on the project. If so, please provide a Geotech report outlining the groundwater conditions so a removal system can be engineered.	No dewatering system is required. The groundwater conditions were provided in the geotech report with the Phase 2, Step 1 QSP documents. A second copy is uploaded with this set of responses for ready reference.	9/25/2026	9/29/2026
38	RFP, SF 1442 Continuation Sheet (Optional Form 336) Pages 3 & 4 of 139	Please confirm if the RFI deadline will be extended until after the 100% Bid Set issuance scheduled for October as the new document set may incur additional clarifying questions from the market.	Please see response to pre-bid RFI no. 1 above.	9/25/2026	9/28/2026
39	NA	Please provide any CAD files and/or design models that SI has related to this document set for use during the technical proposal preparation. We'd appreciate if this could be sent as soon as possible.	Please see response to pre-bid RFI no. 3 above.	9/25/2026	9/28/2026
40	RFP, Factor 2, Section h) Page 104 of 139	Please confirm if an employee with the title Project Manager is acceptable as the Senior Project Manager as long as they meet the years of experience and similar project history requirements. (Please note that different companies have different org structures / title structures).	Acceptable as long as the years of experience and project history experience is met.	9/25/2026	9/29/2026
41	RFP, Factor 2, Section h) Page 104 of 139	Please clarify the intent of the Cost Estimator as part of the Construction Services Team throughout the duration of the project and if this is required or if their full time involvement can be reduced to the GC's discretion.	Per RFI No. 9 the requirement for a separate Cost Estimator has been removed.	9/25/2026	9/29/2026
42	RFP, Factor 2, Section h) Page 105 of 139	Per the RFP, the Site Safety Manager will manage a Site Safety Team and will directly report to the Senior Project Manager. Please confirm if there is flexibility in the reporting structure as long as all named roles are involved.	Flexibility in reporting structure is confirmed	9/25/2026	9/29/2026
43	RFP, Factor 2, Section h) Page 105 of 139	Per the RFP, the Quality Control Manager will manage a quality control team and will directly report to the Office of the Firm. Please confirm if there is flexibility in the team and reporting structure as long as all named roles are involved.	Flexibility in reporting structure is confirmed	9/25/2026	9/29/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
44	RFP, Section B.4 Multi-year Funding Form (page 9 of 139)	Per the RFP and Multiyear Funding form, only $4M is secured for FY 2027. Please confirm this value is correct. If so, please confirm that the line item "TOTAL FY2027" for all bidders must equal $4M and the remainder of the project costs should be reflected in line item "TOTAL FY2028". Please also confirm that in turn, the schedule should only include activities in FY2027 that would total up to $4M.	Yes for the purposes of the Pricing Proposal, $4M for FY2027 is correct and the remainder of the project costs should be reflected in the line item "TOTAL FY 2028". However, if needed and applications for payment are validated by the COTR additional funding will be made available in FY2027. The cost loaded schedule should be developed independent of current funding allotments and reflect what is practical and necessary to meet the period of performance end date of September 2028.	9/25/2026	9/29/2026
45	65% Dwgs, Sheet C-110DP	Ref. C-110DP demolition note #2. Demolition note calls for contractor to conduct a thorough survey before time of bid to locate any additional existing site electric not shown on plan that would need to be rerouted. Please confirm if an allowance should instead be carried by all bidders in lieu of performing surveys and please provide a dollar amount.	Underground electric will be removed in Phase 1. Any underground electric in Phase 2 that needs to be removed will be handled as an unforeseen condition.	9/25/2026	9/29/2026
46	RFP, Section B.3.1 Base Cost Proposal Submission Form	The bid form states "If there are any assumptions, exclusions or qualifications that affect the firm fixed price, a separate detailed breakdown sheet must be provided"; however, this sheet is not mentioned elsewhere in the proposal guidelines. Please confirm assumptions, exclusions and qualifications can be submitted as part of the pricing submission and, if so, please provide a template for bidders to use to submit.	Offerors may NOT submit assumptions, exclusions, or qualifications that affect the firm fixed price as part of their pricing submission. The firm fixed price must be all inclusive. The bid form has been revised accordingly, dated 9/29/2026, and uploaded with this set of responses. Pricing package submissions shall not modify or take exception to the requirements of the solicitation.	9/25/2026	9/29/2026
47	NA	Please provide any schedules related to the adjacent animals' activities, feeding, sleeping, etc.during which construction activities cannot occur.	This will be coordinated with the awarded contractor.	9/25/2026	9/29/2026
48	NA	Please provide any known public events scheduled during the project duration during which construction avtivities cannot occur.	This will be coordinated with the awarded contractor.	9/25/2026	9/29/2026
49	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND Section I: 52.219-8R (page 29 of 129)	Please confirm the required SDVOSB subgoal as part of the 40% small business goal as the RFP does not indicate. This was originally indicated as 7% in the Phase 1 documents.	The subcontracting goal is 40% with small business concerns. No separate SDVOSB subcontracting subgoal is required.	9/25/2026	9/29/2026
50	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 4 of 139 AND Section I: 52.219-8R (page 30 of 129)	Please confirm if there is a required HUBZone subgoal as part of the 40% small business goal as the RFP does not indicate.	The subcontracting goal is 40% with small business concerns. No separate HUBZone subcontracting subgoal is required.	9/25/2026	9/29/2026
51	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 5 of 139	The RFP states "Offerors should not anticipate an extension of the proposal due date"; however, it is likely that bidders will be out Wednesday 11/11 for Veteran's Day as well as the latter half of the week. Please consider adjusting the bid date to allow for bids to be prepared and reviewed before submission.	As stated in the RFP, no extension of the proposal due date (Friday, November 13, 2026 at 3:00 pm EST) is anticipated. Please plan accordingly.	9/25/2026	9/29/2026
52	RFP, Section I: 52.229-S0043 (page 60 of 139)	The RFP states that bidders should include federal, state and local taxes unless the Contractor can obtain a tax exempt certificate. Please confirm if SI will provide tax exemption certificates and if bidders can assume the project is tax exempt for the purposes of this bid.	Offerors shall include applicable Federal, State, and local taxes in their proposed pricing unless the Contractor obtains applicable tax-exempt certificates. In accordance with FAR 52.229-S0043, SI will cooperate with the Contractor in obtaining such certificates.	9/25/2026	9/29/2026
53	NA	Please clarify where power and water sources will be located for construction needs (provided by Smithsonian).	This will be coordinated with the awarded contractor.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
54	65% Specifications Section 31 6333	Regarding the micropile work as specified under Section 31 6333, please clarify if the micropile design will need to be submitted, reviewed and approved by DOB, or if Smithsonian's own AJH will review. If required to be submitted to DOB, please include an allowance for the permit fees.	No. Smithsonian Institution is its own Authority Having Jurisdiction (AHJ). The micropile design will not be submitted to, reviewed by, nor approved by DOB.	9/29/2026	10/9/2026
55	NA	A hollow metal door/frame specification has not been provided. Please issue.	A hollow metal door / frame specification will be provided in the forthcoming 100% Final submission and locations indicated on the door schedule in the drawings.	9/29/2026	10/9/2026
56	65% Drawings Structural Series	Regarding the support of excavation work referenced in the structural drawings, but not specified in the project specifications, please clarify if the design will need to be submitted, reviewed and approved by DOB, or if Smithsonian's own AJH will review. If required to be submitted to DOB, please include an allowance for the permit fees.	As acknowledged in this pre-bid RFI, Smithsonian Institution is its own Authority Having Jurisdiction (AHJ). Therefore, support of excavation (SOE) work will not be submitted to, reviewed by, nor approved by DOB. NOTE: SOE is to be addressed as means and methods by the contractor.	9/29/2026	10/9/2026
57	65% Specifications Section 07 3116	The current 65% specifications for Section 07 3116 identify multiple manufacturers for the copper individual metal shingles, including ATAS International, Reinke Shakes, and Zappone Manufacturing. The documents do not appear to identify a single Basis-of-Design product to align with the design intent. Please confirm whether any of the listed manufacturers may be used for bidding without a substitution request and identify the intended Basis-of-Design manufacturer/product, shingle size and exposure, if applicable. This information is required to obtain accurate manufacturer takeoff, system pricing and warranty requirements.	Further refinement of the Pre-Patinated Copper Shingle Roof Assembly has taken place. The forthcoming 100% Final specifications call out the basis of design for the shingles as Spengler Industries, Size 16, 16oz, 72 degree diamond shingles. Clip and Rail support system shall be delegated design. Alternate Manufacturer is Coppercraft.	9/29/2026	10/9/2026
58	65% Drawings Sheet A-503DT AND 65% Specifications Section 07 3116	Drawing A-503DT identifies the R614 roof assembly as a pre-patinated copper metal shingle roofing system and references 074113.19 Metal Shingle Roofing Panels. The current project specifications provided for bidding include Section 07 3116 – Metal Shingles. Please confirm which specification section and system requirements are to govern the R614 copper roofing assembly for bidding.	Further refinement of the Pre-Patinated Copper Shingle Roof Assembly has taken place. The forthcoming 100% Final drawings reference the correct specification section 07 3116 Metal Shingles. See response to pre-bid RFI No. 57 for additional information.	9/29/2026	10/9/2026
59	65% Drawings AND 65% Specifications Section 07 7253	The roof section details indicate copper snow guards approximately 12 inches from the eave edge as required. Section 07 7253 lists multiple available snow-guard manufacturers; however, a final manufacturer / product, quantity and layout do not appear to be established. Please confirm: 1. Required snow-guard manufacturer/product, if designated; 2. Whether one of the listed manufacturers may be selected by the roofing contractor; 3. Whether the roofing contractor should carry a manufacturer-engineered snow-retention layout and attachment system; and 4. Whether final quantity and spacing are to be determined by the selected snow-guard manufacturer based on project design loads and roof conditions.	1. Manufacturer's integrated snow hooks shall be utilized. Basis of Design, Spengler Industries, includes this. 2. Manufacturer of snow hooks shall match shingle manufacturer. 3. Snow hooks shall be placed at two locations, one roughly half way up and one at the eave (12" from eave). Each strip should be three rows that are staggered. 100% Final Drawings will indicate layout. 4. Quantity and spacing will be provided in the 100% Final drawings. Refer to item 3 response above.	9/29/2026	10/9/2026
60	65% Specifications Section 07 3116	The current documents indicate a pre-patinated dark-brown copper finish for the metal shingles. Please confirm the required finish / color standard and advise whether a specific manufacturer finish, sample or approved color standard is required for bidding. Please also confirm whether associated exposed copper components—including flashing / trim, fascia, soffit, gutters and related sheet metal—are intended to match the metal-shingle roof finish.	The forthcoming 100% Final specifications call for pre-patinated copper verdigris as the required finish for the shingles. All exposed elements shall also be pre-patinated to match.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
61	65% Drawings Sheets A-432 & A432A AND 65% Specifications Section 07 2726	The current architectural documents identify a vapor-permeable fluid-applied membrane air barrier at the A432/A432A exterior wall assemblies. Section 07 2726 also includes requirements for a vapor-retarding fluid-applied membrane air barrier. Please identify the drawings/details and locations where the vapor-retarding system is required and confirm the limits of each air-barrier system to be included in the Division 07 scope.	Vapor-permeable fluid-applied membrane air barrier will be located at the Care Building as noted in the details. Specification will be updated with the forthcoming 100% Final submission to remove vapor-retarding flue-applied membrane air barrier.	9/29/2026	10/9/2026
62	65% Specifications Section 01 3250, Paragraph 1.3.J.	Regarding Data Capture requirements per specification section 01 3250, 1.3, J, requirements note the need to laser scan both site and building facilities during post-demo, rough-in open trenches, close-in and project completion. Please confirm the following: a. Post-demo – Please clarify this is not required as the demo is Phase 1 work, and there's no useful data following site clearing. b. As has been done on past Smithsonian projects, please confirm it is acceptable to as-build the sitework via GPS device layout. c. Please clarify is software capture systems such as OpenSpace (360 Reality Capture Software for Construction | OpenSpace Capture) is acceptable to meet these requirements.	a. Post-demo - laser scan is not required. b. Confirmed, it is acceptable to as-build the sitework via GPS device layout. c. No, software capture systems such as OpenSpace is not acceptable to meet Data Capture (Laser Scan) requirements in spec section 013250. Refer to full section for complete deliverable requirements.	9/29/2026	10/9/2026
63	65% Specifications Section 01 3250, Paragraph 3.5	Specification section 013250, 3.5 notes the need to include "equipment and furnishings" in the BIM model. This level is outside the typical LOD 350. Please clarify what specific equipment and furnishings should be included in the model. Please confirm these elements will exist in the model provided by the design team.	Equipment and Furnishing are not required as part of the As-Built Model(s)	9/29/2026	10/9/2026
64	65% Specifications Section 01 3250, Paragraph 1.1.E.	Specification section 013250, 1.1, E references the Smithsonian BIM execution plan, but does not provide the document. Please provide the document as part of the bid/contract package.	The current BIM Execution Plan document is uploaded with this set of pre-bid RFI responses.	9/29/2026	10/9/2026
65	65% Specifications	The 65% Specifications do not appear to include a structural steel specification. Please provide.	The forthcoming 100% Final specifications include specification section 05 1200 Structural Steel Framing.	9/29/2026	10/9/2026
66	Architect-Engineering Information Center	In reviewing Smithsonian's Architect-Engineering Information Center (Architect-Engineer Information Center | Planning, Design, & Construction) one can find the Smithsonian's BIM Project Execution Plan (PxP). Page 9 of 30 notes the need for Asset Management, 4D modeling, and 5D cost estimating in both the "Construct" and "Operate" columns. These requirements are not outlined in the specifications. Please clarify there are no asset management, 4D or 5D construction BIM requirements as they have not been included in the project specifications.	Confirmed, 4D or 5D construction BIM requirements are not required. Asset Management is required. Refer to 2.4 of specification section 01 3250 and paragraph 2.8 of spec section 01 7823.	9/29/2026	10/9/2026
67	Architect-Engineering Information Center	In reviewing Smithsonian's Architect-Engineering Information Center (Architect-Engineer Information Center | Planning, Design, & Construction) one can find the Smithsonian's BIM Project Execution Plan (PxP). Page 18 of 30 of this plan calls for the Fire Protection subcontractor to utilize MEP CAD AutoSprink. Please verify it is acceptable to utilize other software's provided the contractor is able to provide full coordination and turn over a fully accessible model.	Alternate fire protection modeling software may be utilized. Refer to paragraph 1.3.D of specification section 01 3250. It must meet the BIM requirements of the Contract Documents, supports full coordination with the project BIM model and other trades, and allows delivery of the required final model in a fully accessible and compatible format. Use of alternate software shall not relieve the Contractor or Fire Protection Subcontractor of responsibility for BIM coordination, clash detection, or compliance with the Contract Documents. Any costs associated with software compatibility, file conversion, or coordination shall be the Contractor's responsibility.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
68	65% Specifications Section 26 3650, Paragraph 2.2.N	Spec Section 26 36 50, Paragraph 2.2.N includes a large list of accessories including, but not limited to, auto-start, battery charger receptacle, block heater receptacle, strip heater, surge protection device, utility light, load dump receptacle, and Kirk key interlock. Please confirm which accessories are required for this project and identify any items that may be omitted due to enclosure space limitations within the Trystar docking station.	Yes, all these features are required with the docking station.	9/29/2026	10/9/2026
69	65% Specifications Section 26 3213, Paragraph 1.7.A.1.	Spec Section 26 32 13, Paragraph 1.7.A: The generator warranty period is blank. Please confirm the required warranty period.	These selections will be clarified in the forthcoming 100% Final specifications. Five (5) years will be required.	9/29/2026	10/9/2026
70	65% Specifications Section 26 3213, Paragraph 2.3.A.	The drawings identify the proposed unit as a 200kW Natural Gas Generator; however, Section 26 32 13, Paragraph 2.3.A references "Natural Gas with automatic LP-Gas standby / Natural Gas". Please confirm whether the generator shall be Natural Gas only or dual-fuel Natural Gas / LP.	These selections will be clarified in the forthcoming 100% Final specifications. Natural Gas is the only fuel source.	9/29/2026	10/9/2026
71	65% Specifications Section 26 3213, Paragraph 2.3.I.	Spec section 26 32 13, Paragraph 2.3.I appears unfinished and contains selectable specification language. Please clarify the intended project requirements	These selections will be clarified in the 100% Final specification..	9/29/2026	10/9/2026
72	65% Specifications Section 26 3213, Paragraph 2.3.A.	Section 26 32 13, Paragraph 2.7 specifies a permanent outdoor load bank; however, the drawings indicate a 100kW integrated top-mounted load bank on the 200kW generator enclosure. Please confirm that a 1.0 power factor load bank is acceptable, as this is the standard configuration available for top-mounted load banks.	1.0 PF Resistive load bank is acceptable and will be clarified in the forthcoming 100% Final specifications.	9/29/2026	10/9/2026
73	65% Specifications Section 26 3213, Paragraph 2.7.G.	Spec Section 26 32 13, Paragraph 2.7.G references load bank louvers. Integrated top-mounted load banks are self-contained and do not require separate louvers. Please confirm that separate louvers are not required.	Separate louvers should not be required as long as the integrated load bank have required rain ingress protection.	9/29/2026	10/9/2026
74	65% Specifications Section 26 3213, Paragraph 2.8.A.	Spec Section 26 32 13, Paragraph 2.8.A specifies a walk-in enclosure. Based on the indicated 200kW generator size and site layout, a walk-in enclosure does not appear applicable. Please confirm that a standard skintight enclosure is acceptable.	Skintight enclosure is acceptable and will be clarified in the forthcoming 100% Final specifications.	9/29/2026	10/9/2026
75	65% Specifications Section 26 3213, Paragraph 2.8.A.	Spec Section 26 32 13, Paragraph 2.8.A requires the enclosure to maintain a minimum internal temperature of 40°F. Please confirm enclosure heating is required.	If generator manufacturer can confirm generator block heaters maintain minimum internal temperature requirements per specifications, then supplemental heating is not anticipated.	9/29/2026	10/9/2026
76	65% Specifications Section 26 3213, Paragraph 2.8.E.	Spec Section 26 32 13, Paragraph 2.8.E references a generator load center. Drawing E105 states that the generator load center will be integral to the enclosure. Please confirm an integral generator-mounted load center is acceptable and that a separate load center is not required.	A generator factory provided load center integrated in the enclosure is what is required.	9/29/2026	10/9/2026
77	65% Drawings Sheet E-602SH	Drawing E-602SH indicates a 100kW integrated permanent load bank. Please provide the required generator-mounted circuit breaker size and feeder requirements associated with the integrated load bank.	Circuit breaker and feeder sizing will be shown in 100% Final documents. The specification calls for the load bank to be factory provided and installed by the generator vendor.	9/29/2026	10/9/2026
78	65% Drawings AND 65% Specifications Section 26 3213	The contract drawings indicate a 200 kW natural gas generator with an integrated top-mounted 100 kW load bank. Several requirements in Section 26 32 13 appear inconsistent with this configuration. Please confirm the requirements and advise whether the generator shall be provided in accordance with the drawings or the specifications.	100 kW radiator mounted load bank is required. In addition, a roll up load bank will be accommodated by a permanent docking station. This will be clarified in the forthcoming 100% Final submission	9/29/2026	10/9/2026
79	65% Specifications Section 26 3213	Spec Section 26 32 13 contains multiple unfinished sections, blank values, and selectable specification options. Please provide a complete generator specification.	Updated specifications with selections will be provided in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
80	65% Specifications Section 26 3213, Paragraph 2.1.A	Section 26 32 13, Paragraph 2.1.A identifies Caterpillar, Generac, Cummins, and MTU as acceptable manufacturers. Please confirm that Rehlko is also an acceptable manufacturer for this project.	Rehlko is an acceptable alternate and will be added to the specifications in the forthcoming 100% Final submission.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
81	65% Specifications Section 03 3713, Paragraph 2.1.A.2 AND Section 08 3453, Paragraph 2.1.C	Specification section 033713 - Shotcrete, subsection 2.1-A-2 specifically outlines that bidders wishing to use a fabricator or installer that is not identified in this section must have the proposed fabricator comply with qualification requirements listed herein and submit a letter of qualification. There is similar language in specification section 083453 – Animal Enclosure Caging and Doors, subsection 2.1-C. Please confirm that this qualification package is to be submitted as an RFI, or provide direction on how this package is to be submitted for approval.	NOTE: The forthcoming 100% FINAL specification section 03 3713 will add Cemrock Landscapes Inc. to the approved list. Please submit, as a pre-bid RFI, any other shotcrete fabricators not listed in the specification 03 3713 and request that they be added to the list of accepted fabricators. Please include with the pre-bid RFI a complete PDF qualifications package demonstrating their experience and capability as outlined in specification section 033713, paragraphs 2.1.A.2.a. as a attachment to the RFI submitted. Final acceptance of any proposed company as an approved fabricator or installer is subject to review and approval of the required qualifications package. However, Offeror should not wait to submit a complete qualifications package, if they would like other companies, not currently listed in the 65% specifications, to be considered besides Cemrock Landscapes Inc. Offerors will be notified of a proposed company's acceptance status at least 10 days before Offerors' bids are due. Specific to fabricators and installers applicable to section 08 3453 Animal Enclosures Caging and Doors please see response to both pre-bid RFI no. 91 and 199 below. Follow same procedure outlined therein for other proposed companies.	9/29/2026	10/9/2026
82	65% Drawings Sheets A-903IN & A-904IN & A-904IN	Sheets A-903IN: Basement Finish Floor Plan and A-904IN: Level 1 Finish Floor Plan do not specify a finish for the interior CMU walls. Will these walls remain unfinished, or will a finish be specified?	All interior walls shall receive a finish. Further clarification on type of finish and location to be provided in forthcoming 100% Final submission.	9/29/2026	10/9/2026
83	65% Drawings Sheet E-103SP	Drawing ES-103SP, Note E303 references SHR drawings for fixture mounting details. SHR drawings are not included in the contract drawing set or drawing index. Please provide mounting details for Fixture XL5	Please see 65% drawings, sheet SS-500DT for XL5 mounting details. Note E303 will be updated in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
84	65% Drawings Sheet E-102SP	Please provide mounting details, support details, and wiring pathway details for the site lighting fixtures indicated on Drawing ES-102SP, including Fixtures XL1, XL4A, XL4B, XL6, and XL7.	References to mounting details to be provided in forthcoming 100% Final Submission.	9/29/2026	10/9/2026
85	65% Drawings Sheets TN-601DG & TN-020SP	Drawing TN-601DG indicates a 24-strand single-mode fiber tie-in to the existing network. Drawing TN-020SP references an existing telecommunications pull box and notes to coordinate with the civil plans. Please provide the exact location of the existing telecommunications handhole/pull box on the civil plans.	The existing telecommunications pull box/vault is identified on TN-020SP with Keynote 1. This same existing telecommunications vault is shown on the Civil Utility Plan, drawing 1/C-166UP, at the end of the telecommunications conduit run. On the Civil drawings, the associated telecommunications work is identified by Keynotes T1 and T2. Please coordinate with these drawings and keynotes for the existing telecommunications pull box/vault location.	9/29/2026	10/9/2026
86	65% Drawings Sheet TN-020SP	On drawing TN-020SP, some of the camera locations may exceed the 295' threshold. In these cases, should gamechanger cabling be provided or 4-strand single mode fiber with converters?	For camera locations where the cable distance exceeds the 295-foot limit, provide Gamechanger cabling as an acceptable alternative to 4-strand single-mode fiber with media converters. Contractor should coordinate the final cable distances and provide the appropriate cabling solution based on the actual field conditions and manufacturer requirements.	9/29/2026	10/9/2026
87	65% Drawings Sheets A-920DT & A-921DT	Sheet A-920DT includes references to Sheet A-921DT. Sheet A-921DT has not yet been issued. Please issue.	A-921DT are typical head of wall details and will be included in the forthcoming 100% Final submission.	9/29/2026	10/9/2026
88	NA	Please confirm what type of connectors are required for any single mode fiber? LC? SC?	Provide SC connectors for all single-mode fiber connections. Coordinate fiber termination with the specified fiber converters and associated equipment to ensure compatibility.	9/29/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
89	NA	Please identify the basis-of-design manufacturer and/or acceptable manufacturers for the specified single-mode fiber optic cabling.	Corning: Corning MIC and Unitized MIC Corning: Armored Corning MIC and Unitized MIC Corning: FREEDM	9/29/2026	10/9/2026
90	RFP, Section L: Paragraph L.26 (page 93 of 129)	Page 93 of the solicitation states "The successful Offeror shall submit with their proposal a Small Business and Small Disadvantaged Business Subcontracting Plan which will be evaluated for compliance with FAR 19.7, statutory requirements and approval must be granted by the Office of Equal Opportunity (OEO)" Please confirm that Offerors are required to submit a Small Business Subcontracting Plan with the proposal and NOT after notification of successful award.	Please see response to pre-bid RFI no. 18 above. Confirmed, Offerors are required to submit a Small Business Subcontracting Plan with the proposal and NOT after notification of successful award. This requirement as a separate document with the proposal is made clear in several locations within the RFP (pages 4, 93 and 102 of 139).	9/30/2026	10/9/2026
91	65% Specifications Sections 08 3453 & 32 3100	Ref. specification 323100 and 083453.Please confirm if Otto Environmental Inc.can be approved as an equal to the listed manufacturers and installers for both the metal fences and gates and animal enclosure caging and doors. Please refer to attached product data for more information.	Otto Environmental, Inc. may be proposed as an acceptable fabricator and installer for the work specified under Sections 08 34 53 – Animal Enclosure Caging & Doors and 32 31 00 – Metal Fences and Gates, subject to: 1) compliance with all requirements of the Contract Documents, and; 2) receipt of Otto Environmental's response to the attached questionnaire titled "Animal Containment Door & Gate Manufacturer Questionnaire". NOTE: this questionnaire was also sent, via email, directly to Islam & Iryna at Otto Environmental. Final acceptance of Otto Envronmental as a fabricator / installer is subject to review and approval of the required completed questionnaire. Offerors will be notified of Otto Environmental's acceptance status at least 10 days before Offerors' bids are due. Approval of Otto Environmental as an acceptable fabricator / installer does not relieve the Contractor of responsibility for full compliance with the Contract Documents.	9/30/2026	10/9/2026
92	NA	Please confirm if there is a page limit to the proposal submission.	Please limit proposal submission to no more than 250 pages.	9/30/2026	10/9/2026
93	65% Drawings Sheet A-503DT AND 65% Specifications Section 07 4113.19	A-503DT shows "07413.19 clip and rail support system", but the specifications do not contain this section. Please clarify is this item should apply.	Please see response to pre-bid RFI no. 58 above.	9/30/2026	10/9/2026
94	65% Specifications Section 07 3116 Paragraph 2.3.A.5	Should all roofing related copper items (snowguards, gutters/gutter screens, fascia, soffit, etc.) have a pre-patinated dark brown finish?	Please see response to pre-bid RFI no. 60 above.	9/30/2026	10/9/2026
95	65% Specifications Section 28 1000	Please confirm if there is an existing PACS? If so, please confirm what platform.	This is a new building. Therefore, Contractor will be installing new panels that tie into an existing SoftwareHouse head end.	9/30/2026	10/9/2026
96	65% Specifications Section 28 1000	Please confirm how many online and offline readers are required.	Not sure what this pre-bid RFI is asking. All required readers should be installed and online. Online status should be a programming issue not a installation issue.	9/30/2026	10/9/2026
97	65% Specifications Section 28 1000	Please confirm existing controllers and I/O capacity.	This is a new building. Therefore, Contractor will be installing new panels that tie into an existing SoftwareHouse head end.	9/30/2026	10/9/2026
98	65% Specifications Section 28 1000	Please confirm if a credential database migration is required.	Not required / Not applicable.	9/30/2026	10/9/2026
99	65% Specifications Section 28 1000	Please clarify visitor management requirements.	Not required / Not applicable.	9/30/2026	10/9/2026
100	65% Specifications Section 28 1000	Please confirm which version of C•Cure 9000 is required.	There is an existing C-Cure system that new panels and equipment will be tied into.	9/30/2026	10/9/2026
101	65% Specifications Section 28 1000	Please clarify how many workstation/client licenses are needed.	None	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
102	65% Specifications Section 28 1000	Please clarify if varying access levels and credential policies are required.	Not required / Not applicable.	9/30/2026	10/9/2026
103	65% Specifications Section 28 1000	Please confirm if a database backup/disaster recovery is required.	Not required / Not applicable.	9/30/2026	10/9/2026
104	65% Specifications Section 28 2000	Please clarify the desired video retention period.	Minimum of 30 days	9/30/2026	10/9/2026
105	65% Specifications Section 28 2000	Please confirm the existing network infrastructure as it relates to VMS.	Contractor should be installing new network infrastructure into the new building.	9/30/2026	10/9/2026
106	65% Specifications Section 28 2000	Please confirm the required recording profile as it related to VMS. Please confirm whether continuous or event-triggered recording is desired.	Both continuous and event-triggered recording is required, along with a minimum of 30 days storage is required.	9/30/2026	10/9/2026
107	65% Specifications Section 28 2000	Please confirm the size and quantity of video wall displays required for VMS.	Not applicable for OPS. Animal Care will have two video management displays. These devices are shown on Security/IT/AV sheets on the 1st Floor.	9/30/2026	10/9/2026
108	65% Specifications Section 28 2000	Please confirm if any operator workstations are required for VMS.	Not applicable for OPS. Animal Care will have two video management displays. These devices are shown on Security /IT/AV sheets on the 1st Floor.	9/30/2026	10/9/2026
109	NA	Please confirm if the existing fiber or conduit can be reused for new security scope required as part of this project.	This is a new structure. Therefore, there is no existing fiber or conduit.	9/30/2026	10/9/2026
110	NA	Please confirm if the PoE power budget is sufficient for new security scope required as part of this project.	This is a new structure. Therefore, Contractors should be installing all new equipment	9/30/2026	10/9/2026
111	NA	Please confirm if there are any security requirements for network/IT?	This is a new structure. Therefore, this room doesn't exist yet and will be built as part of the project	9/30/2026	10/9/2026
112	NA	Please clarify the environmental conditions of the room where the Cisco cabinet will be installed as well as if there will be a rack for attachment.	The space is new and will be environmentally conditioned. The contractor shall provide the rack.	9/30/2026	10/9/2026
113	65% Specifications Section 28 1523	Please confirm if there is an existing intercom system.	There is an existing intercom head end system that the new intercoms will be tied into, but no existing intercoms on this project	9/30/2026	10/9/2026
114	65% Specifications Section 28 1523	Please confirm if the intercom must be integrated with PACS/VMS/IDS?	Confirmed.	9/30/2026	10/9/2026
115	RFP, Attachment 7, Page 111 of 139	Please confirm that the animal mesh installers shall use the skilled laborer classification for wage rates or if this scope falls under a difference classification.	Animal mesh installers may be classified as Skilled Laborers, provided the work performed is consistent with the duties and work activities covered under the Skilled Laborer classification in the applicable wage determination. The Contractor remains responsible for complying with all applicable labor classifications and prevailing wage requirements.	9/30/2026	10/9/2026
116	65% Drawings Sheet LS-504DT	Please provide the required cable diameter as the documents indicate 2" mesh, but not a diameter.	This is noted under 2.4 Woven Wire Mesh within Specification 32 3100 Metal Fences and Gates.	9/30/2026	10/9/2026
117	65% Drawings Sheet SS-110DG	Please confirm if the animal neetting is required to be laced directly to the struts where struts are in place of cable.	No lacing is permitted at struts. However, mesh will be directly laced to rails where there is no cable. and is reflected in the Final CD Set.	9/30/2026	10/9/2026
118	65% Drawings Sheet SS-110DG	Please confirm connection at rockwork as the details indicate both rail and cable. If desired connection is cable, please clarify required diameter and finish.	All connections at the enclosure's perimeter have been modeled and shown as rails for purposes of analysis / engineering. Note 5 on drawing SS-100FP indicates the Specialty Fabricator / Installer (SF) to "refer to EX-531DT for alternate mesh connections with cable in place of rail at all faux Rockwork locations." This accounts for the delegated design of the rockwork's geometry which cannot be defined prior to installation. The SF shall determine which detail to proceed with based on build conditions in the field.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
119	65% Specifications Section 26 3650, Paragraph 2.2.N.	Reference section 263650, 2.2 N. This specification section has a long list of accessories. Please confirm if all are needed or some can be eliminated as not enough space inside Trystar cabinet? If so, please list which accessories are not required.	Please see response to pre-bid RFI no. 68 above.	9/30/2026	10/9/2026
120	65% Specifications Section 26 3213	Reference section 263213. This section is unedited in spots. Please advise if newer, updated generator specs will be provided.	Specification Section 26 3213 will be edited further in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
121	65% Specifications Section 26 3213, Paragraph 1.7.A.1.	Reference section 263213, 1.7 A. 1. Please provide required warranty period number of years as it is blank.	Please see response to pre-bid RFI no. 69 above.	9/30/2026	10/9/2026
122	65% Specifications Section 26 3213, Paragraph 2.1.A.	Reference section 263213, 2.1 A. Rehlko is not listed as an approved manufacturer, it only lists Caterpillar, Generac, Cummins, and MTU. Please confirm if a Rehlko generator is acceptable for this project.	Please see response to pre-bid RFI no. 80 above.	9/30/2026	10/9/2026
123	65% Specifications Section 26 3213, Paragraph 2.3.A.	Reference section 263213, 2.3 A. Please confirm if unit is natural gas only or if dual fuel needed NG/LP backup unit	Please see response to pre-bid RFI no. 70 above.	9/30/2026	10/9/2026
124	65% Specifications Section 26 3213, Paragraph 2.3.I.	Reference section 263213, 2.3 I. This section is not edited. Please advise if this section will be reissued.	Please see response to pre-bid RFI no. 120 above.	9/30/2026	10/9/2026
125	65% Specifications Section 26 3213, Paragraph 2.7.	Reference section 263213, 2.7. This section specifies a permanent outdoor load bank with language that does not apply for top/roof mounted load bank on top of the 200 KW generator enclosure. Please confirm 1.0 power factor is acceptable as that is all that is available for "top mounted" 100 KW load banks.	Please see response to pre-bid RFI no. 72 above.	9/30/2026	10/9/2026
126	65% Specifications Section 26 3213, Paragraph 2.7.G.	Reference section 263213, 2.7 G. Louvers are not applicable for a top mounted load bank. Please confirm not required and revise specs.	Please see response to pre-bid RFI no. 73 above.	9/30/2026	10/9/2026
127	65% Specifications Section 26 3213, Paragraph 2.8.A.	Reference section 263213, 2.8 A. This section specifies a "walk-in" enclosure. This is not applicable to small 200 KW unit based on the site plan dimensions. Please confirm standard skintight enclosure is acceptable.	Please see response to pre-bid RFI no. 74 above.	9/30/2026	10/9/2026
128	65% Specifications Section 26 3213, Paragraph 2.8.A.1.	Reference section 263213, 2.8 A.1. Please confirm if an enclosure that maintains minimum 40 degree F inside generator required.	Please see response to pre-bid RFI no. 75 above.	9/30/2026	10/9/2026
129	65% Specifications Section 26 3213, Paragraph 2.8.E.	Reference section 263213, 2.8 E. Please confirm if a generator load center required.	Please see response to pre-bid RFI no. 76 above.	9/30/2026	10/9/2026
130	65% Drawings Sheet E-602SH	Reference drawing E-602SH. A 100 KW top mounted load bank requires a 2nd breaker at the generator. Please provide amperage of circuit breaker to feed 100 KW integrated load bank at generator.	Circuit breaker and feeder sizing will be shown. The specification calls for the load bank to be factory provided and installed by the generator vendor.	9/30/2026	10/9/2026
131	65% Drawings Sheets C200 thru C230	Please confirm horizontal and vertical scales on Site Utility profile sheets C200 thru C230. Callout of depths do not match vertical graphic scale.	The vertical scale on the profiles is 1" = 4'. The minimum cover depth callouts provide the minimum cover, even when the design cover may be greater.	9/30/2026	10/9/2026
132	RFP, Attachment 4, FACTOR 6 (page 106 of 139) AND	Page 106 of the RFP asks for the contractor's plan for use of innovative technologies; however, page 27 of the RFP prohibits the use of GenAI. Due to new AI technologies being at the forefront of construction innovation, are descriptions of use of GenAI or AI allowable in this section of the proposal and are they allowed throughout the duration of the project?	Offerors may propose innovative and creative approaches using any permissible means, methods, or construction practices that are responsive to the requirements of the RFP and specific to the project. Any use of AI or GenAI remains subject to the applicable solicitation and contract clauses, including any requirement for prior SI approval.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
133	NA	Advise if it is acceptable to value engineer the deep foundation system with battered micro-piles. Advise it is acceptable to suggest a design-built solution to reduce project cost and schedule.	No, it is not acceptable. The Offerors shall base their proposals on the foundation system shown in the forthcoming 100% Final documents (specs & dwgs). This is critical path item and alternate pile approaches introduce potential unknowns and risk such as unforeseen impacts on site utility layouts..	9/30/2026	10/9/2026
134	NA	Please provide louver schedules for all Architectural and Mechanical louvers.	This information is forthcoming in the 100% Final Submission.	9/30/2026	10/9/2026
135	65% Drawings Sheets MP-101PP & MP-102PP	Per drawing MP-101PP, Sheet Keynote # M146 and drawing MP-102PP, Sheet Keynote #M120, please provide a detail showing all required cage enclosures with the access panels for all required equipment plus thermostats / sensors.	Heaters shown previously within animal enclosures, have been moved outside the enclosure, eliminating the need for protective cages. This will be clarified in the forthcoming 100% Final submission. Sensor enclosures shall be provided by exhibit discipline.	9/30/2026	10/9/2026
136	65% Drawings Sheet M-808CP	M-808CP, shows two options for Plant Controls (A & B) - are both of these options supposed to be priced separately on a bid form?	Scope has been updated, and only show a singular control strategy in the forthcoming 100% Final submission. The issued sequences no longer apply, since the entirety of the system was revised per owner direction.	9/30/2026	10/9/2026
137	65% Drawings Sheet M-100CP	Per drawing MI-100CP, Sheet Keynote #M141, are all loose HVAC VFD's furnished and installed by the Electrical Subcontractor?	All VFDs that drive equipment by division 23 shall be provided by division 26 subcontractor.	9/30/2026	10/9/2026
138	65% Drawings Sheets MI-100CP & MI-100HP	Per drawing MI-100CP, Sheet Keynote #M134, plus drawing MH-100HP, there are two heaters shown within the hallway, please provide what type of heaters are required at this location.	Referenced heaters are no longer part of scope in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
139	65% Drawings Sheets MP-100PP & M-502DT	Per drawing MP-100PP and drawing M-502DT, detail #5, is AHU #1 supposed be elevated off the floor or does AHU-1 sit on a housekeeping pad? If AHU-1 needs to sit on a housekeeping pad, the detail shown on M-502DT will need to be corrected, since the humidifier condensate line says it requires four feet of drop from the AHU to the humidifier.	AHU-1 is intended to sit on housekeeping pad. Detail will be updated in the forthcoming 100% Final submission..	9/30/2026	10/9/2026
140	65% Drawings Sheet MP-100PP	Per drawing MP-100PP, Sheet Keynote #118 (regarding FCU #1,#2 & #3, please show condensate piping to the new floor drains. And please show condensate piping associated with FCU-4, to the nearest floor drain.	Condensate piping will be shown in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
141	65% Drawings Sheet EX-601DT	Sheet EX-601DT, Detail 3 Shows a CDF Filled Boulder, where does this condition exist on this project?	This occurs at the habitat and guest pools where we want to prevent water, insects or pests from getting into shotcrete voids and becoming stagnant.	9/30/2026	10/9/2026
142	65% Specifications Section 12 3553.13 & 12 3553	Section 123553.13 Metal Laboratory Casework references Section 123553 "General Requirements for Laboratory Casework and Fume Hoods" for all References, Approved Manufacturers, Materials, Hardware, Finishes, Installation, etc." This specification was not provided, please provide the specification.	Section 12 3553 has been removed from the forthcoming 100% Final specifications	9/30/2026	10/9/2026
143	65% Drawings Sheets A-903IN & A-904IN	A-903IN and A-904IN indicate that SS-01 is to be used at window sills, reference the Finish and Material Schedules on both pages. Confirm and identify which windows are to receive window sills and provide a cross section for depth and thickness of sill.	This scope will be clarified in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
144	65% Specifications Section 23 3113 Paragraph 3.9	Per specification 233113-12, 3.9, Duct Cleaning, please confirm all new HVAC equipment, coils, ductwork, grilles, registers, diffusers and louvers will require certified cleaning.	Confirmed.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
145	65% Drawings Sheet MP-100PP	Per drawing MP-100PP, there are two piping lines (with Heat Tracing) between columns D&E and close to column #3. Where are these two lines feeding and coming from? Is this piping supposed to be feeding the two 4" HHWS&R and the two 4" CHWS&R lines as shown on M-301SC, Detail #4 - loading dock area? Do all four of these lines also require shutoff valves? Do the four separate lines just stop inside of the basement with caps or do they need to tie-into the hydronic system?	Scope will be clarified in forthcoming 100% final submission. The four lines tie into a valve box at loading dock. The intent is for the Owner to tie emergency portable chiller/boilers to the building plant at locations as shown.	9/30/2026	10/9/2026
146	65% Drawings Sheets A-102FP & A-601SH	A102 FP references details B1 and B3 on A-601SH for the Kitchen Prep Area. These details are not listed on A601SH, please provide.	This was a reference error, see A-400 series. This will be corrected in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
147	65% Drawings	Within the Electrical rooms B1EL1 & B1EL2, will we be required to provide drain pans with leak detection under the HVAC equipment and piping or just the HVAC Equipment. If yes, please provide a detail showing all scope of work.	Requirements will be clarified in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
148	65% Drawings Sheets TN-020SP, TN-001CS, TN-501DT & TN-502DT	Sheets: TN-020SP – Telecommunication Site Plan, TN-001CS – Telecommunication Symbols & Notes, and TN-501DT / TN-502DT – Telecommunication Details. a. Telecommunications devices are indicated in the outdoor animal habitat area; however, TN-020SP does not identify a complete outside-plant conduit pathway from the building/telecommunications room to each indicated outdoor device location. While Keynote 3 on TN-020SP calls for a 1-inch conduit and exterior-rated back box for the interpretive display, the drawings do not show the routing, quantity, sizing, or intermediate access points needed to support the other outdoor telecommunications outlets. Additionally, TN-001CS identifies the device symbols, and TN-501DT/TN-502DT provide typical duct-bank and pull-box details, but the details do not establish their required site locations or routes. b. Please provide coordinated site/civil and telecommunications drawings showing the complete outside-plant infrastructure for all outdoor animal habitat telecommunications outlets, including conduit routing from the facility, conduit quantity and sizes, duct-bank configuration, burial depth, pull-box/handhole locations, building penetrations, and final device stub-up/termination requirements. c. TN-020SP currently directs coordination of the telecom service route with other disciplines, and TN-501DT/TN-502DT provide typical communication duct-bank and pull-box construction requirements."	A. Telecom Devices show on serviced by direct buy 1" conduit to each location. Those conduits will be coordinated in the field by contractors and verified by Telecom Consultant before covered. Intermediate Pull boxes are described in the Division 27 specifications and shall be submitted to the A/E through the shop drawing process. B. Security Civil and Telecom drawings have been coordinated. The civil engineer is aware of the direct burial conduit and the data drops match the security drawings. C. TN Series cover the Telecom infrastructure while the civil plans are fully coordinated with other utilities.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
149	65% Drawings Sheets TY-100SP, TY-501DT & TY-502DT	TY-100SP identifies numerous outdoor zoo cameras, including pole-mounted, building-mounted, structure-mounted, and tunnel-mounted camera locations within and around the animal habitat area. The sheet requires all zoo camera cabling to route to the telecommunications rack and states that a separate conduit is required for security work; however, it does not show the complete outside-plant conduit routing, handholes/pull boxes, conduit quantities, or connection points from the facility to the individual camera locations. a.Further, TY-501DT and TY-502DT provide typical camera installation details, including 1-inch conduit and 2-inch fiber conduit at pole-mounted cameras, but do not identify where these conduits originate or how they are routed through the site to each habitat camera. b. Please provide coordinated security, telecommunications, and civil drawings showing the complete dedicated outside-plant conduit system serving all outdoor animal habitat cameras. Include conduit routes from the telecommunications rack/facility to each camera, conduit quantity and sizing, fiber and Category 6 pathway requirements, duct-bank and burial details, handhole/pull-box locations, pole/camera stub-up details, building-entry points, and required separation from power and non-security telecommunications pathways. c. TY-100SP explicitly requires a separate security conduit and routing of zoo camera cabling to the telecom rack, while TY-501DT/TY-502DT establish the typical camera-pole conduit requirements."	There are two camera systems, one for Animal Care and one for OPS (Office of Protection Services). The Animal Care cameras are primarily located in the animal care areas. OPS cameras are primarily public and staff spaces. While there is some overlap, the camera systems are managed by two different parties for disparate reasons and must use separate pathways. a: Please refer to the entire forthcoming 100% Final submission. The floorplans illustrate device and equipment locations, details illustrate layout and mounting variations, and diagrams illustrate the two disparate systems. Use the drawings with specifications to understand the project. b: Power, telecom, civil, architecture, and habitat designs have been coordinated to show device locations and mounting conditions. The project requires coordination of the various trades to provide the required pathways throughout. c: Please use the package entirely. Sheets TY501 DT and TY502 DT are details that illustrate mounting conditions. Refer to Diagrams on Sheet TY601 DG for differences with Animal Care and OPS cameras (they are two disparate systems). Schedules shown on Sheets TY701 SH are for Animal Care Cameras, and TY 702 SH are for OPS cameras. Each schedule identifies the camera type, location that's coordinated to the plans and routing to including which	9/30/2026	10/9/2026
150	NA	GWB assemblies indicate all walls are to be non-combustible, but the Door schedule does not indicate doors are to be Fire Rated. Confirm all FRP door openings shown on the door schedule are non-fire rated.	Confirmed, all FRP door openings are not fire rated. However, there will be some hollow metal doors shown in the forthcoming 100% Final drawings with any required fire ratings indicated.	9/30/2026	10/9/2026
151	NA	Are any custom colors or textures anticipated beyond manufacturer standard selection for FRP doors and frames?	No. Custom colors are not expected.	9/30/2026	10/9/2026
152	NA	Are grout filled FRP frames required at masonry openings or will bolt in frames be acceptable (since modifications to the frame in field is not acceptable per specifications).	Bolted frames are acceptable.	9/30/2026	10/9/2026
153	65% Specifications Section 08 1613	081613 FRP Doors and Frames. Tiger Doors are no longer manufactured by Overly. Will Chen Pruf (which Tiger Doors is now affiliated with) be acceptable. CECO no longer has FRP solutions. Will other products that meet the specifications be acceptable?	Specification will be modified to reflect updated available manufacturers in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
154	65% Specifications Section 09 2900	Section 092900 Gypsum Board reference SAFB and STC Rated Assemblies but partition schedule does not list any walls requiring STC. Confirm STC is not required at GWB Partitions.	Specific STC ratings are not required. However, acoustic batt insulation at Restroom 1WC1 and at the entry wall into VIP / Keeper Workspace 101 will be indicated in the forthcoming 100% Final submission..	9/30/2026	10/9/2026
155	65% Specifications Section 09 2900	Per Section 092900 Gypsum Board, are control joints required above every door opening regardless of partition length?	Yes, per specification 092900 control joints are required above every door opening.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
156	65% Drawings Sheet S-002 AND 65% Specifications Section 01 4000 Paragraph 1.2.B	Sheet S-002 indicates testing and special inspections are Owner-provided; however, Section 01 40 00 (1.2.B) requires the Contractor to furnish all testing and inspections, including those otherwise assigned to the Owner. Please clarify which party is responsible for procuring and paying for these services. In the event of a conflict between the drawings and specifications, please identify the governing requirement and provide direction for determining responsibility by trade.	Specification section 01 4000, paragraph 1.2.B overrides drawings and all other specification sections. The contractor is responsible for obtaining and paying for all testing and inspections. Note S-002 has been corrected in the forthcoming 100% Final submission	9/30/2026	10/9/2026
157	65% Specifications Sections 08 3453 & 32 3100	Please see the attached Animal Caging Fabricator/Installer substitution request for Sections 08 3453 and 32 3100 and advise if Otto Environmental is an approved Fabricator/Installer. (See Substitution Request Otto Environmental Folder created under RFI Folder along with proposal package and relevant project experience of previous work as a prequalification package)	Please see response to pre-bid RFI no. 91 above.	9/30/2026	10/9/2026
158	NA	Within the existing Bison Building, is there any HVAC or Fire Suppression demolition required? If yes, please provide a description or show the scope of work.	The existing Bison Building will be demolished in its entirety during Phase 1 - Early Sitework. There is no Bison Building scope of work in this RFP for Phase 2.- Habitats & Animal Care Building.	9/30/2026	10/9/2026
159	65% Drawings Sheet P-100PP	Per drawing P-100PP, Sheet Keynote P309 calls for 4" Gas piping, however on the drawing, near the generator location, the piping says it should be 1". Which pipe size is correct?	The 2 psi line to the generator should be 1 inch and the keynote will be revised in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
160	65% Drawings Sheet P-101PP	Per drawing P-101PP, please confirm all work associated with Sheet Keynote #210 (two separate locations) will be performed by the Civil Subcontractor, including the trench drains (TD-B) and all piping as shown.	All drains and associated work outside the building shall be performed by the Civil Subcontractor including area drains and trench drains. Work by Civil has removed / clarified from the plumbing drawings in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
161	65% Drawings Sheet P-601SH	Per drawing P-601SH, PE-Plumbing Animal Drinking Schedule, please indicate where the manufacture and model numbers are shown on the "EX" drawings. Also, who owns furnishing and installing the animal drinkers?	The plumbing series will provide the information on the piping until the connection of the drinker. The information on the drinkers is provided within the forthcoming 100% Final Exhibit drawings.	9/30/2026	10/9/2026
162	65% Specifications Section 26 0519 Paragraph 3.1.0	26 05 19-3.1.O restricts the use of MC Cable to 1.8m (6ft) maximum whip length for lighting fixtures and 28 31 11-3.3.F-2 allows MC Cable to be used in concealed spaces for fire alarm raceway except for smoke control system wiring. Please confirm all allowable circuitry that can utilize the more cost-effective MC Cable.	MC cable to be used as recommended per specification. Specs 26 series refers to all electrical requirements line voltage 120/208V, 480/277V and Specs 28 series refers to low voltage which provides different requirements from the Specs 26 series.	9/30/2026	10/9/2026
163	65% Specifications Section 08 4400	In Section 084400 Glazed Curtain Walls, the following specification sections are referenced but are not provided: 019119.43 "Exterior Enclosure Commissioning", 054000 Cold Formed Metal Framing, 078443 Joint Firestopping, 084433 Sloped Glazing Assemblies. Confirm they are not required for this project. If required, please provide and identify locations as needed on drawings.	References in this specification will be clarified in the forthcoming 100% Final submission. The following references will be removed: 019119.42 (refer to 019113) and 084433. Sections 078443 and 054000 will be added.	9/30/2026	10/9/2026
164	65% Specifications Section 23 3113 Paragraph 3.9.G.7	Per specification 233113, page 13, G, 7, can you please strike out the word "EPA" and insert ASHREA 62.1?	Specification will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
165	65% Specifications Section 07 8413	Specification Section 07 8413 Penetration Firestopping is referenced in multiple specification sections and needs added to next set. Please include specification section 07 8413 Penetration Firestopping or provide direction for penetration firestopping requirements to be included.	Specification will be added in forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
166	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, offerors are instructed to identify the subcontractors proposed for eight specific trades and provide three references for each. The evaluation criteria also give greater consideration for specific demonstrated experience for the Animal Containment / Transfer Chutes & Doors and Shotcrete Faux Rock and Faux Trees subcontractors. Please confirm whether the Smithsonian Institution expects offerors to provide key personnel resumes and/or relevant experience information for each of the eight subcontractors.	Please see response to pre-bid RFI no. 9 above.	9/30/2026	10/9/2026
167	RFP, Factor 2, Section h) Page 104 of 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, offerors are instructed to include a resume for the Project Engineer. Specific qualifications or additional consideration criteria are not included for this position. Please confirm whether the Smithsonian Institution will be evaluating the Project Engineer Resume based on specific qualifications and/or additional consideration criteria. If yes, please outline these qualifications and/or additional consideration criteria.	The solicitation does not require the proposed Project Engineer to have a minimum of five years of experience. The resume should document the individual's relevant experience for the past five years, to the extent applicable, or the individual's last five projects.	9/30/2026	10/9/2026
168	RFP, Factor 2, Section h) Page 104 of 139	A Project Engineer resume is required in Section Tab 9, but the instructions require that resumes cover five years of experience or the last five projects. Project Engineers are generally promoted to other positions well before they reach five years of experience. Please indicate if you prefer a resume for a Project Engineer with less time (i.e. 2-3 years) or if five years is specifically required.	See response to pre-bid RFI No. 167 above.	9/30/2026	10/9/2026
169	RFP, Attach. No. 4 FACTOR 2, Section d) Page 104 0f 139	In Factor 2: Contractor's Key Personnel and Support Team Qualifications of the RFP, the Senior Cost Estimator is listed as a member of the Construction Services Team. Please confirm whether the Smithsonian expects offerors to submit a resume for this position. If yes, please outline any qualifications and/or additional consideration criteria	Please see response to pre-bid RFI no. 9 above. Requirement for submitting information on the Senior Cost Estimator has been removed.	9/30/2026	10/9/2026
170	RFP, Attach. No. 4 FACTOR 1, Section b) Page 103 0f 139	In Factor 1: Contractor's Ability to Provide Construction Services in the RFP, offerors are instructed to describe their plan for managing and coordinating major subcontractors during construction, including continuity of key subcontractors throughout the project. Please confirm that the terms "major subcontractors" and "key subcontractors" used here are in reference to the subcontractor trades included in the list identified in Factor 2: Contractor's Key Personnel and Support Team Qualifications.	Confirmed, but expect the process for managing and coordinating all subcontractors would be the same.	9/30/2026	10/9/2026
171	65% Drawings Sheet LS-504DT	Drawing LS-504DT and the specifications indicate 2-inch mesh for the pedestrian barrier but do not specify the cable diameter. Please provide the required cable diameter.	Please see response to pre-bin RFI no 116	9/30/2026	10/9/2026
172	65% Drawings Sheet SS-110DG	Drawing SS-110DG shows struts in place of cables. Is it acceptable to lace the netting directly to the struts? Please provide connection details.	Please see response to pre-bin RFI no 117	9/30/2026	10/9/2026
173	65% Drawings Sheet SS-110DG	Drawing SS-110DG shows conflicting rockwork connection details: some sheets indicate a rail, while others show a cable routed through eyebolts. Please clarify the required connection. If a cable is required, provide its diameter and finish, including whether it should be black-oxide stainless steel to match adjacent components.	All connections at the enclosure's perimeter have been modeled and shown as rails for purposes of analysis / engineering. Note 5 on drawing SS-100FP indicates the Specialty Fabricator / Installer (SF) to "refer to EX-531DT for alternate mesh connections with cable in place of rail at all faux Rockwork locations." This accounts for the delegated design of the rockwork's geometry which cannot be defined prior to installation. The SF to determine which detail to proceed with based on build conditions in the field.	9/30/2026	10/9/2026
174	65% Specifications Section 13 3100 Paragraph 3.1.D	Specification Section 13 31 00, Paragraph 3.1.D, requires TyLin to provide a 3D model of the exhibit. Will the model be available before bidding?	See response to pre-bid RFI no. 3 above, NOTE: 100% Final dwgs and specs will be provided on 10/19/26 per pre-bid RFI no. 178.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
175	65% Drawings Sheets EX-205SC & EX-303SC	Drawing EX-205SC references details 1 and 2 on EX-303SC. Drawing EX-303SC was not provided. Please provide this page with these details regarding the animal transfer bridge.	Please refer to details 1&2 on sheet EX-302SC. This will be corrected in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
176	NA	Please provide more details on the desired look for the ceilings for the tunnels.	This information is clarified within the forthcoming 100% Final submission. There is rockwork and acoustical treatment (Sonaspray - basis of design) on the ceiling.	9/30/2026	10/9/2026
177	65% Specifications Sections 01 4000; 084313, Paragraph 1.7.A and 084400, Paragraphs 1.9.B & 1.10.G.3	Specifications 01 40 00, 08 43 13 (1.7.A), and 08 44 00 (1.9.B, 1.10.G.3) require preconstruction testing of laboratory mockups. Please confirm the scope of the laboratory mockup, including whether it is to consist of the curtainwall and window assemblies identified on Sheet A-601SH and/or specific wall assemblies. Also confirm that the Owner will retain and contract directly with the testing agency to perform the required laboratory mockup testing.	Per specification section 01 4000, paragraph 1.2.B the Contractor is responsible for providing an independent, approved subcontractor for all tests and inspections required in the contract documents. This paragraph specifically notes the Contractor must provide such independent approved agency even if there are ones explicitly assigned to the Owner elsewhere in the contract documents. Additional language will be added to this specification section paragraph to make this even clearer.	9/30/2026	10/9/2026
178	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 3 of 139	Please consider a revised RFI deadline when the 100% design documents are released in October.	The 100% Final bid documents are forthcoming via an amendment to be issued on Monday, October 19, 2026. A second, two-week period for pre-bid RFIs has been accounted for in the procurement schedule and will take place from 10/19/26 thru 10/30/26. However, as noted in the SF 1442 request for proposal, Offerors are strongly encouraged to begin preparation of their Technical Proposal in advance of receiving the 100% Final CDs and to submit any administrative or technical pre-bid RFIs sooner rather than later. The new date and time established for submission of both the technical proposal and the pricing proposal are November 20, 2026 at 3:00 pm est. Given the unchanged construction period of performance with final completion still September 2028, Offerors should not anticipate another extension of the proposal due date. NOTE: this response supersedes the response to pre-bid RFI no. 1 and 3 above.	9/30/2026	10/9/2026
179	RFP, SF 1442 Continuation Sheet (Optional Form 336) Page 3 of 139	Please consider scheduling another site visit when the 100% design documents are released in October.	A second site visit is scheduled for Friday, October 23, 2026 at 9:00am.	9/30/2026	10/9/2026
180	RFP, FACTOR 2 Paragraph d) Page 104 of 139	For Factor 2 Part d of the RFP, the key trade elements of work. Please clarify if subcontractor resumes are required along with the references or will only (3) references with contact information be required for this portion of the technical proposal.	Please see response to pre-bid RFI no. 9 above. In addition, as stated in the RFP, those Animal Containment / Caging subcontractors that have five years of experience with projects at zoological facilities, specifically for large carnivores and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration. Similarly, the Shotcrete Faux Rock and Faux Trees subcontractors that have five years of experience and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration,	9/30/2026	10/9/2026
181	RFP, Section B.4 and B.4.1 (Pages 9 & 10 of 139)	For the fiscal year funding breakdown indicated on Part B4 of the RFP, it states that $4 million is obligated at award of FY2027 which is to cover a 9-month period of construction and the balance to be funded in FY2028 which is a 10 month duration. Considering this project could exceed $10 million and nearly half of the construction duration is in FY2027, please consider increasing the funding increment in FY2027 to accommodate the construction costs that will be incurred that fiscal year.	Please see response to pre-bid RFI no. 24 above.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
182	65% Specifications Section 01 8113.15	The Table of Contents identifies Section 01 8113.15, "Sustainable Design Requirements – LEED v4 BD+C"; however, the body of the specification references "LEED 2009 for New Construction & Major Renovations" in the sustainability requirements section on page 179. Please confirm which LEED rating system controls the project requirements.	Please see response to pre-bid RFI no. 30 above.	9/30/2026	10/9/2026
183	65% Drawings Sheet TY-001	Sheet TY-001/Removal Note# 7 states "Provide Mock-Up of Temporary Security System…." Please provide requirements for a temporary security system.	This note has been removed on the forthcoming 100% Final drawings.	9/30/2026	10/9/2026
184	NA	Referring to existing Electronic Safety and Security, will any existing credential database migration be needed as part of this contract? If so, please provide requirements to be included.	Not required / Not applicable.	9/30/2026	10/9/2026
185	NA	Referencing existing Electronic Safety and Security, is there an existing intercom system?	Please see response to pre-bid RFI no. 113 above	9/30/2026	10/9/2026
186	NA	Will the new intercom system need to integrate with PACS/VMS/IDS and if so please provide requirements.	Please see response to pre-bid RFI no. 114 above	9/30/2026	10/9/2026
187	65% Specifications Section 01 3233, Paragraph 1.2.A	Section 013233 para (1.2.A) references preconstruction, periodic video recordings, and Web-Based Construction photographic documentation. However, it does not include further directions. Please confirm scope for these services if to be provided by contractor.	The Contractor shall provide construction photographic and video documentation in accordance with Section 01 32 33.	9/30/2026	10/9/2026
188	65% Specifications Section 08 3453, Paragraph 1.3.B.2 AND Section 08 3456	Section 08 3453 para (1.3.B.2) references section 08 34 56. Please provide section 08 34 56 if applicable.	References to 08 3456 will be removed in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
189	65% Specifications Section 08 3453 Paragraph 1.5.B	Section 08 3453 para (1.5.B) calls for "Animal caging" bidders to submit resumes for key personnel and photographic documentation of previous projects. Is it assumed these can be provided after award and not required with bid.	Please see response to pre-bid RFI no. 9 above. The name of the Animal caging subcontractor and three of their references are required with the Offeror's proposal. In addition, as stated those Animal Containment / Caging subcontractors that have five years of experience with projects at zoological facilities, specifically for large carnivores and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration. Similarly, the Shotcrete Faux Rock and Faux Trees subcontractors that have five years of experience and list 5 installations at 2 or more AZA accredited institutions will be given greater consideration	9/30/2026	10/9/2026
190	65% Drawings Sheets C-151, C-156SP and LS-503DT	Please confirm the type of Fence/Rail required at locations shown on Drawings C-151-C-156SP - Keynote #12 is this "Olmstead Rail" (4,5/LS-503DT)	Refer to the Landscape Plans for the specific rail types. The Civil Plan will be updated in the forthcoming 100% Final submission to better coordinate with Landscape regarding this scope, However, the Landscape Plans will continue to be the set that documents the rail types along the site's perimeter.	9/30/2026	10/9/2026
191	65% Drawings Sheets LS-102SP, LS-504, C-155SP & C-156SP	Drawing LS-102SP identifies a "Bamboo Landscape Rail" (Detail 3/LS-504) at locations where Drawings C-155SP and C-156SP indicate "New Landscape Fence / Handrail / Feature" under Keynote 12. Please clarify the design intent and confirm the required fence, handrail, or rail system at these locations.	Bamboo Landscape Rail (detail 3/ LS-504) is the correct detail for these locations, per drawing LS-102SP. The #12 label on sheet C-156SP near the middle of the sheet, by the gates, refers to the decorative vertical slat fence, as shown on LS-102 SP and detail 2/LS-501	9/30/2026	10/9/2026
192	65% Drawings Sheets C-153SP, C-156SP, LS-102SP & LS-200EL	C-153SP & C-156SP show the Decorative Vertical Slat Fence in the Caderock Wall (Keynote #10). LS-102SP & LS-200EL show a slightly difference path of the fence. Please confirm which layout view is accurate.	Sheet LS-102SP has the correct horizontal layout of the fence. This has been updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
193	65% Drawings Sheet EX-301SC	Can additional details such as plan/elevation views be provided for Glass Viewing Panel (4/EX-301SC)?	These details will be eliminated in the forthcoming 100% Final submission. Refer to sheet A-403EP for scope of work at glazing within tunnel.	9/30/2026	10/9/2026
194	65% Drawings Sheets EX-111SP thru 116SP and C-151SP thru C-156SP	Guest Barrier (B1) & Guest Handrail (B2) layouts on EX-111-116SP are different than shown on C-151-156SP - Keynote #7. Please confirm which layout view is accurate.	The layout shown on the exhibit drawings take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
195	65% Drawings Sheets LS-101SP, LS-504DT & C-151SP	Pedestrian Barrier (1,2/LS-504DT) shown on C-151SP G6 are different than shown LS-101SP K6 Gridlines. Please confirm which layout view is accurate.	Sheet LS-101SP has the correct horizontal layout of the fence. This has been updated in forthcoming 100% final submission.	9/30/2026	10/9/2026
196	65% Specifications Section 05 5213 Paragraph 1.1.B & Section 05 7300	Section 055213 para (1.1.B) references Section 05 7300 Decorative Metal Railings. Please provide section 057300 if applicable.	This reference and section (057300) is not applicable and will be removed in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
197	65% Specifications Section 32 3100 Paragraphs 2.6 thru 2.11	Specifications 32 3100 para (2.9) is noted as painted Bronze. Will Smithsonian allow these items to be powder coated like items referenced in paragraphs (2.6), (2.7), (2.10), and (2.11)?	All handrails shall be shop-primed and painted. Specification will be clarified in the forcoming 100% Final submission.	9/30/2026	10/9/2026
198	NA	Please provide a written scope of work with inclusions / exclusions associated with the Phase 1 work contract that will occur on this project site prior to the start of this project.	The Phase 1 – Early Site work is being performed under a separate contract, and the Phase 1 contract documents have been made available for reference and for review and coordination. Offerors shall base their proposals on the forthcoming 100% Final Phase 2 solicitation documents. Work specifically included in the Phase 1 contract should not be duplicated in the Phase 2 Contractor's proposal. In brief, Phase 1 includes installation of site perimeter temporary fencing, sound barrier, tree protection measures, and erosion and sediment controls. Upon completion of Phase 1, these items will be turned over and become the responsibility of the Phase 2 Contractor to properly maintain, adjust, or modify as necessary, and ultimately remove upon completion of the project. Phase 1 also includes selective site demolition work and storm/water/sanitary, and electrical bypass / infrastructure work necessary to reroute existing utilities outside the limits of the new exhibit area. Following completion and connection of the new or rerouted utilities, the Phase 1 Contractor shall remove abandoned utilities within the new exhibit area as required by the Phase 1 contract documents.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
199	65% Specifications Sections 08 3453 & 32 3100	Please confirm if Hercules Custom Iron is an acceptable fabricator / installer for the Animal Enclosure Caging & Doors (Spec 083453) and Metal Fences & Gates.	Hercules Custom Iron may be proposed as an acceptable fabricator and installer for the work specified under Sections 08 34 53 – Animal Enclosure Caging & Doors and 32 31 00 – Metal Fences and Gates, subject to: 1) compliance with all requirements of the Contract Documents, and; 2) receipt of Hercules Custom Iron's response to the attached questionnaire titled "Animal Containment Door & Gate Manufacturer Questionnaire". NOTE: this questionnaire was also sent, via email, directly to Nick and Evan. Final acceptance of Hercules Custom Iron as a fabricator / installer is subject to review and approval of the required completed questionnaire. Offerors will be notified of Hercules Custom Iron's acceptance status at least 10 days before Offerors' bids are due.. Acceptance of Hercules Custom Iron as a proposed equal does not relieve the Contractor of responsibility for full compliance with the Contract Documents. NOTE: Please see response to pre-bid RFI no. 91 above for similar requirements.	9/30/2026	10/9/2026
200	65% Drawings Sheet E-604SH	Sheet E-604SH states that light fixture XL1 is to be recessed in handrail. Please identify which handrails are to receive this fixture and provide detailed installation and wiring pathways information.	All handrails along pathways will have lights recessed. Handrail lighting is a custom product and wiring pathway to and between handrails to be within conduit. However, the handrail manufacturer shall provide shop drawings indicating wiring pathways and additional installation details for review and approval. Additional detailing and clarifications can be found within the forthcoming 100% Final submission in the EX series (where handrails are scoped), specifically, EX402DT and EX-403DT.	9/30/2026	10/9/2026
201	NA	Please clarify quantity and position/spacing of the bumpers on the loading dock.	Spacing and quantity of loading dock bumpers will be clarified in the forthcoming 100% Final drawings.	9/30/2026	10/9/2026
202	RFP, Attach. No. 4 FACTOR 2, Section h) Page 105 0f 139	The RFP notes the Quality Control Manager must be a full time position once construction starts. May that role be filled by a full time field representative in a dual hat rule, under the guidance of a part-time corporate quality representative?	No. The Quality Control Manager (QCM) shall be a full-time position during construction as required by the RFP. The QCM shall be responsible for implementation and administration of the project Quality Control Program and shall meet the qualifications and requirements identified in the solicitation documents.	9/30/2026	10/9/2026
203	RFP, Attach. No. 4 FACTOR 2, Section h) Page 104 0f 139	Regarding the Superintendent position, the RFP requires 10+ years of construction experience. Provided the Superintendent demonstrations qualifications for the position and project, may the requirement be reduced to 8+ years?	Yes, a minimum of 8 years is acceptable provided the individual has relevant experience with projects that are at AZA accredited facilities as evidenced by their resume.	9/30/2026	10/9/2026
204	NA	Please confirm the following about the PACS - Software & Configuration a. What version of C•CURE 9000 is being used? b. How many workstations/client licenses are needed? c. What are the access levels and credential policies? d. Is Database backup/disaster recovery required?	a. Please see response to pre-bid RFI no.100 above b. Please see response to pre-bid RFI no.101 above c. Please see response to pre-bid RFI no.102 above d. Please see response to pre-bid RFI no.103 above	9/30/2026	10/9/2026
205	NA	Please confirm the video retention period for the VASS system	Please see response to pre-bid RFI no. 104 above	9/30/2026	10/9/2026
206	NA	Please confirm the recording profiles (continuous vs. event-triggered)?	Please see response to pre-bid RFI no. 106 above	9/30/2026	10/9/2026
207	NA	No video wall displays are shown on the contract drawings. Please confirm if these are required. If yes, please provide specifications.	Please see response to pre-bid RFI no. 107 above	9/30/2026	10/9/2026
208	NA	Please confirm if any operator workstations are required.	Please see response to pre-bid RFI no. 108 above	9/30/2026	10/9/2026
209	NA	Please confirm any network/ IT requirements for PACS, VASS, etc.	Please refer to security drawings and specifications for network requirements.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
210	NA	Please confirm if there are any visitor management requirements	Please see response to pre-bid RFI no. 99 above	9/30/2026	10/9/2026
211	65% Drawings Sheet LS-504DT	Landscape drawing LS-504DT calls out details for the Pedestrian Railing, and calls out a 2"x2" woven wire mesh that weaves around a cable. Please confirm the mesh diameter and the cable diameter for the Pedestrian Railing.	Please see response to pre-bid RFI no. 116 above	9/30/2026	10/9/2026
212	65% Drawings Sheet SS-110DG	Drawing SS-110DG showcases the general layout of the enclosure steel, with a number of struts called out between the arches. In regard to netting installation, please confirm if the netting is to be laced directly the struts, or if additional details will be provided.	Please see response to pre-bid RFI no. 117 above	9/30/2026	10/9/2026
213	65% Drawings	The drawings reference that all animal containment netting is to be laced to railings around the site. Please confirm if there are locations where the netting is to be terminated and laced to eye bolts by utilizing a cable, and verify the cable diameter and finish.	Please see response to pre-bid RFI no. 118 above.	9/30/2026	10/9/2026
214	65% Drawings Sheet AL-001F	Sheet AL-001F states that design includes fire extinguishers, fire extinguisher cabinets, and code-required signage. There are currently no details specifying quantity, type, or locations of any of the above elements. Please provide approximate details to be able quote these accessories. Please also provide specifications for fire extinguishers, fire extinguisher cabinets and code-required signage.	Specification Section 10 4416 - Fire Extinguishers will be provided in forthcoming 100% Final submission. Signage drawings are included in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
215	65% Specifications Section 13 3100 Paragraph 3.1.d.1	Specification section 133100 – Special Structure, subsection 3.1D-1, notes that TYLin will be providing a 3D design intent model. Please confirm if this is going to be made available with the release of the 100% CD drawings.	See response to pre-bid RFI no. 174 above.	9/30/2026	10/9/2026
216	RFP, Amendment 2 - Geotech Report	The Geotech report was issued as part of Amendment 0002 but noted as "for reference purposes only". This information will be critical to delegated design elements such as micropiles and support of excavation. Please confirm this information will be part of the contract documents for the successful bidder.	Confirmed. The Geotech report will be part of the contract documents for the successful bidder.	9/30/2026	10/9/2026
217	RFP, Amendment 2 - Geotech Report	Based on the Geotech report issued through Amendment 002, please confirm rock excavation is not expected on the project, or provide an allowance to carry in bidding.	Please see response to pre-bid RFI no 36	9/30/2026	10/9/2026
218	65% Drawings Sheets A-111CP & A-112CP	Architectural Reflected Ceiling Plans do not specify a finish for exposed concrete ceilings. Please provide specifications or details on how exposed concrete ceilings should be finished.	Sheets A-111CP and A112CP note within the legend that all exposed concrete shall be painted unless otherwise noted. Further clarification on finishes to be provided in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
219	65% Drawings Sheets C-153SP, C-155SP & LS-102SP	Drawing C153SP and C155SP show the Decorative Vertical Slat Fence at the same location as the Caderock Wall; reference keynote #10 for the Caderock Wall and key #12 for the Decorative Vertical Slat Fence. Landscape drawing LS-102SP shows a slightly different layout for the Decorative Vertical Slat Fence. Please confirm which layout is to be used for this fence.	The layout shown on landscape drawings should take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
220	65% Specifications Section 05 5213 Paragraph 1.1.B & Section 05 7300	Specification section 055213 – Pipe and Tube Railings, subsection 1.1-B "Related Requirements", specifically calls out specification section 057300 – Decorative Metal Railings. There is no specification section 057300 in the bid documents. Please issue this specification section, or confirm it does not apply.	Referenced specifications listed in paragraph 1.1.B are not applicable. This paragraph has been removed in the updated specification section 05 5213 in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
221	65% Specifications Section 32 3100 Paragraphs 2.7 thru 2.11	Specification section 323100, subsection 2.8 and 2.9, call for the Service Handrail and the On Habitat Handrail to be painted black and bronze, respectively. Please confirm if these are to be painted, or if they are to be powder coated like the rest of the items listed in 2.6, 2.7, 2.10, and 2.11.	The Service Handrail and the On Habitat Handrail are to be shop primed and painted.	9/30/2026	10/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
222	65% Drawings Civil Series & Landscape Series	The layout for the Pedestrian Barrier shown on the Civil Drawings versus the Landscape Drawings do not match. Please confirm which layout is correct.	The layout shown on landscape drawings should take precedence. These layouts will be updated in forthcoming the 100% Final submission.	9/30/2026	10/9/2026
223	65% Drawings Civil Series & Exhibit Series	The layout for the Guest Barrier shown on the Civil Drawings versus the Exhibit Drawings do not match. Please confirm which layout is correct.	The layout shown on the exhibit drawings should take precedence. These layouts will be updated in the forthcoming 100% Final submission.	9/30/2026	10/9/2026
224	65% Specifications Section 31 6333, Paragraphs 4.2.B	Please confirm if changes to the extent of micropiles shown on the drawings will be addressed via unit prices.	Confirmed. Unit prices have been removed from specification section 31 6333 in the forthcoming 100% Final submission. Offerors are required to provide their unit prices associated with micropiles in advance with their Pricing proposal. See revised Bid Schedule uploaded with this set of pre-bid RFIs.	9/30/2026	10/9/2026
225	65% Specifications Sections 03 3713 & 12 1423	Please see the attached substitution request for the Arabian Tiger Facility Project. Please let me know if they will be an acceptable manufacturer/installer on this project.	Cemrock Landscape, Inc. is an acceptable manufactuer / installer on this project for both shotcrete (faux rock) and artificial plants. Accordingly, they have been added to the list of Acceptable Fabricators in updated specifications 03 3713 and 12 1423, dated 2026-10-12.	10/8/2026	10/19/2026
226	65% Specifications Section 08 3453	Please clarify what companies are acceptable manufacturer / installers on the project for Animal Enclosure Caging & Doors.	Specification Section 08 3453 Animal Enclosure Caging & Doors has been replaced with two separate specification sections --- 11 9013 Animal Access Doors and 119014 Keeper Access Doors and Caging. Refer to updated specifications, dated 2026-10-12, for list of acceptable fabricators.	10/8/2026	10/19/2026
227	K1/A-507DT	Detail K1/A-507DT shows molded bumpers at the loading docks. However, the plan view of the loading dock does not show the quantity or spacing of bumpers. Please confirm the quantity and spacing of rubber bumpers.	There is only one bumper. Refer to the Elevation G1 on sheet A-201EL & Detail J7 on sheet A-509DT.	10/27/2026	11/9/2026
228	Division 27 – Structured Cabling Specifications	Please provide the final approved structured cabling manufacturer/platform and associated requirements for Category 6A connectivity, patch panels, racks, grounding, labeling, testing, spare capacity, and manufacturer system warranty.	Owner provided and installed through SI approved vendor CLC.	10/27/2026	11/9/2026
229	65% Drawings – WAP Locations / TN-501DT	Please confirm that the wireless access points are Owner-furnished and identify responsibility for WAP mounting, patch cords, patching, labeling, testing, activation, configuration, and final acceptance for the twelve WAP locations.	Confirmed	10/27/2026	11/9/2026
230	Section 28 0531.10 – Communications Equipment for Electronic Security	Please identify the current OCIO-approved network switch manufacturer/model, SFP/optic requirements, support requirements, configuration responsibility, and the trade responsible for furnishing and installing the security network switches.	Owner provided and installed through SI approved vendor CLC.	10/27/2026	11/9/2026
231	Section 28 1000 – 1.2 System Description, Paragraph B	Please confirm the controlling Software House C•CURE platform and current software version for this project, including whether the existing system is C•CURE 800/8000 or C•CURE 9000.	The current system is C-Cure 9000.	10/27/2026	11/9/2026
232	Section 28 3100 – Intrusion Detection, 1.1 System Description	Please confirm whether a separate dedicated Intrusion Detection System is required or whether the specified intrusion functions are to be monitored and managed through the existing Software House C•CURE system.	New intrusion items will be monitored by the existing SoftwareHouse C-Cure System	10/27/2026	11/9/2026
233	Section 28 1000 – 2.1 PACS Software Licensing	Please confirm whether the existing C•CURE system has sufficient licensing capacity for the project expansion and identify the party responsible for furnishing any additional or upgraded licenses.	New licenses will need to be purchased by the security contractor for all items that require licenses.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
234	Section 28 2000 – Video Surveillance / Existing VMS	Please confirm the controlling video-management architecture and platform for the project, including the relationship between American Dynamics Victor/VideoEdge and Genetec, and identify the platform/version that the new camera system is required to integrate with.	American Dynamics is for OPS cameras and Genetec is for Animal Program cameras. Genetec should not be a new system. The new cameras will be integrated into the existing Genetec system.	10/27/2026	11/9/2026
235	Section 28 2000 – 1.1 System Description	Please confirm whether the existing video-management system has sufficient licensing capacity for all new cameras and identify the party responsible for furnishing any additional camera/VMS licensing.	Licenses will need to be procured for each camera. Those licenses can be obtained through our preferred vendor.	10/27/2026	11/9/2026
236	Section 28 1523 – 1.2 System Description	Please confirm whether the existing Vingtor-Stentofon intercom system has sufficient licensing capacity for the new devices and identify the party responsible for furnishing any additional licensing.	New licenses will need to be purchased by the security contractor for all items that require licenses.	10/27/2026	11/9/2026
237	65% Security Drawings / Camera Schedule	Please provide the final camera schedule for all zoo site, zoo building, and OPS camera tags, including manufacturer, model, mount/accessories, field of view, environmental requirements, illuminator requirements, network connection, and applicable licensing for each camera.	Final camera schedules were provided in the 100% Final Drawings issued with Amendment 4.	10/27/2026	11/9/2026
238	Section 28 2000 – 2.3 Digital Video Recorder	Please confirm whether the American Dynamics ADVER96R5DK VideoEdge 96 TB NVR is to be furnished and installed by the Division 28 contractor or by the Owner.	This should be furnished by the security contractor.	10/27/2026	11/9/2026
239	Division 28 – Access Control / RM Module / Intrusion Detection	Please provide the required sequence of operation and system interface between the intrusion devices, RM reader/module, and Software House access-control system, including the system responsible for monitoring and controlling the associated points.	Please refer to the drawings and specifications. Contractor will be providing new SoftwareHouse C-Cure panels and all associated access control, CCTV and intrusion detection. Monitoring will be by the existing SoftwareHouse head end monitoring center.	10/27/2026	11/9/2026
240	Division 28 – Testing / Performance Verification Testing	Please define the required Performance Verification Testing (PVT), including the extent of testing, witnessing requirements, allowable deficiency threshold, retesting requirements, and party authorized to provide final system acceptance.	This is layed out in the specifications in detail. Please refer to the specifications.	10/27/2026	11/9/2026
241	RFP Attachment 7: Davis Bacon Act Wage Determination Building DC20260002 RFP Attachment 8: Davis Bacon Act Wage Determination Heavy DC20260001	Please clarify which wage determination should be used: "Building" or "Heavy"?	Both the 'Building' and 'Heavy' wage determinations included in the solicitation apply to this contract. Bidders must utilize multiple wage determinations based on the specific scope of work being performed: - Building Wage Determination: Applies to all work associated with the construction, finishes, structural elements, and MEP systems of the 8,000 SF animal keeper building. - Heavy Wage Determination: Applies to all outdoor civil and habitat work, including but not limited to the installation of the micropiles, structural steel arches, mesh enclosures, shotcrete rockwork, and boulder placement within the outdoor exhibits. Contractors and subcontractors will be required to maintain accurate, contemporaneous time records splitting employee hours between the Building and Heavy scopes if an employee performs work under both classifications.	10/27/2026	11/9/2026
242	Amendment 0002, RFI 15 and 16 responses C140	Who are the Phase 1 rental fence subcontractors and what rental rates should the contractor carry in the general conditions?	Phase 1 rental fence subcontractor is Long Fence. Reach out to them for rates.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
243	RFP	In the RFP attachment 4, page 102 of 139, Factor 1 Tab No. 03 is noted as "List of Anticpated Major Subcontractors" however, this seems to correspond to the following item on the next page… "c. Describe in detail how you will manage, convey, and direct recommendations to meet the Smithsonian goals of schedule, cost, and quality through your participation as a team member with the Smithsonian Institution (SI), Architect/Engineer (A/E), and both SI's Third Party Estimator and Commissioning Agent (CxA)." Given that Factor 2 has an entire section dedicated to listing major subcontractors, it's our assumption that Factor 1 Tab 03 is just titled incorrectly. Please provide clarification.	Factor 1 Tab No. 03 "List of Anticipated Major Subcontractors" (page 102 of 139) does not have a corresponding paragraph that elaborates on this requirement on the following page (103 of 139), like the other Factor 1 Tabs. The elaboration was inadvertenly included under Factor 2, paragraph d) on page 104 of 139. Therefore, in Tab No. 3 under Factor 1 please not only include a lsit of anticipated major subcontractors, but also include what is described in paragraph d) on page 104 of 139.	10/27/2026	11/9/2026
244	C-161UP LS-101SP P-100SP	There is no domestic water connection to the new drinking fountain at plan west. Please clarify.	The same existing water connection supplying service to the existing water fountain that is being removed during Phase 1 construction will be utilized to supply water service to the proposed water fountain to be installed during Phase 2 construction.	10/27/2026	11/9/2026
245	LS-100LP Series	Please confirm all salvaged pavers re-usable and quantities are adequate; if not, please advise quantities of new materials to carry.	Phase 2 contractor shall provide all new pavers at Olmstead	10/27/2026	11/9/2026
246	100% Final Dwgs Sheets A-401EP & A-510DT 100% Final Specs Sections 05-5000 & 07 4213.13 65% Specs Section 05 7800	A-401EP and A-510DT references specifications sections 055000 and 057800 for metal battens on shade structure, however, spec section 055000 does not contain any information pertaining to metal battens and spec section 057800 do not exist on 100% IFB set. There is a spec section 074213.13 Formed Metal Panels Walls, but since there are no metal panel walls on this project, is this supposed to be the correct reference? Please clarify.	Information from Section 05 7800 will be included in Section 05 5000 in a future submission. The basis of design will be the same product noted in Section 05 7800 that is provided in the 65% DD Specifications provided with the initial RFP.	10/27/2026	11/9/2026
247	28 2000	For the 42 Genetec Security Center camera connections, should the Enterprise camera connection (GSC-Om-E-1C) or the Standard camera connection (GSC-Om-S-1C) be implemented?	Contractor shall confirm connection with design and preferred vendor.	10/27/2026	11/9/2026
248	28 2000	Is the Arabian Leopard Habitat VMS intended to be a new standalone Genetec system, or will it be added to an existing Genetec Security Center system? If this is an expansion of an existing Genetec system, please provide the Genetec System ID.	If referring to animal program cameras and not OPS, CALF animal program cameras will be added into an existing Genetec system. System ID:GSC-130520-483442	10/27/2026	11/9/2026
249	28 2000	Please confirm if alternate vendors are allowed to construct the Animal Video Monitoring system or if the one vendor listed is preferred and required by SI.	Documents refer to preferred vendor. Alternates and qualificiations to be submitted through the process outlined in Division 01000 specs.	10/27/2026	11/9/2026
250	RFP	The RFP requires resumes to include "work experience covering the last five years and last five project assignments of significant duration (18 months or more)." Please clarify whether these are two separate requirements. For example, if an individual's last two project assignments span the full five-year period, should the resume also include their three preceding qualifying project assignments to provide a total of five, even if those assignments fall outside the five-year period?	These are two separate requirements that will likely overlap because five project assignments that are 18 months or more, at a minimum equal 7 1/2 years alone. It could be even longer, if the person worked on other jobs in between that were not 18 months, or if some of the five projects were more than 18 months.	10/27/2026	11/9/2026
251	A-406EP / 12 5610	Please confirm if FF&E scope is CFCI.	Confirmed CFCI.	10/27/2026	11/9/2026
252	28 3100	Please confirm the number of card readers desired for the SoftwareHouse control system.	Refer to Section 28 3100.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
253	A-50(x)DT	Please confirm if page A-502DT is a drawing page. The Volume 1 drawing sets have A-501DT and A-503DT, but no A-502DT between them.	A-502DT is not included in the set nor the drawing list; thus, is not a part of the construction documents. There are no missing sheets.	10/27/2026	11/9/2026
254	TY-100SP	Keynote 3 states the gate lock "will be an electrified latch by Division 08," while keynote 4 states a "magnetic lock will require mounting plates to connect to gate system," and the plan tags the NE and SE gates "ML" and the north gate "EL." Please confirm the lock type at each of the three card-reader gates	Refer to door hardware schedule for lock types.	10/27/2026	11/9/2026
255	TY-102SP	The 100% security plan shows door contacts only at door 101A (no card reader, reader module or REX). The 65% door hardware Set 1.0 lists 101A with "Card Reader, Door Position Switch and Power Supply - Provided by ACS." Please confirm whether door 101A is a card-access opening or a monitored-only opening, and confirm the 100% hardware set for this door.	Follow 100% Final drawings and specification issued with Amendment 4.	10/27/2026	11/9/2026
256	TY-503DT	Please confirm which door openings require fire alarm releases.	Doors 1CR1, 101, 108, 1CR2A and 1CR3 require fire alarm release.	10/27/2026	11/9/2026
257	TY-702SH; OPS Camera Schedule	The schedule lists Axis Q3517-LVE for the fixed domes and P3748 / P3748-PLE for the multi-imagers. The manufacturer has advised that the current production models are the Axis P3278-LVE (fixed dome) and P3748-PLVE (multi-imager). Please confirm these are acceptable, or confirm the required models.	These are acceptable. Follow submittal procedures post award.	10/27/2026	11/9/2026
258	TY-series	Schedule note 2 directs that camera counts be taken from the plans. The schedule and plans differ: S-1-06 is scheduled but not shown on the plans; S-B-05 is shown on TY 101 FP but not scheduled; TY 100 SP tags two cameras "S-S-XX" (assumed S-1-25 and S-1-26); S-T-01 is drawn as a multi-imager but scheduled as fixed, and S-T-02 is drawn as fixed but scheduled as P3748. Please confirm the OPS camera count (24 per the plans) and the camera type at each of these locations.	Follow counts on plans.	10/27/2026	11/9/2026
259	TY-601DG	TY 601 DG detail 1 shows a NEMA 4X OPS consolidation point for runs exceeding 90 m, but no location is shown on the plans. Please confirm whether the consolidation point is required, or whether GameChanger cabling for runs over 295 ft (Amendment 0003, RFI 86; TN-001CS general note 9) is acceptable.	Contractor will need to closely coordinate conduit runs during construction. Where conduit routes exceed 90 meter (295 feet) horizontal distance, assume use of nCompass 1G solution.	10/27/2026	11/9/2026
260	TY-100SP and TY-601DG	No poles or pole foundations are detailed for the OPS site cameras. Please confirm whether these cameras mount to existing poles, habitat arches or new poles.	Assume pole mounts for OPS cameras will be from planned pole locations. Close coordination will be required to assure proper mounting and required camera fields of views.	10/27/2026	11/9/2026
261	TY-701SH and TY-106FP	Camera AC-1-11 (Keeper Corridor, ceiling mounted) is shown on TY 106 FP but is not on the schedule (item 31 is missing). Cameras AC-1-17 and AC-1-18 are described as "180 hemispherical" but the model listed is Hanwha TNV-8011RC, an anti-grip corner camera. Please confirm the model for AC-1-11, AC-1-17 and AC-1-18.	Pull all camera counts from plans.	10/27/2026	11/9/2026
262	TY-701SH	The Hanwha PNM-9020V is discontinued; Hanwha PNM-C9022RV (8MP panoramic, 209 degree field of view, built-in IR, IK10) is a potential replacement. Please confirm this is acceptable or advise the required model.	For purposes of bidding the proposed models are acceptable. They will be confirmed post award in accordance with process outlined in the Division 01 Specification, Section 01 2500 Substitution Procedures.	10/27/2026	11/9/2026
263	TY-000CS	The specified Hanwha and Axis cameras have integral IR illumination. Please confirm that integral IR satisfies the "IR" requirement and that separate external IR illuminators are not required. Please also confirm the basis of design for the microphones required for cameras without integral microphones (all Animal Care cameras except the anti-grip models).	To be confirmed via the submittal process.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
264	TY-601DG Cable Legend; TN-001CS General Note #11	The cable legend lists plenum-rated cable types (Belden or equivalent). Site, gate and tunnel runs are in underground conduit, which is a wet location. Please confirm that wet-location rated equivalents (e.g., West Penn AquaSeal) are acceptable for these runs. For RS-485, no wet-rated 24 AWG low-capacitance cable is available; please confirm a 22 AWG 2-pair individually shielded wet-rated cable is acceptable.	Utilize exterior rated cable for exterior runs. For RS-485, a 22 AWG /2 pair indivisual shielded cable is acceptible.	10/27/2026	11/9/2026
265	28 2000	Please confirm if two (2) Category 6 cables are required per camera location.	Confirmed	10/27/2026	11/9/2026
266	27 1500	Please confirm if Cat. 6 or Cat. 6A cables are required at data outlets and WAPs.	Cat 6A cables are required at data outlets and WAPs.	10/27/2026	11/9/2026
267	27 1500	Please confirm whether Belden copper cabling and connectivity products are considered approved equal to the specified manufacturer(s).	Belden copper cabling and connectivity products are considered an approved equal, provided the products meet or exceed the specified manufacturer requirements. Final approval shall be deferred to the Owner.	10/27/2026	11/9/2026
268	27 1500	Please confirm whether Belden fiber optic cabling and connectivity products are considered approved equal to the specified manufacturer(s).	Follow 100% Final drawing and specification for bidding. Alternates to be submitted post award through the process outlined in the Division 01 Specification, Section 01 2500 Substitution Procedures.	10/27/2026	11/9/2026
269	27 1116	Please confirm whether Belden racks, ladder racks, and related telecommunications room infrastructure products are considered approved equals.	Follow 100% Final drawing and specification for bidding. Alternates to be submitted post award through the process outlined in the Division 01 Specification, Section 01 2500 Substitution Procedures.	10/27/2026	11/9/2026
270	27 1500	Please confirm cable jacket color requirements for Category 6 and Category 6A cabling. Are separate colors required for data, wireless access points, and camera cabling, or is a single color acceptable for all systems?	The Division 27 cabling is done by a required SI vendor therefore this question irrelvent	10/27/2026	11/9/2026
271	27 1500	Please confirm if specific jack/connector colors are required for data, wireless access points, and camera outlets.	The Division 27 cabling is done by a required SI vendor therefore this question irrelvent	10/27/2026	11/9/2026
272	TN-601DG	Please clarify the intended routing and termination of the twenty-four (24) strand backbone fiber serving the Basement Telecommunications Closet.	The twenty-four (24) strand single-mode backbone fiber shall route from the Basement Telecommunications Closet to the existing telecommunications service vault, where it shall splice into the existing backbone fiber originating from the Panda Habitat.	10/27/2026	11/9/2026
273	Div. 26-28	Please confirm the desired manufacturer, size, and part numbers for the NEMA 250 Type 4X rated enclosures for power, low-voltage, telecommunications, AV, and security system pathways.	There is no type 4X enclosure for electrical. Please provide clarification on comment.	10/27/2026	11/9/2026
274	28 0531.10	28 0531.10 specifies the Catalyst 3850, and TY-501 shows a “Model 2960.” Both are end-of-sale. The 3850 went end-of-sale on October 30, 2020, with last support on October 31, 2025. The latest 2960 series went end-of-sale on October 31, 2022, with last support on October 31, 2027. New units can’t be ordered from Cisco for either, and the 2960’s remaining support window falls inside or shortly after the one-year warranty and any longer support term. Please confirm the intended switch model. Please also state whether a current-generation replacement, such as a Catalyst 9300 series model, is acceptable as the basis of bid.	For purposes of bidding the latest Catalyst 9300 series model is acceptable. It will be confirmed post award in accordance with process outlined in the Division 01 Specification, Section 01 2500 Substitution Procedures.	10/27/2026	11/9/2026
275	28 0531.10	The spec requests for only the “Universal k9 image,” which is the 3850-era scheme. For the replacement model in question #105 above, please confirm the required license tiers: Network Essentials or Network Advantage, and DNA Essentials or DNA Advantage.	Licensing tiers will need to be considered as part of an alternate request.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
276	28 0531.10	TY-501 shows the switches as “Model 2960” while 28 0531.10 specifies the Catalyst 3850. Please confirm if the specifications governs for port count, PoE capability, and uplink requirements of the replacement?	For purposes of bidding the latest Catalyst 9300 series model is acceptable. It will be confirmed post award in accordance with process outlined in the Division 01 Specification, Section 01 2500 Substitution Procedures.	10/27/2026	11/9/2026
277	TY-501 DT	TY-501 DT shows two 48-port switches in the security wall rack, and 28 0531.10 §2.2 specifies a 24-port switch. Please confirm the total quantity of each switch and port-count for each switch for the project. A 24-port switch is not shown on TY-501 DT.	Follow the 100% Final drawings in lieu of the specification for port switches.	10/27/2026	11/9/2026
278	28 0531.10	Several required options are specific to the 3850: the C3850-NM-2-10G uplink module, the PWR-C1-715WAC power supplies, StackWise and StackPower. For the replacement model, please confirm the equivalent uplink module, redundant power supplies and stacking or power-sharing options.	Required options will need to be considered as part of an alternate request.	10/27/2026	11/9/2026
279	28 0531.10	Specification 28 0531.10 §2.1 and §2.2 call for “Four (4) Cisco SFP-10G-SR (two for access switch and two for core).” Is a core switch part of this contract?	Four Cisco SFP-10G-SR will be provided by Owner. Core switch is not applicable.	10/27/2026	11/9/2026
280	28 0531.10	Please clarify whether the “four SFP+ modules rated for 400 m over OM4” under the features and the four SFP-10G-SR under options are the same modules or additional ones.	These modules will be provided by Owner; not in Contractor's scope.	10/27/2026	11/9/2026
281	TY-103/TY-502	Please confirm there are four hardened 8-port PoE switches (one per camera group enclosure on TY-103/TY-502).	Confirmed.	10/27/2026	11/9/2026
282	28 2000	Specification 28 2000 §2.2.E specifies a 54 VDC power supply for a 720 W PoE budget, while TY-501 detail 5 shows a supply “rated for 800 watt.” Please confirm if the specification should govern for power supply.	Follow 100% Final drawing in lieu of specification.	10/27/2026	11/9/2026
283	28 0531.10/ 28 0510.10	Please confirm if the Contractor or the OPS/Zoo IT will perform configuration of the Cisco switches (VLANs, IP addressing, routing, stacking, management). Moreovoer, does this also apply to the CCNA requirement in Specification 28 0500.10	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
284	28 0531.10	Please confirm whether the stacking and “Enable StackPower in redundant mode” requirements are physical installation items or configuration items.	"Enable StackPower in redundant mode" is a digital configuration setup and not a physical installation requirement.	10/27/2026	11/9/2026
285	28 0531.10	The spec lists “EIGRP routing” as a switch feature; please confirm if the contractor is responsible for configuring routing, or if this is a capability requirement?	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
286	28 0531.10	Please confirm the required Cisco digital network architecture subscription term duration.	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
287	28 0531.10	Please confirm if the Owner operates a Cisco Catalyst Center (formerly DNA Center) that will manage network switches? Moreover, will its existing licensing cover them?	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
288	28 0531.10	Please confirm if a Cisco Smart Net Total Care (SmartNet) contract required on each Cisco switch to meet the “24/7/365 hardware and software support from OEM with 4-hour onsite parts” requirement. If so, please state the service level (for example 24x7x4), the term, and the start date (purchase, installation or system acceptance).	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
289	28 2000	Please confirm if the hardened CommNet switch requires any license, management software or support contract.	There are no software licenses or contracts for Comnet industrial switches.	10/27/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
290		Telecomms drawings show the total WAP quantity is 8 (TN-020SP, TN-100FP and TN-101FP), however the architectural plan A-104FP shows 5 WAP tags. Please confirm if the telecomms plans should govern.	A-104FP is a partial floor plan for the clerestory level and does not depict the entirety of the building. Refer to TN series for quantities and locations of WAPs. If there is a desired alignment, the Architectural RCPs on A-11CP and A-112CP will indicate as such and general alignment notes on A-007CS and A-008CS should be referenced.	10/27/2026	11/9/2026
291	27 0500	Please confirm that WAP hardware is Owner-provided (TN-501 detail 2) and Contractor-installed. Moreover, please confirm if the WAP configuration, adoption, controller, and testing responsibility if the responsibility of the Owner.	Owner provided, installed and configured through SI approved vendor CLC.	10/27/2026	11/9/2026
292	TY 103 SP/TY 104 SP/TY 601 DR	Please provide revised site drawings identifying the exact fiber-optic pathways and routing from the designated network equipment locations to each exterior site camera and habitat camera, including the associated underground conduit routes and intermediate connection points, as applicable. Animal Care Security Drawings TY 103 SP, TY 104 SP, and TY 601 DR identify exterior site cameras and habitat cameras; however, the drawings do not indicate the designated pathways or routing for the required fiber-optic cabling serving these cameras.	Pathways including routing are by the contractor.	10/27/2026	11/9/2026
293	TY-502DT SS-320SC SS-500 series	For ARCH MOUNTED CAMERA, details 2 and 5 / TY-502DT callouts state "REFER TO ARCH STRUCTURAL PLANS FOR MOUNTING PLATE DETAILS..." There is a depiction of what appears to be ARCH MOUNTED CAMERA on 1 / SS-320, and it references SS-300 and SS-310, but these are circular references and no mounting plate details are found on SS-500 series. Please advise.	Refer to detail 1/SS-500 for mounting plate information.	10/27/2026	11/9/2026
294	A5/A-509DT	Please confirm the partition type for the wall between the Keeper Corridor and Den 3. Floor plan A-103FP shows depicts a drywall partition assembly between these two rooms, and detail A5/A-509DT is tagged to this partition on the floor plan, but that detail drawing does not seem to match the partition appearance on the floor plan.	This question is unclear. There are multiple rooms called "Keeper Corridor". There is an expansion joint cover that is from the north to south wall of the care building that the Design Team is assuming the question is refering to as a "drywall partition". Detail A5/A-509DT is specific to the exterior wall. There is changing that separates both Keeper Corridor 1CR2 and Keeper Corridor 1CR1 from Den 3.	10/27/2026	11/9/2026
295	C-110DP C-155SP LS-102SP	Keynote #42 / C-110DP calls for landscape rails to be salvaged by phase 1 contractor, then reinstalled by the phase 2 contractorat plan southeast. At the same location, C-155SP calls for new concrete curbs and new rails, references LS-100 series, which calls for B2 new bamboo landscape rails, and it appears that salvaged rails should not be reinstalled. Please clarify.	Phase 2 scope shall install new rails according to the direction provided on the LS-100 series. If the landscape rails salvaged according to the Phase 1 scope noted on the C-100DP series does not meet the specifications and style noted in the Landscape drawings, then these rails shall not be installed and shall remain salvaged at a location acceptable to the SI-NZP CO/COTR.	10/27/2026	11/9/2026
296	Bid RFI 6 from Addendum 002	Bid RFI 6 from Addendum 002 noted weekends or night work are not in the current project timeline. However, Section F - Deliveries or Performance, Clause 52.211-S0025 of the RFP notes requirements to work extended hours including weekends to maintain the schedule. Please confirm this clause is void.	See responses to pre-bid RFIs 6 and 17.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
297	Bid RFI13 from Addendum 002	Bid RFI13 from Addendum 002 regarding the final grading plan that will be turned over to the successful Phase 2 contractor did not answer the question relative to the existing grades that will be provided. Please confirm the existing grades will follow the existing conditions drawing C-100XP following demolition, site clearing and utilities.	Drawing C-100XP represents the existing site conditions at the time of the original survey. The Phase 1 Contractor will rough grade demolished areas to a smooth surface, free of irregular surface changes, and provide smooth transitions between adjacent existing and new grades. Accordingly, the site will be turned over to the Phase 2 contractor following completion of the Phase 1 demolition, site clearing, utility installation, and associated restoration work. Actual grades may vary slighty from those depicted on Drawing C-100XP.	10/28/2026	11/9/2026
298	Bid RFI 18 from Addendum 002	Bid RFI 18 from Addendum 002 noted additional funds above $4,000,0000 can be made available as needed for FY27. Bid RFI 44 in Addendum 002 seems to contradict Bid RFI 18 and notes FY2027 must equal $4,000,000. Please clarify if the form provided on B.4.1 should add up to $4,000,0000, or the bidders' best estimate of FY27 costs.	Response to pre-bid RFI 21 from Addendum 002 NOT pre-bid RFI 18 noted additional finds above $4M can be made available, if needed and applications for payment are validated by the COTR. The form provided on B.4.1 should add up to $4M. As noted in response to pre-bid RFI 44, the cost loaded schedule should be developed independent of current funding allotments and reflect what is practical and necessary to meet the period of performance end date of September 2028.	10/28/2026	11/9/2026
299	Bid RFI 15 from Addendum 002	Bid RFI 15 from Addendum 002 responded to perimeter controls that are being turned over from the Phase 1 contractor to Phase 2. However, the question was not answered in its entirety. Please clarify: a. Fence Rental – Question 16 goes on to explain the fence is under rent. Please clarify what the monthly rental of the fence is and who it is being rented through. b. Fence Rental – If rented, please clarify the company renting the fencing to the Phase 1 contractor. c. Sediment and Erosion – The response noted controls will have to be modified. Please verify these modifications will be shown in the Phase 2 civil set. If not, clarify modifications.	The Phase 1 Contractor is renting the fence from Long Fence (Garreth Fearon at 301-350-2400). Modifications or additional Sediment & Erosion will need to be installed for any work currently outside the installed perimetor fencing, such as, installtion of new Phase 2 storm structures along Olmsted and Asia Trail.	10/28/2026	11/9/2026
300	Spec 23-73-13.19	Based off preliminary manufacturer procurement feedback, the Custom indoor AHU (spec section 23 73 13.19) has an approximate lead times of 40 weeks for a factory assembled unit, and 18 weeks for a field assembled unit. Given the period of performance, and the need to complete the building concrete structure as quickly as possible, its is believe the unit would have to come into the building in pieces. Please confirm a field assembled unit is acceptable.	Provide as specified. Long lead items such as this will need early procurement to meet project schedule.	10/28/2026	11/9/2026
301	LT-100SP & C-503DT	Tree Protection is mentioned [BB2.1] [DJ2.2] in both Phase 1 and Phase 2 documents. Please clarify what Tree Protection procedures and material are introduced into Phase 2, and if there are any Tree Protection material (fencing, matting, signage, etc.) from Phase 1 that will remain for Phase 2? Please confirm if the root pruning shown on LT-100SP and the associated details on C-503DT will be completed in Phase 1 or Phase 2.	Tree protection including root pruning is provided by the Phase 1 Contractor and shall be maintained and removed at project completion by the Phase 2 Contractor. The four trees in the planter box area along Olmstead will now be removed by the Phase 1 Contractor. Accordingly, the Tree protection in this area will not be installed.	10/28/2026	11/9/2026
302	LS-500DT, C-510DT, & and S-301	Regarding the floor of the tunnel, LS-500DT depicts a crushed stone base with poured-in-place rubber surfacing, while C-510DT and S-301 show concrete pedestrian paving. Confirm the Landscape drawings take precedence over the Civil and Structural drawings regarding the Tunnel flooring.	LS-500DT takes precendence over the Civil and Structural Drawings. Poured-in-place rubber surfacing is correct.	10/28/2026	11/9/2026
303	E-503DT, Details 2-4	Details 2-4 on E-503DT calls for "#2/0 Ground (eliminate if not required by utility company)." Our understanding is that power is being pulled off existing Smithsonian power. Please clarify if this ground is needed.	Confirmed. #2/0 ground is not needed.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
304	Controls	Regarding building controls systems, please confirm the basis of design system by Siemens is to be provided, and no “or equal” systems will be allowed.	Confirmed.	10/28/2026	11/9/2026
305	TN-501DT	Please confirm that all wireless access points will be provided by the owner per drawing TN-501DT. Please provide make, model, and manufacturer specifications for the WAPs for coordination with contractor-furnished components. Will the owner provide installation of these access points, or will the contractor be responsible for installation and all associated work?	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
306	Security	Please provide the required sequence of operation and system interface between the intrusion devices, RM reader/module, and Software House access-control system, including the system responsible for monitoring and controlling the associated points.	See answer to RFI 239.	10/28/2026	11/9/2026
307	Structural	Please confirm all excavation from the site can be used as structural fill, and any unsuitable soils on the project can be viewed as an unforeseen condition.	Not all material excavated from the Site should be assumed suitable for reuse as Structural Fill. Any claim for differing site conditions should be evaluated by SI under the applicable Contract provisions and based on the conditions encountered relative to the information made available to bidders.	10/28/2026	11/9/2026
308	Specifications sections 11-90-13, 11-90-14, 01-33-50	Specifications sections 119013 and 119014 reference Specification Section 01 33 50 – Delegated Design Submittals. Section 013350 is not provided. Which section should these two specifications reference for Delegated Design Submittals?	The reference to Specification Section 01 33 50 – Delegated Design Submittals in Sections 11 9013 and 11 9014 is incorrect. Refer to Specification Section 01 3573 – Delegated Design Requirements and Procedures for delegated design submittal requirements. All delegated design responsibilities, calculations, drawings, certifications, and submittals shall comply with Section 01 3573 and the applicable technical specification sections.	10/28/2026	11/9/2026
309	Civil	Please clarify if Olmsted walk remediation, including paver replacement at temporary site fencing (from Phase 1) is included in the Phase 2 scope of work. If so, please define and quantify the remediation work, as it does not appear on the contract documents. Please provide an allowance for this work if it cannot be detailed for pricing.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmstead	10/28/2026	11/9/2026
310	32-31-00 & 01-33-23	Specification Sections 323100 references 013323 for required submittals. Section 01 33 23 is not issued with this specification set. Which Section should section 323100 reference for delegated design submittals?	Reference 01 3573 Delegated Design Requirements and Procedures.	10/28/2026	11/9/2026
311	S-303, EX-120, EX-128	Structural Sheet details on S-303 state to reference Exhibit drawings for top of wall elevations when walls are covered by rockwork. The habitat grading plans on sheets EX-120 through EX-128 provide elevations for the tops of walls when they are exposed, but do not provide top of wall elevations for walls when they are covered by rockwork. Please provide top-of-wall elevations for walls covered by rockwork.	Top of walls to linearly slope between noted wall elevations where they enter rockwork.	10/28/2026	11/9/2026
312	S-113FP	Sheet S-113FP contains references to Mat Foundation M18. There are no details or schedule for Mat foundation M18. Please provide details and schedule for mat foundations.	Provide #5 bars @ 6" O.C. top/bottom reinforcing each way.	10/28/2026	11/9/2026
313	Sheet S-111FP & A-103FP	Sheet S-111FP and Sheet A-103FP provide conflicting information on the finished floor elevation of the Dayroom. Please confirm that the structural sheets take precedence. Please also advise whether there are any considerations for sloping the Dayroom finished floor towards the drain, and whether the dayroom floor will receive a seal coat.	Correct because there are topping slabs throughout the care building to account for radiant piping and, specifically for the Day Room, exposed aggregate concrete to bring the elevation up to the Finish Floor height annotated on the A-100s. The exposed aggregate concrete shall be sealed.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
314	E-602SH	Per previous bid RFIs, the generator load-bank breaker and feeder sizing 'will be shown in 100% Final documents.' E-602SH shows a 150A CB / output for a 100kW temporary load bank and an integrated 100kW permanent load bank, but no breaker size or feeder for the integrated load bank, and no schedule for the generator-integral load center. Please confirm the integrated load-bank breaker/feeder and provide the generator load center circuits.	Final CD drawings show the load bank on top of the generator with a 150A CB and feeder tag. The feeder tag its also shown in the feeder schedule.	10/28/2026	11/9/2026
315	E-600SH	Switchboard DP-G1 'Supply From' is blank. E-600SH shows existing 15kV gear, existing 800A SWBD 'MDP' and 1600A SWBD 'PH'. Please confirm the source of DP-G1, the service feeder size/route, and the Phase 1 vs. Phase 2 responsibility for the service feeder.	Distribution Panelboard DP-G1 is supply from the Panda House 'PH' switchboard. Drawing E-100SP delineates Phase 1 from Phase 2. Ductbank from last north manhole to inside the building up to the DP-G1 shall be considered on Phase 2.	10/28/2026	11/9/2026
316	Electrical	Panel PP-OS-G1 header shows Mains Type 'MCB' and Bus 250 A, but no MCB rating. Please confirm the main breaker size.	PP-OS-G1 should be provided with a 250A MCB.	10/28/2026	11/9/2026
317	E-606SH, E-607SH, & E-608SH	Panel locations for PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 are truncated on schedules ('EMERGENCY ELECTRICAL...'). Please confirm the room for each. Reference drawings E-606SH, E-607SH, E-608SH.	Panelboards PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 to be located on Emergency Electrical Room B1EL1. Refer to sheet E-506DT deatail #2 for panelboards PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 location.	10/28/2026	11/9/2026
318	Electrical	Six circuit descriptions are truncated on the panel schedules (end in '...'), e.g. RP-G1-2 'OUTDOOR DRINKERS - D1 TO D4...', RP-G1-4 'IRRIGATION CONTROLLER - NORT...', RP-OS-G1-27 'ACC-1 HEAT TRACE -...'. Please provide the complete descriptions/locations. Reference drawings E-606SH - PP-G1 ckt 22; RP-G1 ckts 2, 4, 23); E-607SH (PP-OS-G1 ckt 1; RP-OS-G ckt 27)	Complete circuit description on panelboards will be provided: RP-G1 #2 - (PRS LD) - * OUTDOOR DRINKERS - D1 TO D4, #4 - (PRS LD) - IRRIGATION CONTROLLER, #22 - (RCPT) - RCPT CONV - B1ME1, OUTDOOR, RP-OS-G1 #27 - (MECH) (GFPE) - ACC-1 HT - GEN YARD, PP-G1 #22 - (EXT LTG) - HABITAT 'XL4A' & 'XL4B', and PP-OS-G1 #1 - (RCPT) - AHU-1 LC (LTG, MISC) - B1ME1	10/28/2026	11/9/2026
319	Electrical	Panelboard PP-EM-G1 indicates Circuit 41 without an associated load description. Please confirm whether this circuit is intended to remain spare, space, or serve a specific load.	Circuit is intended to remain Spare	10/28/2026	11/9/2026
320	E-600 series	The E-600 series index lists E-600SH and E-602SH with no E-601SH (the Phase 1 set includes an E-601SH). Please confirm no E-601SH is issued for Phase	Confirmed. Sheet E-601SH provides the electrical voltage drop calculation which only applies for Phase 1.	10/28/2026	11/9/2026
321	EL-100FP, EL-101FP, A-111CP, A-112CP, EL-100FP, EL-101FP, & E-604SH,	Lighting fixtures on the architectural RCPs are untagged symbols, and E-604SH has no quantity column. Please confirm the electrical lighting plans (EL-100FP / EL-101FP) govern fixture type and quantity where they differ from the RCP. Reference - A-111CP, A-112CP vs. EL-100FP, EL-101FP, E-604SH,	EL series will govern light fixture count and type designations.	10/28/2026	11/9/2026
322	Electrical	Tape lights XL7/XL8 and the track for XL4A/XL4B are linear products, but run lengths are not dimensioned. Please confirm lengths (or confirm they are to be scaled).	Lengths of linear products are shown to scale with scales provided on respective sheets.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
323	Specification Section 32-18-19.13	Specification Section 321819.13 specifies that the surface must meet ASTM F 1292, ASTM F 1487, and CPSC no. 325. The basis of design product, Flexi-pave porous flexible paving, does not meet all of these standards. Which standard(s) will the porous flexible paving need to meet?	Flexi-pave porous flexible paving does not need to meet ASTM F 1292, ASTM F 1487, or CPSC no. 325. Paving should meet the following standards: ASTM C666, Procedure A - Freeze-Thaw Resistance ASTM D3385 - Infiltration/Permeability ISSA TB-100 - Wet Track Abrasion ISSA TB-139 - Cohesion/Torque Resistance ASTM G154 or ASTM G155 - UV/Weathering Resistance PRI TM-025 - Flexibility/Deflection TXDOT 242-F (Hamburg Wheel Tracking Test) - Rutting Resistance ASTM D2990 - Static Creep ASTM D7369 - Resilient Modulus Documents to be updated in future submission	10/28/2026	11/9/2026
324	Telecom	Please confirm whether Belden copper cabling and connectivity products are considered approved equal to the specified manufacturer(s).	Belden copper cabling and connectivity products are considered an approved equal, provided the products meet or exceed the specified manufacturer requirements. Final approval shall be deferred to the Owner.	10/28/2026	11/9/2026
325	Telecom	Please confirm whether Belden fiber optic cabling and connectivity products are considered approved equal to the specified manufacturer(s).	Belden fiber optic cabling and connectivity products are considered an approved equal, provided the products meet or exceed the specified manufacturer requirements. Final approval shall be deferred to the Owner.	10/28/2026	11/9/2026
326	Telecom	Please confirm whether Belden racks, ladder racks, and related telecommunications room infrastructure products are considered approved equals.	Belden racks, ladder racks, and related telecommunications room infrastructure products are considered approved equals, provided the products meet or exceed the specified manufacturer requirements. Final approval shall be deferred to the Owner.	10/28/2026	11/9/2026
327	Telecom	Please confirm cable jacket color requirements for Category 6 and Category 6A cabling. Are separate colors required for data, wireless access points, and camera cabling, or is a single color acceptable for all systems?	A single cable jacket color is acceptable for Category 6 and Category 6A cabling serving data, wireless access points, and camera systems. Cable jacket and jack color preferences shall be deferred to the Owner for final selection and approval.	10/28/2026	11/9/2026
328	Telecom	Please confirm if specific jack/connector colors are required for data, wireless access points, and camera outlets.	Specific jack/connector colors for data, wireless access points, and camera outlets shall be deferred to the Owner for final selection and approval.	10/28/2026	11/9/2026
329	TN-601DG	Per Drawing TN-601DG, please clarify the intended routing and final termination point of the twenty-four (24) strand single-mode backbone fiber serving the Basement Telecommunications Closet. The Contract Documents indicate the backbone fiber routes from the Basement Telecommunications Closet to the existing telecommunications vault/pull box identified by Keynote 1 on Drawing TN-020SP and referenced in ALF RFI 86. Please confirm whether the backbone fiber is intended to terminate within the existing vault, splice into an existing backbone fiber within the vault, or continue to another termination location beyond the vault. If the latter, please identify the final termination location and required connection details.	The twenty-four (24) strand single-mode backbone fiber shall route from the Basement Telecommunications Closet to the existing telecommunications service vault, where it shall splice into the existing backbone fiber originating from the Panda Habitat.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
330	Telecom	The contract documents reference NEMA 250 Type 4X rated enclosures; however, no manufacturer, size, material, or part number has been identified. Please clarify the intended mounting method and support requirements for all NEMA-rated enclosures included in the project scope.	The mounting method and support requirements for NEMA 250 Type 4X rated enclosures shall be coordinated with the enclosure manufacturer and project conditions. Final enclosure selection, mounting method, and support requirements shall be submitted for review and approval by the Owner.	10/28/2026	11/9/2026
331	TY-501	28 0531.10 specifies the Catalyst 3850, and TY-501 shows a "Model 2960." Both are end-of-sale. The 3850 went end-of-sale on October 30, 2020, with last support on October 31, 2025. The latest 2960 series went end-of-sale on October 31, 2022, with last support on October 31, 2027. New units can't be ordered from Cisco either, and the 2960's remaining support window falls inside or shortly after the one-year warranty and any longer support term. Please confirm the intended switch model. Please also state whether a current-generation replacement, such as a Catalyst 9300 series model, is acceptable as the basis of bid.	Smithsonian OCIO is using Cisco 9200s and is responsible for procuring, installing, and configuring its own network switches. Smithsonian OPS is using Cisco 9300s and will not be providing any switches. Contractor is responsible for providing	10/28/2026	11/9/2026
332	TY-501	TY-501 shows the switches as "Model 2960" while 28 0531.10 specifies the Catalyst 3850. Which document governs for port count, PoE capability and uplink requirements of the replacement?	Follow specifications.	10/28/2026	11/9/2026
333	TY-501	TY-501 shows two 48-port switches in the security wall rack, and 28 0531.10 §2.2 specifies a 24-port switch. Please confirm the total quantity of each switch for the project. No 24-port switch is shown.	Follow specifications, specification provides 48 and 24 port switches. Provide network switch ports to meet the project requirements.	10/28/2026	11/9/2026
334	Telecom	Several required options are specific to the 3850: the C3850-NM-2-10G uplink module, the PWR-C1-715WAC power supplies, StackWise and StackPower. For the replacement model, please confirm the equivalent uplink module, redundant power supplies and stacking or power-sharing options.	Owner procured, installed, and configured.	10/28/2026	11/9/2026
335	28-05-31.10	28 0531.10 §1.3 lists "Fiber Switches" and "Fiber Modules" with no product article, quantity or location. Are these required? If so, please provide the model and quantity.	Network switches are required.	10/28/2026	11/9/2026
336	Telecom	§2.1 and §2.2 call for "Four (4) Cisco SFP-10G-SR (two for access switch and two for core)." Is a core switch part of this contract? If not, who supplies the core-side SFPs? Please also clarify whether the "four SFP+ modules rated for 400 m over OM4" under the features and the four SFP-10G-SR under options are the same modules or additional ones.	Smithsonian OCIO Is handling the SFP and accessories related to network devices. Smithsonian OPS handles their own switches and SFPs. OPS does not provide any equipment. All security items including switches and network devices need to be providied by the contractor	10/28/2026	11/9/2026
337	TY-103 & TY-502	Please confirm there are four hardened 8-port PoE switches (one per camera group enclosure on TY-103/TY-502). Please also state who supplies the SFP modules at each hardened switch and at the rack end of the fiber.	The contractor will be responsible for these industrial switches and SFP modules. This is Division 28 scope.	10/28/2026	11/9/2026
338	28-20-00	28 2000 §2.2.E specifies a 54 VDC power supply for a 720 W PoE budget, while TY-501 detail 5 shows a supply "rated for 800 watts." Which governs?	Assume 800 watts. Ensure power calcs in the shop drawings to confirm all power loads. Follow manufacturer recommendations for the number of power supplies necessary to not overheat the enclosure.	10/28/2026	11/9/2026
339	Telecom	Who configures the Cisco switches (VLANs, IP addressing, routing, stacking, management)? Is the contractor's scope limited to physical installation, power-up and connection, with the Owner or OPS/Zoo IT doing the configuration?	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
340	Telecom	Please confirm whether the stacking and "Enable StackPower in redundant mode" requirements are physical installation items or configuration items.	Refer to answer to RFI 284.	10/28/2026	11/9/2026
341	Telecom	The spec lists "EIGRP routing" as a switch feature. Is the contractor expected to configure routing, or is this only a capability requirement?	The contractor would not be expected to configure routing. All network configuration would be responsibility of the owner.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
342	Telecom	Who configures the four hardened switches?	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
343	28-05-00.10	Does the CCNA requirement (28 0500.10 p. 862) imply that the contractor configures the Cisco switches? If configuration is Owner-performed, may this requirement be waived for the switch work?	Assume OPS network switches are configured by the contractor per OPS requirements.	10/28/2026	11/9/2026
344	Telecom	The spec requires only the “Universal k9 image,” which is the 3850-era scheme. For the replacement model in item 15, please state the required license tiers: Network Essentials or Network Advantage, and DNA Essentials or DNA Advantage.	Owner provided. Not in Contractor's scope.	10/28/2026	11/9/2026
345	Telecom	Please state the required DNA subscription term (3, 5 or 7 years).	Digital Network Architecture (DNA) subscription service periods shall be determined by ownership along with all network configuration.	10/28/2026	11/9/2026
346	Telecom	Does the Owner operate a Cisco Catalyst Center (formerly DNA Center) that will manage these switches? If so, does its existing licensing cover them?	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
347	Telecom	Is a Cisco Smart Net Total Care (SmartNet) contract required on each Cisco switch to meet the “24/7/365 hardware and software support from OEM with 4-hour onsite parts” requirement? If so, please state the service level (for example 24x7x4), the term, and the start date (purchase, installation or system acceptance).	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
348	Security	Does the hardened CommNet switch require any license, management software or support contract?	Confirm with manufacturer.	10/28/2026	11/9/2026
349	A-104FP, TN-020SP, TN-100FP, & TN-101FP	Please confirm the total WAP quantity is 8 (TN-020SP, TN-100FP and TN-101FP). The architectural plan A-104FP shows 5 WAP tags, so please confirm the telecom plans govern the count.	A-104FP is a partial floor plan for the clerestory level and does not depict the entirety of the building. Refer to TN series for quantities and locations of WAPs. If there is a desired alignment, the Architectural RCPs on A-11CP and A-112CP will indicate as such and general alignment notes on A-007CS and A-008CS should be referenced.	10/28/2026	11/9/2026
350	TN-501 detail	Please confirm the WAP hardware is Owner-provided (TN-501 detail 2) and that the contractor’s scope is installation only.	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
351	Telecom	Please confirm the contractor has no WAP configuration, adoption, controller or testing responsibility. No wireless survey or controller spec is included.	Owner provided, installed and configured through SI approved vendor CLC.	10/28/2026	11/9/2026
352	28 20 00-1, Item 2	Section 28 20 00-1, Item 2 – Video Systems for Animal Care (AC), identifies the video surveillance system as an extension of the existing Genetec system and lists Unlimited Technology as an approved vendor. Please clarify whether Unlimited Technology is required to provide the entire Animal Care video surveillance system, including cameras, camera mounts, camera poles, fiber-optic backbone cabling, Category 6 cabling, NEMA-rated enclosures, and associated equipment, or whether other Division 28 contractors may competitively bid the furnishing and installation of these components, with Unlimited Technology responsible only for the Genetec software, licensing, programming, and system integration.	Documents refer to preferred vendor. Alternates and qualificiations to be submitted through the process outlined in Division 01000 specs.	10/28/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
353	TY-103-SP, TY-104-SP, & TY-601-DR	Animal Care Security Drawings TY 103 SP, TY 104 SP, and TY 601 DR identify exterior site cameras and habitat cameras; however, the drawings do not clearly indicate the designated pathways or routing for the required fiber-optic cabling serving these cameras. Please provide revised site drawings identifying the exact fiber-optic pathways and routing from the designated network equipment locations to each exterior site camera and habitat camera, including the associated underground conduit routes and intermediate connection points, as applicable.	Pathways including routing are by the contractor. Refer to previous RFI responses.	10/28/2026	11/9/2026
354	Spec section 23-64-23.13	Is Multistack an acceptable manufacturer for spec section 23 64 23.13? – Air cooled, scroll water chillers.	Unless directed otherwise by Smithsonian, we strongly recommend rejecting Multistack for this specification.	10/28/2026	11/9/2026
355	Spec section 23-73-13.19	Is Klimak an acceptable manufacturer for spec section 23 73 13, 19? – Indoor, custom air handling units.	Unless directed otherwise by Smithsonian, we strongly recommend rejecting Klimak for this specification.	10/28/2026	11/9/2026
356	RFI 177	RFI 177 confirms that laboratory mockups are required for the glass and glazing systems. Please clarify what the required dimensions are for this testing.	No longer needed. Refer to 100% submission specifications for updates.	10/28/2026	11/9/2026
357	A-403EP, A-601SH & Spec Section 08-88-13	The glass types listed on sheet A-601SH reference Specification Section 08 8813 (Glass Viewing Panels); however, this section appears to be missing from the current project manual package. (Note: While RFI 193 states that certain drawing details for viewing panels are being eliminated in favor of sheet A-403EP, Section 08 8813 is still needed to define the actual glass makeups.)	Refer to specification section 088000 Glazing for glazing composition.	10/28/2026	11/9/2026
358	EX-119SP, EX- 202SC, Y EX-203SC.	RFI response #176 confirms both artificial rock and Sonaspray in tunnel ceilings. For estimating the interface, please identify the governing ceiling-zone boundaries and which trade furnishes/installs transition backing, terminations and protection. If a coordinated marked-up plan exists, please provide it. Reference: EX-119SP; EX-202SC; EX-203SC.	Reference G5/A-403EP for additional information.	10/28/2026	11/9/2026
359	RFI responses #33–35	RFI responses #33–35 address utility consumption, Bus Lot/Olmsted Walk delivery restrictions and dumpster movements. Please identify the approved last truck drop point, laydown areas, pump/compressor staging, washout location, and actual water/power connection points. Are contractor-supplied Gator/UTVs or golf carts permitted for internal material shuttling, and under what restrictions?	Refer to Specification Sections 01 1000, 01 3100, and 01 5000, and the applicable site logistics and traffic control drawings. The Contractor shall be responsible for developing and submitting a comprehensive Site Utilization Plan and Traffic Control Plan identifying proposed delivery routes, truck unloading locations, material laydown and storage areas, equipment staging locations, dumpster locations, concrete washout facilities, temporary utility connections, and internal material transportation methods. Gators/UTVs may be proposed for internal material transportation, subject to the approval by the COTR.	10/28/2026	11/9/2026
360	Spec Section 03-37-13	Section 03 3713 assign delegated rockwork engineering to the theming trade. Please advise the anticipated review/approval duration and required approval milestones for rockwork armatures, independent footings and connection details before dependent structural/enclosure work proceeds.	Baseline for review/approvall duration can be found in section 1 of the 03 3713 specification.	10/28/2026	11/9/2026
361	E-604SH	Sheet E-604SH states that light fixture XL1 is to be recessed in handrail. Please identify which handrails are to receive this fixture and provide detailed installation and wiring pathways information.	Refer to sheet ES-102SP for site plan where XL1 handrail lights are shown in designated runs. Refer to sheet E-604SH for lighting fixture cut sheet for XL1. Product manufacturer will be provide shop drawings detailing installation and wiring information.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
362	Spec 083453	Please confirm if Hercules Custom Iron is an acceptable fabricator / installer for the Animal Enclosure Caging & Doors (Spec 083453) and Metal Fences & Gates.	With regard to Animal Enclosure Caging & Doors, Hercules is now among the updated list of acceptable vendors. See response to pre-bid RFI no. 226. For Metal Fences & Gates acceptability, post award, Hercules will be subject to qualfications per Division 01 2500 Substitution Procedures. NOTE: The basis of design for Decorative Vertical Slat Fence is Landscape Forms. Hercules may be accepted for Decorative Vertical Slat Fence if work samples of similar fencing style and quality can be provided. If awarded, full shop drawings, samples, and finishes to be provided.	10/30/2026	11/9/2026
363	A601SH & Spec 081613	Door schedule A601SH lists FRP doors with HM frames (doors B1AV1, B1EL1, B1EL2, 1CR2C, 1CS1, 1WC1, 100B, 101A) , confirm if just the frame is HM or if the door and frame are both HM. There is no specification for hollow metal doors and frames, please provide if HM frames or doors are required. The Fiberglass Doors and Frames Specification 081613 does not indicate hollow metal frames for any of the doors, please clarify door material, frame material for the door schedule.	Refer to the updates in the 100% Final Dwgs and Specs issued with Amendment 4. One item to note, for those HM doors indicated as HM with an FRP-01 finish on A-601SH, the finish shall be PT-05 in lieu of FRP-01.	10/30/2026	11/9/2026
364	A601SH	On A601SH there is a material identified at MP-1, please identify what MP-1 is, is it metal panel? What are the design criteria for the MP-1, will a specification be provided for MP-1? Please advise.	Refer to the updated sheet A-601SH in the 100% Final Drawings issued in Addendum . MP-1 has been eliminated therefore no specification is required.	10/30/2026	11/9/2026
365	RFI Responses #15 &16	AM #2, RFI Responses 15 and 16 state that the sound wall and security fence will be turned over to the Phase 2 contractor. Please provide the fencing contractor's contract information, including current rental rates and terms, to enable accurate pricing of all associated rental costs during Phase 2.	See responses to pre-bid RFI #s 242 and 299 above.	10/30/2026	11/9/2026
366	Architectural	The drawings show molded dock bumpers, but do not indicate quantity or position/spacing of the bumpers on the loading dock. Please provide quantity and elevations for the bumpers needed on the project.	Refer to updates in the 100% Final Submission issued with Amendment 4. Loading Dock bumpers are indicated on the equipment schedule.	10/30/2026	11/9/2026
367	TN-501DT	Reference TN-501DT: Please confirm that the wireless access points are Owner-furnished and identify responsibility for WAP mounting, patch cords, patching, labeling, testing, activation, configuration, and final acceptance for the twelve WAP locations.	Owner provided, installed and configured through SI approved vendor CLC.	10/30/2026	11/9/2026
368	Spec 280531.10	Reference 280531.10: Please identify the current OCIO-approved network switch manufacturer/model, SFP/optic requirements, support requirements, configuration responsibility, and the trade responsible for furnishing and installing the security network switches.	Owner provided, installed and configured through SI approved vendor CLC.	10/30/2026	11/9/2026
369	Spec 281000-1.2	Reference 281000-1.2: Please confirm whether the existing C•CURE system has sufficient licensing capacity for the project expansion and identify the party responsible for furnishing any additional or upgraded licenses.	Security contractor is responsible for providing any licenses required for new devices.	10/30/2026	11/9/2026
370	Spec 282000	Reference 282000: Please confirm the controlling video-management architecture and platform for the project, including the relationship between American Dynamics Victor/VideoEdge and Genetec, and identify the platform/version that the new camera system is required to integrate with.	American Dynamics is for OPS cameras and Genetec is for Animal Program cameras. Genetec should not be a new system. The new cameras will be integrated into the existing Genetec system.	10/30/2026	11/9/2026
371	Spec 28200-1.2	Reference 28200-1.2: Please confirm whether the existing video-management system has sufficient licensing capacity for all new cameras and identify the party responsible for furnishing any additional camera/VMS licensing.	Security contractor is responsible for providing any licenses required for new devices.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
372	Spec 282000-2.3	Reference 282000-2.3: Please confirm whether the American Dynamics ADVER96R5DK VideoEdge 96 TB NVR is to be Government Furnished and identify responsibility for configuring and installing.	It is not to be provided by the governement. The security contractor should be providing it	10/30/2026	11/9/2026
373	A-122NP	Contract Drawing A-122NP indicates that the following rooms are receiving both P-02 and P-03 paint on the walls: Keeper Corridors, Dens 1-5, Kitchen Prep. Please advise which walls are to receive the P-02 and P-03 finishes within these rooms.	Within the Finish and Material Schedule on A-122NP, P-02 is called out to be 144"H. The remaining wall surface shall then be P-03 which is indicated as being at all exposed ceiling and walls, UON.	10/30/2026	11/9/2026
374	MH-100HP	Per drawing MH-100HP, shows a Glycol Feeder (GFS-1). Please provide a detail showing the piping with tie-ins associated with the Glycol Feeder.	Detail will be furnished in a future issuance.	10/30/2026	11/9/2026
375	MH-101HP	Per drawing MH-101HP, Sheet Keynote #179. It is noted that that HVAC controls, sequences and operation will be by other disciplines. Please explain what other disciplines will be required to perform and bid on this scope of work?	Actuator control, sequences and operation is by the Fire Alarm. Refer to FA series drawings and specifications.	10/30/2026	11/9/2026
376	MI-101CP	Per drawing MI-101CP, Sheet Keynote #133, Mentions that the Actuator Control and Integration by other discipline. Please explain what other discipline will be required to perform and bid on this scope of work?	Actuator control and integration is by the Fire Alarm. Refer to the FA series drawings and specifications.	10/30/2026	11/9/2026
377	MP-100PP	Per drawing MP-100PP. General Sheet Note #H, states all exterior piping systems must have heat tracing. Does the chilled water S/R piping serving ACC-1 require heat tracing?	Do not provide heat tracing on chilled water S/R (30% Propylene Glycol) system	10/30/2026	11/9/2026
378	Spec 088000	Per section 088000 Glazing para 1.6.A “furnish for future maintenance and repair the following glass types for attic stock:” however, there is no information provided. Confirm no attic stock/maintenance materials are require for glazing.	Paragraph 1.6 is not applicable to this project and will be removed in a future issuance.	10/30/2026	11/9/2026
379	Spec 088000	Please confirm which EGL and IGL types are to take into account the Animal Enclosure Design Forces? Reference Section 088000 para 2.2.B3 and A-601SH,	Whereever an animal can touch glass shall be applicable to the animal design forces. This includes: EGL-1, EGL- 2, EGL-3, IGL-2.	10/30/2026	11/9/2026
380	A-601SH	Confirm which glades openings are to be a storefront and which are curtainwall, as both specifications have been provided, but there is no delineation shown on the Openings Schedules and Types A-601SH.	Both are included as some may be able to be storefront, but some may need to be curtainwall. For example, the day room most likely will be curtainwall.	10/30/2026	11/9/2026
381	A504DT, Detail A5	Detail A5/A504DT notes faux rock location shall not encroach on curtain wall, is there a specific distance to which the faux rock needs to be placed from the curtain wall?	There are notes throughout the set indicating that faux rock cannot touch glazing and need to be clear of the glazing systems to allow for glazed unit replacement if need be and allowance for movement.	10/30/2026	11/9/2026
382	A510DT	Please reference J6/A510DT Dayroom Canopy at CW, it appears that there are 2 types of glass make ups shown on this detail, but A601SH notes this curtain wall to have EGL-2 at all openings, please clarify why 2 different make ups are shown for the same EGL-2 glass	The upper glazing unit should match the lower EGL-2 unit.	10/30/2026	11/9/2026
383	A601SH	Please confirm EGL-3 is not required, it is not listed on any of the curtain wall window types listed on A601SH.	EGL-3 shall be utilized in lieu of EGL-1 on A6/A-601SH for the glazing system for viewing from the tunnel into the west habitat. An IGU is not needed at this location.	10/30/2026	11/9/2026
384	Spec 092900	Confirm Level 5 finishes are not required for project, per specification 092900 "level 5: where indicated on Drawings", but no locations are indicated.	Confirmed, only Level 4 is required where there is no P-02 indicated. Please note, manufacturer installation instructions of P-02 require Level 3 and below finish.	10/30/2026	11/9/2026
385	P-001	Per drawing P-001, Demolition General Notes #1 through #10, is there plumbing demolition required on this project? If yes, please indicate and show where plumbing demolition is required.	There is no plumbing demolition to be required as a part of this scope. All demolition shall be completed by the Phase 1 contractor.	10/30/2026	11/9/2026
386	M-606SH & P603DG	Per drawings M-606SH and P603DG, Boiler / Natural Gas Equipment Schedules, B-1,2,&3 have different Fulton Model numbers. Which model number(s) are correct?	Model number is the Fulton Mark II.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
387	Specs 220516 & 230516	Per specifications 220516 and 230516 Expansion Fittings and Loops, please indicate where expansion loops with pipe guides and anchors will be required on this project? If required, please show where on the drawings and confirm delegated design requirements are required for this application per the specifications.	As required by 23 0516 and 220516, location of expansion loops with pipe guides and anchors is delegated design. Contractor shall engage a licensed professional to determine location of accessories (guides, anchors, loops) based on produced shop drawings by mechanical contractor. Locations of these accessories will be reviewed by design A/E (SmithGroup).	10/30/2026	11/9/2026
388	Specs 233113-11	Per specification 233113-11, HVAC Cleaning, what Davis Bacon wage scale determination shall the duct cleaning field workers use: Skilled Labor? If no, please explain which wage scale determination will need to be used for HVAC cleaning?	Contractor to determine classification based on Davis-Bacon list for SI review. Typically, it is a general laborer.	10/30/2026	11/9/2026
389	A1/A504DT & Spec 084400	In Specification Section 084400, Glazed Curtain Walls para 1.9.C.2.a, it notes Mockup Size, reference detail A1/A504DT, however there are no sizes or indications of mockup requirements on that detail. Please clarify mockup requirements.	The intent is to construct the detail to show the various systems coming together for approval across the whole project. The contractor can assume an 5' x 5' x 5' mockup.	10/30/2026	11/9/2026
390	Spec 084400	Specification 084400, Curtain Wall, notes terra cotta samples, confirm no terra cotta is required for curtain wall system	Terra cotta is not applicable to this project.	10/30/2026	11/9/2026
391	Architectural	Please advise on the glass makeup for EGL-1 “security glazing IGU” at the Keeper Workspace – no real information given on drawings or specs	EGL-1 is intended to be laminated glazing to contain an animal with a security film in the event the glazing is broken.	10/30/2026	11/9/2026
392	Architectural	Please provide required makeups for three ply impact rated glass	EGL-2 and 3 can be 2 or 3-ply which is all dependent on maintaining the animal design loads noted in the specifications as they may change from manufacturer to manufacturer. Basis of design is based on Guardian Glass: **EXTERIOR** Glass 1 - 1/4" Guardian Clear Glass (Surface 1 - Guardian Bird 1st Etch DX22 and Surface 2 - Sunguard SNX 60+) + Gap 1 3/8" (10% Air, 90% Argon) + Glass 2 - 5/16" Guardian Clear Glass+Interlayer 1(0.060" Sentry Glass) + Glass 3 - 5/16" Guardian Clear Glass **INTERIOR**	10/30/2026	11/9/2026
393	A-511DT	Exhibit tunnel viewing is shown as “security glazing IGU” but detail H1 on A-511DT shows a 3 ply lami – please confirm which is correct especially since an IGU here wouldn’t serve any real purpose as neither side of the tunnel viewing is temperature controlled	EGL-3 shall be utilized; an IGU is not necessary.	10/30/2026	11/9/2026
394	Architectural	Caulked butt joints at the viewing window is discouraged in this instance as there is no product that can stand up to being clawed at by the Leopards – additionally this could cause a potential danger for the Leopard(s) as well, since someone could stick something sharp through the caulk joint and injure the Leopard(s) – please advise on how to approach this issue	It is industry standard to minimize sightlines at key viewing windows in zoo design and prevelant throughout the Zoo. A sealed butt joint is the design intent on this project and shall remain.	10/30/2026	11/9/2026
395	Spec 084400	Preconstruction testing on glazed curtain wall 084400 gives 3 different test types (on-building, off-building, preconstruction laboratory mockup), please confirm if all 3 of these are required for the project	Specification section 084400 1.9 Mockups denotes the applicable Mockups where preconstruction testing shall be applied.	10/30/2026	11/9/2026
396	Architectural	Please clarify what the required dimensions are for the laboratory mockups for storefront and curtainwall?	Laboratory mockups are not necessary for this project.	10/30/2026	11/9/2026

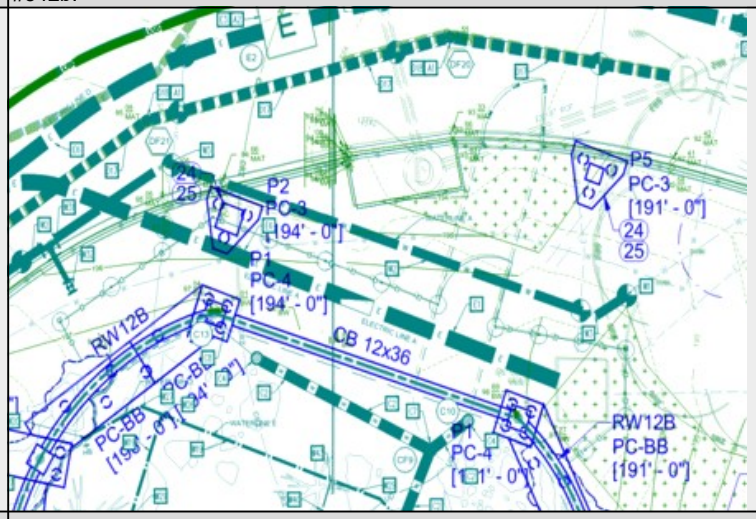
PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
397	A-601SH, Spec 088813, RFI 193, A-403EP, & Spec 088800	37.The glass types listed on sheet A-601SH reference Specification Section 08 8813 (Fire Rated Glazing); however, this section appears to be missing from specifications. While RFI 193 states that certain drawing details for viewing panels are being eliminated in favor of sheet A-403EP, Section 08 8813 or section 088800 (Glazing) still needs to define the actual glass makeups.	Refer to RFI 392. EGL-1 - Laminated glazing with Security film interlayer (BOD Sentry Film) EGL-2 - As described above in RFI 392 response. EGL-3 - (2-3) layers of glass with with Security film interlayer (BOD Sentry Film); dependent on animal loading and what manufacturer needs to provide to meet performance criteria. IGL-1 - 1/4" Laminated Glazing IGL-2 - 1/4" Laminated Glazing with Security film interlayer (BOD Sentry Film)	10/30/2026	11/9/2026
398	A102FP & 401EP	38.Reference A102FP and 1/TN-401EP - is the South wall to be furred out with plywood, furred out with drywall and plywood or similar to the West wall which looks to be plywood direct applied to the concrete wall. Drawings do not have the wall labeled and plywood appears to be offset from wall.	3/4" A/C rated plywood is only necessary per standard on one (1) wall in the telecom room for ease of mounting low voltage equipment. The south wall will house security and FA equipment and therefore should be a plywood backed wall mounted on metal hat channels, P0FH.	10/30/2026	11/9/2026
399	LS-100SP	Reference LS-100SP - Confirm that all benches regarding site furnishings will be Owner Furnish and Installed per the detail.	Confirmed. All benches will be owner furnished and owner installed.	10/30/2026	11/9/2026
400	Architectural	The EGL-2 glass is listed as 'Tri-Ply Laminated Impact IGU'. Is the intent a triple-pane insulated (outboard lite of glass, air space, middle lite of glass, air space, inboard lite of glass) or a true tri-ply laminated glass with three plies laminated together? The Glazing spec does not provide any specifics on glass makeup.	See response to RFI 392.	10/30/2026	11/9/2026
401	Specs 087100, 012500, & 016000	The mandatory hardware and facility keying requirements: Section 087100 specifies Schlage seven-pin SFIC/facility keyway, while Sections 012500 and 016000 have differing substitution/comparable-product provisions. Please clarify which requirements govern. This is not a manufacturer's substitution request.	Schlage 7 pin SFIC is the basis of design. Alternates may be entertained via the Division 1000 substitution request process.	10/30/2026	11/9/2026
402	AV/IT	Will the new intercom system need to integrate with PACS/VMS/IDS and if so please provide requirements.	Yes, please refer to drawings.	10/30/2026	11/9/2026
403	Architectural	Confirm field installed glazing at hollow metal doors is acceptable as this is standard practice.	This is acceptable for those locations where fire rated glazing is not required.	10/30/2026	11/9/2026
404	A511DT, A1	Please reference A1/A511DT. The viewing window at the tunnel appears to require a steel frame. The steel is not shown on structural drawings, there appear to be some type of steel angle for the faux rock work as well as steel plates at top and bottom of the window. The window calls for a Stainless-steel angle storefront system, but there are no specifications for steel storefronts, just aluminum storefronts. Please clarify this window's requirements/specifications.	The design intent is to provide a stainless steel system at the tunnel viewing as our team felt it would be the most cost effective. The steel is shown at the top and bottom for ease of attachment and to suppor the flashing behind the rockwork. An aluminum storefront can also be considered at this location as well.	10/30/2026	11/9/2026
405	A102FP, A601SH, & A920DT	A102FP, A601SH, and A920DT reference to a chain-link wall assembly and chain link door to divide the AV/IT and Security room. No wire mesh partition specification has been provided or BOD for reference. Please advise what is required for this partition.	Assume #9 10 gauge expanded metal mesh powder coated in black.	10/30/2026	11/9/2026
406	Spec 015715	Per Spec 015715, Please confirm if temp noise and vibration control acoustic walls are in the Phase 2 project scope or are these walls only in the Phase 1 scope as they are already installed by the time Phase 2 work starts.	The sound barrier was installed in Phase1. The Phase 2 Contractor shall remove the sound barrier at the completion of Phase 2 work.	10/30/2026	11/9/2026
407	Spec 011000	Section 011000 Part 1.6G requires both a Traffic Safety Officer and Flaggers. Can the Traffic Safety Officer also be a Flagger or does this need to be a separate full time person?	The traffic safety officer can also be a flagger	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
408	Spec 011000	Section 011000 Part 1.6G requires a Traffic Safety Officer. Please confirm that the Traffic Safety Officer can have other duties/responsibilities on the project when deliveries are not taking place.	The traffic safety officer can have other duties, if they are qualified to perform, when deliveries are not taking place.	10/30/2026	11/9/2026
409	C150SP & LS100SP	Per drawings C150SP and LS100SP, please clarify the intent of the existing paver work. Is the existing brick pavers to be 100% salvage and reinstalled (no replacement required) or will new pavers need to be provided due to damage/repair requirements. If new pavers are to be provided to replaced damaged please provide a quantity allowance (SF or % of total SF) to carry for the new pavers.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmsted	10/30/2026	11/9/2026
410	C150SP	Per drawing C150SP, the Asia Trail calls for full depth repairs to the concrete paving. For bidding purposes, please provide a quantity allowance of repair/replacement work in this location.	The existing curbs and walls along Asia Trail have been removed under the Phase 1 contract, with very minimal damage (allow 25 SF of damage to repair) to the existing concrete pavement. The Phase 2 Contactor shall be responsible for repair of this pavement that they may damage and repair of the pavement neccessary after the Phase 2 utility connections in the Asia Trail.	10/30/2026	11/9/2026
411	A601SH	Large EGL-2 Impact Glass Sizing, reference B6/A601SH shows a large EGL-2 impact-resistant IGU approximately 13'-4" W x 11'-7 1/4" H. Please confirm that the design intent is for this to remain one piece of glass and that the specified EGL-2 construction can be manufactured at the size shown. If not, please provide an acceptable mullion location or glass subdivision.	The design intent is to have a full sheet of glass with no interrupting mullion.	10/30/2026	11/9/2026
412	Specs 084131, 084400 & 014000.	Confirm whether project specific off-site laboratory mockup/testing is required for the storefront and curtain wall systems, or whether manufacturer existing test reports may be accepted in lieu of project-specific laboratory testing. If project-specific testing is required, please confirm the systems/openings to be represented, required mockup configurations. Reference specifications 084131, 084400 and 014000.	Laboratory testing and mockups are not necessary for this project.	10/30/2026	11/9/2026
413	Architectural	Please confirm the required manufacturer/BOD, system series, face dimensions, frame/mullion depth, finish type and finish color for both storefront and curtain wall. The storefront specification calls for a thermally broken stick-built aluminum system with color anodic finish but does not identify an exact series, depth or color. The curtain wall specification identifies an X151 stick-built, 4 sided captured, thermally broken system and indicated color to match P-06 Duranar 122151 Bronze. Please confirm whether this bronze finish applies to curtain wall only or to both systems.	The Duranar Bronze 122151 is to be applied to both storefront and curtain wall systems. Please refer to the drawings and specifications for the design intent of the curtain wall and storefront systems. Exact sizing to be determined as a part of the delegated design effort.	10/30/2026	11/9/2026
414	Spec 088000	Section 088000 requires three full-size IGUs for Architect review before production. Please confirm which glass types and sizes are required for these three IGU mockups and whether they are in addition to the storefront/CW performance mockups?	Three full-size IGUs are not required and will be removed from specification in a future issuance.	10/30/2026	11/9/2026
415	Spec 084313	The storefront specification requires the glazing contractor to be NACC certified and glazing technicians to be AGMT certified. Please confirm whether NACC and AGMT certifications are mandatory for this project or whether equivalent glazing contractor qualifications will be accepted. Ref spec section 084313.	Both NACC and AGMT specifications are required per specifications.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
416	Spec 010000	Please provide proposed location of GC trailer and staging areas for this project.	The Phase 2 contractor shall propose locations for its field office trailer, material laydown, and construction staging areas as part of its site utilization/logistics plan, subject to review and approval by the Smithsonian. Proposed locations shall be within the designated construction limits or other areas specifically authorized by the Smithsonian. The contractor shall coordinate its proposed site logistics with NZCBI to avoid interference with ongoing Zoo operations, visitor circulation, animal care activities, emergency access, and existing utilities.	10/30/2026	11/9/2026
417	A601SH & A510DT	Reference A601SH and detail J6/A510DT for Dayroom South curtainwall notes. The detail indicates AESS tube steel and steel angle, but neither are shown on the structural drawings. Please clarify if components are required per structural (and update drawings accordingly) or are provided as design intent and are delegated design and the responsibility of the Glazing subcontractor.	Components are shown for design intent and shall be the responsibility of the delegated design.	10/30/2026	11/9/2026
418	Architectural	At the animal enclosures, the animal cages have a mesh style ceiling structure. Please confirm if sprinkler protection is required for this mesh ceiling? If the sprinkler is to be provided at the mesh cage structure is a heat collection plate to be provided?	Sprinkler protection is provided at the ceiling above the enclosures and is not required at the mesh.	10/30/2026	11/9/2026
419	Civil	Please confirm that the Phase 1 paver scope is removal only, with no paver reinstallation required during this phase.	The Phase 1 Contractor will remove the pavers on Olmsted. The Phase 2 Contractor shall provide all new pavers at Olmstead. The Phase 1 Contractor will remove and replace the pavers at the new electric duct bank work from the Panda overlook entrance to the existing exterior electrical switchgear.	10/30/2026	11/9/2026
420	Civil	Please confirm that all paver removal will be performed by the Phase 1 contractor.	Confirmed. The majority of the pavers will be removed in Phase 1. The Phase 2 Contractor will be required to remove and replace pavers that are outside the installed security fence as needed to make utility connections.	10/30/2026	11/9/2026
421	Civil	Will the salvaged pavers be palletized and wrapped by the Phase 1 contractor?	See reponse to RFI 245, The Phase 2 Contractor shall provide all new pavers at Olmstead . The Phase 1 Contractor will remove and replace the pavers at the electric duct bank form the Panda overlook entrance to the existing exterior electrical switchgear.	10/30/2026	11/9/2026
422	CM	Will the salvaged paver pallets be stored within the project LOD, or will they be moved to a different part of the site? If so, please identify the designated on-site stockpile/staging location for salvaged pavers. If off-site storage is required, please advise who will be responsible for transportation and storage costs.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmstead	10/30/2026	11/9/2026
423	Civil	Please confirm whether salvaged pavers are to be cleaned of existing setting-bed material during removal and prior to stockpiling/reuse by the Phase 1 contractor. If the salvaged pavers are not cleaned and need to be cleaned prior to reinstallation by the Phase 2 contractor, please clarify the acceptable condition for reuse.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmstead	10/30/2026	11/9/2026
424	CM	Can the COTR provide an estimated percentage of the existing pavers that should be assumed reusable after removal? Please also clarify how shortages resulting from breakage, damage, or unsuitable existing pavers are to be addressed if the stated percentage is exceeded.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmstead	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
425	Civil	There is no detail showing the installation of the paver trays. Typically, these trays are installed over a concrete slab, and the frame is bolted down, but the pavers are being set on an HMA base. Please provide a detail showing how these are to be set and whether the frame can be set and anchored into the HMA or if a concrete collar will be required around the utility.	Please see details on Sheets C-540DT and C-541DT. If the pavement section surrounding does not provide at least 6-inch depth concrete slab for the paver tray frames to bolt and anchor for support, then assume a 6-inch thick concrete collar at a minimum 3,500-psi comparessive strength will be provided at the bolt and anchor points. During Constructin Phase, the bolting and anchoring requirements shall be coordinated with the selected paver tray manufacturer.	10/30/2026	11/9/2026
426	Civil	If concrete or other supplemental support is required, please confirm that it is furnished and installed by others and identify the responsible trade.	All work shown in drawings and specs to be provided by General Contractor, unless otherwise specified.	10/30/2026	11/9/2026
427	Civil	Please confirm the required material, finish, color, and loading/performance requirements for the Wunder Covers. Please also provide the applicable manufacturer/models for each size.	The pavement for each recessed paver tray shall match the adjacent pavement where the recessed paver tray is being installed. Loadings are to match the required loading of the utility structures they are covering. Please see details on Sheets C-540DT and C-541DT.	10/30/2026	11/9/2026
428	541DT	Detail 1/C-541DT shows a tray that is roughly 30” square, but it is noted that it is for 48” and 60” manholes, which are larger. Please clarify whether the trays at the 48” and 60” manholes need to be larger.	The Paver Trays are to be sized for the access lid's diameter not necessarily the manhole diameter. If Bidder believes the Paver Tray needs to be larger at select structures, then the Bidder can consider a large model paver tray.	10/30/2026	11/9/2026
429	RFP Fact 2	Please confirm that the Site Safety Manager is only required for one day per week per the RFP Factor 2 (page 105) and is not required to be Full Time.	Confirmed	10/30/2026	11/9/2026
430	Spec 010000	It was stated that some of the rentals from Phase 1 will be passed onto the Phase 2 contractors. Do we know what costs we need to account for or how we should factor that into our proposal?	Phase 1 rental fence subcontractor is Long Fence. Reach out to them for rates.	10/30/2026	11/9/2026
431	C-161, Keynote W-13	Sheet C-161, Keynote W-13, Top Left of the page, shows a 3" gate valve that is to be completed by Phase 2 contractors. However, that entire line is being completed by Phase 1 contractors. Is it possible for the Phase 1 contractors to add this to their scope instead of the phase 2 contractors coming out and dismantling the work the previous contractor did.	This 3" gate valve will be installed by the Phase 1 Contractor.	10/30/2026	11/9/2026
432	A-401	Please provide specification for bird netting under Dayroom Canopy as referenced on Detail G1/A-401 if to be provided by contractor.	Bird netting is not required and can be eliminated from the project.	10/30/2026	11/9/2026
433	119013, 119014, & 133100?	Are the acceptable fabricators / installers listed for Animal Access Doors and Caging Systems (11 9013) & (11 9014) also approved to perform work as Specialty Contractor for fabrication and installation of the permanent SS mesh structure supported by steel arches as specified in section 133100?	No, qualifications and pre-approved vendors are annotated in each specification section appropriately. They are also (2) very different systems/structure types. If there are vendors outside of those annotated in each section, qualfications shall be submitted as required by Division 010000.	10/30/2026	11/9/2026
434	SS-110DG	Sheet SS-110DG on 65% showed a total steel weight of 47,000 lbs. and on 100% drawings shows a total steel weight of 4,700 lbs. Which is correct?	47,000 is correct. The summation the itemized weights clarifies this.	10/30/2026	11/9/2026
435	Spec 23 64 23.13, Para. 2.2.A	Air-Cooled, Scroll Water Chillers – May “Multistack” be added to the list of acceptable manufacturers for spec section 23 64 23.13, Para. 2.2.A?	Unless directed otherwise by Smithsonian, we strongly recommend rejecting Multistack for this specification.	10/30/2026	11/9/2026
436	237313.19, Para. 2.3.A	Indoor, Custom Air-Handling Units – May “Klimak” be added to the list of acceptable manufacturers for spec section 23 73 13,19, Para. 2.3.A?	Unless directed otherwise by Smithsonian, we strongly recommend rejecting Klimak for this specification.	10/30/2026	11/9/2026
437	238219, Para. 2.3.A?	Fan Coil Units – May “Superior Rex” be added to the list of acceptable manufacturers for spec section 23 82 19, Para. 2.3.A?	Unless directed otherwise by Smithsonian, we strongly recommend rejecting Superior Rex for this specification.	10/30/2026	11/9/2026
438	MEP	Please provide the piping schedules for the three HVAC loops when available so that chemical treatment and glycol quantities can be properly calculated?	Pipe sizes are shown on the Mechanical drawings. System volumes for glycol and chemical treatment are to be coordinated with shop drawings from installed piping and equipment data per Spec Section [23 25 00 / 23 21 13].	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
439	N/A	Left blank in pre-bid RFI document.	N/A	10/30/2026	11/9/2026
440	MEP	Do not see a requirement for any duct being internally lined. Does any duct require internal liner?	Confirmed. Ducts do not require internal lining.	10/30/2026	11/9/2026
441	M-001CS	Per drawing M-001CS states any negative pressure duct over 3” WG should follow industrial SMACNA. Industrial SMACNA requires an engineer to tell us how to construct the duct. Can we figure standard SMACNA?	No system on the M-001CS Static Pressure Classification schedule exceeds negative 3" WG. Construct per the scheduled pressure classes.	10/30/2026	11/9/2026
442	MP-101PP	Per drawing MP-101PP, Sheet Keynote #158. Please indicate what drawings issued by other disciplines we will need to coordinate the plumbers radiant pex piping scope of work.	Contractor shall coordinate installation of PEX piping with architectural drawings for elevations, structural drawings	10/30/2026	11/9/2026
443	N/A	Left blank in pre-bid RFI document.	N/A	10/30/2026	11/9/2026
444	M-803CP, detail #1	Per drawing M-803CP, detail #1, mentions integration into existing siemens system via network drop; see documents issued by other discipline. Can you please explain the other discipline plus documentation required for integration design? Also, on the same drawing, Mech Room, there is a note about "Typ by Other Discipline: document physical location of switch + router for owner records. What other discipline is responsible for this scope of work?	Refer to the TN series drawings and Specifications issued by division 27. Mechanical/controls shall coordinate the drop and port with contractor and complete the BAS-side connection to the existing Siemens system per M-803CP, detail #1, and document location of the network device for owner records.	10/30/2026	11/9/2026
445	C-110DP, Keynotes 4 and 5	Drawing C-110DP Keynotes 4 and 5 require removal of the existing shed/pool including foundations. Please provide foundation depths and extents.	This demolition scope is to be performed by the Phase 1 Contractor.	10/30/2026	11/9/2026
446	FX102FP, keynote 210	Drawing FX102FP, keynote 210 calls for custom color sprinklers. How many colors will be required?	Custom colored cover plates will be required to match Dayroom ceiling. Refer to architectural drawings for ceiling finish.		11/9/2026
447	Spec 211300-7, 2.2	Per specification 211300-7, 2.2, calls for all Galvanized Piping. This is unusual for a building of this type. Please confirm.	Galvanized piping is a Smithsonian requirement for animal holding areas and keeper areas. Provide galvanized piping as specified.	10/30/2026	11/9/2026
448	EX-601DT	Please confirm which areas of rockwork (if any) require controlled density fill. This was shown on EX-601DT of the 65% set, but appears to be removed now.	Controlled density fill has been removed from the set.	10/30/2026	11/9/2026
449	EX-704FP	Please confirm there is no rockwork on the floors, walls, or ceiling inside the keeper vestibule and the east-west habitat shift (1&2/EX-704FP).	There is no rockwork on the floors, walls, and/or ceilings inside the keeper vestibule and the east-west habitat shift.	10/30/2026	11/9/2026
450	Architectural	As currently drawn in the 100% the dayroom south curtain wall system would put most of the weight on the center of the intermediate horizontal causing the member to bow in more than the allowable 1/8" for the specified manufacturer's systems. Would an intermediate vertical member be acceptable to accommodate the specification requirements. Reference drawing provided.	The design intent is to have a full sheet of glass with no interrupting mullion.	10/30/2026	11/9/2026
451		Due to the extensive construction activities occurring in the vicinity of Trees 48-50 during both Phase 1 and Phase 2 of the project, there is significant concern regarding the long-term health, stability, and survivability of these trees. While root pruning, tree protection measures, and substantial efforts to preserve the trees are taken, the volume of excavation, utility installation, grading, and other construction operations within this area will likely have a detrimental impact on the trees' root systems and overall health. As a result, there is a considerable risk that the trees will not survive the construction process despite these preservation efforts. Please confirm that Trees 48-50 can be removed as part of the Phase 1 work.	The four (4) trees located in the planter box/berm area will now be removed in Phase 1 in lieu of preserving.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
452 a	SP36 and SP37 on Sheet SS-100FP	SP36 and SP37 on Sheet SS-100FP are associated with micropiles and pile caps in a congested area. Please see overlayed plans below. It appears that these micropiles and pile caps would be installed in locations that conflict with the Olmsted curb, Electrical Line A, Waterline A and tree protection areas for Tree #32. Please provide a coordinated set of drawing details for these pile caps. See image in RFI #542b.	Pile caps to be set below grade, below adjacent curbs at Olmsted walk, and will occur within tree protection zone. Please see updated 100% Final drawings issued with Amendment 4 for locations relative to utilities.	10/30/2026	11/9/2026
452 b	SP36 and SP37 on Sheet SS-100FP			10/30/2026	11/9/2026
453	N/A	Left blank in Whiting-Turner's pre-bid RFI document.	N/A	10/30/2026	11/9/2026
454	Specification Section 055000	Metal Fabrications calls for fabrication of Metal Bollards, but there is no reference to this in the drawings. Please confirm the location(s) and details of the Metal Bollards named in this specification.	There are no metal bollards in the project scope.	10/30/2026	11/9/2026
455	Specification Section 033713	Shotcrete, lists (4) contractors that are considered acceptable fabricators for the shotcrete theming scope of work. Please confirm that Elite Concrete Solutions is an acceptable fabricator and installer for this scope of work; attached is their qualification package.	Preferred vendors are listed in the specifications. Qualifications of any additional vendors will be reviewed post award per division 01000.	10/30/2026	11/9/2026
456	Sheet E-602SH	Transformer T-RP states it is a 45kva but has a feeder schedule note of T75. What size is transformer T-RP?	T-RP should be a 75kVA transformer	10/30/2026	11/9/2026
457	Sheet ES-103SP	Note E303 references SS-500DT for fixture XL5 mounting details; However, sheet SS-500DT only shows the conduit information. Please confirm what elevation the XL5 fixtures are mounted?	Fixture mounting height is variable and shown in the SS Series. Reference SS-300SC and SS-310SC for XL5 mounting heights on each arch. Reference SS-500DT for XL5 mounting detail. Reference the rest of SS Series for further information.	10/30/2026	11/9/2026
458	Exhibit (EX) Series of Drawings	Exhibit (EX) drawings show an electrified barrier perimeter, please provide electrical requirements for the barrier.	Electrical requirements will be clarified in the next issuance.	10/30/2026	11/9/2026
459	Sheet LS-503DT; Detail 1	Detail 1/LS-503DT calls out grazer lighting and toe kick lighting at the decorative retaining wall. These lights are not noted on the electrical drawings. Please provide product data and electrical details for these lights.	Refer to sheet ES-102SP for site plan where grazer and toetick lighting are shown at the decorative retaining wall. Refer to sheet E-604SH for lighting fixture cut sheet for those types.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
460	Sheet TY-702SH	Cameras S-1-25 and S-1-26 are indicated on the camera schedule on drawing TY 702SH, however cameras S-1-25 and S-1-26 are not shown anywhere else on the security drawings. Please confirm the locations of cameras S-1-25 & S-1-26.	These cameras are located in the West Habitat Viewing Tunnel.	10/30/2026	11/9/2026
461	Civil Series of Drawings	Per the Civil drawings, sections of the existing Olmsted curb will be demolished and removed, but the drawings are unclear about whether this demolition is the responsibility of the Phase 1 or Phase 2 Contractor. Will the Phase 2 contractor be responsible for demolition of any of the existing Olmsted Curb, and if so, which sections?	The removal of the existing Olmsted Walk curbs is included in the Phase 1 contractor's scope of work.	10/30/2026	11/9/2026
462	Civil Series of Drawings	Per the Civil Drawings, the Olmsted Pavers are to be salvaged and stockpiled, and the Olmsted walk will be backfilled with stone. The drawings are unclear about whether the Phase 1 or Phase 2 contractor will be responsible for this work. Will the Phase 2 contractor be responsible for any salvaging, stockpiling and backfilling of the Olmsted Path? If so, which sections will the Phase 2 contractor be responsible for?	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmsted	10/30/2026	11/9/2026
463	Civil Series of Drawings	Per the Civil Drawings, the Asia trail pedestrian concrete paving will be repaired. It is unclear how the pedestrian paving will be turned over from the Phase 1 contractor. Will the Phase 1 contractor restore any sections of the Asia trail prior to handing over the site? Will the Phase 2 contractor be responsible for demolition and replacement of the entire existing concrete Asia Trail pedestrian paving within the LOW?	The Phase 2 will be responsible for replacing the Olmsted pavers with new pavers including the underlayment work per detail 5/LS 500 DT. The Phase 1 Contractor with remove the Olmsted pavers as required to complete their utility by-pass work.	10/30/2026	11/9/2026
464	Telecommunications Series of Drawings	The telecommunications duct bank is shown on both the Phase 1 Civil Drawings and the Phase 2 Telecommunications Drawings. Note T1 on the Phase 1 Civil Drawings references telecommunications drawings for additional information, but there are no telecom drawings in phase 1. Please confirm whether the telecommunications duct bank is intended to be installed as part of Phase 1 or Phase 2.	See reponse to RFI 410	10/30/2026	11/9/2026
465	Sheets LP-103SP and LP-104SP	Sheets LP-103SP and LP-104SP reference plants with a callout of “ACH.” There is no perennial ACH in the legend. Which plant is associated with the “ACH” callout?	Please associate ACH with SX *Solidago x 'Dansolitlem'*, Little Lemon Goldnerod	10/30/2026	11/9/2026
466	Sheets M-100FP; Note M101; C-161UP thru C-165UP EX-520DT and EX-523DT	Sheet note M101 on M-100FP notes 3 habitat pool makeup water locations and says reference C-161UP-C-165UP. When checking drawings C-161UP-C-165UP only 2 locations found, keynote W23 says see drawing EX-520DT series for detail. The Pool fill pipe detail found on EX-523DT shows fill pipe but there is no mention of the water consumption totalizer that is to tie into the BAS mentioned on mechanical drawing MH-100FP. Please clarify what is needed, and design intent.	There are (3) habitat pools throughout the exhibit as noted on the Civil and Exhibit drawings. Design intent is to track and integrate water consumption of habitat utilities into BAS via single water meter at building. All accessories, including encoders, wiring to BAS and integration will be by division 23. Scope will be clarified in next issuance to indicate (1) M101 note on M-100FP at the care building.	10/30/2026	11/9/2026
467	Sheet TY-501; Detail 2	Drawing TY501 Detail #2 indicates 8 hours back up for 12-volt DC. There are no details regarding 24V. Please clarify number of hours for 24V back up power	See Specs. Provide 8 hours back of both 12vdc and 24vdc.	10/30/2026	11/9/2026
468	Section 32-1816.13; Paragraph 2.1-A,	Spec Section 32 1816.13, sub-section 2.1-A, states that the product used for the rubber crumb shall be a “specialty-produced, clean, colored, rubber crumb engineered specifically for porous flexible paving.” The basis-of-design	Please clarify request.	10/30/2026	11/9/2026
469	Sheet C-153SP	C-153SP legend refers to coordination with COTAR on Existing brick pavers to be salvaged and reinstalled where possible, please clarify if we are allocating pricing for only salvaged pavers, if so what the current count of salvaged pavers. In addition, please clarify if pricing allowance should be carried out for the non-salvageable brick pavers.	See reponse to RFI 245, Phase 2 contractor shall provide all new pavers at Olmsted	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
470	Section 28 1523; Paragraph 2.3	Section 28 1523, Paragraph 2.3 – Gate Post Mount Kit for Credential Reader and Intercom, identifies a Pedestal Pro 10-inch square stainless steel housing and references Drawing TY 504 DT for the required custom arm mount. Drawing TY 504 DT does not provide a detail or mounting requirements for the custom arm mount. Please provide the missing mounting details for the custom arm mount, to establish an accurate basis of bid.	Refer to Landscape plans. Assume devices will be mounted per landscape plans.	10/30/2026	11/9/2026
471	Section 08 7100; Page 15	Section 08 7100, Page 15 – Door Hardware Sets, indicates that doors equipped with access control card readers shall include a request-to-exit (REX) switch integrated into the door lever to signal authorized egress to the access control system. However, the Division 28 Security (TY) drawings identify a separate request-to-exit motion sensor at each access-controlled door. Please clarify whether the intent is to utilize the door hardware's integrated REX switch or provide a separate REX motion sensor as indicated on the Security drawings, or if both devices are required.	If integral request to exit is provided, assume no request to exit PIR will be necessary.	10/30/2026	11/9/2026
472	Section 08 7100	Section 08 7100, Door Hardware Set 18.0, identifies Door B1AV2 as a chain-link gate equipped with an electrified gate lock (GL1-FLM), card reader, door position switch, and emergency exit button. However, Security Drawing TY 101 FP identifies Door B1AV2 with an "MG" lock designation, which is not defined in the Security drawing legend. Please clarify the intended locking hardware for Door B1AV2 and confirm whether the "MG" designation represents a magnetic lock or the electrify ed gate lock identified in Hardware Set 18.0.	Follow Division 08 for electrified door hardware. Coordinate with Division 28.	10/30/2026	11/9/2026
473	Sheet TY 503 DT	Drawing TY 503 DT does not provide an installation detail for the B1AV2 door type identifying the required gate lock configuration or card reader mounting arrangement for this chain-link gate. Please provide a gate installation detail identifying the required mounting configuration for the electrified lock, card reader, door position switch, and associated access control equipment.	Refer to Landscape plans.	10/30/2026	11/9/2026
474	Sheets TY-701SH and TY-106FP	Cameras AC-1-17 and AC-1-18 are shown on the exterior of the building. The camera schedule (TY-701SH) indicates that these cameras are interior cameras. Please confirm the location of these cameras on sheet TY-106FP are accurate. If these are exterior cameras, please provide appropriate exterior-rated camera specifications and mounting requirements.	All cameras should be exterior rated.	10/30/2026	11/9/2026
475	Sheets TY-101FP and TY-701SH	Security Drawing TY 101 FP identifies Camera S-B-05; however, this camera is not included in the Animal Care Camera Schedule on Drawing TY 701 SH. Please confirm this camera should be added to the Camera Schedule.	Follow counts on plans.	10/30/2026	11/9/2026
476	Sheet TY-00CS	Please provide specifications for the SenSource People counters. Security Drawing TY 00 CS identifies people counters in the device legend with the notation "Infrastructure Only." Please clarify the intended scope of work associated with the "Infrastructure Only" designation, including whether conduit, pathways, cabling, network connections, and power provisions are required.	Only the supporting infrastructure / conduits shall be by the Contractor. SenSource people-counting system and wiring shall be procured, installed, and configured by the Owner's vendor in coordination with OCIO to ensure communication with the exisiting park-wide system.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
477	Section 28 3100; Paragraph 1.1.A	Section 28 3100, Paragraph 1.1.A identifies the Intrusion Detection System (IDS) Paragraph 3.2 requires integration between the IDS, electronic door hardware, access control system, and video surveillance system. Please provide the intended sequence of operation and integration requirements between the IDS, PACS, and Video Management System (VMS), including alarm monitoring, door locking/unlocking functions, and event-driven camera call-up and recording.	Refer to answer to RFI 239.	10/30/2026	11/9/2026
478		Please confirm whether 3 Cell MaxCell innerduct is required in all conduits containing fiber optic cabling, or only in conduits where multiple fiber cables are installed, or future pathway expansion is anticipated. If needed, which conduits?	3-cell maxcell innerduct can be limited to conduits containing multiple fiber optic cables or conduits slated for future expansion.	10/30/2026	11/9/2026
479	Section 28 2000; Paragraph 1.4 and Paragraph 2.2	Section 28 20 00-1, 1.4 , Part 2, 2.2 IStar Ultra SE. Replacement Part is the is the GSTAR008-SE-NPS GSTAR016-SE-NPS. Are these panels acceptable replacements?	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
480	Section 28 2000; Paragraph 1.4 and Paragraph 2.3	Section 28 20 00-1, 1.4 , Part 2.3 IStar EX-4. Replacement Part is the GSTAR004. Are these panels acceptable replacements?	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
481	Sheets A-601SH, A-121 & A-122	Sheet A-601 SH – Openings Schedules and Types, door schedule states that several doors have a “FRP-01” finish, and to reference sheets A-121 and A-122 for details regarding this finish. Those sheets do not have details for finish FRP-01. What finish should be provided for doors with finish “FRP-01”?	Refer to 081613 Fiberglass (FRP) Doors and Frames for specific colors. Refer to RFI 363 for additional clarifications.	10/30/2026	11/9/2026
482	Section 28 2000; Paragraph 1.4 and Paragraph 2.4	Section 28 20 00-1, 1.4 , Part 2.4 Reader Modules Replacement Part is the G2-RM-DCM-2. Please confirm this an acceptable replacement?	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
483	Sheet LS-503DT; Detail 1	Drawing LS-503DT Detail 1 calls for a 7 Gauge Corten Steel Panel with Laser Cut Design. Please provide laser cut design intended.	The laser-cut panel design indicated on Drawing LS-503DT, Detail 1, has not been finalized. The final laser-cut pattern will be developed and provided at a later date in coordination with the project’s interpretive design requirements. Contractor shall proceed based on the specified 7-gauge Corten steel panel, with the final laser-cut artwork/design to be issued upon completion of the interpretive design process.	10/30/2026	11/9/2026
484	Sheet TN-401EP	Drawing TN-401EP Keynote 9 it mentions to provide a 2-Post data rack and on Keynote 4 mentions a 4-post AV Equipment rack. In specs 27 1116-2 2.1 Equipment Racks specs call for the Mighty Mo 20 part number OR-MM20716-B which is a 4-post rack. Ortronics does make a standard 2-post data rack. Please confirm if we are to provide (1) 2-post rack and (1) 4-post Mighty Mo rack or (2) Mighty Mo 4-post racks.	Owner provided, installed and configured through SI approved vendor CLC. Funded through the project.	10/30/2026	11/9/2026
485	E-100SP	Drawing E-100SP indicated that the duct bank installed during phase 2 is to be extended from the existing 480/277v manhole to the new electrical room. Please confirm that the existing feeders enters the existing manhole and is to be extended from that point using splice connectors and new conductors in the new duct bank to the electrical room.	Will defer to the electrical contractor on the means and methods. If a splice is needed at this point or a continuous conductor run can be provided up to the Main Electrical Room shall be determined by the contractor.	10/30/2026	11/9/2026
486	Fire Protection	Please confirm the manufacturer, model, and part number of the Fire Alarm Radio Alarm Transmitter (RAT)/Keltron Transceiver shown on the fire alarm riser and floor plans to ensure compatibility with the Zoo's existing receiving equipment.	Provide Keltron LS NET9000 transceiver.	10/30/2026	11/9/2026
487	Sheets P-501DT and P-601SH	Expansion Tank (ET-1) is shown on 2/P-501DT and P-601SH but is not shown on the plumbing schedule. Please provide required manufacturer, model, capacity and design criteria for ET-1.	BOD for ET-1 is Amtrol ST-12 tank volume of 4.4 gal, acceptance factor 0.73 with 3/4" connection.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
488	Sheet P-001	Per P-001 note 8, Please confirm whether Trap Guards (or equal trap seal protection devices) are acceptable in lieu of trap primers.	Per Smithsonian standards, traps shall be primed via electronically timed trap primers. Trap guards are not acceptable.	10/30/2026	11/9/2026
489	Sheet P-101PP	Please confirm the intended routing of the trap primer piping shown at angles to the building walls on P-101PP.	intent is to run the trap priming piping directly to the floor drain with minmal bends.	10/30/2026	11/9/2026
490	Sheet P-101PP	Please confirm whether trap priming is required for the restroom floor drain, as no trap primer connection is shown on P-101PP.	Trap priming is required for the restroom floor drain. A trap primer shall be provided in the CUSTODIAL RM and routed to the restroom floor drain. This will be captured in a future submission	10/30/2026	11/9/2026
491	Sheet P-101PP	Please confirm whether trap priming is required for MSB-1, as no trap primer connection is shown on P-101PP.	trap priming is not required for MSB-1	10/30/2026	11/9/2026
492	Civil	Please indicate the required routing and termination location for the natural gas regulator vent piping, as this information is not shown on the drawings.	regulators inside the building shall be fitted with a vent limiting device installed per manufacturer instructions	10/30/2026	11/9/2026
493	Plumbing	Please confirm whether trap primer piping installed below grade requires a carrier pipe or conduit.	underground water piping shall be installed in PE encasement per spec 221116	10/30/2026	11/9/2026
494	Plumbing	Please confirm whether cold water piping installed below grade requires a carrier pipe or conduit.	underground water piping shall be installed in PE encasement per spec 221116	10/30/2026	11/9/2026
495	Electrical	Confirm temporary power can be pulled from the existing switchboard SWBD-PH.	Temporary power can be pulled from existing switchboard 'PH'. However, electrical contractor should determined on field.	10/30/2026	11/9/2026
496	E-602SH keynotes, E603, E606; RFI responses #76, 77, and 130.	SI responded that the generator load-bank breaker and feeder sizing 'will be shown in 100% Final documents.' E-602SH shows a 150A CB / output for a 100kW temporary load bank and an integrated 100kW permanent load bank, but no breaker size or feeder for the integratedload bank, and no schedule for the generator-integral load center. Please confirm the integrated load-bank breaker/feeder and provide the generator load center circuits.	Final CD drawings show the load bank on top of the generator with a 150A CB and feeder tag. The feeder tag its also shown in the feeder schedule. Confirm if the information provided is sufficient or if any additional information needed to be incorporated on drawings.	10/30/2026	11/9/2026
497	E-600SH and E-606SH	Switchboard DP-G1 'Supply From' is blank. E-600SH shows existing 15kV gear, existing 800A SWBD 'MDP' and 1600A SWBD 'PH'. Please confirm the source of DP-G1, the service feeder size/route, and the Phase 1 vs. Phase 2 responsibility for the service feeder.	Distribution Panelboard DP-G1 is supply from the Panda House 'PH' switchboard. Drawing E-100SP delineates Phase 1 from Phase 2. Ductbank from last north manhole to inside the building up to the DP-G1 shall be considered on Phase 2.	10/30/2026	11/9/2026
498	E-607SH	Panel PP-OS-G1 header shows Mains Type 'MCB' and Bus 250 A, but no MCB rating. Please confirm the main breaker size.	PP-OS-G1 should be provided with a 250A MCB.	10/30/2026	11/9/2026
499	E-606SH, E-607SH, E-608SH	Panel locations for PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 are truncated on the schedules ('EMERGENCY ELECTRICAL...'). Please confirm the room for each (B1EL1 or other).	Panelboards PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 to be located on Emergency Electrical Room B1EL1. Refer to sheet E-506DT deatail #2 for panelboards PP-EM-G1, RP-EM-G1, PP-LR-G1, RP-LR-G1, PP-OS-G1 and RP-OS-G1 location.	10/30/2026	11/9/2026
500	E-606SH (PP-G1 ckt 22; RP-G1 ckts 2, 4, 23); E-607SH (PP-OS-G1 ckt 1; RP-OS-G1 ckt 27)	Six circuit descriptions are truncated on the panel schedules (end in '...'), e.g. RP-G1-2 'OUTDOOR DRINKERS - D1 TO D4...', RP-G1-4 'IRRIGATION CONTROLLER - NORT...', RP-OS-G1-27 'ACC-1 HEAT TRACE -...'. Please provide the complete descriptions/locations.	Complete circuit description on panelboards will be provided: RP-G1 #2 - (PRS LD) - * OUTDOOR DRINKERS - D1 TO D4, #4 - (PRS LD) - IRRIGATION CONTROLLER, #22 - (RCPT) - RCPT CONV - B1ME1, OUTDOOR, RP-OS-G1 #27 - (MECH) (GFPE) - ACC-1 HT - GEN YARD, PP-G1 #22 - (EXT LTG) - HABITAT 'XL4A' & 'XL4B', and PP-OS-G1 #1 - (RCPT) - AHU-1 LC (LTG, MISC) - B1ME1	10/30/2026	11/9/2026
501	E-606SH (PP-EM-G1 ckt 41)	Circuit 41 on PP-EM-G1 is blank (no breaker or description). Please confirm SPACE or SPARE.	Circuit is intended to remain Spare	10/30/2026	11/9/2026
502	Sheet index G-003CS/G-004CS;E-600SH,E-602SH	The E-600 series index lists E-600SH and E-602SH with no E-601SH (the Phase 1 set includes an E-601SH).Please confirm no E-601SH is issued for Phase 2.	Confirmed, no E-601SH is to be issued for Phase 2.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
503	A-111CP, A-112CP, EL-100FP, EL-101FP, E-604SH	Lighting fixtures on the architectural RCPs are untagged symbols, and E-604SH has no quantity column. Please confirm the electrical lighting plans (EL-100FP / EL-101FP) govern fixture type and quantity where they differ from the RCP.	Confirmed.	10/30/2026	11/9/2026
504	061000, 061600, 064116	Per RFI 030 response, project does not have a formal LEED certification level requirement and spec section 018113 is deleted on 100% IFB set, however, multiple areas in Division 06 specification sections call for regrional material requirement and FSC or similar certification for wood project, which appears to be are errors. Please advise.	Regional material and FSC or similar certification are not required. Spec sections will be updated in future issuance.	10/30/2026	11/9/2026
505	EX-110 series E-100SP	Please provide further clarification on B6 Electrified Barrier, called out on EX-110SP and EX-110 series drawings, as there are no relevant details and specifications.	Refer to response of RFI 458	10/30/2026	11/9/2026
506	A-111CPA-121NPA-509DTMI-101CPM-505DT	Per A-111CP and A-121NP, basement ceilings is exposed concrete and paint finished, however multiple details on A-509DT imply that certain areas / basement ceilings needs to have underdeck / stick-pin insulation and some locations have gypsum soffit board finish. Please clarify ceiling finish condition.	Interior spaces are exposed, exterior shall be stick-pin insulation with gwb soffit.	10/30/2026	11/9/2026
507	S-507DT and S508DT	Minimum pile lateral capacities are provided on sheets S-507DT and S508DT. Please provide the direction of lateral loading. Also indicate if loading is reversible.	Loading on piles is predominently in the direction normal to retained soil. However, due to varying retained soil, irregular geometry across the site, and load from supported structures (such as the enclosure arches), load should be considered reversable until further specific coordination can be carried out with selected bidder.	10/30/2026	11/9/2026
508	Structural	Load test approval per is specified as in accordance with FHWA 2005, Chapter 7.4 which identifies an acceptable test as one with a slope of the load versus settlement curve at 2xDL to be 0.025 in/kip or less. Please confirm if the intent is that this will satisfy section 1810.3.3.1.3 as “other methods approved by the building official” in the 2024 IBC.	Yes, but FHWA 2005 acceptance criteria are project-specific requirements and do not waive any review or approval by SI Structural Engineer or COTR.	10/30/2026	11/9/2026
509	Structural	Please confirm if the uplift demand is due to wind/seismic or other load sources.	At retaining walls, uplift demand is primarily due to overturning from lateral soil pressure, though there are contributions from wind/seismic at foundations supporting enclosure arches, faux rockwork, and other site structures projecting above grade.	10/30/2026	11/9/2026
510	Structural	The specifications define bedrock as residual metasedimentary disintegrated rock (residuum) with a Standard Penetration Test (SPT) resistance, N-value ≥ 60 blows per foot (bpf). However, several of the project borings (HA-series) were terminated in soils with SPT N-values less than 60 bpf. Given this apparent discrepancy and the lack of subsurface information confirming the depth to bedrock in these areas, please clarify how the specification requirement is to be applied. Are additional borings or other subsurface investigations planned to further define the bedrock surface and extent of residuum across the project site?	No additional borings or investigations are planned. This definition of disintegrated rock is provided in the Geotechnical Report to describe residuum encountered in the borings. It is not intended to define a continuous subsurface stratigraphic profile throughout the project site. The boring logs represent conditions only at the boring locations, and residuum may vary between borings. Also, the definition is not intended to require demonstration of material exhibiting an SPT resistance of 60+ bpf at every foundation or micropile location. Foundation bearing subgrades and micropile installation conditions shall be evaluated based on actual field conditions encountered during construction and in accordance with the Contract Documents.	10/30/2026	11/9/2026
511	Structural	Please confirm intent to use 2D spacing for several of the pile caps. Increasing spacing to 3D will greatly increase the lateral performance of the pile caps.	The intent is to use 2D spacing (24", for 12" dia. micropiles), at the recommendation of the geotechnical engineer.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
512	12 2413; A-112CP	Please confirm if roller shades shall be single or double. Specification 12 2413 - 1.1A dictates single-roller shades, however the A-112CP Reflected Ceiling Plans call-out dual rollers.	Rollershads shall be dual roll shades as indicated on the drawings.	10/30/2026	11/9/2026
513	12 2413	Please confirm the desired shadeband color for the window shades.	Clarification needed. The valance should be exposed as these are surface mounted and Architect shall choose from manufacturer's selection. Shade fabric shall be light filtering (roll 1) and blackout (roll 2). Final selection to be confirmed during submittal phase.	10/30/2026	11/9/2026
514	27 4100	Please confirm the location and make/model for AV equipment that is described in the specifications.	Audio visual scope has been limited to future expansion rack in the telecom room. Specifications will be updated to remove audio visual outlets/wiring and miscellaneous materials.	10/30/2026	11/9/2026
515	27 4116	Please confirm that the Contractor is responsible for furnish-and-installation of the audio-visual equipment, outlets, and wiring on this project or if this work is to be by Owner.	Owner provided and installed through SI approved vendor CLC. Funded through the project.	10/30/2026	11/9/2026
516	C-161UP C-215UP C-531DT	Please advise if Keynote W22, FIRE HYDRANT. SEE SHEET C-531DT FOR DETAIL, has already been completed by the Phase 1 contractor. If not, please provide relevant detail and profiles for this work.	Phase 1 Contractor scope is Fire Hydrant Removal. Phase 2 Contractor scope is Fire Hydrant Installation. Please see Detail 3 Sheet C-531DT. Assume New Fire Hydrant is to match the style of the existing fire hydrants at the Zoo. Product shall be proposed in a Submittal for both SI and A/E approval. The New Fire Hydrant will connect to the existing water service line that was serving the Existing Fire Hydrant.	10/30/2026	11/9/2026
517	LT-100SP C-161UP	Please confirm Phase 2 contractor does not need to provide directional borings shown on LT-100SP as per Keynote W2 and D17 / C-161UP, Phase 1 contractor already completed this work.	Correct. Phase 2 Contractor scope includes no directional boring.	10/30/2026	11/9/2026
518	077273 329115 A-503DT A-511DT	Per specification 077273-1.11, roofer is required to provide the special warranty for plant growth, however, per R512 / A-503DT (and A-511DT), planting soil called for references specification 329115, which is being provided by the landscaper, and all plants are being provided by the landscaper. Please advise if spec section 077273-1.11 is an error and the landscaper is to provide plant warranties per specification 329300-1.10.	Plant warranties shall be provided per Specification Section 32 9300.	10/30/2026	11/9/2026
519	Amendment 0004, RFI 13, 14, 45, & 158 responsesC-110 series	Per RFI Responses 13, 14, 45, & 158, phase 1 contractor completed the demolition / removal of the "bison building", bypasses install and underground electrical removal, however, Keynote #6 / C-110DP is in bold, still calling for demolition / removal of the animal care building, and and Keynotes #20, 21, 22, 40, & 46 / C-112 is in bold, still calling for removal of underground electric. Please clarify.	Whether a keynote is bold on the Demolition Plans does not have to do with whether it is Phase 1 Contractor scope or Phase 2 Contractor scope. It has to do with whether it is Site Demolition, Tree Demolition, or Utility Demolition.	10/30/2026	11/9/2026
520	S-101FP 2026-10-09 PN 2533105 CALF - Geotechnical Engineering Study r1 Diane Evans	Keynote #15 / S-101FP states "UNCONTROLLED FILL MATERIALS BELOW FOOTINGS SHALL BE REMOVED AND REPLACED WITH COMPACTED STRUCTURAL FILL TO ACHIEVE ALLOWABLE BEARING PRESSURES AS NOTED ON S-001. SEE GEOTECH FOR ADDITIONAL INFORMATION ON DEPTH AND COMPACTION REQUIREMENTS." Neither S-001 nor the geothechnical report defines how much / the quantitiy of "undercut / over-excavation and backfill with suitables / controlled fill" required to acheive the allowable bearing pressures at each footing / shallow foundation locations. Please define / quantify the "undercut operation" to include in the base bid.	Look at the Utility Profiles and Utility Plans for necessary structural fill where utilities are within the load plane of foundations. For all other areas where structural fill may be required, refer to Structural.	10/30/2026	11/9/2026
521	07 3116	Please confirm the warranty details for the copper roofing system described in Specification 07 3116	Section 07 3115.1.10 Warranty is confirmed.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
522	27 0528	Please confirm whether 3 Cell MaxCell innerduct is required in all conduits containing fiber optic cabling, or only in conduits where multiple fiber cables are installed or future pathway expansion is anticipated.	Refer to answer to RFI 478.	10/30/2026	11/9/2026
523	28 0500	Please confirm whether an expansion is required to the existing CCure license. If so, please provide the current license serial number in order to properly quote software from the manufacturer.	Per section 28 100, Access Control, provide assume upgrade existing site license to Software House PACS license 20	10/30/2026	11/9/2026
524	Section 28 20 00-1, 1.4 , Part 2, 2.2 IStar Ultra SE	Reference Section 28 20 00-1, 1.4 , Part 2, 2.2 IStar Ultra SE. Replacement Part is the is the GSTAR008-SE-NPS GSTAR016-SE-NPS. Please confirm if these panels are acceptable replacements.	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
525	Section 28 20 00-1, 1.4 , Part 2.3 IStar EX-4	Reference Section 28 20 00-1, 1.4 , Part 2.3 IStar EX-4. Replacement Part is the GSTAR004. Please confirm if these panels are acceptable replacements.	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
526	Section 28 20 00-1, 1.4 , Part 2.4 Reader Modules	Reference Section 28 20 00-1, 1.4 , Part 2.4 Reader Modules. Replacement Part is the G2-RM-DCM-2. Please confirm this is an acceptable replacement?	Follow specifications. Submit replacements per Section 28 0500.10 during shop drawings submission process.	10/30/2026	11/9/2026
527	TY 501 DT	Please clarify the number of hours for 24V back-up power. Detail #2 indicates 8-hour back-up for 12-volt DC, but there is not a detail 24V.	Follow Section 28 0507.10 Power Sources for Electronic Security.	10/30/2026	11/9/2026
528	28 0500	Section References SI Special Conditions Document for Formats and Contract Requirements. Please provide access to referenced documents so that contractor can accurately estimate engineering hours.	These requirements are available at the SI Architect-Engineer Infromation Center website.	10/30/2026	11/9/2026
529	TY 103/104 SP; TY 601 DR	Please confirm if there are desired pathways for fiber optic conduit to proposed camera locations.	Follow Section 270528.10, Pathways for Elecronic Security which outlines specific pathway requirements for fiber optic cabling supporting security systems	10/30/2026	11/9/2026
530	28 3100 - 1.1A	Please confirm if the intrusion detection devices are intended to be connected directly to the PACS or to a separate intrusion detection control panel integrated with the PACS.	Refer to answer to RFI 232.	10/30/2026	11/9/2026
531	28 3100	Please confirm the intended sequence of operation and integration requirements between the IDS, PACS, and Video Management System (VMS), including alarm monitoring, door locking/unlocking functions, and event-driven camera call-up and recording.	Refer to Section 280500.10, Results for Electronic Security which outlines the system requirements. The IDS is an integrated element of the CCURE System. Video is also references requirements for call up and recording.	10/30/2026	11/9/2026
532	08 7100	Please clarify whether the intent is to utilize the door hardware's integrated REX switch or to provide a separate REX motion sensor as indicated on the Security drawings, or if both devices are required. Please confirm the required REX configuration for all applicable access-controlled doors.	Where Division 08 utilize a integral request to exit, a separate PIR RTE is not required. If drawings indicate a separate PIR RTE and it is not required - provide the PIR RTE as a spare parts.	10/30/2026	11/9/2026
533	08 7100	Please confirm the intended locking hardware for Door B1AV2 and confirm whether the "MG" designation represents a magnetic lock or the electrified gate lock identified in Hardware Set 18.0.	Electrified gate lock.	10/30/2026	11/9/2026
534	TY 701 SH	Please confirm whether Cameras AC-1-17 and AC-1-18 are intended to be interior or exterior cameras. If exterior installations are required, please provide the appropriate exterior-rated camera specifications and mounting requirements.	Assume cameras in animal care areas require exterior ratings.	10/30/2026	11/9/2026
535	TY 100 SP; TY 701 SH	Please confirm that the two (2) cameras identified as "S-S-XX" on Drawing TY 100 SP correspond to Cameras S-1-25 and S-1-26 listed on Drawing TY 701 SH.	Confirmed	10/30/2026	11/9/2026
536	AV/IT	Please provide the intended system design and specifications for the infrastructure SenSource people-counting system to be furnished and installed by the Contractor. Please confirm that only pathways should be furnished-and-installed, and not any devices, wiring, or computer software programming for the SenSource system.	Only the supporting infrastructure / conduits shall be by the Contractor. SenSource people-counting system and wiring shall be procured, installed, and configured by the Owner's vendor in coordination with OCIO to ensure communication with the exisiting park-wide system.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
537	E-100SP	Drawing E-100SP indicates that a new duct bank is to be extended from an existing 480/277v Manhole to the new Electrical Room. Please confirm if the existing conduit before the manhole details that it is Existing Feeder 4A. Moreover, is the feeder existing from existing PH Switchboard to the existing manhole and at that point spliced to new conductors in the new duct bank; or, is the feeder new from Switchboard PH to the DP-G1 panel in ALF?	Will defer to the electrical contractor on the means and methods. If a splice is needed at this point or a continuous conductor run can be provided up to the Main Electrical Room shall be determined by the contractor.	10/30/2026	11/9/2026
538	28 3111	Please provide the manufacturer and system information for the Fire Alarm Radio Alarm Transmitter (RAT) detailed in the Fire Alarm riser and floor plan.	Provide Keltron LS NET9000 transceiver to tie into the existing SI Keltron system.	10/30/2026	11/9/2026
539	0337713, 121423	Ref. specification 033713 and 121423. Please confirm if Elite Concrete Solutions. can be approved as an equal to the listed manufacturers and installers for both the shotcrete and simulated nature. Please refer to attached product data for more information.	Preferred vendors are listed in the specifications. Qualifications of any additional vendors will be reviewed post award per division 01000.	10/30/2026	11/9/2026
540	EX-601SH, 119013, 119014	Reference EX-601SH, 119013 and 119014. The caging specifications call for stainless steel mesh as part of the animal caging, but the schedule on EX-601SH calls for galvanized steel. Please confirm which finish material is required for the mesh for the animal caging.	Stainless steel is confirmed.	10/30/2026	11/9/2026
541	Bid Schedule	Please confirm that the general contractor's P&P and GL costs should be included as part of the "Bonds and Insurance" line item in the bid schedule or if this line item should also include the subcontractors' insurance costs. Alternatively, subcontractor insurance costs could be included in their respective trade cost line item.	Confirmed. The subcontractor insurance cost should be carried in their respective trade cost line items.	10/30/2026	11/9/2026
542	Bid Schedule	Please confirm the general contractor's builder's risk costs should be included in the "Bonds and Insurance" line item on the bid schedule.	Confirmed	10/30/2026	11/9/2026
543	Bid Schedule	Please confirm the intent for the "Home Office Overhead" line item on the bid schedule. Please clarify which costs should be reflected here that wouldn't be reflected as part of "General Reqs / General Conditions" or "Profit / Fee".	Bidders shall breakout their home office OH separate from their General Conditions cost.	10/30/2026	11/9/2026
544	C-153SP, S-101FP, EX-114SP, EX-525DT	Reference C-153SP, S-101FP, EX-114SP, and EX-525DT. The exhibit drawings provide a section through the W3 seat wall and show a concrete seat wall with integral color and radiused corners. The structural drawings, however, do not show this W3 seat wall nor provide a detail. Please provide a structural detail for this wall.	See section 2/EX-525DT in updated 100% Final Drawings issued in Amendment 4 for detail.	10/30/2026	11/9/2026
545	100% Final Specs Section12 1423	Reference 121423. Section 1.5 lists 3 acceptable fabricators and installers (Cost of Wisconsin, Edge Concrete, Nassal Company); however, section 2.1 lists only 1 acceptable fabricator and installer (Cemrock). Please confirm all 4 companies listed are acceptable for all scope within this specification section.	All 4 companies are acceptable for all scope in this specification section.	10/30/2026	11/9/2026

PN 2533105 RENEW ARABIAN LEOPARD FACILITY: PHASE 2 HABITATS & ANIMAL CARE BUILDING TECHNICAL & PRICING PACKAGES - REQUESTS FOR INFORMATION (RFI)					
RFI No.	**Reference / Source**	**Question**	**Response**	**Date In**	**Date Out**
546	100% Final Dwgs Sheet C-161UP, C-162UP and C-166UP	Please confirm the intended pipe size for the locations identified below. The referenced drawings indicate a 3" DIP connection to the hose bibs and animal drinkers, which appear oversized for these fixtures. Please confirm that the indicated 3" DIP pipe sizes are correct. o Drawing C161UP: Note W27 indicates a 3" DIP connection to HB (hose bib). o Drawing C162UP: Note W29 indicates a 3" DIP connection to HB (hose bib). o Drawing C166UP: Note W27 indicates a 3" DIP connection to an animal drinker.	The intention is that the distribution network/loop is to be 3" DIP (Waterline 'E'). The lines drawing from this loop that are serving each individual hose bib are intended to be 1" K Copper. 1) Waterline O: Assume a 3"x3" tee. Then there will need to be a reducer from 3" down to 1" that will also have to be an adapter between DIP and K Copper. 2) Waterline E.2 past the Cross with Waterline E: Assume a 3"x3" cross. Then there will need to be a reducer from 3" down to 1" that will also have to be an adapter between DIP and K Copper. 3) Waterline F: Assume a 3"x3" tee. Then there will need to be a reducer from 3" down to 1" that will also have to be an adapter between DIP and K Copper.	11/6/2026	11/9/2026
547	NA	Due to limited access to the site, trucks will need to move across the Olmsted walk from the bus lot to the construction entrance. Confirm that portions of the Olmsted Walk that will receive significant vehicle traffic can have protection placed over it for the duration of construction. If protection is not allowed, confirm that the contractor will not be liable for damage to the Olmsted walk outside of the limits of work due to normal delivery traffic into the construction site.	Protection will be allowed on Olmsted walk, but not for duration of the project. Contractor will be responsible for any damages. Goal is to have deliveries in and out during non-public hours.	11/6/2026	11/9/2026
548	NA	During periods of high volumes of deliveries to the site, such as when pouring concrete, timely completion of the project will depend on a smooth and steady flow of traffic into the side [site]. Confirm that during such times, some portion of the bus lot or North Road will be available for staging delivery vehicles? If so, which portions of the Bus Lot or North Road can be used? Per pre-bid RFI #34, what process must be followed to receive an exception to allow deliveries during visitor hours?	Yes, some potion of the bus lot or North Road will be available for staging delivery vehicles. Coordinate with COTR as needed.	11/6/2026	11/9/2026
549	100% Final Dwgs Sheet A-510DT & 100% Final Specs Sections 05 1200, 05 5000 and 05 7800	Sheet A510DT reference spec section 057800. Spec Section 057800 is not issued with the 100% Specification set. Which section should these callouts refer to? Additionally, callouts on other sheets for the Plaza Shade Structure reference Specification Sections 051200 and 055000. These two sections do not mention the plaza shade structure or it's components. Please issue a spec for Decorative Metal Battens and HSS components of the Plaza Shade Structure and the Overlook Shade Structure.	Refer to RFI response 246.	11/6/2026	11/9/2026
550	NA	Given the minimal laydown area and tight logistics of the site, will it be possible to place a field office outside of the site fencing?	See response to pre-bid RFI 416. Preferred location is within the site fencing, but other locations can be considered subject to review and authorization by Smithsonian.	11/6/2026	11/9/2026
551	65% Specs Sections 08 8813, 08 8853, 13 3120 and 22 1313	The following specification sections were included in the 65% documents but didn't carry over to the 100% documents, and their removal has not been addressed in other pre-bid RFIs or Amendments: 088813, 088853, 133120, 221313. Please clarify the need for these spec sections on this project.	-088113 Glass Viewing Panels - integrated into 088000 Glazing - 088853 Security Glazing - integrated into 088000 Glazing - 133120 Cable Supported Mesh Structures - 133100 Special Structures was appropriate section (both 65% and Final CDs) and 133120 was a duplicate section in 65%CDs. - 221313 Facilitiy Sanitary Sewers - moved to 333000 Sanitary Sewerage Utilities	11/6/2026	11/9/2026
552	65% Specs Section 07 7253	The Snow hooks in the 100% documents replaced the 65% Spec Section 077253 – Snow Guards. Please provide specifications for the snow hooks.	Refer to RFI response 59. This information can be found in 07 3116 Metal Shingle specification.	11/6/2026	11/9/2026

SIGN-IN SHEET

Project: NZP Construct Arabian Leopard (ALF) Phase 2	**Meeting Date:** September 18, 2026
Facilitator: Ryan Swanier	**OPDC#** 2533105

Name	*Email*	*Company*	*Phone*	*Time*
Ryan Swanier	*swanierr@si.edu*	*SI*	*2023940448*	*9:00 AM*
Chris Borzi	ChrisBorzi@agrow-llc.com	AES	240-695-3160	11
Eric Hartlove	eric.hartlove@whiting-turner.com	WT	240 372 8594	
Tony Magnolia	tmagnolia@josephjm.com	Joseph J. Magnolia Inc	202-457-3565	
Ryan Mellen	rmellen@consigli.com	Consigli	774 278 4243	
Christa Imada	cimada@aquafied.com	Aquafied	(301) 540-8889	
Adam Garland	AGarland@Lessard.com	Lessard	508-767-0594	
Sean Moynihan	SMoynihan@Lessard.com	Lessard	240-95-8096	
Lauren Hoffer	LHoffer@Lessard.com	Lessard	202-941-6237	
Brandon Welch	Bwelch@Welchandsons.com	W&R	202-815-7881	
Jonathon Tackett	jonathontackett@gruley.com	Gruley	301-775-2785	
Ryan Garland	RyanGarland@gruley.com	Gruley	240-399-6137	
Maria Ferraccio	mferraccio@century-concrete.com	Century	703-674-6019	
Tyler Schepers	tschepers@kellyelectric.com	Kelly Electric	240 524 1262	

SIGN-IN SHEET

Project: NZP Construct Arabian Leopard (ALF) Phase 2	**Meeting Date:** September 18, 2026
Facilitator: Ryan Swanier	**OPDC#** 2533105

Name	*Email*	*Company*	*Phone*	*Time*
Ryan Swanier	*swanierr@si.edu*	*SI*	*2023940448*	*9:00 AM*
Micah Strickland	Micah.Strickland@pyrbarkers.com		3015360344	
JOHN AKERS	JAKERS@STONHARD.COM	STONHARD	410-218-7511	
Peter Scarborough	Peter.Scarborough@keller-na.com	Keller	410-808-0114	9 AM
Maddie Patterson	mpatterson@pioneerroofing.com	Pioneer Roofing	703-835-4628	
AJ Hannon	alexanderhannon@uepmech.com	UEP Mech	443-570-0475	9 Am
DAVE HANDZO	davehandzo@UEPMECH.com	UEP MECH	3014585655	9AM
MICHAEL STRUNIAK	MSTRUNIAK@CORESECURE-LLC.com	CORE	5715792963	9AM
JASON TIBBETTS	JTIBBETTS@CORESECURELLC.com	CORE	703-708-5198	9AM
JARED PAYNE	jpayne@starelectricmd.com	Star Electric	410-585-4334	9am
Alberto Moreno	morenoca@si.edu	SI	832-526-4341	9 am
Grace Ellison	grace.ellison@whit	WT	(227)249-3857	9am
Oyindamola Dada	oyindamola.dada@whiting-turner.com	WT	3015372775	9:00 AM
Jack Drexel	jack.drexel@whiting-turner.com	WT	301-275-6755	9:00 AM
KRISTOFER	KRISTOFER@CLARKFOUNDATIONS LLC.COM	CF	202-345-5590	9:00 AM

SIGN-IN SHEET

Project: NZP Construct Arabian Leopard (ALF) Phase 2	**Meeting Date:** September 18, 2026
Facilitator: Ryan Swanier	**OPDC#** 2533105

Name	*Email*	*Company*	*Phone*	*Time*
Ryan Swanier	*swanierr@si.edu*	*SI*	*2023940448*	*9:00 AM*
DARIUS KUBICEK	DKUBICEK@BERKEL AMERICA.COM	BERKEL	410-215-5178	"
Steve Hoover	shoover@berkelandcompany.com	Berkel	443-253-4871	
MACK EDSALL	MEdsall@FLIPPO.com	FLIPPO	443-262-5927	
Jason Hawkins	JHawkins@constructionTradeservice.com	CTS	3017489129	
Mike Kenyon	MKenyon@Vistatech.biz	Vistech	703-372-2458	
JORGE CONTRERAS	Jcontreras@atlasfoundations.com	ATLAS	3013954965	
RYAN GARLAND	RYANGARLAND@GRUNLEY.com	GRUNLEY	240-899-6137	
Ellie Parson	elleparson@grunley.com	Grunley	9142681063	
Christopher Hall	christopher.Hall@siemens.com	Siemens	2404847079	
Mark Neil	MNeil@DenverElek.com	Denver-Elek	410-957-9535	
Matt Stoner	mstoner@ndg1.com	NDG	8047615272	
DEVAN HARE	devan.hare@brightview.com	BRIGHTVIEW	443-603-3193	
HEATH Yancey	hyancey1@verizon.net	Yancey Roofing	301-704-9308	
DAVID ALEXANDER	daalexander@fidelity-ps.com	FIDELITY POWER	410.365.2433	
Fallon Francisco	ffrancisco@kge.com	KGE	4437210127	
Kate Carlson	Kcarlson@kge.com	KELLY GEN		
SIXTO FERNANDEZ	S.FERNANDEZ@SCHINDLER.com	SCHINDLER	202-748-2291	

~~Peter Scarborough~~