MEP REFERENCE DRAWINGS - 3RD FLOOR BATHROOM

Response attachment to Request for Information No. 1 (MEP Drawings)

Project

561-26-104 Repair OR Floor and Bathroom Leaks

Notes

1. These drawings are from prior project 561-14-106, which renovated this bathroom. They are the latest and only MEP drawings available. The only as-built information available is the field-marked plumbing plan on packet page 13.


2. All drawings are for reference only and may not reflect current field conditions. The Contractor shall field-verify all existing MEP conditions, dimensions and system locations affecting the work, shall include all MEP modifications associated with the specified work, and shall prepare all required coordination and shop drawings in accordance with the SOW.

3. The general notes and key notes shown are from the previous project. Not all of them, and possibly none, apply to this project; they are provided in case they are helpful. The SOW and project specifications govern. Sheets referenced within the excerpts are not part of this packet.


Contents

Architectural - plan, interior elevations, notes	p. 2-4
Plumbing - plan, risers, notes	p. 5-7
Mechanical - plan, notes	p. 8-9
Electrical - plan, notes	p. 10-12
Field-Marked As-Built - Plumbing	p. 13

ARCHITECTURAL - FLOOR PLAN

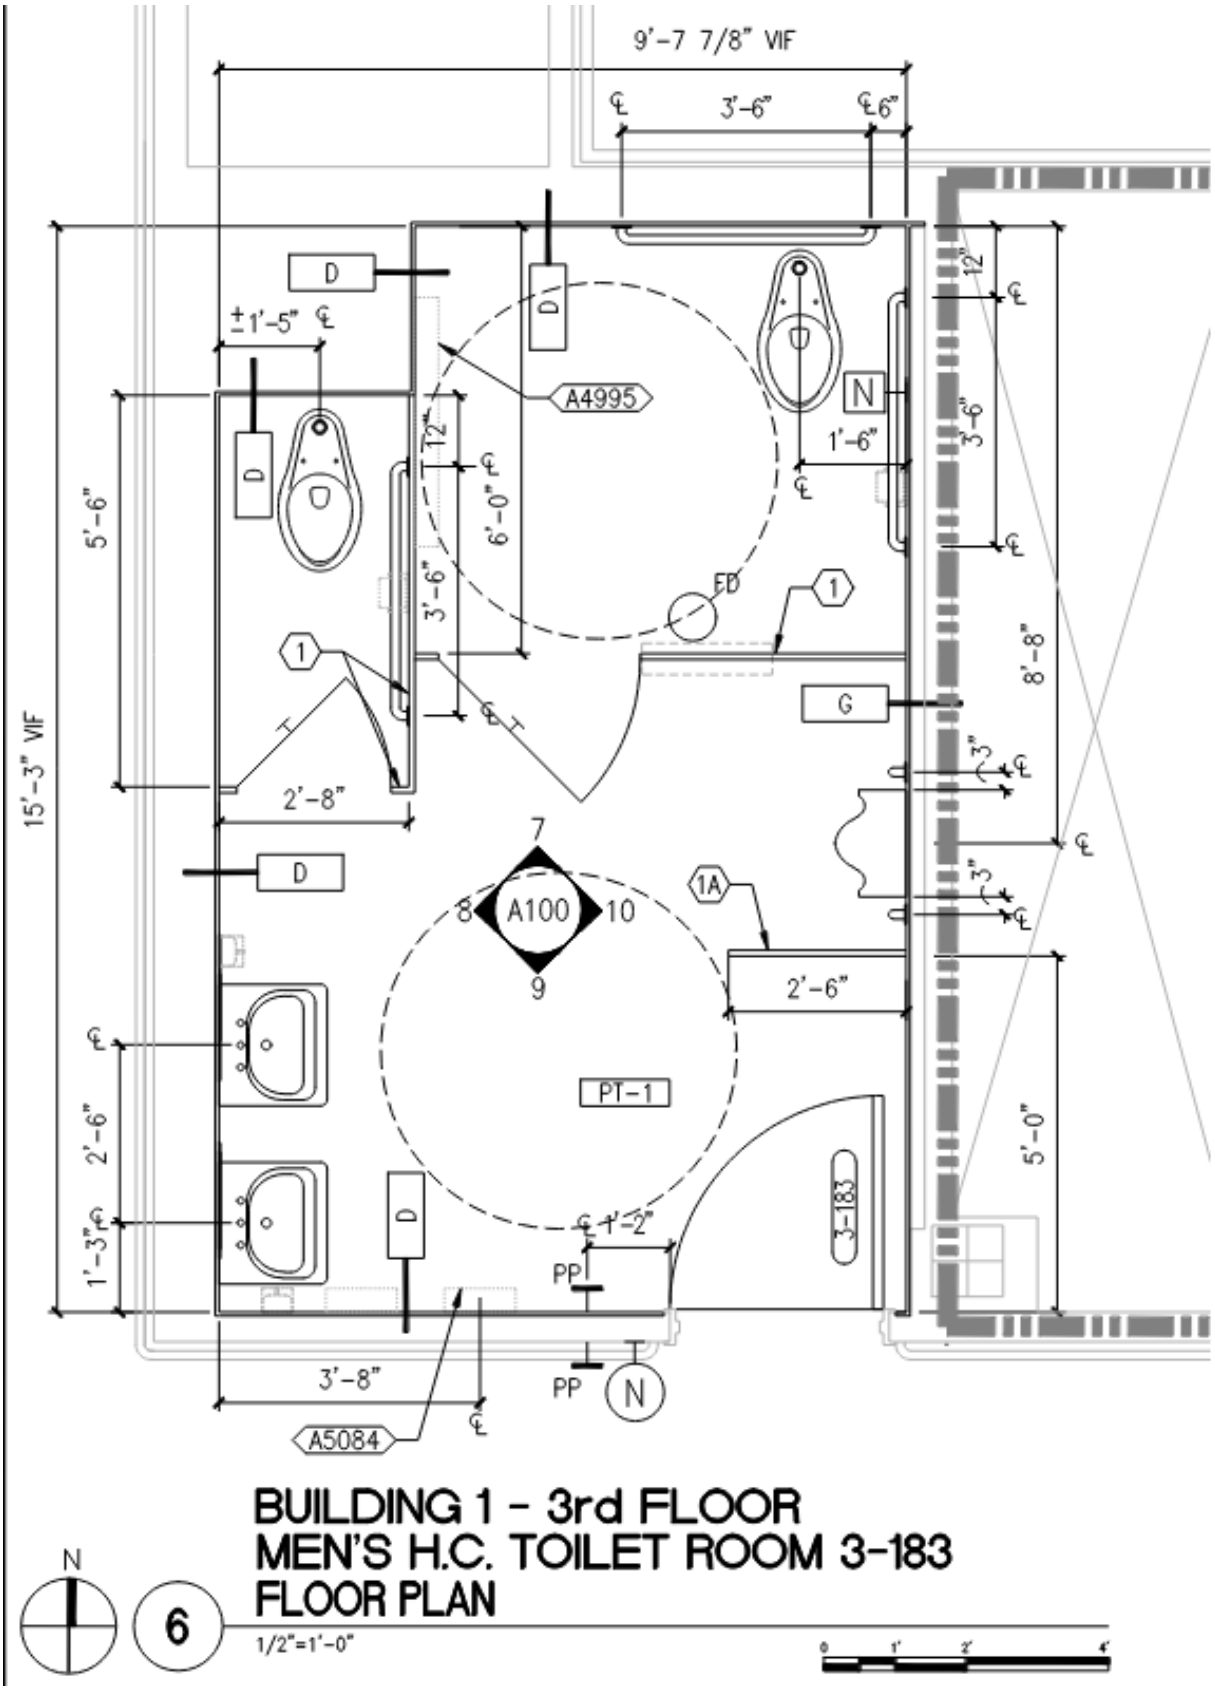

ARCHITECTURAL - INTERIOR ELEVATIONS

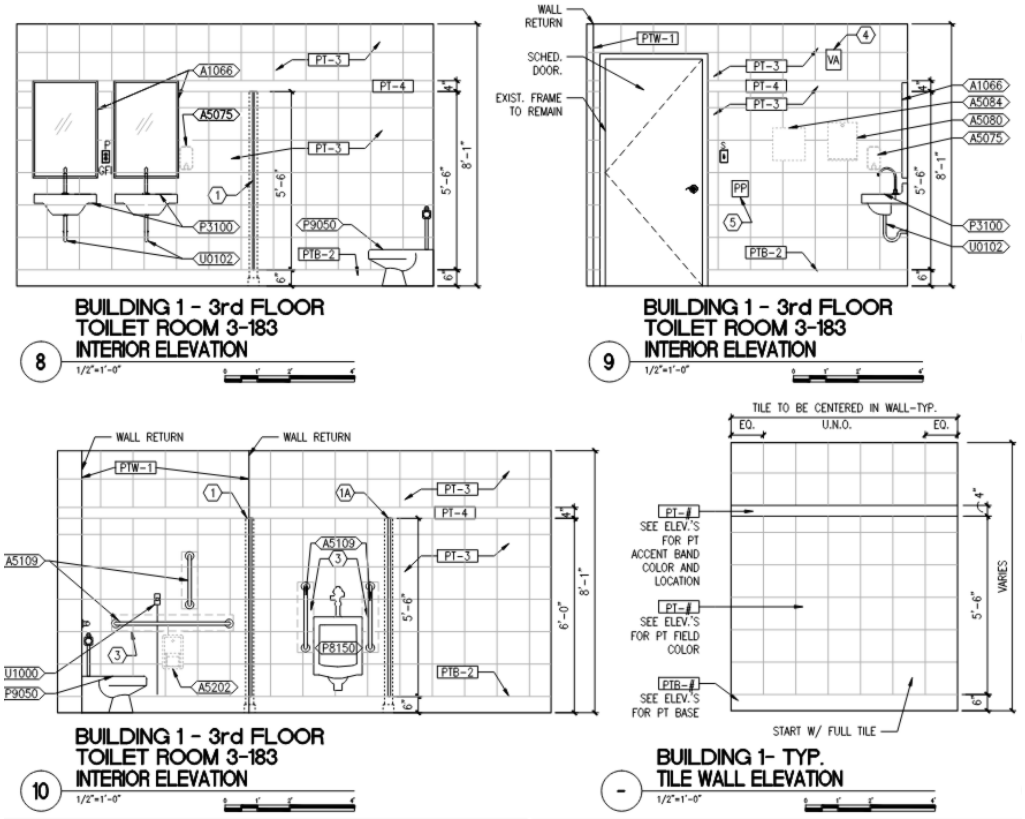


BUILDING 1 - 3rd FLOOR
TOILET ROOM 3-183
INTERIOR ELEVATION
8 1/2"=1'-0"

BUILDING 1 - 3rd FLOOR
TOILET ROOM 3-183
INTERIOR ELEVATION
9 1/2"=1'-0"

BUILDING 1 - 3rd FLOOR
TOILET ROOM 3-183
INTERIOR ELEVATION
10 1/2"=1'-0"

BUILDING 1- TYP.
TILE WALL ELEVATION
- 1/2"=1'-0"

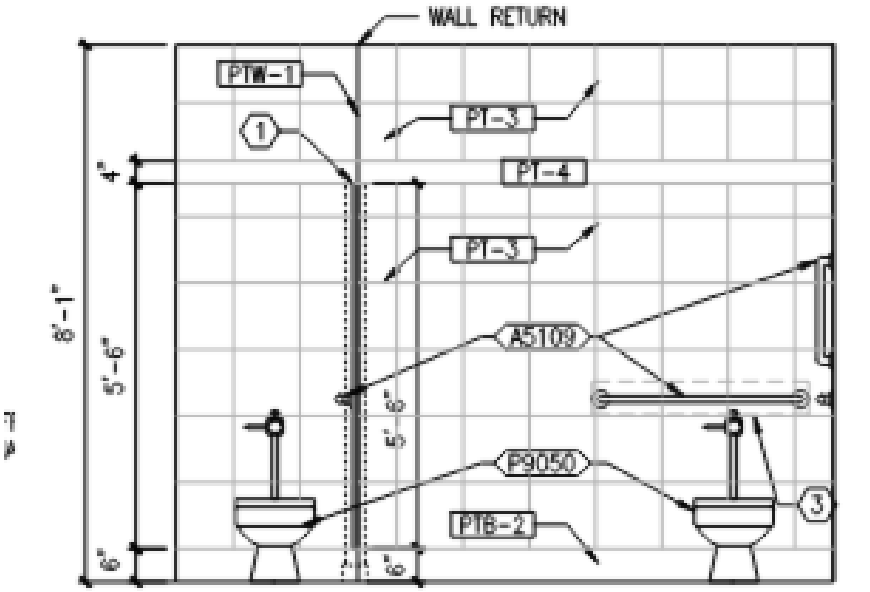

BUILDING 1 - 3rd FLOOR
TOILET ROOM 3-183
INTERIOR ELEVATION
7 1/2"=1'-0"

ARCHITECTURAL - NOTES

GENERAL INTERIOR ELEVATION NOTES


A. REFER TO SHEET GI004 FOR INTERIOR ELEVATION LEGEND.
B. REFER TO SHEETS GI001 FOR GENERAL NOTES.
C. REFER TO SHEET GI005 FOR TYPICAL MOUNTING HEIGHTS AND GRAB BAR SIZES.
D. REFER TO SHEET A501 FOR TYPICAL WALL TYPES.
E. REFER TO SHEET A502, A503 FOR TYPICAL DETAILS.
F. REFER TO SHEET A601 FOR DOOR SCHEDULE.
G. REFER TO SHEET I601 FOR ROOM FINISH SCHEDULE AND ROOM FINISH LEGEND.
H. REFER TO SHEET I602 FOR FURNITURE AND EQUIPMENT SCHEDULE.
I. REFER TO SHEET I603 FOR INTERIOR ROOM SIGNAGE SCHEDULE AND DETAILS.
J. REFER TO SHEETS IF100 THRU IF102 FOR FLOOR FINISH PLANS.
K. REFER TO SHEET PLUMBING (P) SHEETS FOR PLUMBING FIXTURES.
L. REFER TO MECHANICAL (M) SHEETS FOR MECHANICAL EQUIPMENT.
M. REFER TO ELECTRICAL (E) SHEETS FOR ELECTRICAL EQUIPMENT.
N. PROVIDE 8" X 20 GAUGE CONTINUOUS BACK-UP BLOCKING PLATES SECURELY ANCHORED WITH FLAT HEAD SCREWS OVER METAL STUDS BEHIND ALL TOILET ACCESSORIES, BASE CABINETS, WALL CABINETS, MILLWORK, SHELVING, VISUAL DISPLAY BOARDS, WALL/HANDRAIL (NEW WALLS) AND ALL OTHER SURFACE MOUNTED ITEMS. REFER TO DETAIL ON SHEET A501.
O. PROVIDE CLEARANCE BETWEEN LAVATORY FAUCETS AND MIRROR ABOVE. REFER TO GI005.
P. PROVIDE CERAMIC BACKER BOARD, AT ALL WALLS TO RECEIVE FULL HEIGHT PORCELAIN TILE WALL FINISH, OVER EXISTING METAL STUDS.
Q. REFER TO CEILING PLANS FOR LOCATION OF NURSE PULL CORD LOCATION.
R. ALL INTERIOR WALL CORNERS WITH PORCELAIN TILE FINISH TO HAVE VERTICAL STAINLESS STEEL TRANSITION TRIM. REFER TO ROOM FINISH SCHEDULE AND DETAILS ON SHEET A503.
S. ALL OUTSIDE CORNERS WITH PORCELAIN TILE FINISH SHALL HAVE VERTICAL STAINLESS STEEL PROTECTION. REFER TO RM. FINISH SCHEDULE AND DETAILS ON SHEET A503.
T. ALL FLOOR/WALL TILE SHALL BE CENTERED IN THE FLOORS/WALLS (CORNER TO CORNER). SEE TYP. WALL TILE ELEVATION ON DRAWINGS FOR INFORMATION.
U. WALL BASE TILE TO ALIGN WITH WALL TILE.

⟨X⟩ TOILET ROOM PLAN AND INTERIOR ELEVATION KEY NOTES

NOT ALL NOTES APPLY TO EVERY DRAWING.

1. FLOOR MOUNTED TOILET PARTITION. SEE ROOM FINISH LEGEND.
1A. FLOOR MOUNTED PRIVACY SCREEN. SEE ROOM FINISH LEGEND.
1B. WALL MOUNTED URINAL SCREEN. SEE ROOM FINISH LEGEND.
2. SIDE GRAB BAR TO BE MOUNTED TO FLOOR AT RADIATOR LOCATIONS ONLY.
3. CONTINUOUS 8" HIGH, 20 GAUGE SHEET METAL BACKING PLATE BEHIND LOCATIONS OF WALL MOUNTED ACCESSORIES (TYP). REFER TO DETAIL ON SHEET A501.
4. WALL MOUNTED FIRE ALARM DEVICE. SEE ELECTRICAL DRAWINGS FOR COMPLETE INFORMATION.
5. ADA COMPLIANT AUTOMATIC DOOR OPERATOR, REFER TO DOOR SCHEDULE SHEET A601.
6. NEW RADIATOR COVER TO REPLACE AND MATCH EXISTING.
7. ELECTRIC UNIT HEATER. SEE ELECTRICAL DWGS FOR ADDITIONAL INFORMATION.
8. PATCH AND REPAIR WALL WITH NEW METAL STUDS AND GYPSUM BOARD. REFER TO WALL PARTITION TYPE.
9. NEW DOUBLE SASH STORM WINDOW TO BE INSTALLED AND MECHANICALLY FASTENED TO NEW SOLID SURFACE SILL, RETURNS AND HEAD.
10. NEW SPANDREL PANEL TO BE INSTALLED IN EXISTING WINDOW UNIT.
11. WALL MOUNTED SHOWER SEAT.
12. INSTALL NEW BREAK METAL COVER (TO MATCH EXISTING REMOVED). COLOR TO MATCH NEW RADIATOR COVER.
13. DASHED RECTANGLE INDICATES AREA WHERE EXISTING RECESSED CONVECTOR UNIT HAS BEEN REMOVED. OPENING TO BE INFILLED WITH WALL CONSTRUCTION AND INSULATION TO MATCH EXISTING. PREPARE SURFACE TO RECEIVE NEW WALL FINISH.
14. PUSH PLATE TO REMAIN TO BE CONNECTED TO EMERGENCY POWER FOR CONTINUED USE DURING POWER OUTAGE. REFER TO ELECTRICAL DRAWINGS.
15. OUTSIDE CORNERS OF EXPOSED COUNTERTOPS TO HAVE 1" RADIUS.
16. PATCH/PAINT WALLS AT WINDOW ALCOVE.

PLUMBING - PLAN

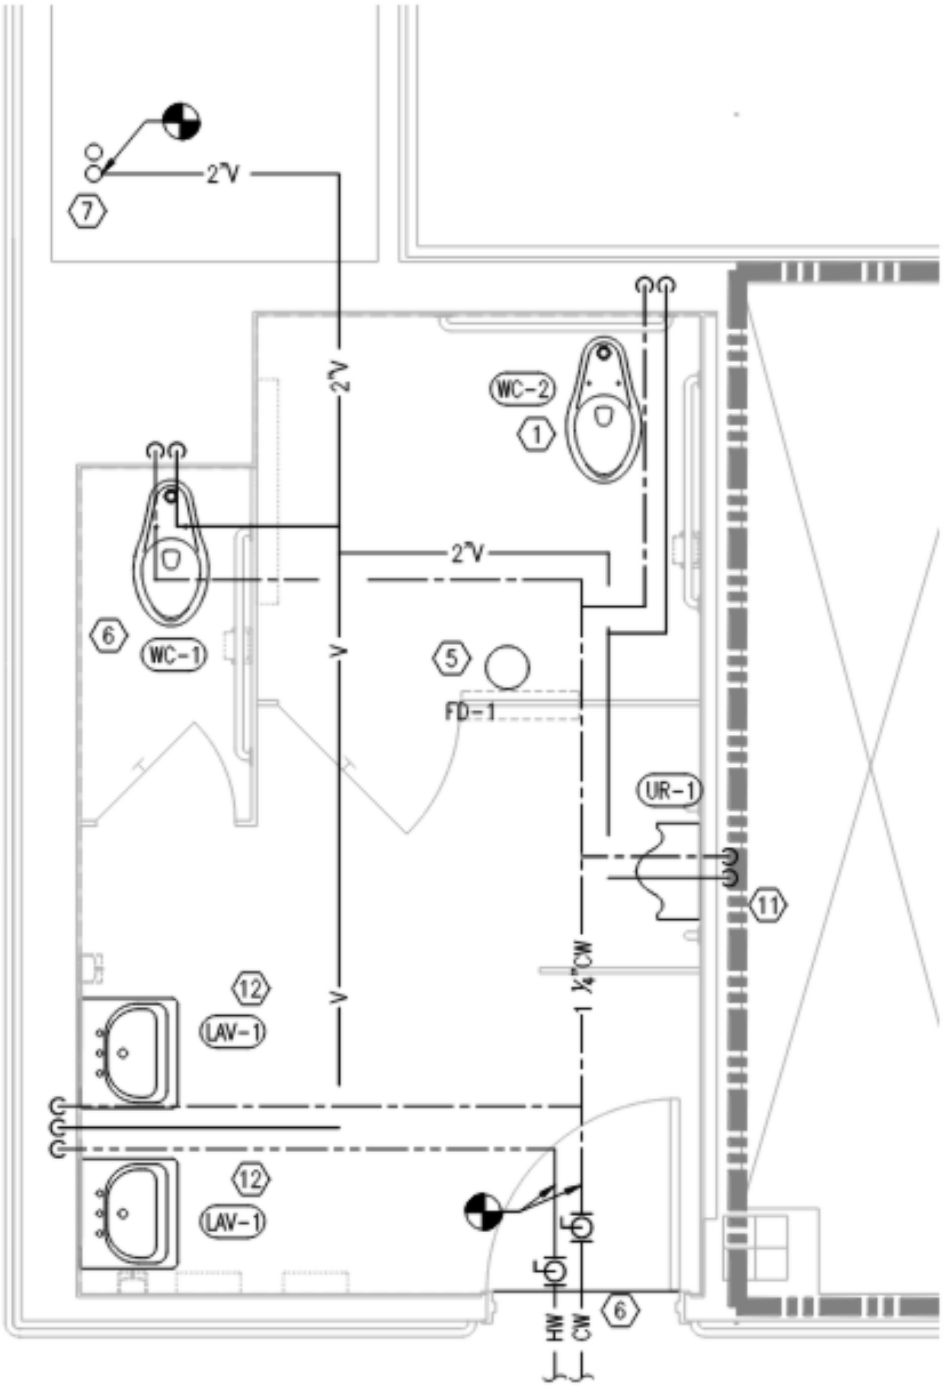


N

2


BUILDING 1 - 3rd FLOOR
MEN'S H.C. TOILET ROOM 3-183
PLUMBING PLAN

1/2"=1'-0"

PLUMBING - RISER DIAGRAMS

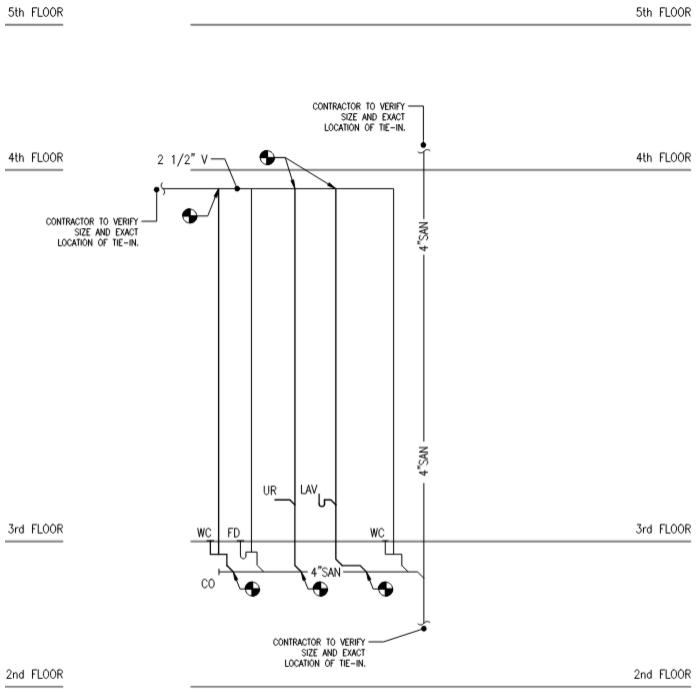

BUILDING 1 - 3rd FLOOR
MEN'S TOILET ROOM 3-183
NEW WORK RISER DIAGRAM
4 NTS

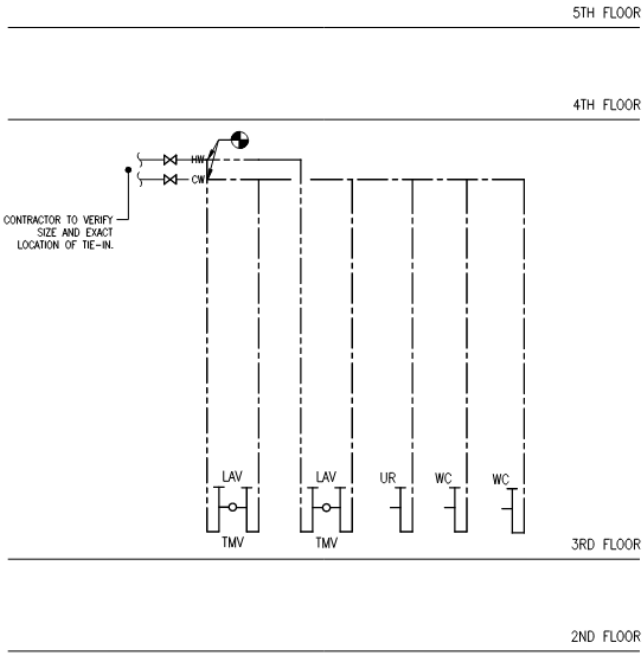

BUILDING 1 -3rd FLOOR
MEN'S H.C. TOILET ROOM 3-183
NEW WORK PLUMBING PLAN
4 NTS

PLUMBING - NOTES

GENERAL PLUMBING NOTES

A. ALL ASSOCIATED PIPING SHALL INCLUDE BUT NOT BE LIMITED TO COLD WATER, HOT WATER, HWC, SANITARY WASTE AND VENT PIPING.

B. PROJECT AREA MAY CONTAIN CONCEALED AREAS OF ACM PIPING INSULATION. DEMOLITION CONTRACTOR SHALL TAKE CARE DURING WORK NOT TO DISTURB ASBESTOS PIPE INSULATION. ALL INSULATION THAT IS NOT CORK, FOAM OR FIBERGLASS SHOULD BE ASSUMED TO BE ASBESTOS CONTAINING. WHERE ASBESTOS CONTAINING MATERIAL IS FOUND, REFER TO HAZARDOUS MATERIAL DRAWINGS AND ABATEMENT SPECIFICATIONS FOR PROPER REMOVAL.

C. REFER TO PLUMBING FIXTURE ROUGH-IN SCHEDULE FOR BRANCH CONNECTION TO FIXTURE.

D. ALL PIPING TO BE 3/4" MINIMUM UNLESS OTHERWISE NOTED.

E. ALL HORIZONTAL DRAINAGE PIPING 4" OR LARGER SHALL BE PITCHED A MINIMUM OF 1/8" PER FOOT.

F. NO PIPING SHALL BE CONNECTED TO EXISTING CORK LINED PIPING.

G. ROUTE ALL PIPING AT EXTERIOR WALLS ON THE INTERIOR SIDE OF THE WALL INSULATION TO PREVENT PIPES FROM FREEZING.

H. SANITARY DOUBLE CROSS TEES SHALL NOT BE ALLOWED.

I. ALL SHUT-OFF VALVES SHALL BE LOCATED IN ACCESSIBLE CEILING AND LABELED PER SPECIFICATIONS.


J. ALL FAUCETS SHALL HAVE THERMOSTATIC MIXING VALVES INSTALLED TO PREVENT SCALDING.

K. ALL WATER CLOSETS TO BE PROVIDED WITH A WATER HAMMER ARRESTOR: PRE-CHARGED BELLOWS TYPE, STAINLESS STEEL CONSTRUCTION. CERTIFIED ANSI A112.26.1.M, ASSE 1010, AND PDI. BOD MANUFACTURER: ZURN MODEL Z1700 OR APPROVED EQUAL.

⟨X⟩ PLUMBING KEY NOTES

1. CONTRACTOR TO PROVIDE FLOOR MOUNTED WATER CLOSET IN THE SAME LOCATION. REWORK AND REROUTE PIPING TO ACCOMMODATE PLUMBING FIXTURE.
2. CONTRACTOR TO PROVIDE URINAL WITH SUPPORT IN THE AS SHOWN ON ARCHITECTURAL DRAWINGS. REFER TO PLUMBING MATERIAL LIST FOR MORE INFORMATION.
3. CONTRACTOR TO PROVIDE LAVATORY WITH SUPPORT AS SHOWN ON ARCHITECTURAL DRAWINGS. REFER TO PLUMBING MATERIAL LIST FOR MORE INFORMATION.
4. FURNISH AND INSTALL PLUMBING FIXTURE AS SHOWN ON ARCHITECTURAL DRAWINGS. REWORK AND REROUTE PIPING TO ACCOMMODATE NEW PLUMBING FIXTURE LOCATION. REFER TO PLUMBING MATERIAL LIST FOR MORE INFORMATION.
5. CONTRACTOR TO PROVIDE NEW FLOOR DRAIN COVER TO MATCH EXISTING FLOOR DRAIN.
6. EXISTING PLUMBING RISERS/MAIN TO REMAIN. PROVIDE NEW SHUT-OFF VALVE AS SHOWN.
7. EXISTING PLUMBING RISERS/MAIN TO REMAIN.

MECHANICAL - PLAN

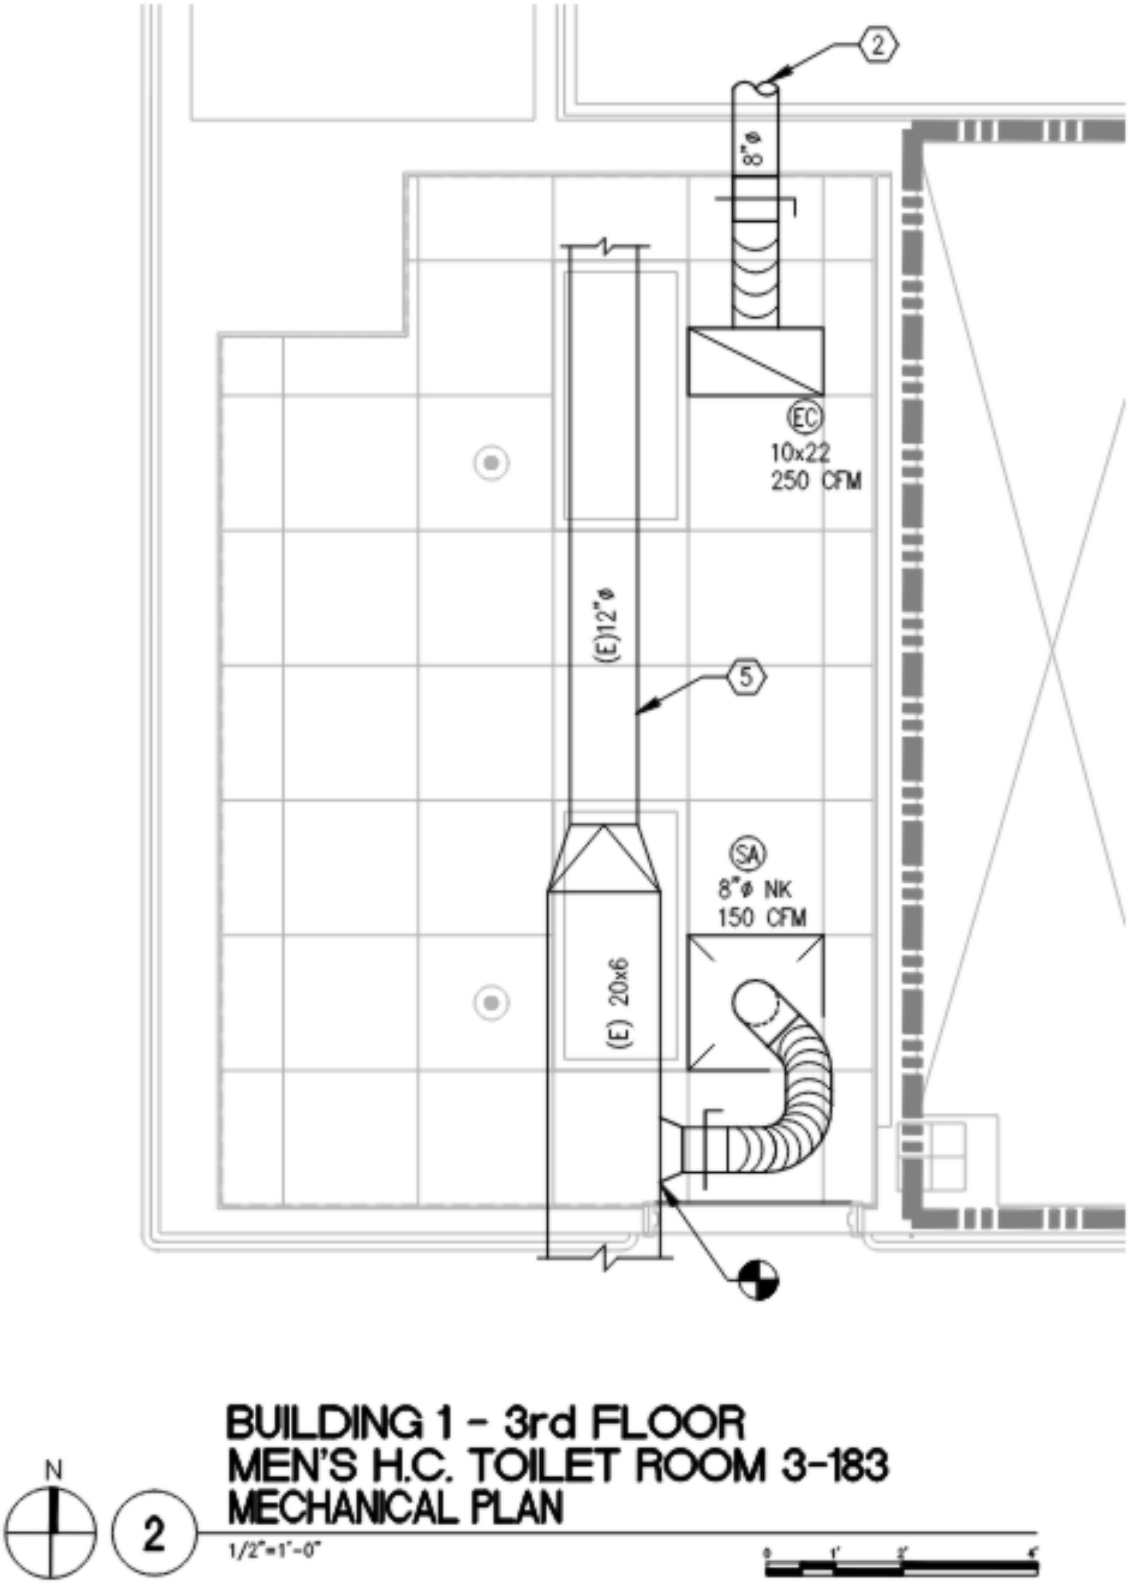

MECHANICAL - NOTES

GENERAL MECHANICAL NOTES

A. PROVIDE BALANCING DAMPERS AT ALL SUPPLY DIFFUSERS, RETURN GRILLES AND EXHAUST GRILLES.

B. COORDINATE CEILING MOUNTED GRILLES AND DIFFUSERS WITH SPRINKLER HEADS, LIGHTING FIXTURES AND ALL CEILING MOUNTED DEVICES. REFER TO ARCHITECTURAL CEILING GRID FOR COMPLETE INFORMATION.

C. DURING CONSTRUCTION, PROVIDE TEMPORARY CLOSURES ON ALL SUPPLY AND RETURN AIR DUCT OPENINGS BY SEALING WITH A DISPOSABLE POLYETHYLENE SHEETING TO PREVENT CONSTRUCTION DUST FROM ENTERING DUCTWORK SYSTEM OR AIR TERMINAL UNITS.

D. CONTRACTOR SHALL REPAIR AND/OR REPLACE ALL EXISTING SHEET METAL DUCTWORK AND PIPE INSULATION THAT BECOMES DAMAGED DURING CONSTRUCTION.


E. PROJECT AREA MAY CONTAIN CONCEALED AREAS OF ACM PIPING INSULATION. DEMOLITION CONTRACTOR SHALL TAKE CARE DURING WORK NOT TO DISTURB ASBESTOS PIPE INSULATION. ALL INSULATION THAT IS NOT CORK, FOAM OR FIBERGLASS SHOULD BE ASSUMED TO BE ASBESTOS CONTAINING. WHERE ASBESTOS CONTAINING MATERIAL IS FOUND, REFER TO HAZARDOUS MATERIAL DRAWINGS AND ABATEMENT SPECIFICATIONS FOR PROPER REMOVAL.

⟨X⟩ MECHANICAL PLAN KEY NOTES

NOT ALL NOTES APPLY TO EVERY DRAWING.

1. MAKE CONNECTION TO EXISTING SUPPLY MAIN. FIELD VERIFY EXACT LOCATION.
2. MAKE CONNECTION TO EXISTING EXHAUST MAIN. FIELD VERIFY EXACT LOCATION.
3. 12x10 UP TO EF-1 ON ROOF AND 10x8 DOWN TO CEILING BELOW.
4. EF-1 ON ROOF.
5. EXISTING DUCTWORK.
6. PROVIDE NEW COVER FOR EXISTING FINNED TUBE RADIATION. COORDINATE WITH ARCHITECTURAL DRAWINGS.
7. CAREFULLY REMOVE EXISTING SUPPLY AND EXHAUST GRILLES TO ALLOW FOR CEILING REMOVAL. RE-CONNECT GRILLES IN SAME LOCATION WHEN CEILING HAS BEEN RE-INSTALLED.

ELECTRICAL - PLAN

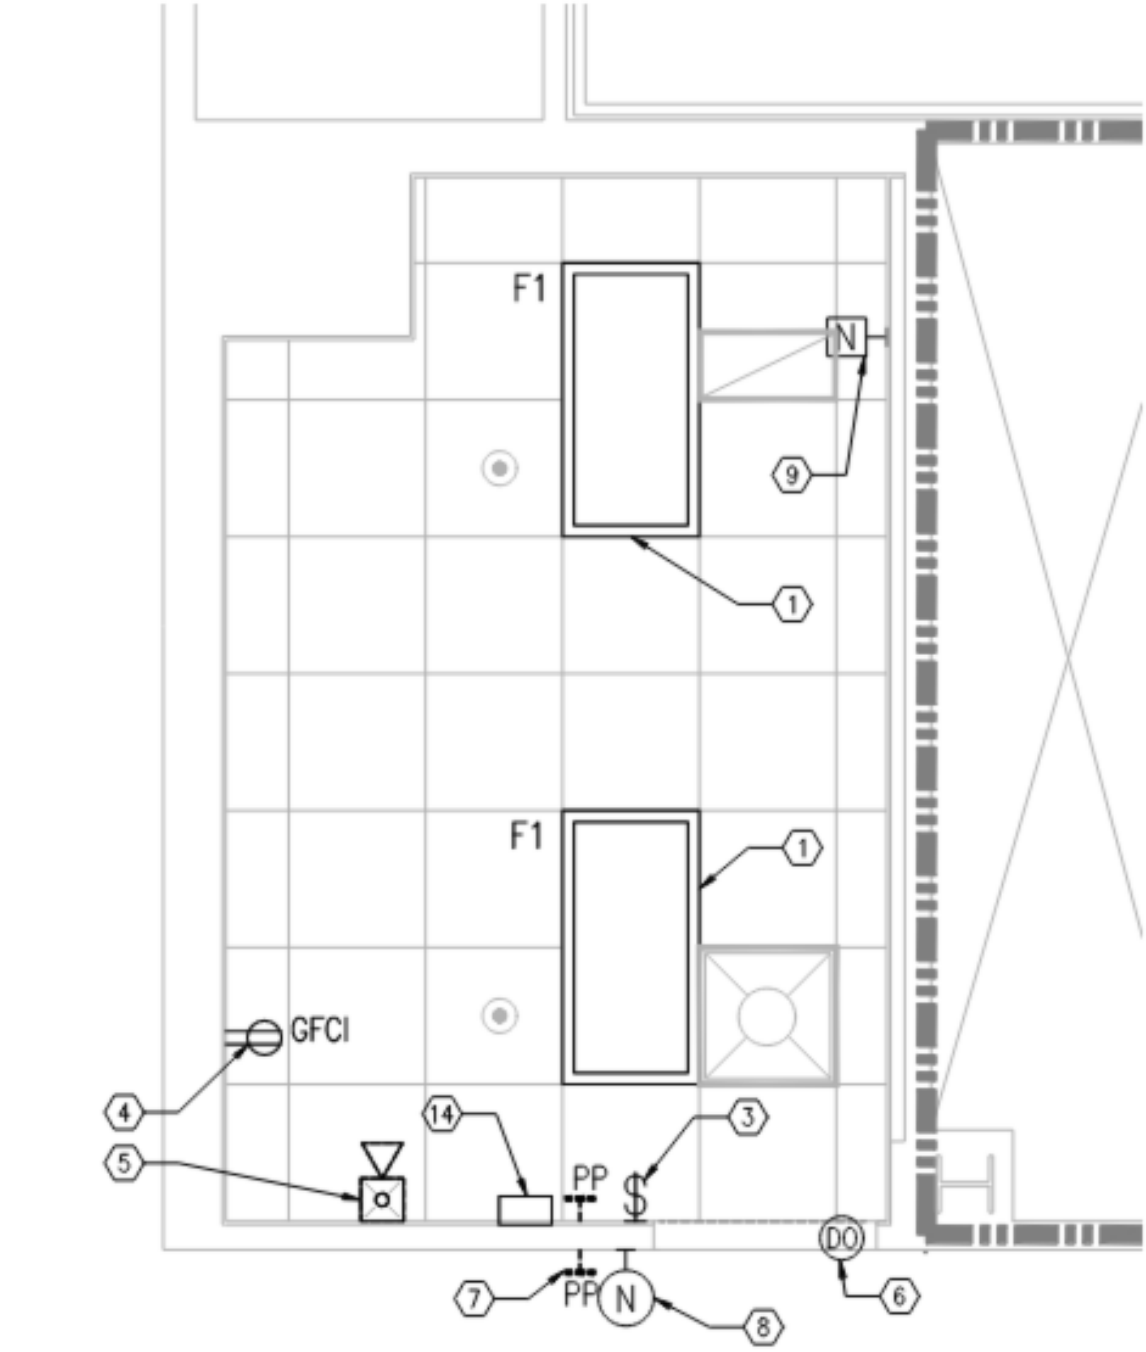

BUILDING 1 - 3rd FLOOR
MEN'S H.C. TOILET ROOM 3-183
ELECTRICAL PLAN
2
1/2"=1'-0"

ELECTRICAL - GENERAL NOTES

GENERAL ELECTRICAL NOTES

A. REFER TO DRAWING G1002 FOR GENERAL CONSTRUCTION AND FIRE AND SAFETY NOTES.
B. REFER TO ARCHITECTURAL DEMOLITION DRAWINGS FOR ADDITIONAL NOTES REGARDING SPECIFIED DEMOLITION WORK.
C. REFER TO ARCHITECTURAL DRAWINGS FOR ADDITIONAL NOTES REGARDING SPECIFIED NEW WORK.
D. REFER TO MECHANICAL SHEET M-601 FOR FAN AND UNIT HEATER SCHEDULE.
E. REFER TO ELECTRICAL SHEET E-002 FOR LIGHTING FIXTURE SCHEDULE.
F. WHEN WIRING FIRE ALARMS, COORDINATE WORK WITH CERTIFIED FIRE PROTECTION CONTRACTOR.
G. WHEN WIRING NURSE CALL SYSTEM COORDINATE WITH VA TO DE-ENERGIZE AND ENERGIZE SYSTEM.
H. RUN FIRE ALARM WIRING TO FIRE ALARM PANEL, AND LEAVE COILED. CERTIFIED FIRE PROTECTION CONTRACTOR WILL TERMINATE TO FIRE PANEL.
I. IF NEW TERMINATION POINTS ARE REQUIRED IN FIRE ALARM PANEL, THEY SHALL BE INSTALLED BY A CERTIFIED FIRE PROTECTION CONTRACTOR.

ELECTRICAL - KEY NOTES

⟨X⟩ ELECTRICAL PLAN KEY NOTES

NOT ALL NOTES APPLY TO EVERY DRAWING.

1. NEW RECESSED LED LIGHTING FIXTURE. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATION. CONNECT TO EXISTING TOILET LIGHTING CIRCUIT OF ADEQUATE CAPACITY IN THIS AREA. EXTEND CONDUIT AND WIRING AS REQUIRED.
2. NEW RECESSED CEILING ELECTRIC UNIT HEATER.
3. NEW LIGHT SWITCH FOR CONTROL OF ALL LIGHT FIXTURES IN THIS AREA. REFER TO ARCHITECTURAL ELEVATIONS FOR EXACT LOCATION. CONNECT TO EXISTING TOILET LIGHTING CIRCUIT OF ADEQUATE CAPACITY IN THIS AREA. EXTEND CONDUIT AND WIRING AS REQUIRED.
4. NEW GROUND FAULT INTERRUPTER TYPE DUPLEX RECEPTACLE. REFER TO ARCHITECTURAL ELEVATIONS FOR EXACT LOCATION. CONNECT TO EXISTING TOILET RECEPTACLE CIRCUIT OF ADEQUATE CAPACITY IN THIS AREA. EXTEND CONDUIT AND WIRING AS REQUIRED.
5. NEW RECESSED FIRE ALARM VISUAL SIGNALING DEVICE. CONNECT TO EXISTING FIRE ALARM SYSTEM. EXTEND CONDUIT AND WIRING AS REQUIRED. ENSURE THAT CONTINUITY OF EXISTING FIRE ALARM SYSTEM IS MAINTAINED.
6. NEW AUTOMATIC DOOR OPERATOR. THE ELECTRICAL CONTRACTOR SHALL PROVIDE NEW 120-VOLT, 20A. 1P. CIRCUIT TO THIS LOCATION FROM NEAREST 120/208 VOLT PANEL OF ADEQUATE CAPACITY. CONNECT TO SPARE CIRCUIT BREAKER IN EXISTING PANEL. IF NO SPARE CIRCUIT BREAKERS ARE AVAILABLE, PROVIDE NEW CIRCUIT BREAKER (MATCH EXISTING) IN EXISTING SPACE. INSTALL AND WIRE PUSH PLATES FURNISHED WITH UNIT (SEE KEY NOTE #6).
7. NEW DOOR OPERATOR PUSH PLATE ACTIVATOR. INSTALL AND WIRE PER MANUFACTURER'S SPECIFICATIONS.
8. NEW LOCAL NURSE CALL DOME LIGHT. CONNECT TO UNSWITCHED TOILET LIGHTING CIRCUIT AND WIRE PER MANUFACTURER'S SPECIFICATIONS.
9. LOCAL NURSE CALL PULL CORD ACTIVATOR. INSTALL AND WIRE PER MANUFACTURER'S SPECIFICATIONS.
10. NEW EXHAUST FAN MOUNTED ON ROOF. ELECTRICAL CONTRACTORS SHALL CONNECT TO UNSWITCHED LIGHTING CIRCUIT. IN ELECTRICAL ROOM FOLLOW DETAIL NO. 11 ON MECHANICAL DRAWING M402 TO TERMINATE WIRING TO DISCONNECT ON FAN EF-1 ASSEMBLY. ROUTE 3W, #12, 20A CIRCUIT FROM 120/208V PANEL IN ELECTRICAL ROOM, THROUGH CORRIDOOR 5-2-100, THROUGH ELEVATOR LOBBY 5-2-105B INTO CEILING OF TOILET ROOMS 5-2-105.
11. REINSTALL AND RECONNECT STORED LIGHT FIXTURE. TO BE INSTALLED IN SAME LOCATION PRIOR TO REMOVAL.
12. NEW 1800 WATT RECESSED ELECTRIC HEATER FURNISHED WITH INTEGRAL DISCONNECT SWITCH AND CONTROLS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE NEW 120-VOLT, 20A. 1P. CIRCUIT TO THIS LOCATION FROM IRM CLOSET 5-B-103A 208/120V PANEL OF ADEQUATE CAPACITY. CONNECT TO SPARE CIRCUIT BREAKER IN EXISTING PANEL. IF NO SPARE CIRCUIT BREAKERS ARE AVAILABLE, PROVIDE NEW CIRCUIT BREAKER (MATCH EXISTING) IN EXISTING SPACE. UTILIZE DETAILS ON DRAWING E501.
13. NEW CEILING MOUNTED EXHAUST FAN. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATION. CONNECT TO EXISTING TOILET LIGHTING CIRCUIT OF ADEQUATE CAPACITY IN THIS AREA. EXTEND CONDUIT AND WIRING AS REQUIRED.
14. CONTRACTOR TO PROVIDE DEDICATED 20A 3-WIRE CIRCUIT FOR HAND DRYER.
15. RUN CIRCUIT TO ELECTRICAL CLOSET 5-B-103A, 208/120V NORMAL POWER.

FIELD-MARKED AS-BUILT - PLUMBING

