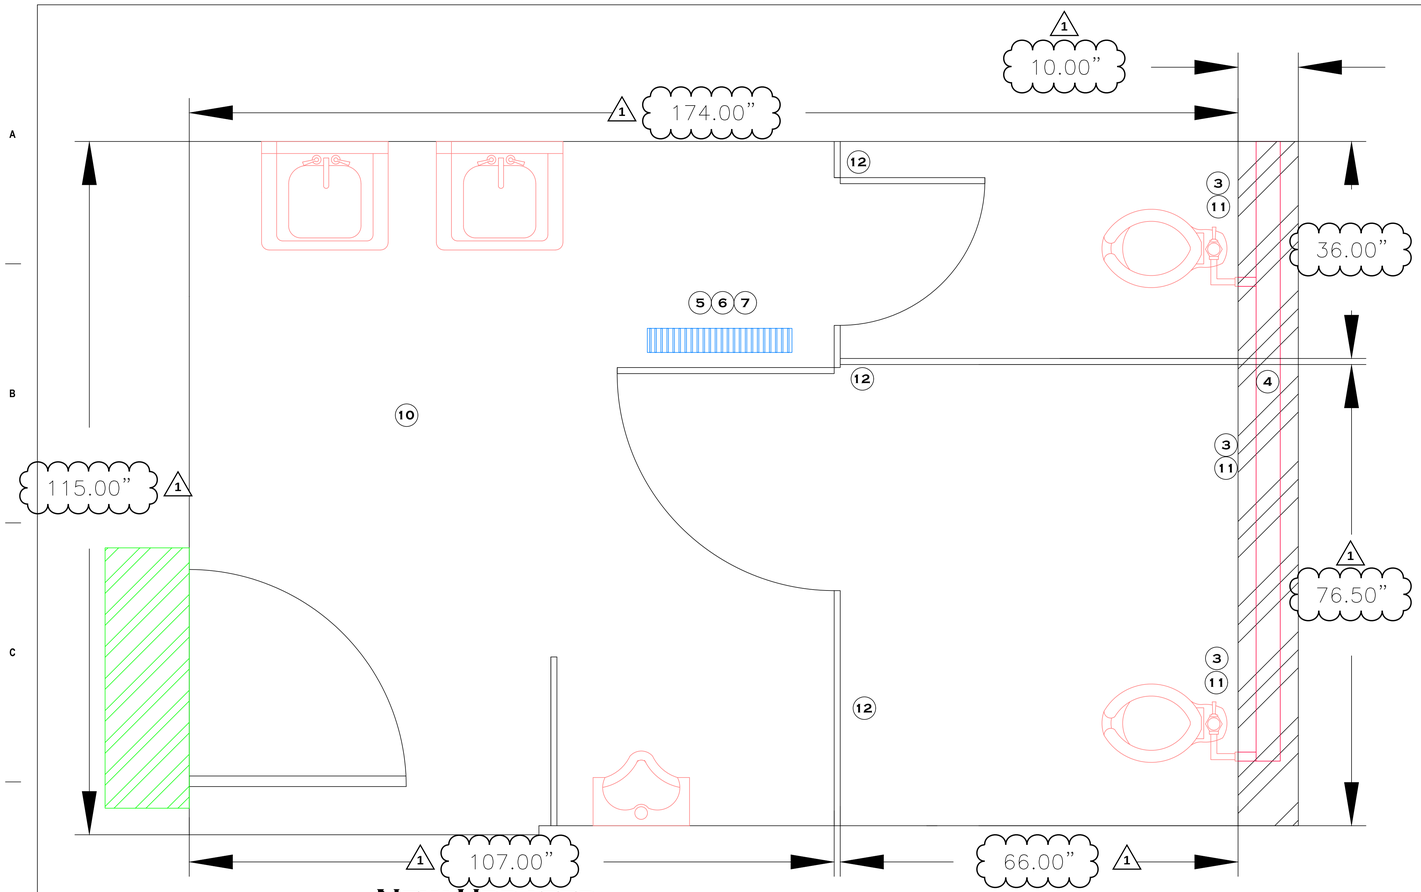


NEW UPDATED PIPING WALL


NEW WALL MOUNTED TOILETS

NEW PIPING

NEW TRENCH DRAIN

ICRA BARRIER

HEPA FILTRATION

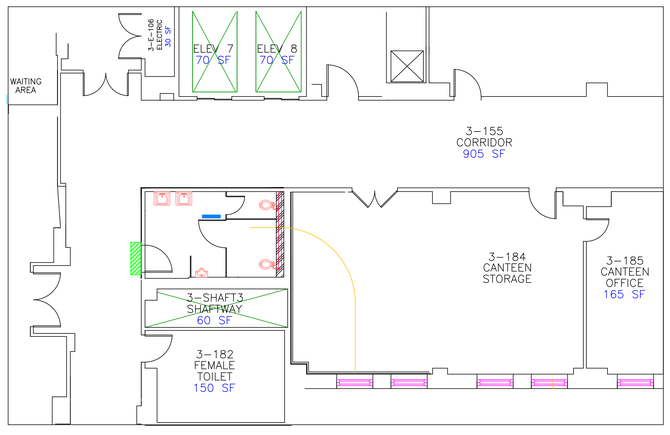

NOTES

1. CONTRACTOR SHALL VERIFY ALL EXISTING FIELD CONDITIONS, DIMENSIONS, AND SYSTEM LOCATIONS PRIOR TO STARTING WORK. REPORT ALL DISCREPANCIES TO THE COR BEFORE PROCEEDING.
2. CONTRACTOR SHALL FULLY COMPLY WITH PCRA, ICRA, AND ILSM REQUIREMENTS FOR ALL BATHROOM AND ADJACENT WORK AREAS.
3. DEMOLISH EXISTING TOILETS, PARTITIONS, FLOORING, CEILING MATERIALS, AND ANY WALL SECTIONS NECESSARY TO ACCESS REQUIRED PLUMBING.
4. DEMOLISH ALL EXISTING PIPING AND DRAIN LINES THAT ARE LEAKING OR MAY POTENTIALLY LEAK. PLUMBING DEMOLITION IN ROOM 2-220A CEILING SHALL BE PERFORMED AFTER HOURS ONLY.
5. DEMOLISH EXISTING FLOOR AND SUBSTRATE NECESSARY TO ACCOMMODATE THE NEW TRENCH DRAIN. ~~REMOVE ALL MATERIALS REQUIRED TO CREATE NEW FLOOR PITCH (1:50) TOWARD THE DRAIN.~~
6. INSTALL NEW TRENCH DRAIN AS SHOWN ON DRAWINGS. ENSURE ALL CONNECTIONS, SUPPORTS, AND ALIGNMENTS COMPLY WITH MANUFACTURER REQUIREMENTS AND NJ STATE CODES.
7. ~~PROVIDE SMOOTH, CONSISTENT FLOOR PITCH (1:50) TOWARD THE NEW TRENCH DRAIN TO ENSURE PROPER DRAINAGE AND COMPLIANCE WITH VA AND MANUFACTURER STANDARDS.~~
8. TOILET VENTING SHALL BE INSTALLED OR REUSED IN FULL COMPLIANCE WITH CURRENT NJ STATE PLUMBING CODES.
9. SEAL ALL FLOOR OPENINGS AND WALL PENETRATIONS PER VA AND STATE REQUIREMENTS. PROVIDE APPROVED FIRESTOP SYSTEMS FOR ALL PENETRATIONS.
10. INSTALL NEW FLOOR TILE AND BASEBOARD IN ACCORDANCE WITH MANUFACTURER SPECIFICATIONS, INCLUDING SUBSTRATE PREPARATION, LEVELING, SPACING, AND ALIGNMENT.
11. CONSTRUCT NEW WALLS AS REQUIRED AND INSTALL NEW WALL-HUNG TOILETS WITH PROPER SUPPORTS AND CONNECTIONS.
12. REINSTALL EXISTING PARTITIONS AND GRAB BARS AND ENSURE ALL DIMS, FASTENERS AND SUPPORTS MEET VA/ADA REQUIREMENTS.
13. PROVIDE PATCHING, PAINTING, AND FINISH RESTORATION TO MATCH EXISTING ADJACENT CONDITIONS.
14. ALLOW VA PERSONNEL TO PERFORM ALL REQUIRED UTILITY SHUTDOWNS, INCLUDING WATER AND WASTE LINE ISOLATION.
15. REMOVE ALL DEMOLITION DEBRIS AT THE END OF EACH SHIFT AND MAINTAIN A CLEAN, SAFE WORK AREA THROUGHOUT THE PROJECT.
16. ALL WORK SHALL MEET OR EXCEED VA DESIGN GUIDES, VA MASTER SPECIFICATIONS, ABA GUIDELINES, OSHA REQUIREMENTS, NJ STATE CODES, LOCAL REGULATIONS, AND ALL CONTRACT DOCUMENTS. ANY CONDITION IMPACTING COMPLIANCE SHALL BE REPORTED IMMEDIATELY TO THE COR.
17. ANY UNFORESEEN CONDITIONS, DAMAGE, OR SYSTEM CONFLICTS DISCOVERED DURING WORK SHALL BE REPORTED TO THE COR PRIOR TO CONTINUING TO ENSURE PROPER RESOLUTION AND TO AVOID CONTRACTOR LIABILITY FOR NON APPROVED WORK.
18. DRAWINGS DO NOT REPRESENT THE FULL PROJECT SCOPE. CONTRACTOR SHALL REFER TO THE STATEMENT OF WORK (SOW) FOR COMPLETE SCOPE REQUIREMENTS, INCLUDING ALL ADDITIONAL TASKS, CONDITIONS, AND CONSTRAINTS NOT ILLUSTRATED ON THE DRAWINGS.
19. ALL REPAIRS, PATCHES, AND PENETRATIONS SHALL FULLY COMPLY WITH APPLICABLE VA, NFPA, AND STATE FIRESTOPPING CODES AND STANDARDS. CONTRACTOR SHALL INSTALL APPROVED FIRESTOP SYSTEMS AND RESTORE ALL FIRE RATED ASSEMBLIES TO THEIR ORIGINAL FIRE STOPPING RATING.
20. ALL DIMENSIONS SHOWN ARE APPROXIMATE AND SHALL BE VERIFIED IN THE FIELD. (1)

Revisions:	Date:
1 ADDENDUM NO. 1 - DIMENSIONS ADDED; NOTES 5, 7, 20 REVISED	11/09/2026

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: THIRD FLOOR - PROPOSED BUILDING 1 BATHROOM LAYOUT	Phase: DESIGN DEVELOPMENT	Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS	Project Number: 561-26-104
Approved: Project Director	FULLY SPRINKLERED	Location: EAST ORANGE, NJ	Building Number: BLDG 1
		Issue Date: 11/09/2026 / Checked: X / Drawn: CF	Drawing Number: (1) A102

VA FORM 08 - 6231