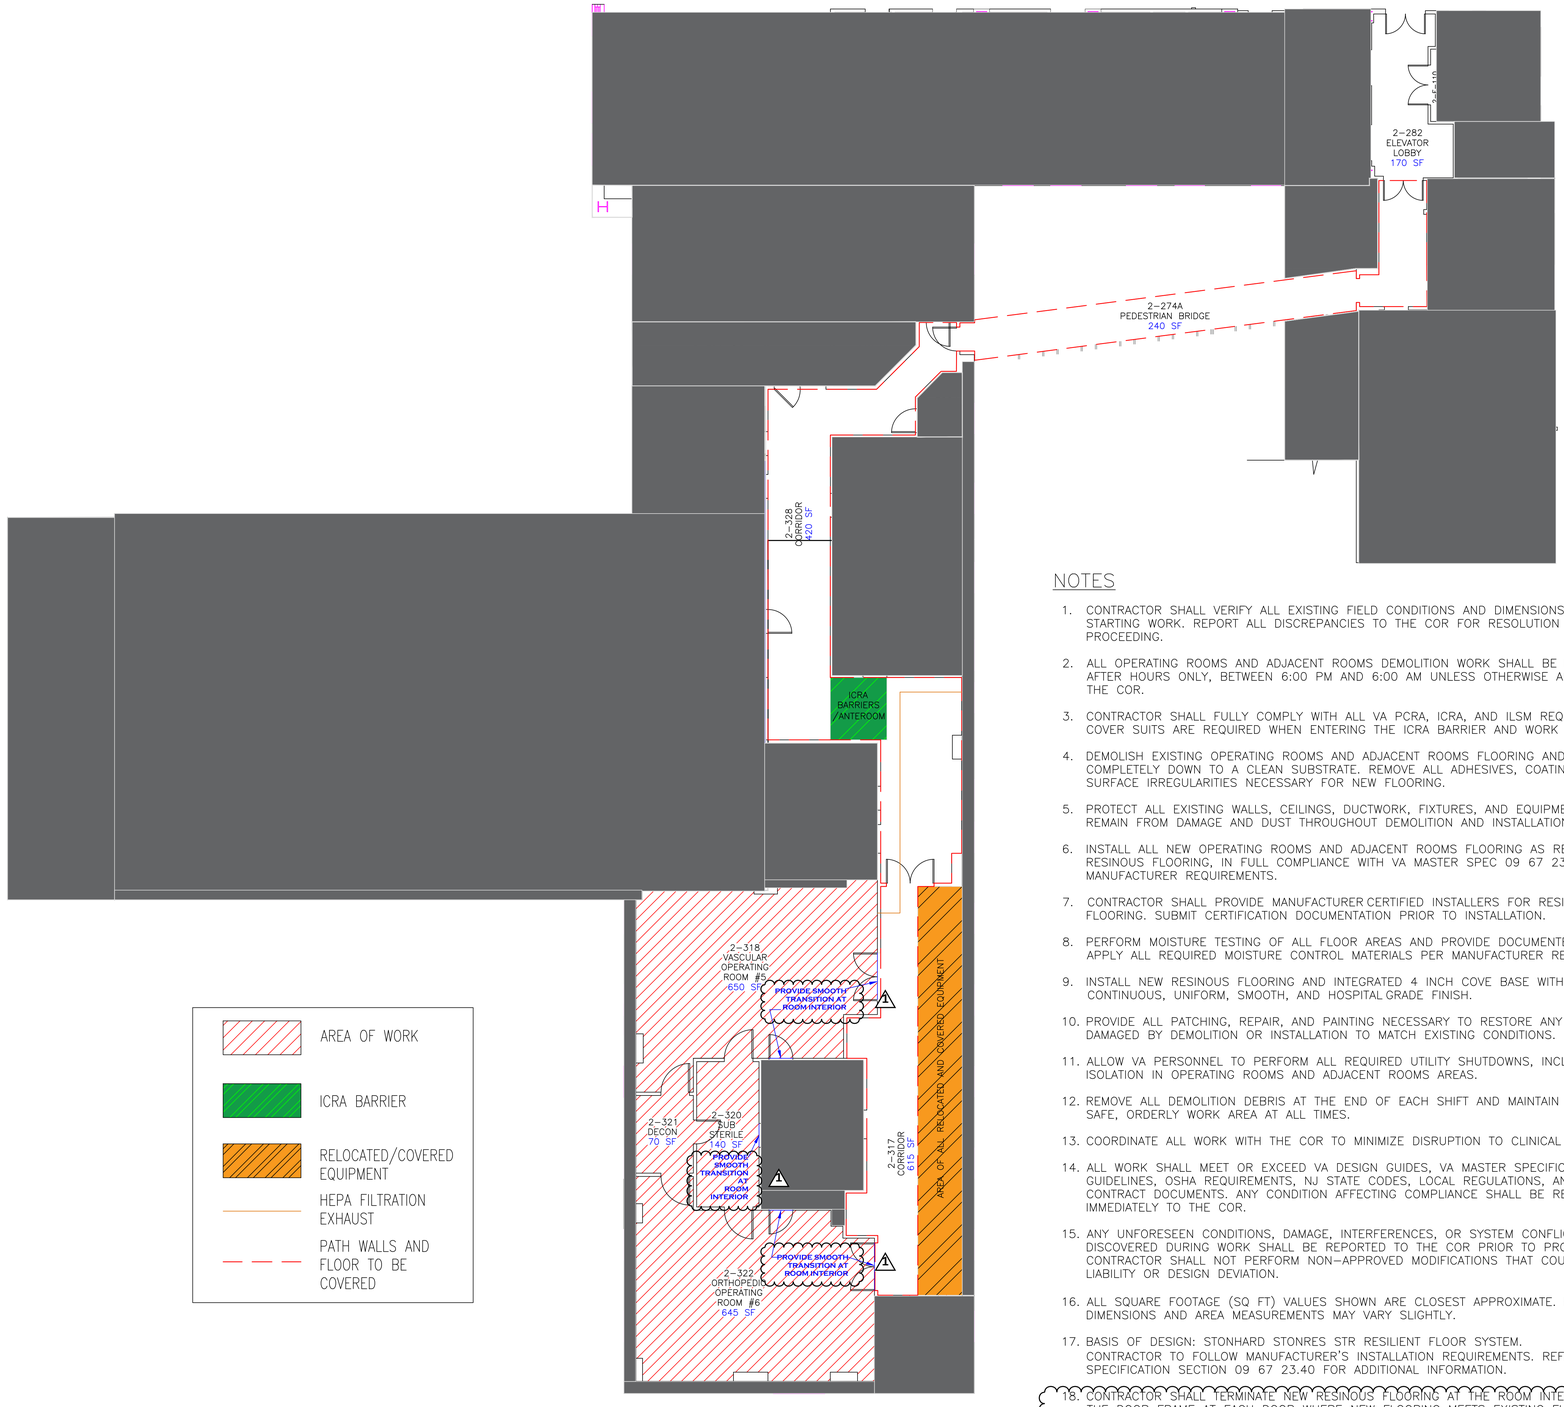


NOTES

1. CONTRACTOR SHALL VERIFY ALL EXISTING FIELD CONDITIONS AND DIMENSIONS PRIOR TO STARTING WORK. REPORT ALL DISCREPANCIES TO THE COR FOR RESOLUTION BEFORE PROCEEDING.
2. ALL OPERATING ROOMS AND ADJACENT ROOMS DEMOLITION WORK SHALL BE PERFORMED AFTER HOURS ONLY, BETWEEN 6:00 PM AND 6:00 AM UNLESS OTHERWISE APPROVED BY THE COR.
3. CONTRACTOR SHALL FULLY COMPLY WITH ALL VA PCRA, ICRA, AND ILSM REQUIREMENTS. COVER SUITS ARE REQUIRED WHEN ENTERING THE ICRA BARRIER AND WORK AREA.
4. DEMOLISH EXISTING OPERATING ROOMS AND ADJACENT ROOMS FLOORING AND COVE BASE COMPLETELY DOWN TO A CLEAN SUBSTRATE. REMOVE ALL ADHESIVES, COATINGS, AND SURFACE IRREGULARITIES NECESSARY FOR NEW FLOORING.
5. PROTECT ALL EXISTING WALLS, CEILINGS, DUCTWORK, FIXTURES, AND EQUIPMENT TO REMAIN FROM DAMAGE AND DUST THROUGHOUT DEMOLITION AND INSTALLATION.
6. INSTALL ALL NEW OPERATING ROOMS AND ADJACENT ROOMS FLOORING AS RES-4 RESINOUS FLOORING, IN FULL COMPLIANCE WITH VA MASTER SPEC 09 67 23.40 AND ALL MANUFACTURER REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE MANUFACTURER CERTIFIED INSTALLERS FOR RESINOUS FLOORING. SUBMIT CERTIFICATION DOCUMENTATION PRIOR TO INSTALLATION.
8. PERFORM MOISTURE TESTING OF ALL FLOOR AREAS AND PROVIDE DOCUMENTED RESULTS. APPLY ALL REQUIRED MOISTURE CONTROL MATERIALS PER MANUFACTURER REQUIREMENTS.
9. INSTALL NEW RESINOUS FLOORING AND INTEGRATED 4 INCH COVE BASE WITH A CONTINUOUS, UNIFORM, SMOOTH, AND HOSPITAL GRADE FINISH.
10. PROVIDE ALL PATCHING, REPAIR, AND PAINTING NECESSARY TO RESTORE ANY SURFACES DAMAGED BY DEMOLITION OR INSTALLATION TO MATCH EXISTING CONDITIONS.
11. ALLOW VA PERSONNEL TO PERFORM ALL REQUIRED UTILITY SHUTDOWNS, INCLUDING HVAC ISOLATION IN OPERATING ROOMS AND ADJACENT ROOMS AREAS.
12. REMOVE ALL DEMOLITION DEBRIS AT THE END OF EACH SHIFT AND MAINTAIN A CLEAN, SAFE, ORDERLY WORK AREA AT ALL TIMES.
13. COORDINATE ALL WORK WITH THE COR TO MINIMIZE DISRUPTION TO CLINICAL OPERATIONS.
14. ALL WORK SHALL MEET OR EXCEED VA DESIGN GUIDES, VA MASTER SPECIFICATIONS, ABA GUIDELINES, OSHA REQUIREMENTS, NJ STATE CODES, LOCAL REGULATIONS, AND ALL CONTRACT DOCUMENTS. ANY CONDITION AFFECTING COMPLIANCE SHALL BE REPORTED IMMEDIATELY TO THE COR.
15. ANY UNFORESEEN CONDITIONS, DAMAGE, INTERFERENCES, OR SYSTEM CONFLICTS DISCOVERED DURING WORK SHALL BE REPORTED TO THE COR PRIOR TO PROCEEDING. CONTRACTOR SHALL NOT PERFORM NON-APPROVED MODIFICATIONS THAT COULD RESULT IN LIABILITY OR DESIGN DEVIATION.
16. ALL SQUARE FOOTAGE (SQ FT) VALUES SHOWN ARE CLOSEST APPROXIMATE. FINAL DIMENSIONS AND AREA MEASUREMENTS MAY VARY SLIGHTLY.
17. BASIS OF DESIGN: STONHARD STONRES STR RESILIENT FLOOR SYSTEM. CONTRACTOR TO FOLLOW MANUFACTURER'S INSTALLATION REQUIREMENTS. REFER TO SPECIFICATION SECTION 09 67 23.40 FOR ADDITIONAL INFORMATION.
18. CONTRACTOR SHALL TERMINATE NEW RESINOUS FLOORING AT THE ROOM INTERIOR SIDE OF THE DOOR FRAME AT EACH DOOR WHERE NEW FLOORING MEETS EXISTING FLOORING, AND SHALL PROVIDE A SMOOTH, GAP-FREE TRANSITION BETWEEN NEW AND EXISTING FLOORING. CONTRACTOR SHALL NOT USE TRANSITION STRIPS. (1)

1 ADDENDUM NO. 1 - NOTE 18 AND CALLOUTS ADDED	11/09/2026
Revisions:	Date:

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: SECOND FLOOR BUILDING 1 OR FLOORING LAYOUT	Phase: DESIGN DEVELOPMENT	Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS	Project Number: 561-26-104
			Building Number: BLDG 1
Approved: Project Director	FULLY SPRINKLERED	Location: EAST ORANGE, NJ	Drawing Number: (1) A104
		Issue Date: 11/09/2026 / Checked: X / Drawn: CF	

VA FORM 08 - 6231