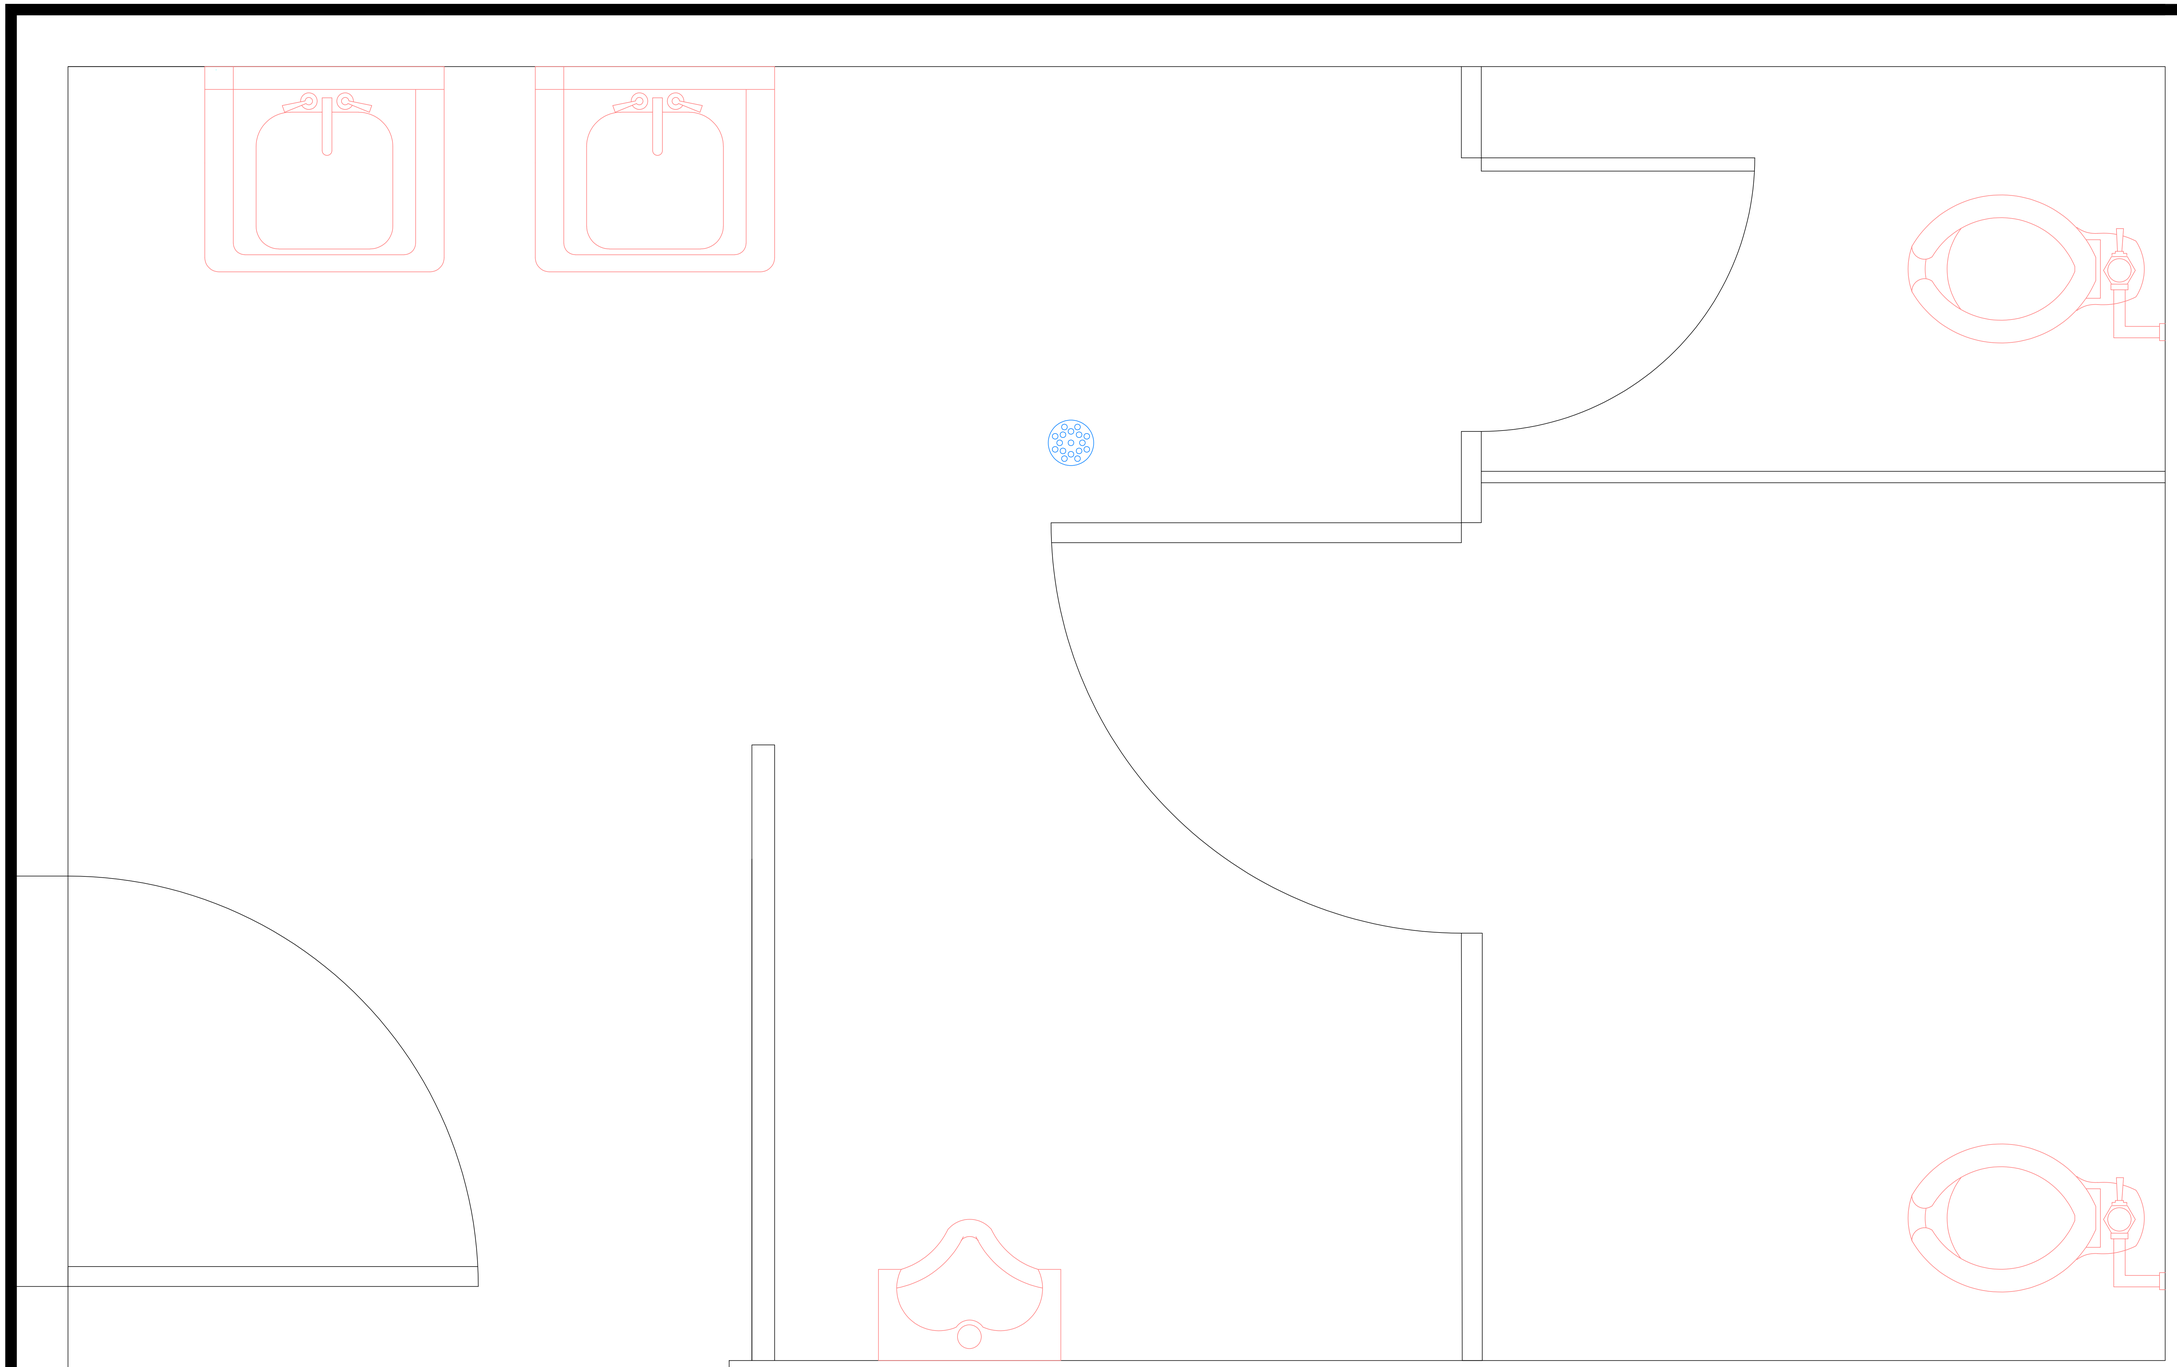


Revisions:	Date:

.

.

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: THIRD FLOOR - AS-BUILT BUILDING 1 BATHROOM LAYOUT

Approved: Project Director

Phase: DESIGN DEVELOPMENT

FULLY SPRINKLERED

Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS

Location: EAST ORANGE, NJ

Issue Date: 08/12/2026

Checked: X


Drawn: CF

Project Number: 561-26-104

Building Number: BLDG 1

Drawing Number: A101

VA FORM 08 - 6231

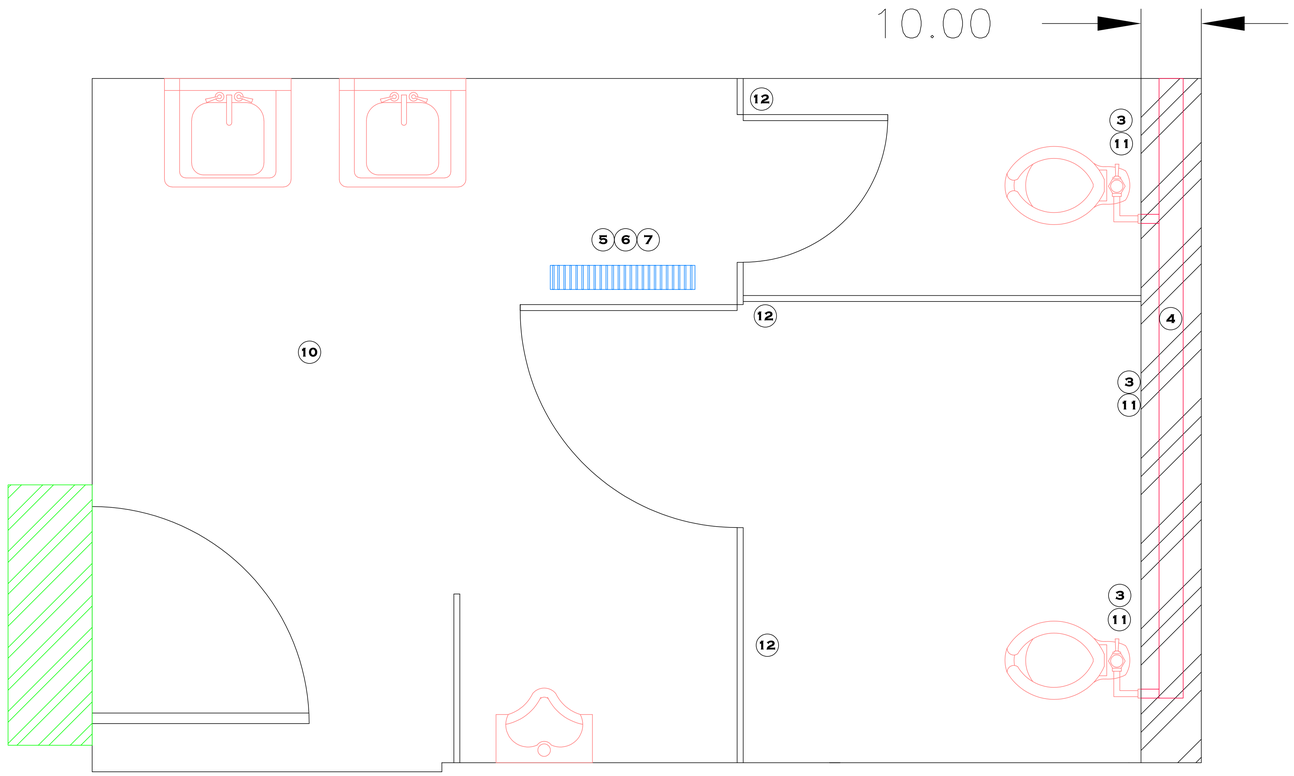

New Updated Piping Wall


New Wall Mounted Toilets

New Piping

New Trench Drain

ICRA Barrier

HEPA FILTRATION

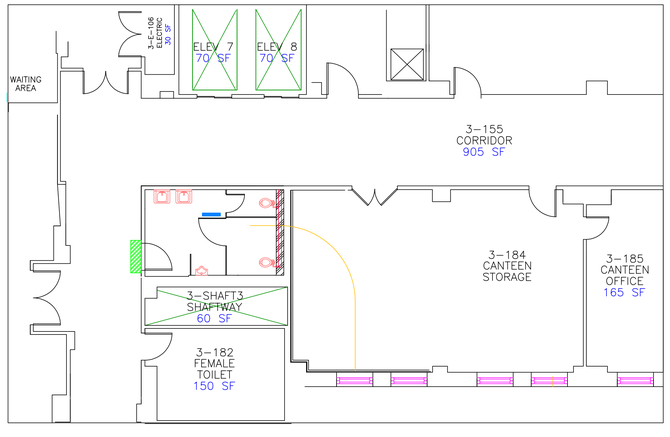

NOTES

1. CONTRACTOR SHALL VERIFY ALL EXISTING FIELD CONDITIONS, DIMENSIONS, AND SYSTEM LOCATIONS PRIOR TO STARTING WORK. REPORT ALL DISCREPANCIES TO THE COR BEFORE PROCEEDING.
2. CONTRACTOR SHALL FULLY COMPLY WITH PCRA, ICRA, AND ILSM REQUIREMENTS FOR ALL BATHROOM AND ADJACENT WORK AREAS.
3. DEMOLISH EXISTING TOILETS, PARTITIONS, FLOORING, CEILING MATERIALS, AND ANY WALL SECTIONS NECESSARY TO ACCESS REQUIRED PLUMBING.
4. DEMOLISH ALL EXISTING PIPING AND DRAIN LINES THAT ARE LEAKING OR MAY POTENTIALLY LEAK. PLUMBING DEMOLITION IN ROOM 2-220A CEILING SHALL BE PERFORMED AFTER HOURS ONLY.
5. DEMOLISH EXISTING FLOOR AND SUBSTRATE NECESSARY TO ACCOMMODATE THE NEW TRENCH DRAIN. REMOVE ALL MATERIALS REQUIRED TO CREATE NEW FLOOR PITCH (1:50) TOWARD THE DRAIN.
6. INSTALL NEW TRENCH DRAIN AS SHOWN ON DRAWINGS. ENSURE ALL CONNECTIONS, SUPPORTS, AND ALIGNMENTS COMPLY WITH MANUFACTURER REQUIREMENTS AND NJ STATE CODES.
7. PROVIDE SMOOTH, CONSISTENT FLOOR PITCH (1:50) TOWARD THE NEW TRENCH DRAIN TO ENSURE PROPER DRAINAGE AND COMPLIANCE WITH VA AND MANUFACTURER STANDARDS.
8. TOILET VENTING SHALL BE INSTALLED OR REUSED IN FULL COMPLIANCE WITH CURRENT NJ STATE PLUMBING CODES.
9. SEAL ALL FLOOR OPENINGS AND WALL PENETRATIONS PER VA AND STATE REQUIREMENTS. PROVIDE APPROVED FIRESTOP SYSTEMS FOR ALL PENETRATIONS.
10. INSTALL NEW FLOOR TILE AND BASEBOARD IN ACCORDANCE WITH MANUFACTURER SPECIFICATIONS, INCLUDING SUBSTRATE PREPARATION, LEVELING, SPACING, AND ALIGNMENT.
11. INSTALL NEW CLEANOUT WITH ACCESS PANEL AS REQUIRED TO PROVIDE PROPER MAINTENANCE ACCESS AND COMPLIANCE WITH VA AND STATE PLUMBING CODE REQUIREMENTS.
12. CONSTRUCT NEW WALLS AS REQUIRED AND INSTALL NEW WALL-HUNG TOILETS WITH PROPER SUPPORTS AND CONNECTIONS.
13. REINSTALL EXISTING PARTITIONS AND GRAB BARS AND ENSURE ALL DIMS, FASTENERS AND SUPPORTS MEET VA/ADA REQUIREMENTS.
14. PROVIDE PATCHING, PAINTING, AND FINISH RESTORATION TO MATCH EXISTING ADJACENT CONDITIONS.
15. ALLOW VA PERSONNEL TO PERFORM ALL REQUIRED UTILITY SHUTDOWNS, INCLUDING WATER AND WASTE LINE ISOLATION.
16. REMOVE ALL DEMOLITION DEBRIS AT THE END OF EACH SHIFT AND MAINTAIN A CLEAN, SAFE WORK AREA THROUGHOUT THE PROJECT.
17. ALL WORK SHALL MEET OR EXCEED VA DESIGN GUIDES, VA MASTER SPECIFICATIONS, ABA GUIDELINES, OSHA REQUIREMENTS, NJ STATE CODES, LOCAL REGULATIONS, AND ALL CONTRACT DOCUMENTS. ANY CONDITION IMPACTING COMPLIANCE SHALL BE REPORTED IMMEDIATELY TO THE COR.
18. ANY UNFORESEEN CONDITIONS, DAMAGE, OR SYSTEM CONFLICTS DISCOVERED DURING WORK SHALL BE REPORTED TO THE COR PRIOR TO CONTINUING TO ENSURE PROPER RESOLUTION AND TO AVOID CONTRACTOR LIABILITY FOR NON□APPROVED WORK.
19. DRAWINGS DO NOT REPRESENT THE FULL PROJECT SCOPE. CONTRACTOR SHALL REFER TO THE STATEMENT OF WORK (SOW) FOR COMPLETE SCOPE REQUIREMENTS, INCLUDING ALL ADDITIONAL TASKS, CONDITIONS, AND CONSTRAINTS NOT ILLUSTRATED ON THE DRAWINGS.
20. ALL REPAIRS, PATCHES, AND PENETRATIONS SHALL FULLY COMPLY WITH APPLICABLE VA, NFPA, AND STATE FIRESTOPPING CODES AND STANDARDS. CONTRACTOR SHALL INSTALL APPROVED FIRESTOP SYSTEMS AND RESTORE ALL FIRE RATED ASSEMBLIES TO THEIR ORIGINAL FIRE STOPPING RATING.

Revisions:	Date:


STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: THIRD FLOOR - PROPOSED BUILDING 1 BATHROOM LAYOUT	Phase: DESIGN DEVELOPMENT	Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS	Project Number: 561-26-104
			Building Number: BLDG 1
Approved: Project Director	FULLY SPRINKLERED	Location: EAST ORANGE, NJ	Drawing Number: A102
		Issue Date: 08/12/2026 / Checked: X / Drawn: CF	

VA FORM 08 - 6231

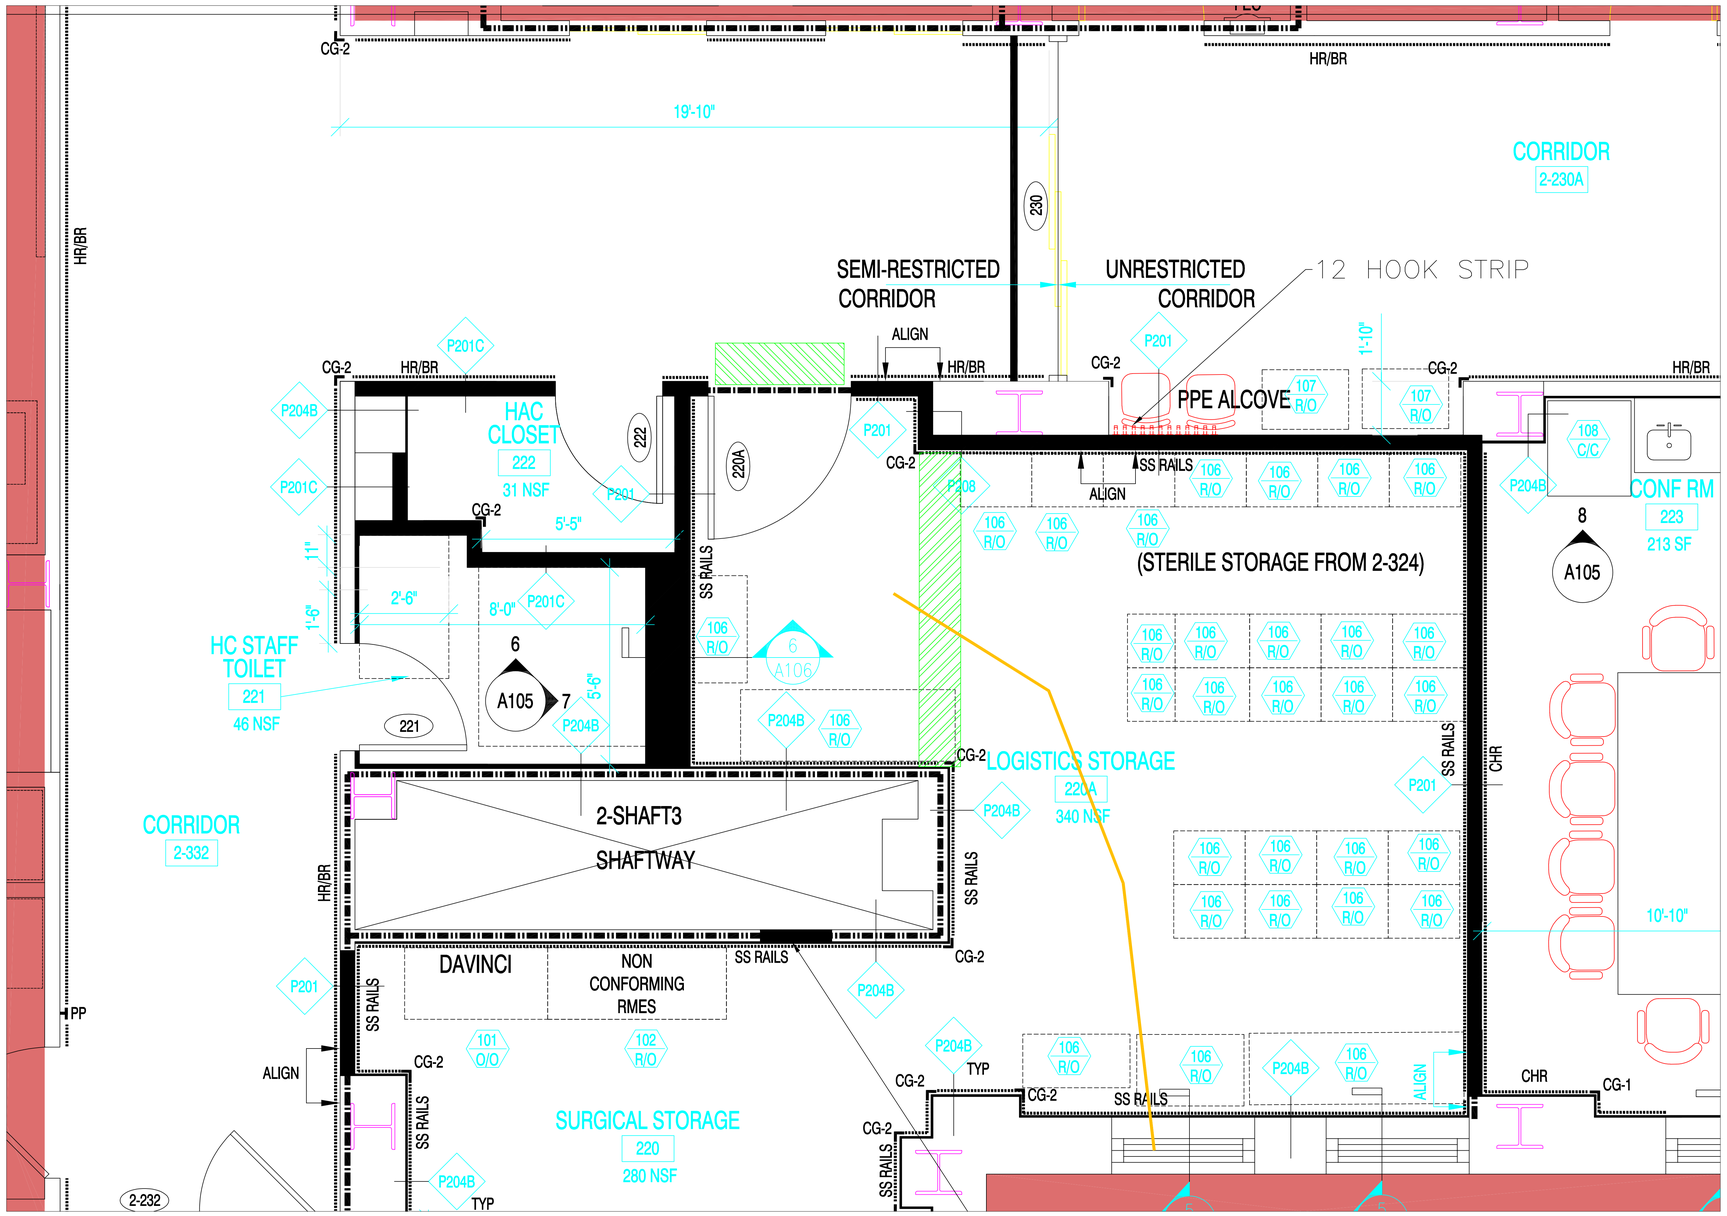

ICRA BARRIER

HEPA EXHAUST

Revisions:	Date:

.

.

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: SECOND FLOOR - 2-220A PROPOSED ICRA PLAN

Approved: Project Director

Phase: DESIGN DEVELOPMENT

FULLY SPRINKLERED

Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS

Location: EAST ORANGE, NJ


Issue Date: 08/12/2026 | Checked: X | Drawn: CF

Project Number: 561-26-104

Building Number: BLDG 1

Drawing Number: A103

VA FORM 08 - 6231

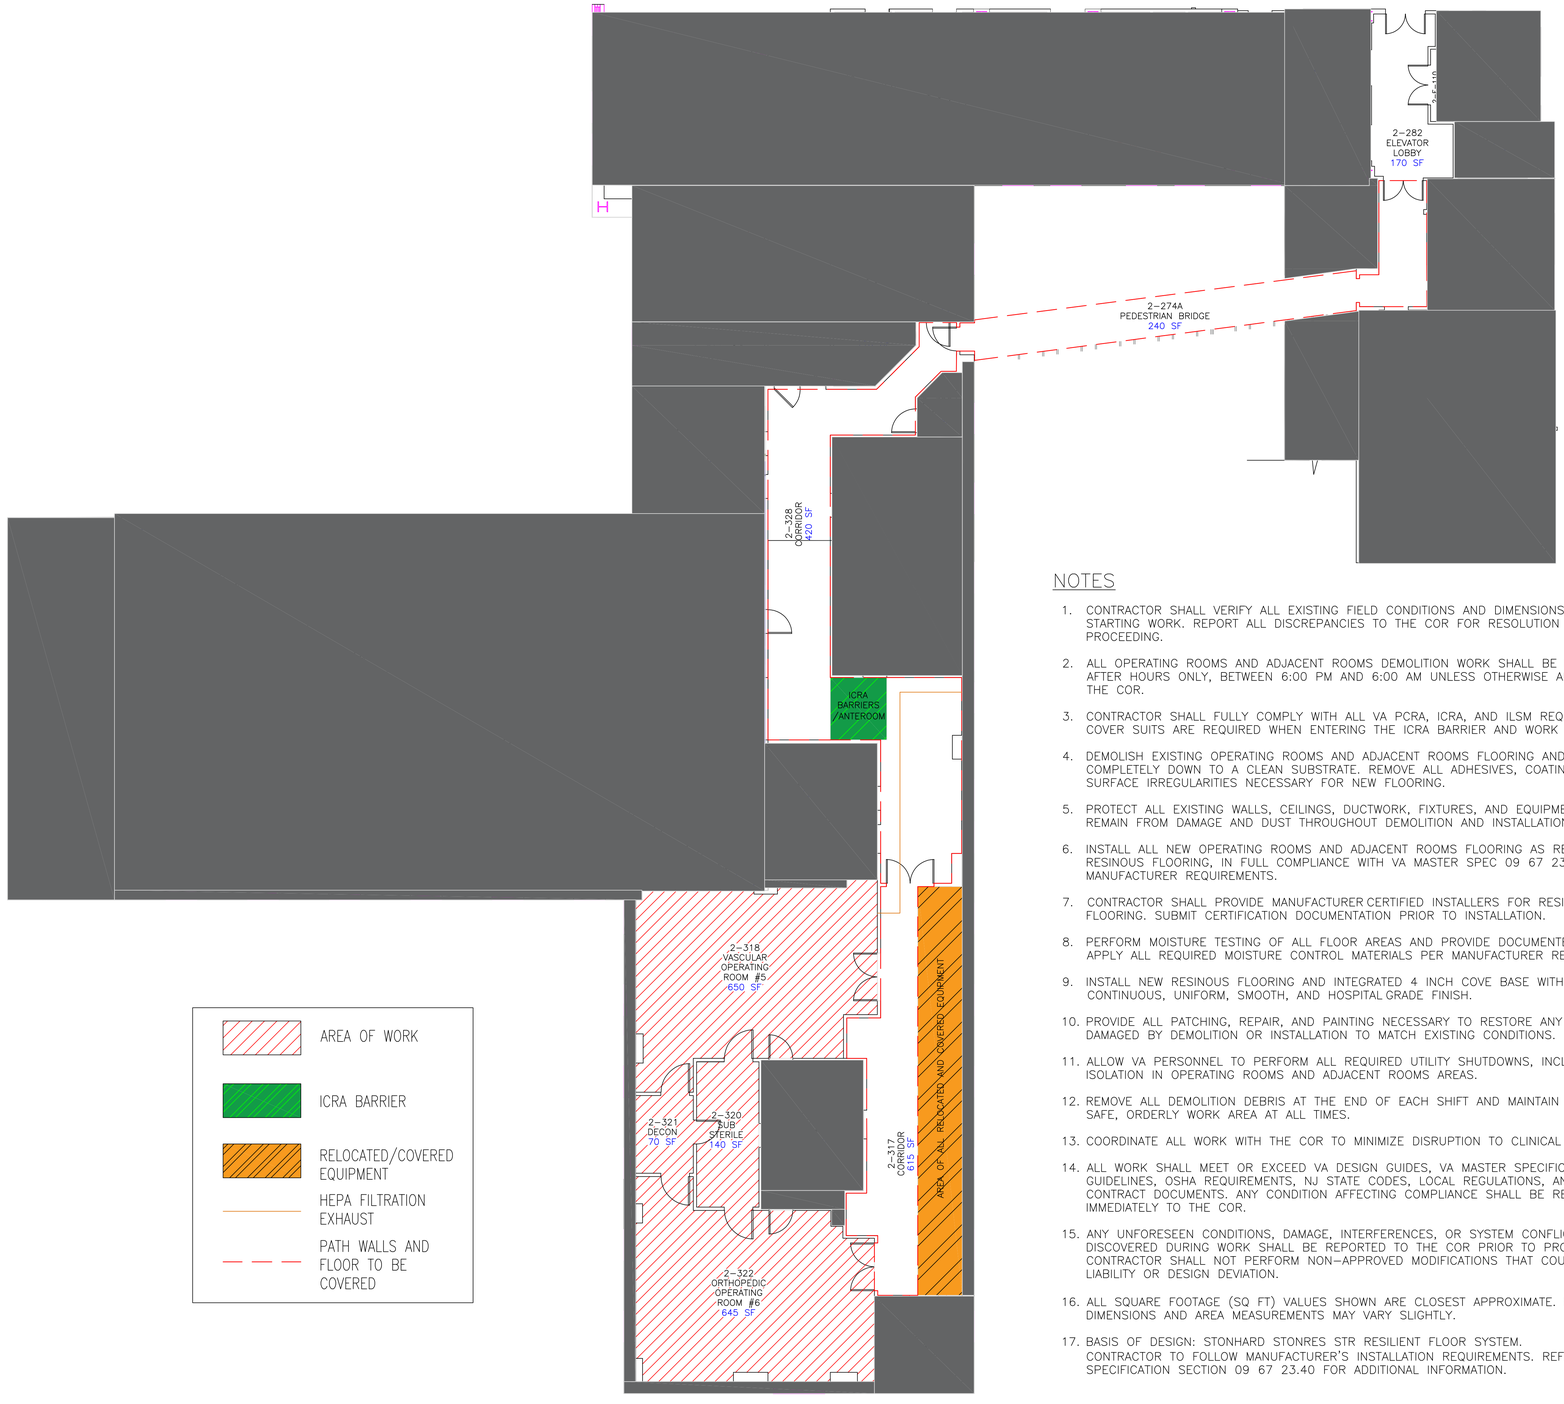

NOTES

1. CONTRACTOR SHALL VERIFY ALL EXISTING FIELD CONDITIONS AND DIMENSIONS PRIOR TO STARTING WORK. REPORT ALL DISCREPANCIES TO THE COR FOR RESOLUTION BEFORE PROCEEDING.
2. ALL OPERATING ROOMS AND ADJACENT ROOMS DEMOLITION WORK SHALL BE PERFORMED AFTER HOURS ONLY, BETWEEN 6:00 PM AND 6:00 AM UNLESS OTHERWISE APPROVED BY THE COR.
3. CONTRACTOR SHALL FULLY COMPLY WITH ALL VA PCRA, ICRA, AND ILSM REQUIREMENTS. COVER SUITS ARE REQUIRED WHEN ENTERING THE ICRA BARRIER AND WORK AREA.
4. DEMOLISH EXISTING OPERATING ROOMS AND ADJACENT ROOMS FLOORING AND COVE BASE COMPLETELY DOWN TO A CLEAN SUBSTRATE. REMOVE ALL ADHESIVES, COATINGS, AND SURFACE IRREGULARITIES NECESSARY FOR NEW FLOORING.
5. PROTECT ALL EXISTING WALLS, CEILINGS, DUCTWORK, FIXTURES, AND EQUIPMENT TO REMAIN FROM DAMAGE AND DUST THROUGHOUT DEMOLITION AND INSTALLATION.
6. INSTALL ALL NEW OPERATING ROOMS AND ADJACENT ROOMS FLOORING AS RES-4 RESINOUS FLOORING, IN FULL COMPLIANCE WITH VA MASTER SPEC 09 67 23.40 AND ALL MANUFACTURER REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE MANUFACTURER CERTIFIED INSTALLERS FOR RESINOUS FLOORING. SUBMIT CERTIFICATION DOCUMENTATION PRIOR TO INSTALLATION.
8. PERFORM MOISTURE TESTING OF ALL FLOOR AREAS AND PROVIDE DOCUMENTED RESULTS. APPLY ALL REQUIRED MOISTURE CONTROL MATERIALS PER MANUFACTURER REQUIREMENTS.
9. INSTALL NEW RESINOUS FLOORING AND INTEGRATED 4 INCH COVE BASE WITH A CONTINUOUS, UNIFORM, SMOOTH, AND HOSPITAL GRADE FINISH.
10. PROVIDE ALL PATCHING, REPAIR, AND PAINTING NECESSARY TO RESTORE ANY SURFACES DAMAGED BY DEMOLITION OR INSTALLATION TO MATCH EXISTING CONDITIONS.
11. ALLOW VA PERSONNEL TO PERFORM ALL REQUIRED UTILITY SHUTDOWNS, INCLUDING HVAC ISOLATION IN OPERATING ROOMS AND ADJACENT ROOMS AREAS.
12. REMOVE ALL DEMOLITION DEBRIS AT THE END OF EACH SHIFT AND MAINTAIN A CLEAN, SAFE, ORDERLY WORK AREA AT ALL TIMES.
13. COORDINATE ALL WORK WITH THE COR TO MINIMIZE DISRUPTION TO CLINICAL OPERATIONS.
14. ALL WORK SHALL MEET OR EXCEED VA DESIGN GUIDES, VA MASTER SPECIFICATIONS, ABA GUIDELINES, OSHA REQUIREMENTS, NJ STATE CODES, LOCAL REGULATIONS, AND ALL CONTRACT DOCUMENTS. ANY CONDITION AFFECTING COMPLIANCE SHALL BE REPORTED IMMEDIATELY TO THE COR.
15. ANY UNFORESEEN CONDITIONS, DAMAGE, INTERFERENCES, OR SYSTEM CONFLICTS DISCOVERED DURING WORK SHALL BE REPORTED TO THE COR PRIOR TO PROCEEDING. CONTRACTOR SHALL NOT PERFORM NON-APPROVED MODIFICATIONS THAT COULD RESULT IN LIABILITY OR DESIGN DEVIATION.
16. ALL SQUARE FOOTAGE (SQ FT) VALUES SHOWN ARE CLOSEST APPROXIMATE. FINAL DIMENSIONS AND AREA MEASUREMENTS MAY VARY SLIGHTLY.
17. BASIS OF DESIGN: STONHARD STONRES STR RESILIENT FLOOR SYSTEM. CONTRACTOR TO FOLLOW MANUFACTURER'S INSTALLATION REQUIREMENTS. REFER TO SPECIFICATION SECTION 09 67 23.40 FOR ADDITIONAL INFORMATION.

Revisions:	Date:

.

.

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: SECOND FLOOR BUILDING 1 OR FLOORING LAYOUT

Approved: Project Director

Phase: DESIGN DEVELOPMENT

FULLY SPRINKLERED

Project Title: REPAIR OR FLOOR AND BATHROOM LEAKS

Location: EAST ORANGE, NJ

Issue Date: 07/01/2026

Checked: X

Drawn: CF

Project Number: 561-26-104

Building Number: BLDG 1

Drawing Number: A104

VA FORM 08 - 6231