

NOTES:


1. PREPARE SOIL BEFORE INSTALLING BLANKETS, INCLUDING APPLICATION OF LIME, FERTILIZER, AND SEED. NOTE: WHEN USING EROSION CONTROL BLANKETS NOT SEED PREPARED AREA. EROSION CONTROL BLANKET MUST BE INSTALLED WITH PAPER SIDE DOWN.
2. BEGIN AT THE TOP OF THE SLOPE BY ANCHORING THE BLANKET IN 6" DEEP X 6" WIDE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING.
3. ROLL THE BLANKETS (A) DOWN OR (B) HORIZONTALLY ACROSS THE SLOPE.
4. THE EDGES OF PARALLEL BLANKETS MUST BE STAPLED WITH APPROXIMATELY 2" OVERLAP. REFER TO MANUFACTURER'S GUIDE FOR CORRECT STAPLE PATTERN RECOMMENDATIONS FOR SLOPE INSTALLATIONS.
5. WHEN BLANKETS MUST BE SPLICED DOWN THE SLOPE, PLACE BLANKETS END OVER END (SHINGLE STYLE) WITH APPROXIMATELY 4" OVERLAP. STAPLE THROUGH OVERLAPPED AREA, APPROXIMATELY 12" APART.
6. EROSION CONTROL BLANKET FOR USE ON SLOPES SHALL BE A BIODEGRADABLE DOUBLE NET WOVEN BLANKET WITH JUTE NETTING AND COCONUT FIBER MATRIX.
7. ONCE PERMANENT STABALIZATION IS ACHIEVED, REMOVE ANY NON -BIODEGRADABLE MESH, IF USED.

C1 EROSION CONTROL BLANKETS


NTS




FIBER ROLL AROUND
TYPE "C" OR "C-L" CATCH BASIN TOP



INLET SEDIMENT CONTROL DEVICE
AT TYPE "C" OR "C-L" CATCH BASIN




PLAN



SECTION


C3 INLET PROTECTION

NTS

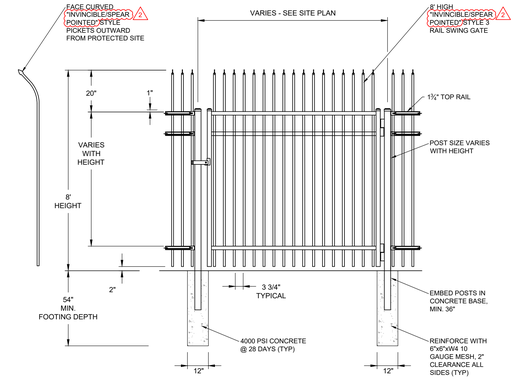

C6 8-FT HIGH PERIMETER SECURITY SWING GATE

NTS

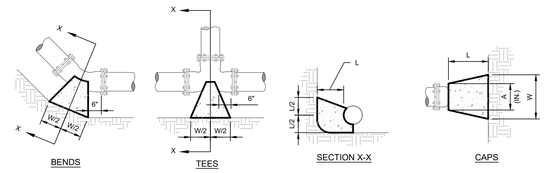

BENDS

TEES

SECTION X-X

CAPS

PIPE SIZE	22.5°			45°			90°			TEE, WYE, DEAD END		
	L	W	AREA (SF)	L	W	AREA (SF)	L	W	AREA (SF)	L	W	AREA (SF)
4"	20"	10"	1.3	20"	10"	1.3	20"	14"	1.9	20"	10"	1.3
8"	24"	13"	2.1	24"	25"	4.1	24"	46"	7.6	24"	33"	5.4
10"	26"	19"	3.3	26"	36"	6.4	26"	66"	11.8	26"	47"	8.4
SOIL TYPE: REFER TO GEOTECHNICAL REPORT												


NOTES:
1. ASSUMED WORKING PRESSURE = 200 LB/IN^2
2. ASSUMED ALLOWABLE SOIL BEARING PRESSURE = 1,875 LB/FT^2
3. ALL BEARING SURFACES TO BE CARRIED TO UNDISTURBED GROUND
4. CONCRETE TO BE 3000 PSI MIN.
5. BLOCKS THICKNESS SHALL EQUAL PIPE DIAMETER PLUS 4" (A VALUE)

B9 THRUST BLOCK

NTS


GENERAL NOTES:

1. MAXIMUM DESIGN DEFLECTION FOR R-B 350 GUIDERAIL AT THE STANDARD POST SPACING OF 6'-3" IS 4'-3". DEFLECTION REQUIREMENTS IS MEASURED FROM THE BACK OF POST TO THE FACE OF OBJECT.
2. FOR CURVES WITH RADII OF 150' OR LESS, ALL RAIL ELEMENTS SHALL BE SHOP FABRICATED TO THE PROPER RADIUS AND GALVANIZED AFTER FABRICATION. RADIUS RAIL WHEN REQUIRED AND NOTED ON THE PLANS, IS INCLUDED IN THE PAY ITEM FOR GUIDERAIL.
3. RAIL HEIGHT WITH CURBING SHALL BE MEASURED FROM THE TOP OF PAVEMENT. ON LOW SPEED ROADWAYS (<45mph, 6" CURBING MAY BE USED IN CONJUCTION WITH GUIDERAIL AND THE RAIL ELEMENT SHALL BE PLACED A MAXIMUM OF 9" BEHIND THE FACE OF CURB.
4. THREE BLOCKOUTS MAY BE USED FOR ONE POST ONLY. TWO BLOCKOUTS MAY BE USED FOR A SERIES OF POSTS. THE COST OF ADDITIONAL BLOCKOUTS AND LONGER BOLTS SHALL BE INCLUDED IN THE BID PRICE PER FOOT OF GUIDERAIL. EXTRA BLOCKOUTS AT TRANSITION TO BRIDGE PARAPETS SHOULD BE AVOIDED.
5. W-BEAM GUIDERAIL MAY BE PLACED 1' OR MORE FROM THE EDGE OF PAVEMENT ONLY ON SLOPES 10:1 OR FLATTER AND WITHOUT CURBING. IF THE RAIL IS INSTALLED WITHIN 2' OF THE EDGE OF PAVEMENT, THE RAIL HEIGHT IS MEASURED FROM THE SHOULDER SLOPE EXTENDED TO THE RAIL. IF THE RAIL IS INSTALLED BEYOND 2' FROM THE EDGE OF PAVEMENT, THE RAIL HEIGHT IS MEASURED FROM THE GROUND DIRECTLY BELOW THE RAIL.
6. 20" DIA. EXCAVATED HOLE SHALL BE BACKFILLED WITH SUITABLE MATERIAL. OR GRANULAR FILL COMPACTED IN 6" LIFTS BEFORE DRIVING POST OR POSTS MAY BE SET IN EXCAVATED HOLE AND BACKFILLED WITH CONTROLLED LOW STRENGTH MATERIAL (CLSM). 8" DIA. HOLE SHALL BE BACKFILLED WITH SUITABLE MATERIAL.
7. WHERE PAVEMENT FOR RAILING IS NOT BEING INSTALLED, A MIN. 6" DEPTH OF PROCESSED AGGREGATE SHALL BE INSTALLED FROM THE PAVEMENT EDGE OR BACK OF CURB TO A MINIMUM OF 2' BEHIND THE GUIDERAIL POST AND COMPACTED IN 6" LIFTS.
8. MINIMUM RAIL HEIGHT FOR NEW CONSTRUCTION SHALL BE 29" ± 1".

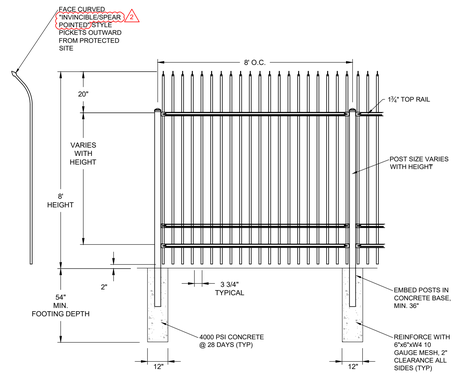


E5 8-FT HIGH PERIMETER SECURITY FENCE

NTS



PLAN VIEW




SECTION A

NOTES:
1. INSTALL CONCRETE WASHOUT SIGN WITHIN 30 FT. OF CONC. WASHOUT.
2. THE CONTRACTOR SHALL REPLACE CONCRETE WASHOUT WHEN IT HAS BEEN DEGRADED OVER TIME OR AT THE REQUEST OF THE CONTRACTING OFFICER AND/OR SWPPP INSPECTOR DURING CONSTRUCTION. CONCRETE WASHOUT STATIONS SHOULD BE EMPTIED, CLEANED, OR REPLACED ONCE IT HAS REACHED 75% CAPACITY TO PREVENT OVERFLOW FROM WASH WATER OR RAIN.

D6 CONCRETE WASHOUT


NTS

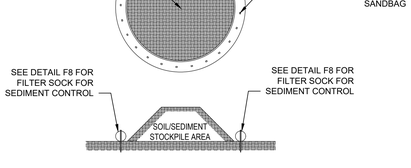


NOTE: SOIL STOCKPILE SHALL BE COVERED WITH A SECURED TARPAULIN WHEN NOT IN USE.

D9 TEMPORARY STOCKPILE AREA

NTS

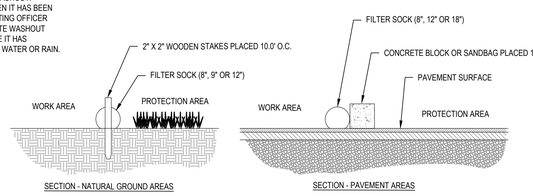

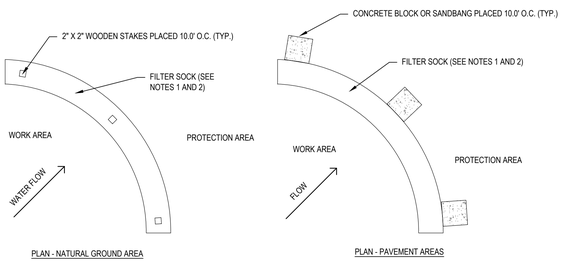


NOTES:


1. SOCK SIZE TO BE PER MANUFACTURER'S RECOMMENDATION FOR THE APPLICATION.
2. FILTER MATERIAL TO BE PER MANUFACTURER'S RECOMMENDATION FOR THE APPLICATION.
3. COMPOST MATERIAL SHALL BE REMOVED AND DISPERSED OFF OF VA PROPERTY.

F8 FILTER SOCK

NTS




PLAN



ELEVATION


METAL BEAM RAIL (TYPE R-B 350)




DETAIL A
RAIL MOUNTING

CONDITION 1:
IF SOIL DEPTH IS ≤ 18" DEEP (A) DRILL 20" DIA. HOLE; 24" INTO LEDGE (B)


CONDITION 2:
IF SOIL DEPTH IS > 18" DEEP (A) DRILL 8" DIA. HOLE, 12" INTO LEDGE (B) OR TO THE DEPTH OF FULL EMBEDMENT OF (WHICHEVER IS LESS)



ELEVATION
(SEE NOTE 6)




CURB APPLICATION

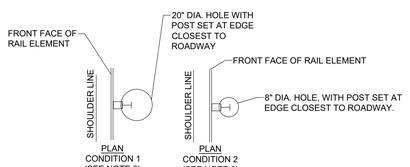

DRILLING IN ROCK FOR GUIDERAIL POSTS

F2 GUARD RAIL

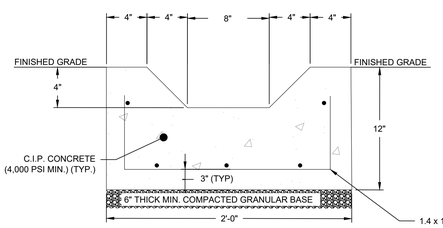

NOTES:

1. ALL EXTERIOR CONCRETE PAVING SHALL HAVE SOLAR REFLECTIVE CONCRETE ADMIXTURE FOR LEED CREDITS TOWARDS HEAT ISLAND REDUCTION

F5 CONCRETE DRAINAGE SWALE

NTS

BIDDING RFIS	09/23/2026	1/A
Revisions:	Date:	

CONSTRUCTION AGENT

US Army Corps of Engineers ®

New England District

CONSULTANT

Mabbett®
Scientists | Engineers | Program Managers
Mabbett & Associates, Inc.
105 Central Street Stoneham, MA 02180-1248
T. 781-275-6050
www.mabbett.com

DESIGNER OF RECORD

A/E:
LEO A DALY JOINT VENTURE | Perkins&Will

STAMP

Office of Construction and Facilities Management

VA | U.S. Department of Veterans Affairs

Drawing Title: CIVIL DETAILS

Phase: READY TO ADVERTISE

Project Title: CHILLED WATER PLANT REPLACEMENT AND SITE UTILITY IMPROVEMENTS PHASE A2

Project Number: 689-040

Building Number: 17

Approved:

FULLY SPRINKLERED

Location: 950 CAMPBELL AVENUE WEST HAVEN, CT 06516

Drawing Number: CK502

Issue Date: 2026-07-31 | **Checked:** RBB | **Drawn:** KRS

Autodesk Docs://001-102/10-001_Phase_A2/689-040_BLDG-17_ARCH-Interior.rvt

VA FORM 08 - 6231