

United States Department of Agriculture
Forest Service

ALASKA
HOPE, ALASKA
ALASKA REGION
CHUGACH NATIONAL FOREST
SEWARD RANGER DISTRICT

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

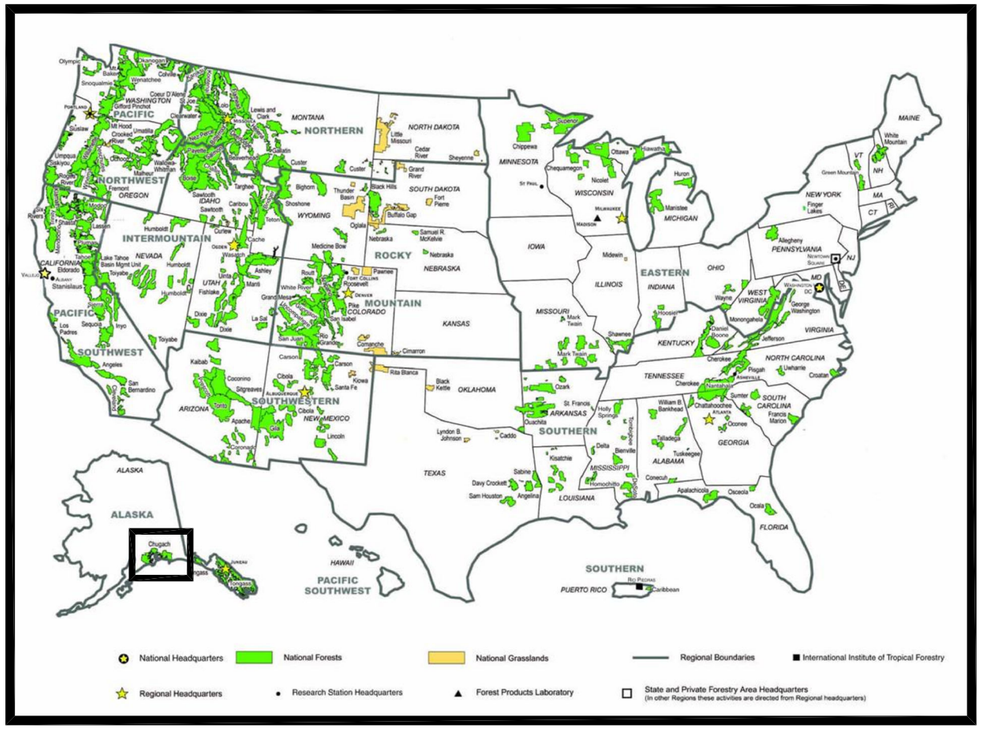

FOREST LOCATION MAP

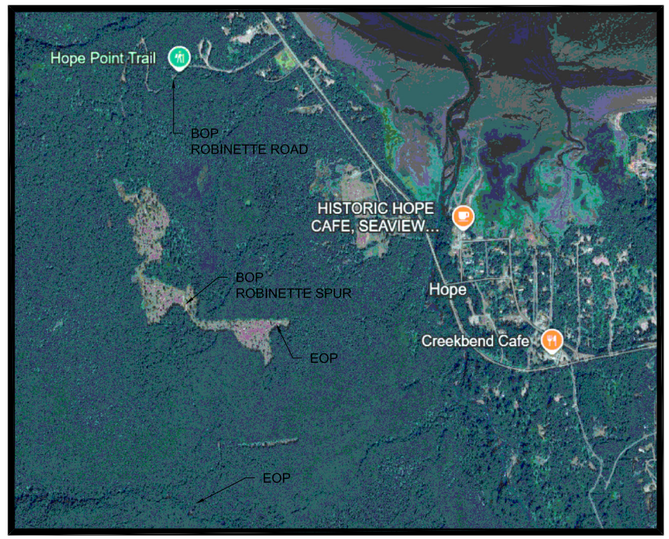

PROJECT LOCATION MAP

TRAVEL DIRECTIONS:

FROM ANCHORAGE, TAKE SEWARD HIGHWAY (AK-1 S) FOR 70.2 MILES. TURN RIGHT TO HOPE HIGHWAY (AK-14) FOR 17.7 MILES. TURN LEFT ON BOB MATHEWSON LN. BOP WILL BE APPROXIMATELY 0.25 MILES.

INDEX OF SHEETS

SHEET	SHEET TITLE	SHEET ID
1	COVERSHEET	
2	SUMMARY OF ESTIMATED QUANTITES	
3	ROAD STRUCTURE DETAILS	
4	CLEARING DETAILS	
5	WATERBAR DETAILS	
6	WORKLIST	

RECOMENDED BY:

DESIGNER

FOREST ENGINEER

APPROVED:

DISTRICT RANGER

FOREST SUPERVISOR

6/30/26 08:06 JLATHAM C:\USERS\JLATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\REF DOCS\PORC STUFF\PORC PLANS.DWG;

ROAD NAME			Robinette Road	Robinette Spur	PAYMENT WILL BE MADE ON ACTUAL WORK PERFORMED AS DESCRIBED IN FP-14 109.01 UNLESS OTHERWISE NOTED.
PROJECT LENGTH (MILES)			1.54	0.31	
ITEM NO	**DESCRIPTION**	**UNIT**	**Quantity**		**NOTES**
15101	MOBILIZATION	LUMP SUM	ALL		COVERS ENTIRE PROJECT: HAZAROUS SPILL EQUIPMENT, EQUIPMENT WASHING, FIRE PREVENTION, AND SIGN INSTALLATION ARE INCLUDED BY INDIRECT PAYMENT.
20103	CLEARING AND GRUBBING, DISPOSAL METHOD: SCATTER AND DECK	MILE	1.54		SEE SPECIFICATIONS FOR DISPOSAL.
20401	ROADWAY EXCAVATION, COMPACTION METHOD 2	CUBIC YARD*	300		FOR CURVE REALIGNMENT
20423	DRAINAGE EXCAVATION, TYPE ARMORED DIP	CUBIC YARD*	96		INCLUDED ALL EXCAVATION FOR RECONSTRUCTION OF EXISTING AND CONSTRUCTION OF PROPOSED SITES.
21201	LINEAR GRADING, COMPACTION METHOD 2	MILE	1.54	0.31	INCLUDES REMOVAL OF ORGANIC AND UNSUITABLE MATERIAL FOR ENDHAULING TO DISPOSAL SITES IDENTIFIED ON THE GROUND WITHIN THE PROJECT AREA.
30103	SUBBASE, GRADING A, COMPACTION METHOD 2	CUBIC YARD*	100		SURFACING MATERIAL FOR SWITCHBACK. COMMERCIAL SOURCE. CERTIFIED WEED FREE.
30210	PITRUN, MAX SIZE 6", COMPACTION METHOD 2	CUBIC YARD*	550		SUBGRADE REENFORCEMENT MATERIAL. COMMERCIAL SOURCE. CERTIFIED WEED FREE. ENGINEER WILL IDENTIFY LOCATIONS AFTER UNSUITABLE MATERIALS ARE REMOVED.
62552	SEEDING AND MULCHING, DRY METHOD	LUMP SUM	All		COMMERCIAL SOURCE. CERTIFIED WEED FREE. INCLUDES MULCHING OF ALL DISTURBED AREAS AND DISPOSAL AREAS FOR ENTIRE PROJECT.
63501	TEMPORARY TRAFFIC CONTROL	LUMP SUM	All		CONFORM TO MUTCD STANDARDS.
30103O1	LINEAR GRADING, COMPACTION METHOD 2	CUBIC YARD*	4300	1000	SURFACING MATERIAL FOR ROADWAY. COMMERCIAL SOURCE. CERTIFIED WEED FREE.

DISPOSAL AREA: 6' MAXIMUM HEIGHT OF MATERIAL, 1V:1.5H SLOPES, SHAPE TO DRAIN & RECONSTRUCT DITCHLINE BETWEEN ROAD AND DISPOSAL SITE. DISPOSAL AREAS WILL BE FLAGGED BY CO

SEE CONTRACT FOR DAILY AND SEASONAL RESTRICTIONS.

ALL UTILITY LOCATES, PERMITS, AND WATER RIGHTS ARE THE RESPONSIBILITY OF THE CONTRACTOR.

* DENOTES CONTRACT QUANTITIES

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

CHUGACH NATIONAL FOREST


SEWARD RANGER DISTRICT

DRAWING TITLE

SUMMARY OF ESTIMATED QUANTITIES

DATE 06/28/2026	ARCHIVE NO.
DESIGNER J. LATHAM	DRAWING SHEET NO.
DRAWN X.XXX	
CHECKED X.XXX	
PROJECT NO.	SHEET 2 OF 6


6/28/26 20:47 JLATHAM C:\USERS\JLATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\PORC PLANS.DWG;

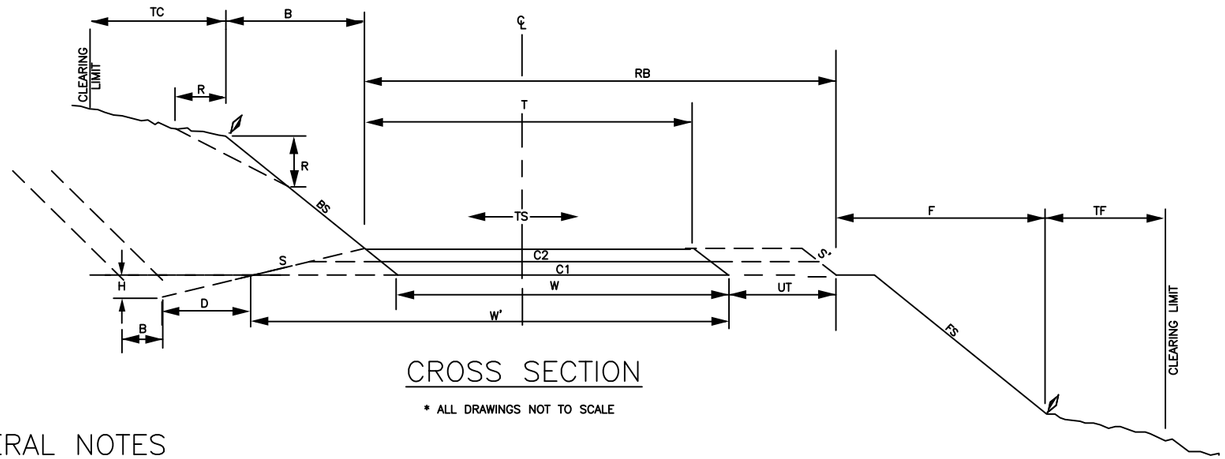

CROSS SECTION

* ALL DRAWINGS NOT TO SCALE

TURNOUT AND TURNAROUND SYMBOLS

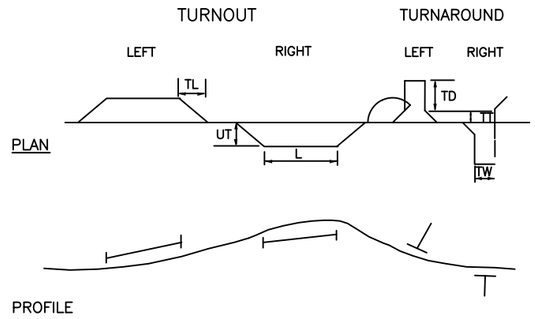

GENERAL NOTES

1. CURVE WIDENING, TURNOUTS AND TURNAROUNDS SHALL BE SURFACED TO THE SAME DEPTH AS THE ROADBED UNLESS OTHERWISE SHOWN ON THE PLANS.
2. EX – MATCH EXISTING DIMENSIONS
3. V – VARIES, SEE RECONSTRUCTION LOGS

					Grading													Surface structure								Shoulder rock			
Road Number	Station or Milepost	To	Station or Milepost	Traveled way width	Construction tolerance	Cutlope (O) Inslope(I) Crown(C)	Roadbed width		Ditch Dimentions			Turnout			Turn around			Gradation		Compacted depth		Slope ratio		Depth	Slope ratio	Width	Gradation
				FT		%	FT		FT			FT	FT	FT	FT	FT	FT			IN		Agg	ASP				
				(T)		(TS)	(W)	(W')	B	D	H	UT	TL	L	TT	TW	TD	C1	C2	C1	C2	S	S'	IN		FT	
ROBINETTE	0.00		1.54	12	C	EX	12	15	0	2	1	8	25	50	EX	EX	EX	A		12		1:1					
SPUR	0.00		0.31	12	C	EX	12	15	0	2	1	8	25	50	EX	EX	EX	A		12		1:1					

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

CHUGACH NATIONAL


SEWARD RANGER DISTRICT

DRAWING TITLE

ROAD STRUCTURE DETAILS

DATE 06/28/2026	ARCHIVE NO.
DESIGNER J. LATHAM	DRAWING SHEET NO.
DRAWN X.XXX	
CHECKED X.XXX	
PROJECT NO.	SHEET 3 OF 6

6/28/26 20:47 JLATHAM C:\USERS\JLATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\PORC PLANS.DWG;

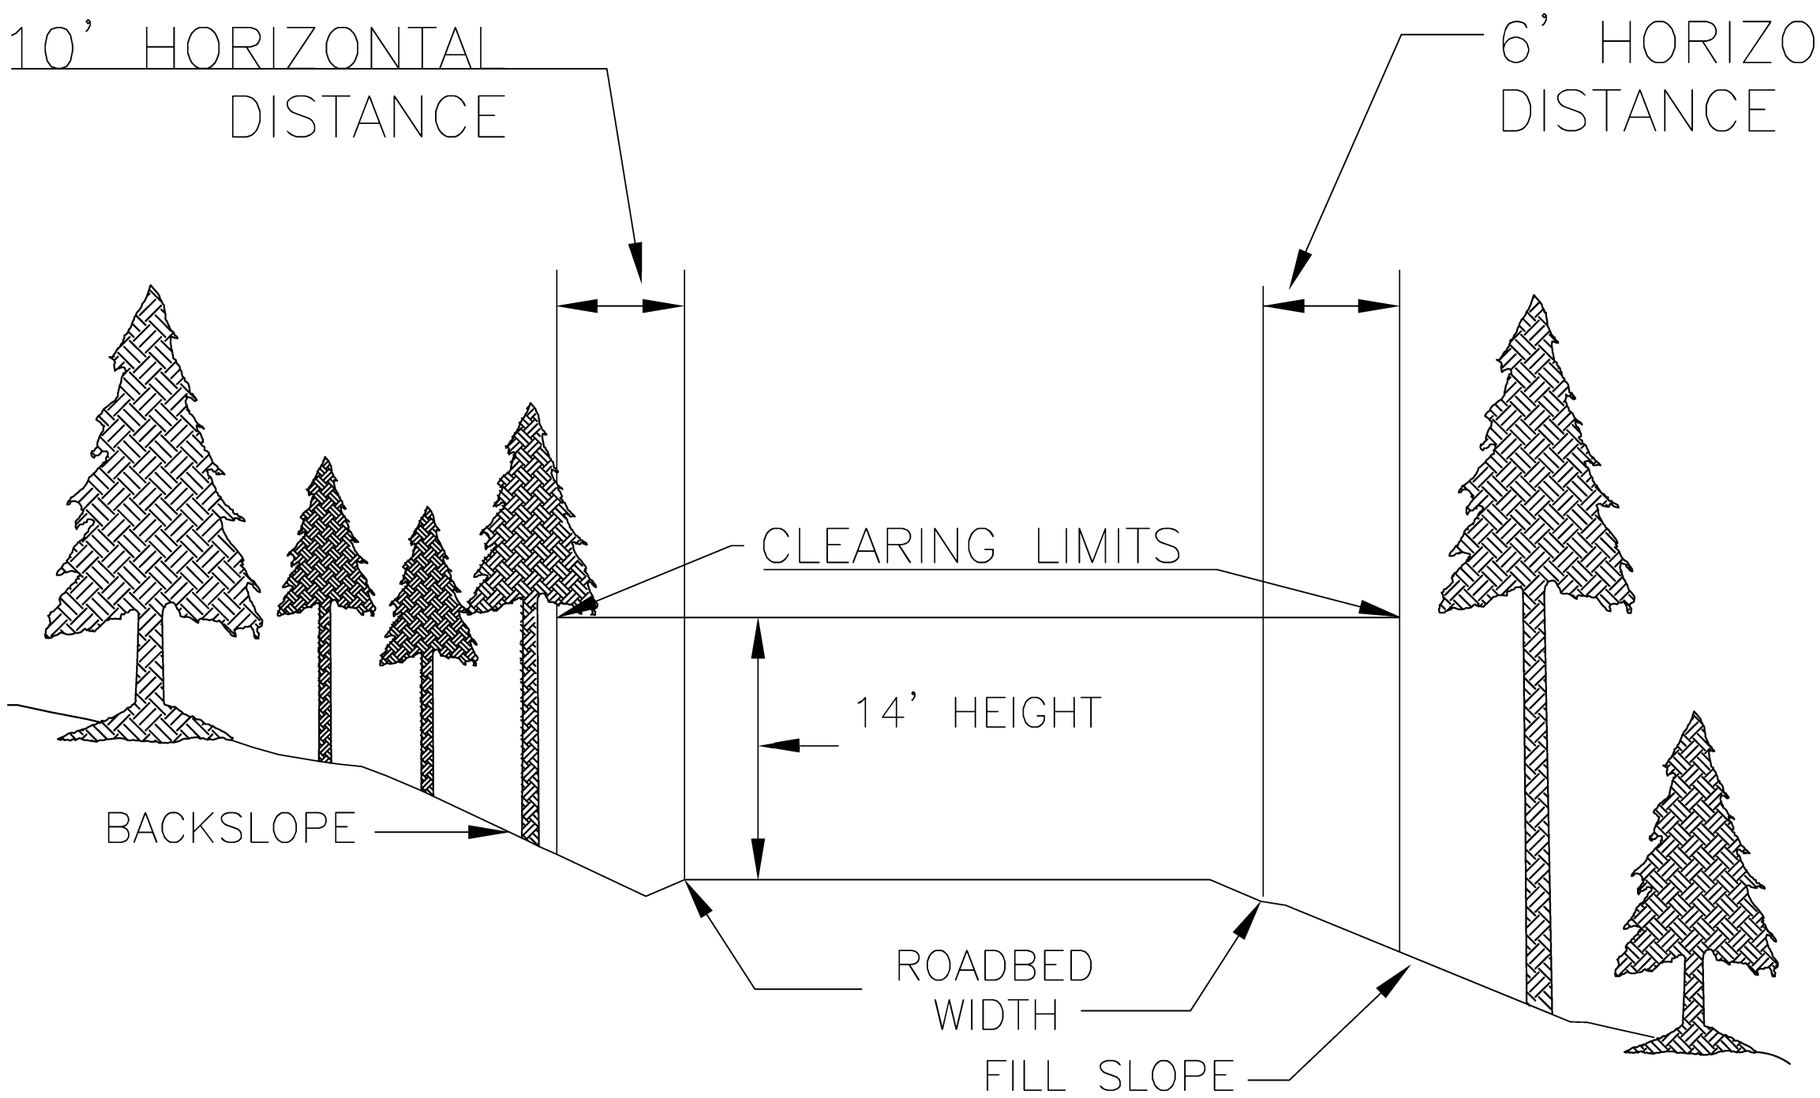

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

CHUGACH NATIONAL FOREST


SEWARD RANGER DISTRICT

DRAWING TITLE

CLEARING DETAILS


DATE 06/28/2026	ARCHIVE NO.
DESIGNER J. LATHAM	DRAWING SHEET NO.
DRAWN X.XXX	
CHECKED X.XXX	
PROJECT NO.	SHEET 4 OF 6

6/28/26 20:47 J:\LATHAM C:\USERS\J.LATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\PORC PLANS.DWG;

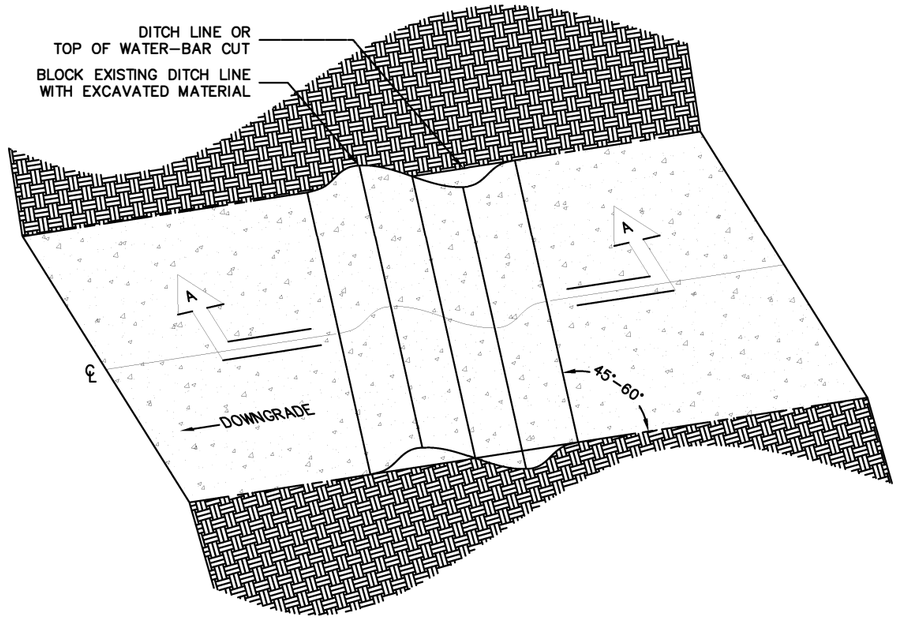

WATER–BAR
PERSPECTIVE VIEW

Not to Scale

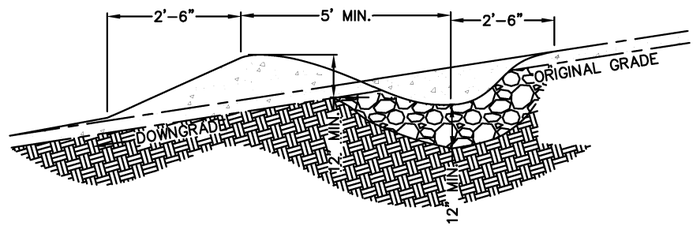

SECTION A – A

Not to Scale

NOTES:

1. CONSTRUCT WATER–BARS AS DIRECTED BY CONTRACTING OFFICER OR AS MARKED ON THE GROUND.
2. INLET OF WATER–BARS SHALL BE TO BOTTOM OF DITCH LINE OR A MINIMUM OF 6" BELOW THE EXISTING ROAD ELEVATION.
3. GRADE OF WATER–BARS SHALL BE OUT–SLOPED A MINIMUM OF 6% OR 2% MORE THAN THE EXISTING ROAD OUT–SLOPE, WHICHEVER IS GREATER.

6/28/26 20:47 J.LATHAM C:\USERS\JLATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\PORC PLANS.DWG;

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

CHUGACH NATIONAL FOREST

SEWARD RANGER DISTRICT

DRAWING TITLE

WATERBAR DETAILS

DATE 06/28/2026	ARCHIVE NO.
DESIGNER J. LATHAM	DRAWING SHEET NO.
DRAWN X.XXX	
CHECKED X.XXX	
PROJECT NO.	SHEET 5 OF 6

ROBINETTE ROAD				
MILE POST	**REMARKS**	**UNIT**	**QTY**	**PAY ITEMS**
0.00	BOP			
	BEGIN CLEARING AND GRUBBING, DISPOSAL METHOD SCATTER OUTSIDE ROAD COORIDOR FOR BRUSH, ALL TREES MUST BE TREATED IN ACCORDANCE WITH UTILZATION STANDARDS IN SPECS.	MI	1.54	20103
	BEGIN LINEAR GRADING, COMPACTION METHOD B. REMOVE ALL ORGANIC MATERIAL AND ENDHAUL TO DISPOSAL LOCATIONS.	MI	1.54	21201
	BEGIN SUBBASE GRADING A PLACEMENT, 12" DEPTH, 12' SURFACE, COMPACTION METHOD B	CY	4300	30103O1
0.20	BEGIN CURVE RECONSTRUCTION			
	ROADWAY EXCAVATION, COMPACTION METHOD B	CY	300	20401
	BEGIN SUBBASE GRADING A PLACEMENT, 12" DEPTH, 12' SURFACE, COMPACTION METHOD B	CY	100	30103
0.80	BEGIN PLACEMENT OF 6" MINUS PITRUN, COMPACTION METHOD B FOR SUBGRADE STABILIZATION AS IDENTIFIED ON THE GROUND BY COR.	CY	400	30210
THROUGHOUT	TWELVE ARMORED DIP CROSSINGS, LOCATION AND SKEW TO BE IDENTIFIED ON THE GROUND. EACH SITE WILL REQUIRE SALVAGING OF LARGE AGGREGATE, EXCAVATION OF 12-18" DEPTH, AND PLACEMENT AND COMPACTION OF SALVAGED MATERIAL PLUS 10 CY OF 6" PITRUN.			
	DRAINAGE EXCAVATION, TYPE ARMORED DIP	CY	96	20423
	6" PITRUN, COMPACTION METHOD B	CY	150	30210
1.54	EOP			
	END CLEARING AND GRUBBING			
	END LINEAR GRADING			
	END AGGREGATE PLACEMENT			

ROBINETTE SPUR ROAD				
MILE POST	**REMARKS**	**UNIT**	**QTY**	**PAY ITEMS**
0.00	BOP			
	BEGIN LINEAR GRADING, COMPACTION METHOD B. REMOVE ALL ORGANIC MATERIAL AND ENDHAUL TO DISPOSAL LOCATIONS.	MI	0.31	21201
	BEGIN SUBBASE GRADING A PLACEMENT, 12" DEPTH, 12' SURFACE, COMPACTION METHOD B	CY	1000	30103O1
1.54	EOP			
	END LINEAR GRADING			

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

CRIPPLE CREEK VEGETATION MANAGEMENT ROADS RECONSTRUCTION

CHUGACH NATIONAL FOREST

SEWARD RANGER DISTRICT

DRAWING TITLE

WORKLIST

DATE 06/28/2028	ARCHIVE NO.
DESIGNER J. LATHAM	DRAWING SHEET NO.
DRAWN X.XXX	
CHECKED X.XXX	
PROJECT NO.	SHEET 6 OF 6

6/28/28 20:47 JLATHAM C:\USERS\JLATHAM\DESKTOP\PORCUPINE ROAD RECONDITIONING\PORC PLANS.DWG;