EFFIGY MOUNDS NATIONAL MONUMENT

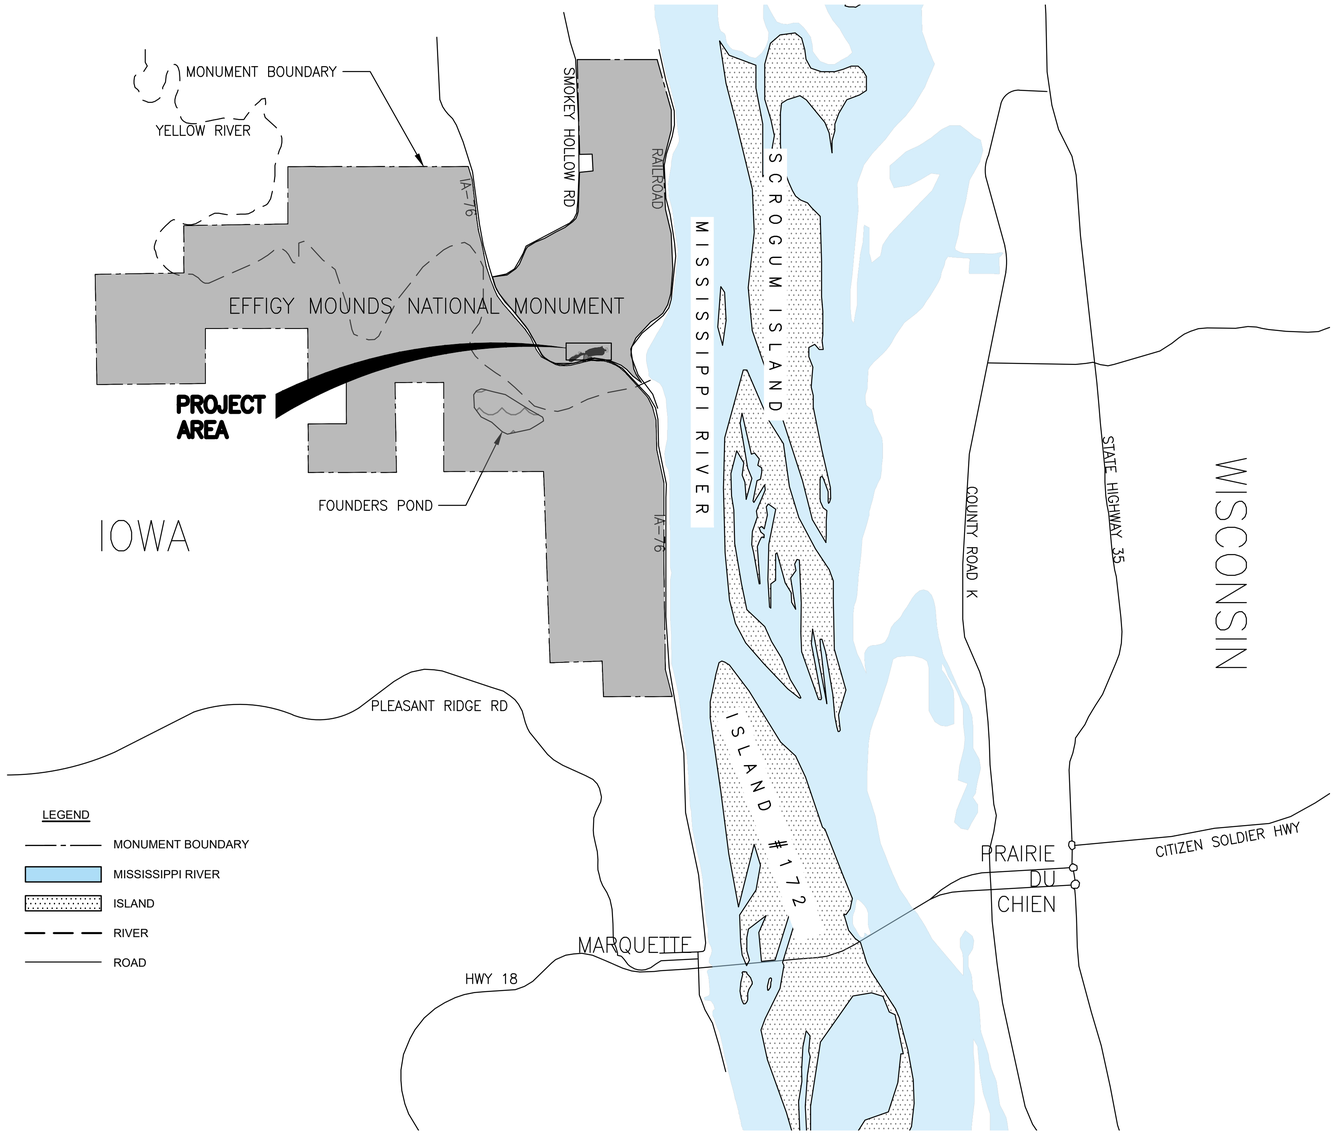

CIVIL — CERTIFICATION

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Iowa.

EMILY A. MAGGIO — P30462 — IOWA — LICENSED PROFESSIONAL ENGINEER

Name: Emily Maggio
My license renewal date is: 12/31/2027
Pages or sheets covered by this seal: G Series, C Series

LANDSCAPE — CERTIFICATION

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Iowa.

STATE OF IOWA — LINDSAY MARTIN — 05/29/2026 — PROFESSIONAL LANDSCAPE ARCHITECT — No. LA00875

Name: Lindsay Martin
My license renewal date is: 06/30/2026
Pages or sheets covered by this seal: L Series

ELECTRICAL — CERTIFICATION

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Iowa.

JEFF MULLIKIN — P25384 — IOWA — LICENSED PROFESSIONAL ENGINEER

Name:
My license renewal date is: 12/31/2026
Pages or sheets covered by this seal: E Series

SHEET NO	DWG NO	SHEET TITLE
1	G000	COVER SHEET
2	G001	CIVIL LEGENDS & ABBREVIATIONS
3	G100	EXISTING CONDITIONS KEY MAP
4	G101	EXISTING CONDITIONS I
5	G102	EXISTING CONDITIONS II
6	C000	STAGING PLAN
7	C100	TESC & DEMOLITION PLAN KEY MAP
8	C101	TESC & DEMOLITION PLAN I
9	C102	TESC & DEMOLITION PLAN II
10	C200	SITE PLAN KEY MAP
11	C201	SITE PLAN I
12	C202	SITE PLAN II
13	C203	SIGNAGE & STRIPING PLAN
14	C300	ACCESSIBILITY PLAN
15	C400	GRADING & DRAINAGE PLAN KEY MAP
16	C401	GRADING & DRAINAGE PLAN I
17	C402	GRADING & DRAINAGE PLAN II
18	C403	GRADING & DRAINAGE PLAN III
19	C404	GRADING & DRAINAGE PLAN IV
20	C405	GRADING & DRAINAGE PLAN V
21	C406	LAYOUT AND ELEVATION TABLES I
22	C407	LAYOUT AND ELEVATION TABLES II
23	C408	PARKING LOT PLAN & PROFILE VIEW I
24	C409	PARKING LOT PLAN & PROFILE VIEW II
25	C410	DRAINAGE PLAN & PROFILE I
26	C411	DRAINAGE PLAN & PROFILE II
27	C500	DETAILS I
28	C501	DETAILS II
29	C502	DETAILS III
30	C503	SECTIONS
31	L100	LANDSCAPE PLAN KEY MAP
32	L101	LANDSCAPE PLAN I
33	L102	LANDSCAPE PLAN II
34	L500	LANDSCAPE DETAILS
35	E000	ELECTRICAL COVER SHEET I
36	E001	ELECTRICAL COVER SHEET II
37	ED100	ELECTRICAL SITE LIGHTING DEMOLITION PLAN
38	E100	ELECTRICAL SITE LIGHTING PLAN
39	E500	ELECTRICAL LIGHTING SCHEDULES

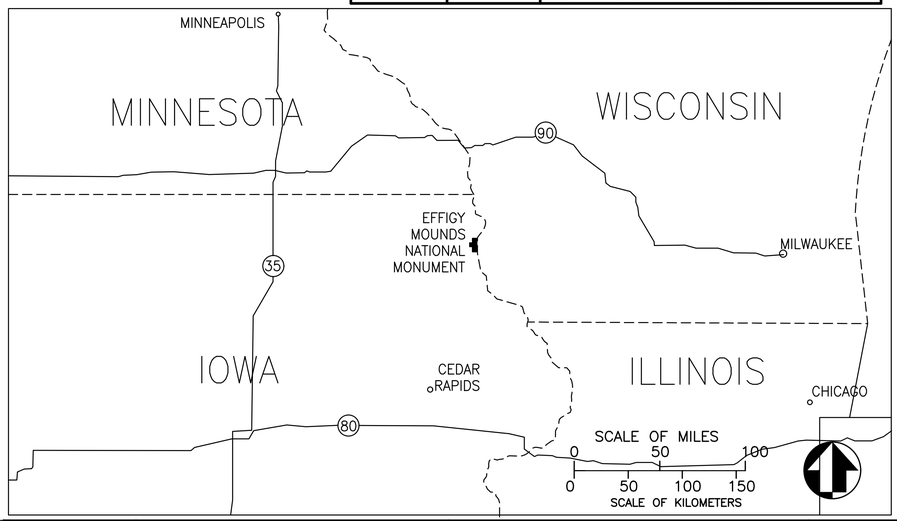

811 Know what's below. Call 811 before you dig.

PRIME / CIVIL / LANDSCAPE:
OTAK, INC
REDMOND, WA 98052

STRUCTURAL:
OTAK, INC
PORTLAND, OR 97024

ARCHITECT:
ANDERSON HALLAS, PC
GOLDEN, CO 80401

ELECTRICAL:
AE DESIGN
DENVER, CO 80202

MECHANICAL / PLUMBING:
360 ENGINEERING
GOLDEN, CO 80403

FIRE PROTECTION:
INTERFACE ENGINEERING, INC
PORTLAND, OR 97204

Mark	Sheet	REVISION	Date	Initial

QUALITY DESIGN CERTIFICATION

- ☐ Prepared in Accordance with Preliminary Design (Title I) OR Drawing No. ____
- ☐ Variance from Preliminary Design (Title I) Approved by Superintendent on ____ (Date) OR
- ☐ Construction Drawing Not Preceded by Preliminary Design (Title I)

Project Manager ____ Date ____

FINAL CONSTRUCTION DOCUMENTS

UNITED STATES
DEPARTMENT OF THE INTERIOR

NATIONAL PARK SERVICE
IOWA SERVICE CENTER

TITLE OF DRAWING
EFFIGY MOUNDS NATIONAL MONUMENT VISITOR CENTER PARKING LOT

LOCATION WITHIN PARK
VISITOR CENTER
NAME OF PARK
EFFIGY MOUNDS NATIONAL MONUMENT

REGION: MIDWEST
COUNTY: ALLAMAKEE
STATE: IOWA

DRAWING NO. 394 / 192943

PKG. NO. EFMO 244 159

SHEET 1 OF 39

LEGEND

EXISTING	DESCRIPTION	PROPOSED
△	SURVEY CONTROL POINT	
◯	SEWER MANHOLE	
▭	CATCH BASIN	
RD	ROOF DRAIN	
∽	LINE CONTINUES	
H	FIRE HYDRANT	
⋈	WATER VALVE	
⌒	AUTO SPRINKLER	
⊸	UTILITY POLE	
⟵	GUY ANCHOR	
Ⓜ	ELECTRIC METER	
Ⓙ	ELECTRIC JUNCTION BOX	
Ⓜ	GAS METER	
Ⓙ	COMMUNICATION JUNCTION BOX	
♿	HANDICAPPED PARKING	
FP	FLAG POLE	
⊓	SIGN	
•	BOLLARD	
⌒	AUTO SPRINKLER	
	DECIDUOUS TREE	
	EVERGREEN TREE	
× 680.55	SPOT ELEVATION	
	CONCRETE SURFACE	
	BITUMINOUS SURFACE	
	RETAINING WALLS	
	LANDSCAPE WOODCHIPS	
	PAVER SURFACE	

LEGEND (CONTINUED)

EXISTING	DESCRIPTION	PROPOSED
W	UNDERGROUND WATER LINE	
UE	UNDERGROUND ELECTRIC LINE	
UT	UNDERGROUND PHONE LINE	
S S	UNDERGROUND SEWER LINE	
OHL	OVERHEAD LINE	
	CULVERT (VARIOUS SIZES)	
	BRUSH LINE	
50	MAJOR (5') CONTOUR LINE	50
51	MINOR (1') CONTOUR LINE	51
	DIRT ROAD	
	CEMENT CONCRETE PAVEMENT REMOVAL	
	ASPHALT PAVEMENT REMOVAL	
	LANDSCAPE ISLAND REMOVAL	
	SAWCUT	
	LIMITS OF WORK	
	STORM DRAIN REMOVAL	
	CURB REMOVAL	
	CONCRETE SIDEWALK	
	HEAVY DUTY HMA	
	HOT MIX ASPHALT	
	WATTLE	
	CORRUGATED POLYETHYLENE PIPE	SD
	GRADING LIMITS	
	DRAINAGE SWALE	
	CONCRETE CURB AND GUTTER	
	SLOPED BACK CURB AND GUTTER	
	DETECTABLE WARNING SURFACE	
	ACCESSIBLE ROUTE	
	TREE PROTECTION	
	TREE REMOVAL	

ABBREVIATIONS

ABA	=	ARCHITECTURAL BARRIERS ACT
ABAAS	=	ARCHITECTURAL BARRIERS ACT ACCESSIBILITY STANDARD
AC	=	ASPHALT CONCRETE
AP	=	ANGLE POINT
ASPH	=	ASPHALT
BOW/BW	=	BOTTOM OF WALL
BTM	=	BOTTOM
BVCS	=	BEGIN VERTICAL CURVE STATION
BVCE	=	BEGIN VERTICAL CURVE ELEVATION
CIP	=	CAST–IN–PLACE
CLK	=	CHAIN LINK
CLIN	=	CONTRACT LINE ITEM NUMBER
CMP	=	CORRUGATED METAL PIPE
CMR	=	CONSTRUCTION MANAGEMENT REPRESENTATIVE
CO	=	CONTRACTING OFFICER
CONC	=	CONCRETE
CP	=	CONTROL POINT
CPP	=	CORRUGATED POLYETHYLENE PIPE
DEC	=	DECIDUOUS
DI	=	DUCTILE IRON
DIA	=	DIAMETER
E	=	EASTING
EOP	=	EDGE OF PAVEMENT
EVCS	=	END VERTICAL CURVE STATION
EVCE	=	END VERTICAL CURVE ELEVATION
EVER	=	EVERGREEN
ELEV	=	ELEVATION
EX/EXIST	=	EXISTING
FFE	=	FINISHED FLOOR ELEVATION
FG	=	FINISHED GRADE
FL	=	FLOW LINE
FOC	=	FACE OF CURB
GB	=	GRADE BREAK
HMA	=	HOT MIX ASPHALT
HORIZ	=	HORIZONTAL
IE	=	INVERT ELEVATION
INFO	=	INFORMATION
ISA	=	INTERNATIONAL SYMBOL OF ACCESSIBILITY
LF	=	LINEAL FEET
LVC	=	LENGTH OF VERTICAL CURVE
OC	=	ON CENTER
N	=	NORTHING
NAVD	=	NORTH AMERICAN VERTICAL DATUM
NIC	=	NOT IN CONTRACT
PC	=	POINT OF CURVATURE
PL	=	PARKING LOT
PT	=	POINT OF TANGENCY
PT	=	POINT
PT	=	PRESSURE TREATED
PVC	=	POLYVINYL CHLORIDE
PVI	=	POINT OF VERTICAL INTERSECTION
R	=	RADIUS
RCP	=	REINFORCED CONCRETE PIPE
RP	=	RADIUS POINT
REBAR	=	STEEL REINFORCING ROD
S	=	SLOPE
SD	=	STORM DRAIN
SSCO	=	SANITARY SEWER CLEANOUT
SSMH	=	SANITARY SEWER MANHOLE
STA	=	STATION
STD	=	STANDARD
TBC	=	TOP BACK OF CURB
TESC	=	TEMPORARY EROSION & SEDIMENT CONTROL
T.O.C.	=	TOP OF CONCRETE
TBD	=	TO BE DETERMINED
TW/T.O.W.	=	TOP OF WALL
TYP.	=	TYPICAL
UON	=	UNLESS OTHERWISE NOTED
VERT	=	VERTICAL
VCP	=	VITRIFIED CLAY PIPE

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
TOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
CADD ZS, CS	G001	CIVIL LEGENDS & ABBREVIATIONS	394 / 192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 2 OF 39

Plotted: May 22, 2026 - 2:05pm lindsey.martin O:\PROJECT\33200\332784E\04 CAD\ACAD\EMO\224159\DRAWINGS\CIVIL\CIVIL ABBREVIATIONS AND LEGEND.dwg Layout Name: G001

G102

G101

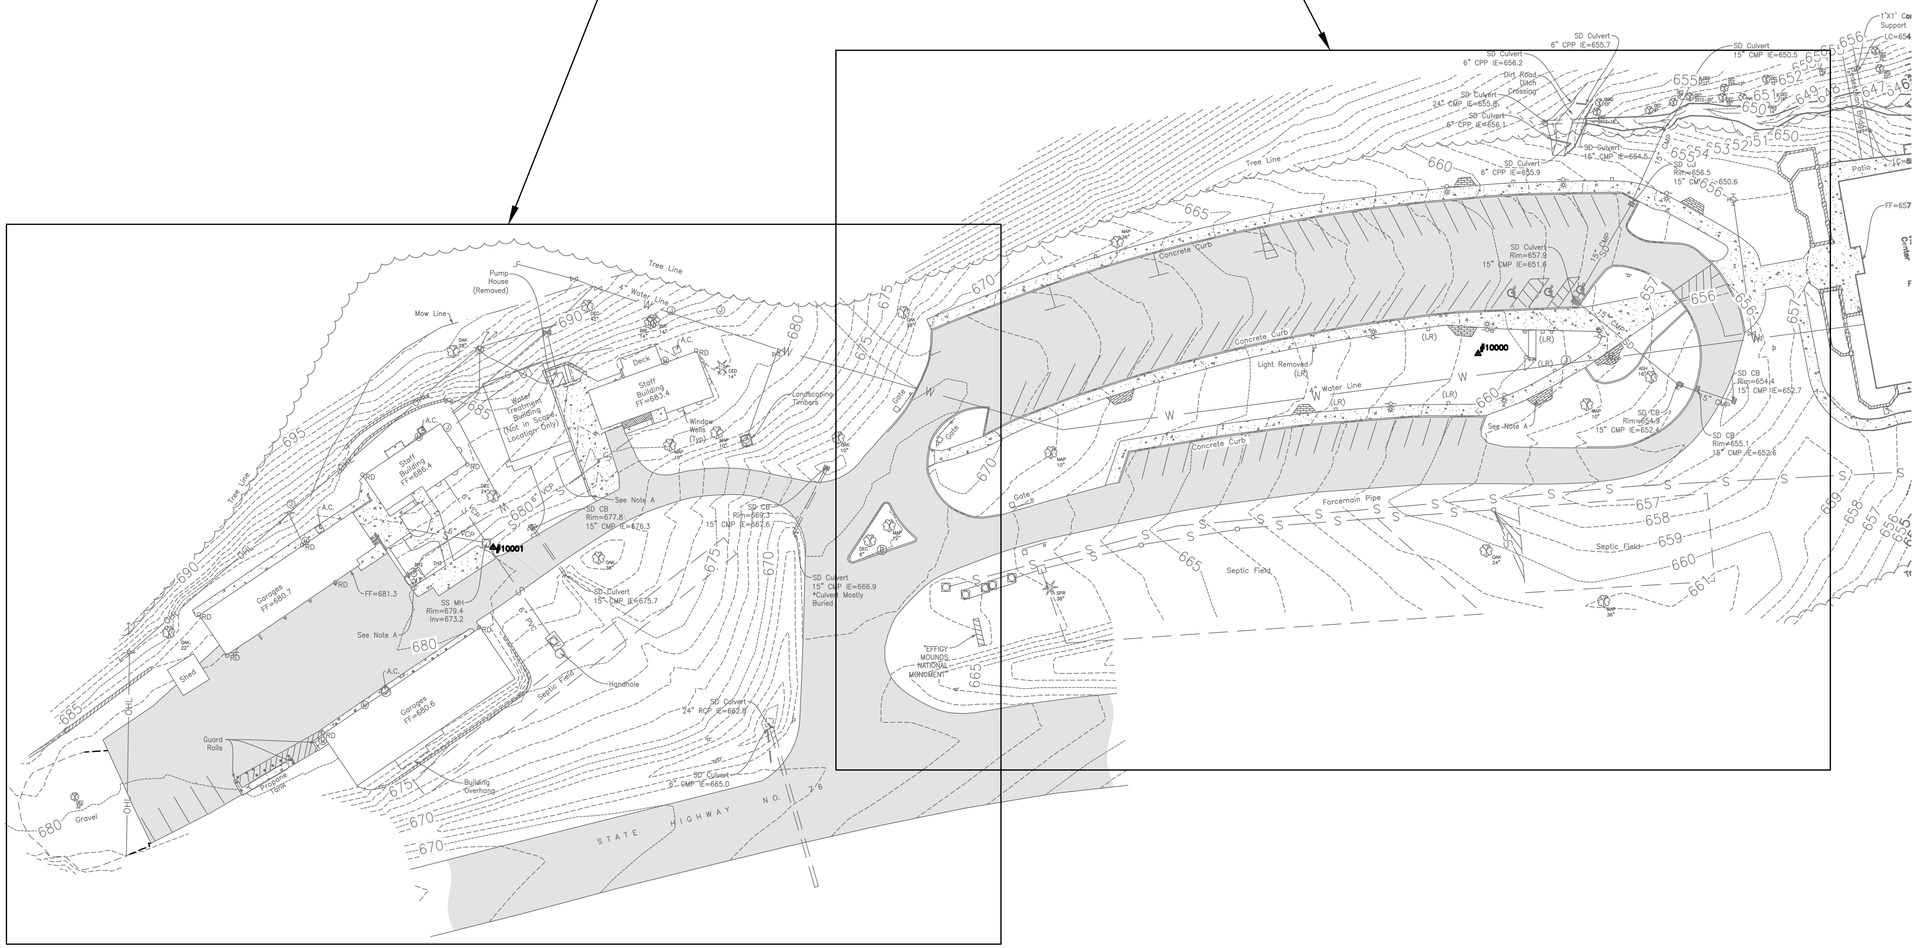

EFMO – EFFIGY MOUNDS
NATIONAL MONUMENT
EXISTING CONDITIONS
7–28–2022
MDR

PROJECT COORDINATES AND ELEVATIONS:

PROJECT COORDINATES ARE IOWA STATE PLANE, CENTRAL ZONE, NAD83(2011), SCALED TO GROUND, BASED ON EXISTING CONTROL POINTS PROVIDED BY NPS FROM PRIOR WORK AT THE SITE.

PROJECT ELEVATIONS ARE NAVD88, BASED ON EXISTING CONTROL POINTS PROVIDED BY NPS FROM PRIOR WORK AT THE SITE.

UNITS IN US SURVEY FEET.

DATUM	NORTHING	EASTING	ELEVATION
CP #10000	3868265.08	5539212.14	660.86
CP #10001	3868162.82	5538692.17	679.01

40' 0' 40' 80'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED:	LM, CS
CADD	ZS, CS
TECH REVIEW:	EM, KK
DATE:	5/29/2026

SUB SHEET NO.
G100

TITLE OF SHEET
EXISTING CONDITONS KEY MAP

EFFIGY MOUNDS NATIONAL MONUMENT

DRAWING NO. 394 192943
PMIS/PKG NO. 224159
SHEET 3 OF 39

Plotted: May. 22, 2026 – 2:12pm lindsey.martin O:\PROJECT\33200\333708E\04 CAD\ACAD\EFMO\224159\DRAWINGS\GEN\EXCOND.dwg Layout Name: G100

NOTES

A) THIS SURVEY MADE TIES TO "NEW" FEATURES AND CONDITIONS WITHIN THE LIMITS OF THE PRIOR TOPOGRAPHIC SURVEY. THESE AREAS ARE OUTSIDE OF THE ADDITIONAL SURVEY SCOPE AND WERE TIED AND NOTED FOR REFERENCE ONLY.

B) THE TREE INFORMATION SHOWN HEREON WAS COLLECTED DURING THE FIELD SURVEY BY NON-FORESTRY TRAINED ANDERSON ENGINEERING OF MINNESOTA SURVEY PERSONNEL. TREE SIZES ARE ESTIMATES AND LOCATIONS ARE ACCURATE TO PLUS OR MINUS THREE FEET.

C) NO TITLE WORK WAS PROVIDED FOR THE PREPARATION OF THIS SURVEY TO VERIFY THE LEGAL DESCRIPTION OR THE EXISTENCE OF ANY EASEMENTS OR ENCUMBRANCES.

D) THE LOCATION AND EXTENT OF UNDERGROUND UTILITIES, IF SHOWN, ARE BASED UPON EXISTING DRAWINGS PROVIDED BY THE UTILITY COMPANIES, ABOVE GROUND EVIDENCE AND IOWA ONE CALL MARKINGS. THERE IS NO GUARANTEE AS TO THE ACCURACY OR THE COMPLETENESS OF THIS INFORMATION. THE SIZE AND LOCATION SHOULD BE CONSIDERED APPROXIMATE. ADDITIONAL UNDERGROUND UTILITIES MAY BE PRESENT. VERIFICATION OF THE EXISTENCE AND LOCATION OF ALL UTILITIES SHOULD BE OBTAINED FROM THE UTILITY OWNERS PRIOR TO ANY PLANNING OR DESIGN. IN ACCORDANCE WITH IOWA, THE LOCATION OF UTILITIES SHALL BE CONFIRMED PRIOR TO ANY DEMOLITION OR CONSTRUCTION.

THIS DRAWING ONLY REFLECTS AND VERIFIES THE FILED SURVEY DATA OF THOSE FEATURES AND CONDITIONS PRESENT WITHIN THE ORIGINAL SURVEY LIMITS AS OF DEC 12, 2021 AND WITHIN THE ADDITIONAL SURVEY LIMITS AS OF JULY 29, 2024

HOR. DATUM: IOWA STATE PLANE NORTH ZONE NAD83(2011)(EPOCH 2010.00).

VERT. DATUM: NAVD 88

DATUM	NORTHING	EASTING	ELEVATION
CP #10000	3868265.08	5539212.14	660.86
CP #10001	3868162.82	5538692.17	679.01

20' 0' 20' 40'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: EXISTING CONDITIONS I	DRAWING NO. 394 192943
DRAWN: ZS, CS	G101		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 4 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: Jul 09, 2026 - 2:32pm Zach.Schneider O:\PROJECT\33200\332784E\04 CAD\ACAD\FMO\224159\DRAWINGS\GEN\GXCOND.dwg Layout Name: G101

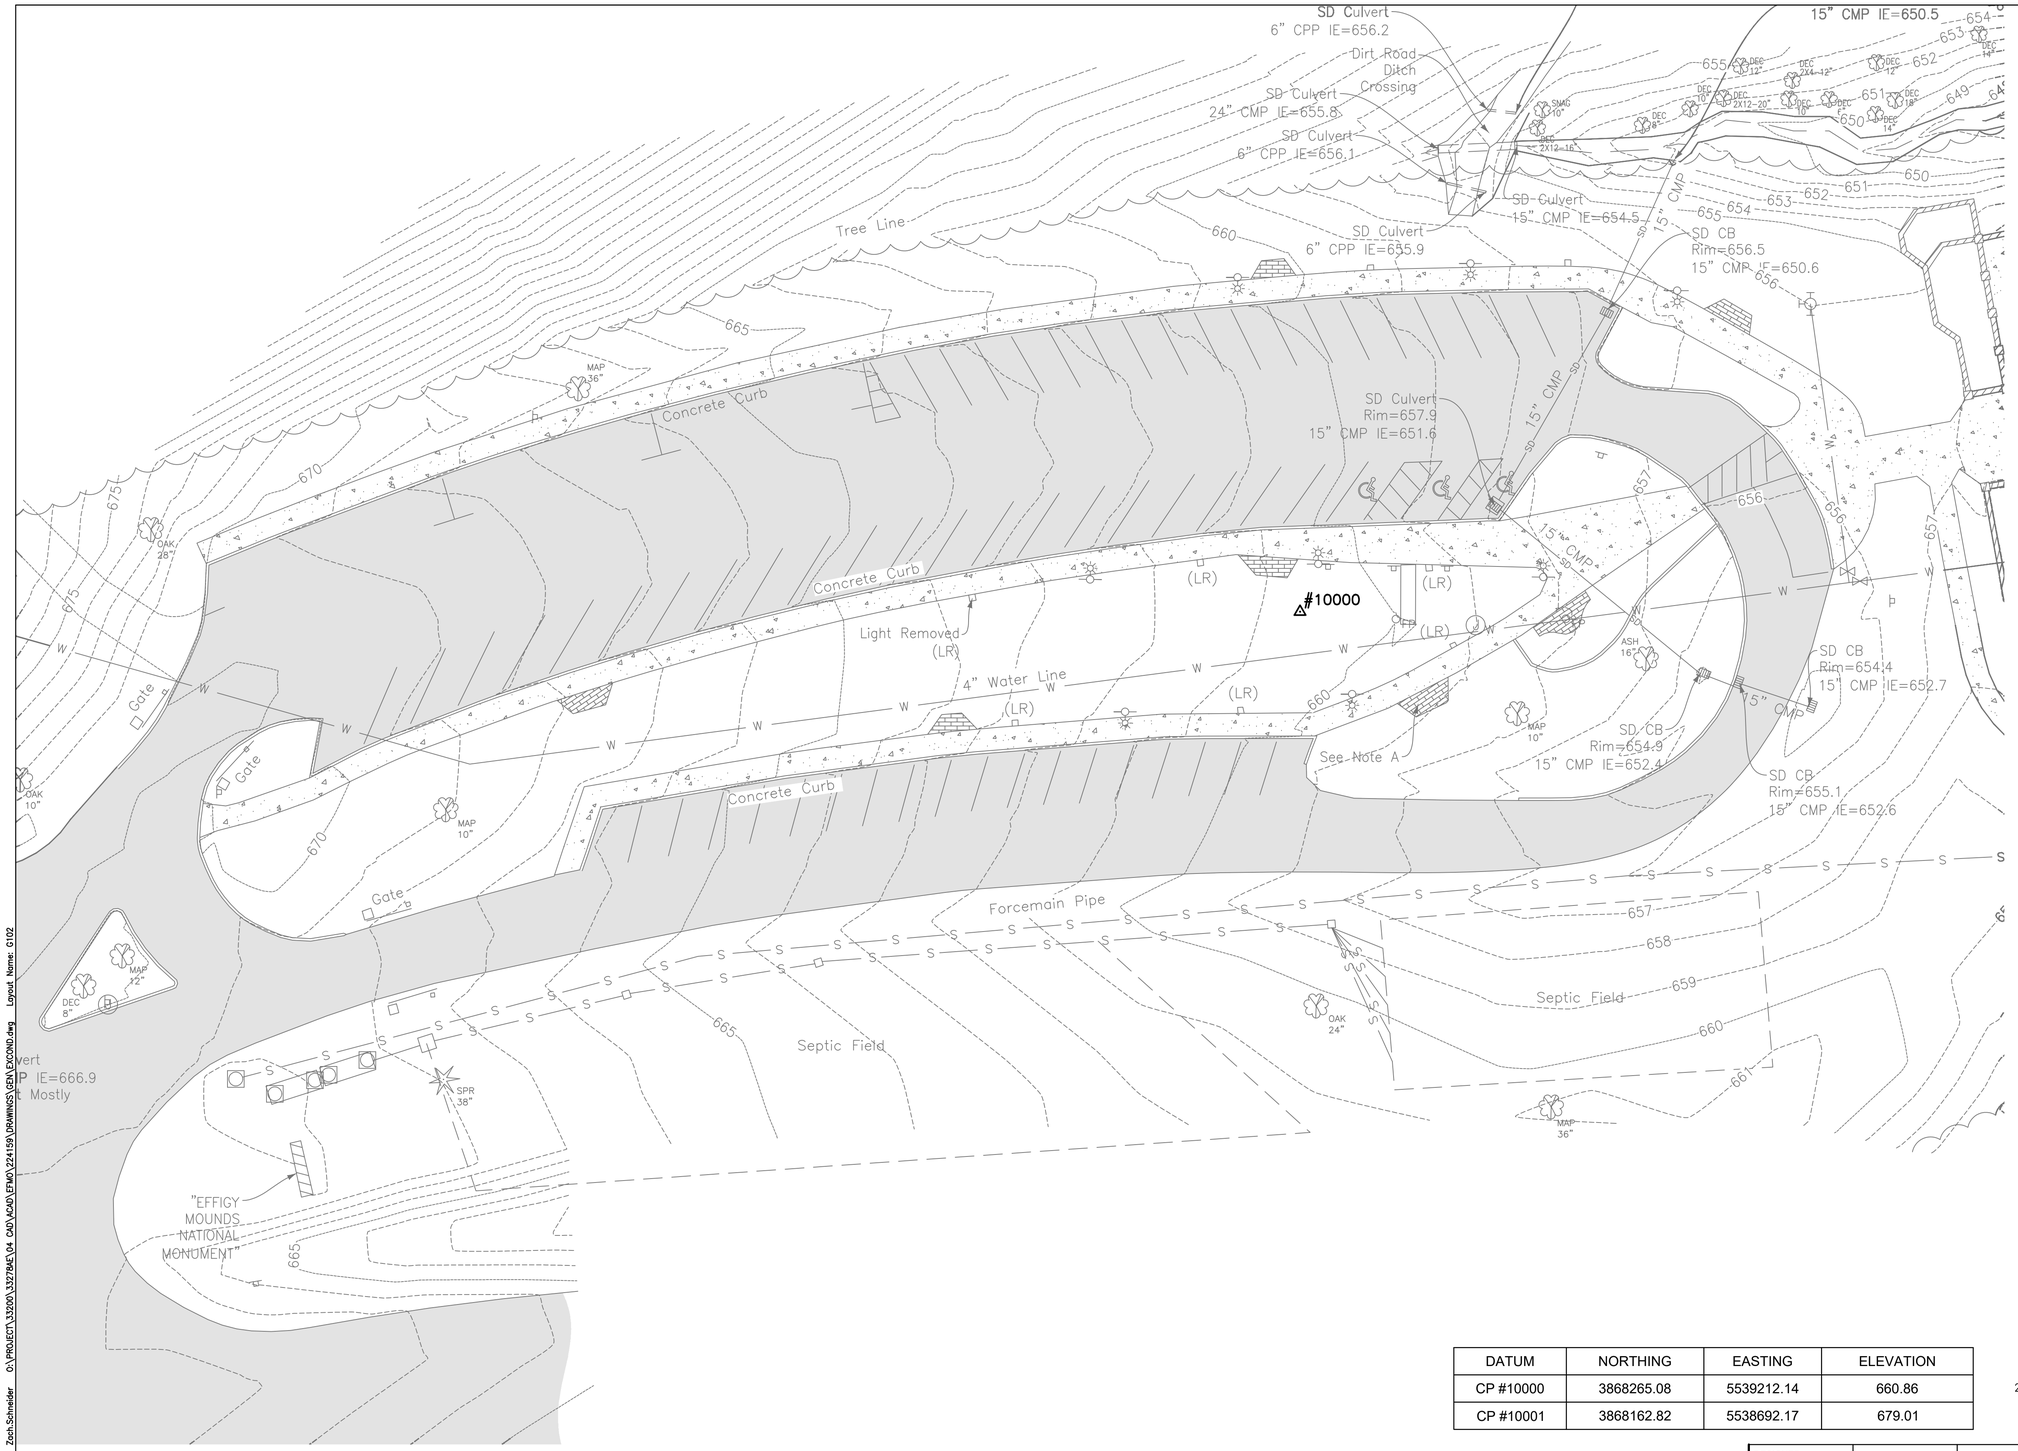

NOTES

A) THIS SURVEY MADE TIES TO "NEW" FEATURES AND CONDITIONS WITHIN THE LIMITS OF THE PRIOR TOPOGRAPHIC SURVEY. THESE AREAS ARE OUTSIDE OF THE ADDITIONAL SURVEY SCOPE AND WERE TIED AND NOTED FOR REFERENCE ONLY.

B) THE TREE INFORMATION SHOWN HEREON WAS COLLECTED DURING THE FIELD SURVEY BY NON-FORESTRY TRAINED ANDERSON ENGINEERING OF MINNESOTA SURVEY PERSONNEL. TREE SIZES ARE ESTIMATES AND LOCATIONS ARE ACCURATE TO PLUS OR MINUS THREE FEET.

C) NO TITLE WORK WAS PROVIDED FOR THE PREPARATION OF THIS SURVEY TO VERIFY THE LEGAL DESCRIPTION OR THE EXISTENCE OF ANY EASEMENTS OR ENCUMBRANCES.

D) THE LOCATION AND EXTENT OF UNDERGROUND UTILITIES, IF SHOWN, ARE BASED UPON EXISTING DRAWINGS PROVIDED BY THE UTILITY COMPANIES, ABOVE GROUND EVIDENCE AND IOWA ONE CALL MARKINGS. THERE IS NO GUARANTEE AS TO THE ACCURACY OR THE COMPLETENESS OF THIS INFORMATION. THE SIZE AND LOCATION SHOULD BE CONSIDERED APPROXIMATE. ADDITIONAL UNDERGROUND UTILITIES MAY BE PRESENT. VERIFICATION OF THE EXISTENCE AND LOCATION OF ALL UTILITIES SHOULD BE OBTAINED FROM THE UTILITY OWNERS PRIOR TO ANY PLANNING OR DESIGN. IN ACCORDANCE WITH IOWA, THE LOCATION OF UTILITIES SHALL BE CONFIRMED PRIOR TO ANY DEMOLITION OR CONSTRUCTION.

THIS DRAWING ONLY REFLECTS AND VERIFIES THE FILED SURVEY DATA OF THOSE FEATURES AND CONDITIONS PRESENT WITHIN THE ORIGINAL SURVEY LIMITS AS OF DEC 12, 2021 AND WITHIN THE ADDITIONAL SURVEY LIMITS AS OF JULY 29, 2024

HOR. DATUM: IOWA STATE PLANE NORTH ZONE NAD83(2011)(EPOCH 2010.00).

VERT. DATUM: NAVD 88

DATUM	NORTHING	EASTING	ELEVATION
CP #10000	3868265.08	5539212.14	660.86
CP #10001	3868162.82	5538692.17	679.01

20' 0' 20' 40'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: EXISTING CONDITIONS II	DRAWING NO. 394 / 192943
DRAWN: ZS, CS	G102		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 5 OF 39
DATE: 5/29/2026			

Plotted: Jul 09, 2026 - 2:33pm Zach.Schneider G:\PROJECT\33000\332784C\04 CAD\ACAD\EFMO\224159\DRAWINGS\GEN\EXCOND.dwg Layout Name: G102

NOTE: SEE STAGING PLAN ON C000 FOR ADDITIONAL TEMPORARY SIGNS.

(1) TEMPORARY SIGN, SIZE: 103" X 55"

(2) TEMPORARY SIGN, SIZE: 103" X 47"

(7) TEMPORARY SIGN, SIZE: 67" X 31"

(3) TEMPORARY SIGN, SIZE: 103" X 47"

(4) TEMPORARY SIGN, SIZE: 103" X 47"

(8) TEMPORARY SIGN, SIZE: 67" X 31"

(5) TEMPORARY SIGN, SIZE: 103" X 55"

(6) TEMPORARY SIGN, SIZE: 124" X 55"

NOTE: MOUNT TO CONTRACTOR PERIMETER ENCLOSURE FENCE AT THE ENTRY DRIVE. THE BOTTOM OF SIGN SHALL BE 6' ABOVE FINISHED GRADE.

LEGEND

- STAGING / STOCKPILE AREA
- TRAILER LOCATIONS
- CONTRACTOR PARKING AREA
- LIMITS OF WORK

NOTES:

1. FINAL STAGING AREAS TO BE COORDINATED IN THE FIELD WITH THE CO.
2. CONTRACTOR TO REMAIN WITHIN AREAS SUBJECT TO THE WORK AT HAND UNLESS APPROVED BY THE CONTRACTING OFFICER.
3. SITE AREAS AND ELEMENTS OUTSIDE THE LIMITS OF WORK SHALL BE PROTECTED DURING CONSTRUCTION. SEE SHEET C101–C102 FOR REMOVALS.
4. ACCESS THROUGH THE SITE TO THE MAINTENANCE AREA SHALL BE COORDINATED WITH NPS AS NEEDED.
5. SEE SHEET C502 FOR TEMPORARY SIGNAGE DETAIL FOR INSTALLATION OF ALL TEMPORARY SIGNS EXCLUDING SIGN 5.

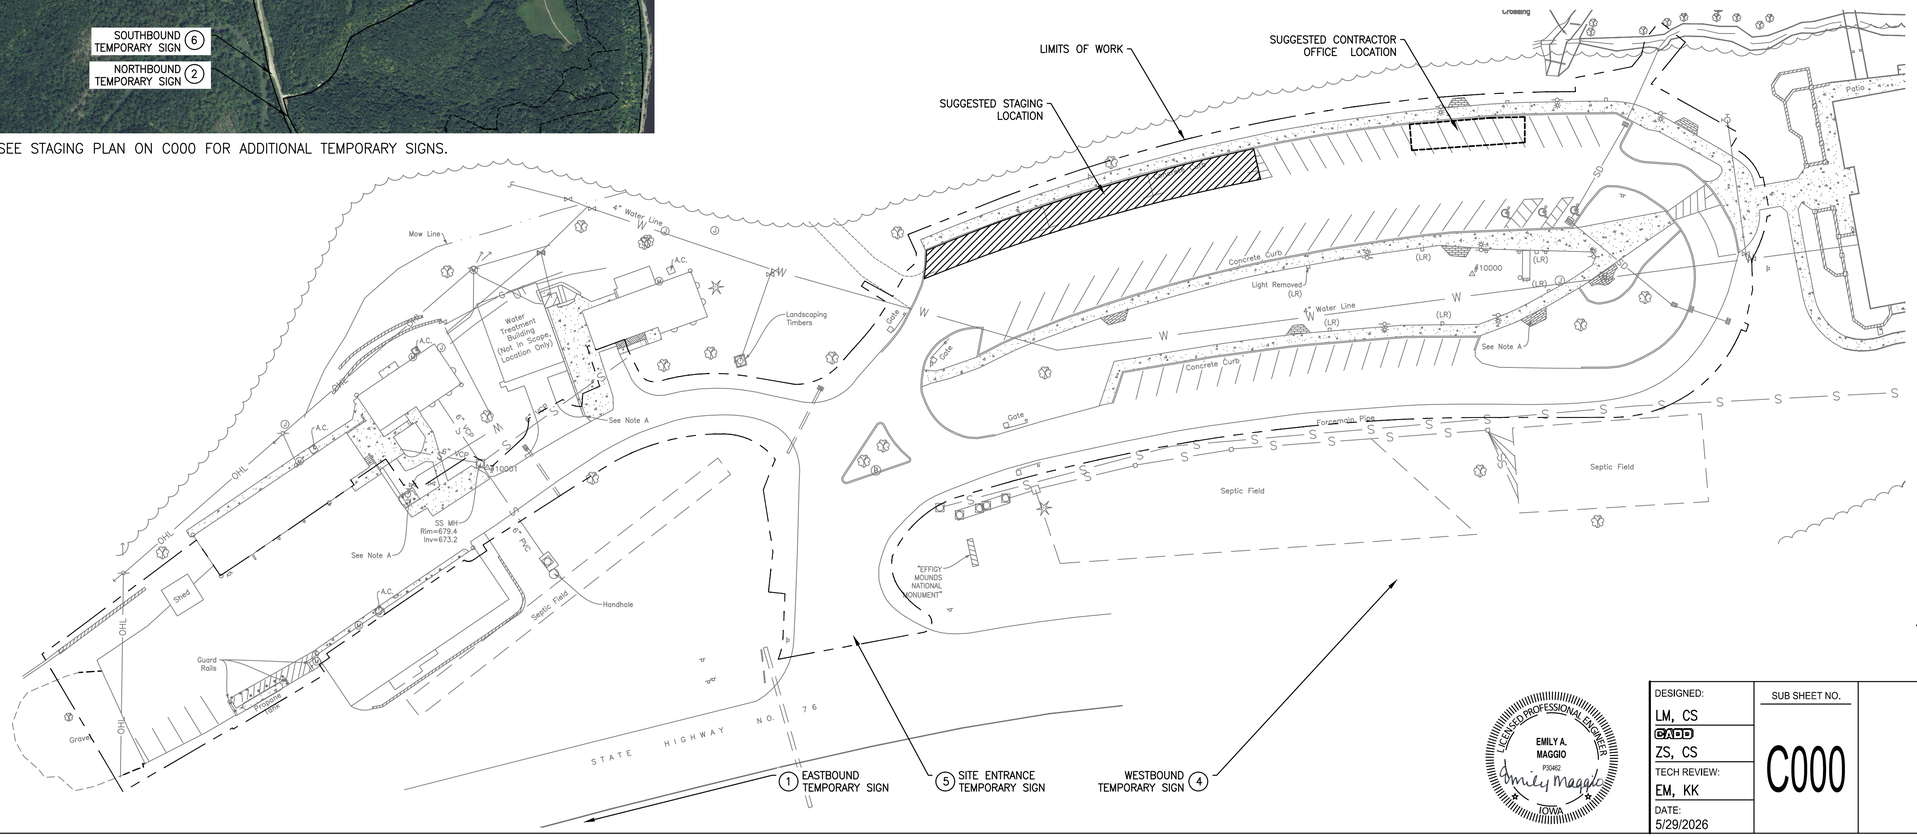

40' 0' 40' 80'
SCALE OF FEET

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P32482
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: STAGING PLAN	DRAWING NO. 394 / 192943
DRAWN: ZS, CS	C000		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 6 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 - 2:17pm lindsey.martin O:\PROJECT\332001\332784E\04 CAD\ACAD\ETMV\2241159\DRAWINGS\CIVIL\STAGING AND TEMPORARY SIGNAGE PLAN.dwg Layout Name: C000

C102

C101

LIMITS OF WORK

VISITORS CENTER

STAFF BUILDING

STAFF BUILDING

GARAGE

GARAGE

Water Treatment Building (Not In Scope, Locator Only)

"EFFIGY MOUNDS NATIONAL MONUMENT"

STATE HIGHWAY NO. 76

Tree Line

Mow Line

4" Water Line

Landscaping Timbers

Light Removed (LR)

#10000

See Note 4

Patio

Gravel

Footprint

SD Culvert 6" CPP IE=656.2

SD Culvert 6" CPP IE=655.7

SD Culvert 24" CMP IE=655.8

SD Culvert 6" CPP IE=656.1

SD Culvert 15" CMP IE=650.5

SD Culvert 15" CMP IE=656.5

SD Culvert 15" CMP IE=651.8

SD Culvert 15" CMP IE=652.7

SD Culvert 15" CMP IE=652.6

SD Culvert 15" CMP IE=657.7

SD Culvert 24" RCP IE=662.5

SD Culvert 3" CMP IE=665.0

Dirt Road Ditch Crossing

40' 0' 40' 80'

SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
PE0402
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
CADD: ZS, CS	C100	TESC & DEMOLITION PLAN KEY MAP	394 192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 7 OF 39

Plotted: May 22, 2026 - 2:15pm lindsey.martin O:\PROJECT\33200\33278A\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\DEMO.dwg Layout Name: C100

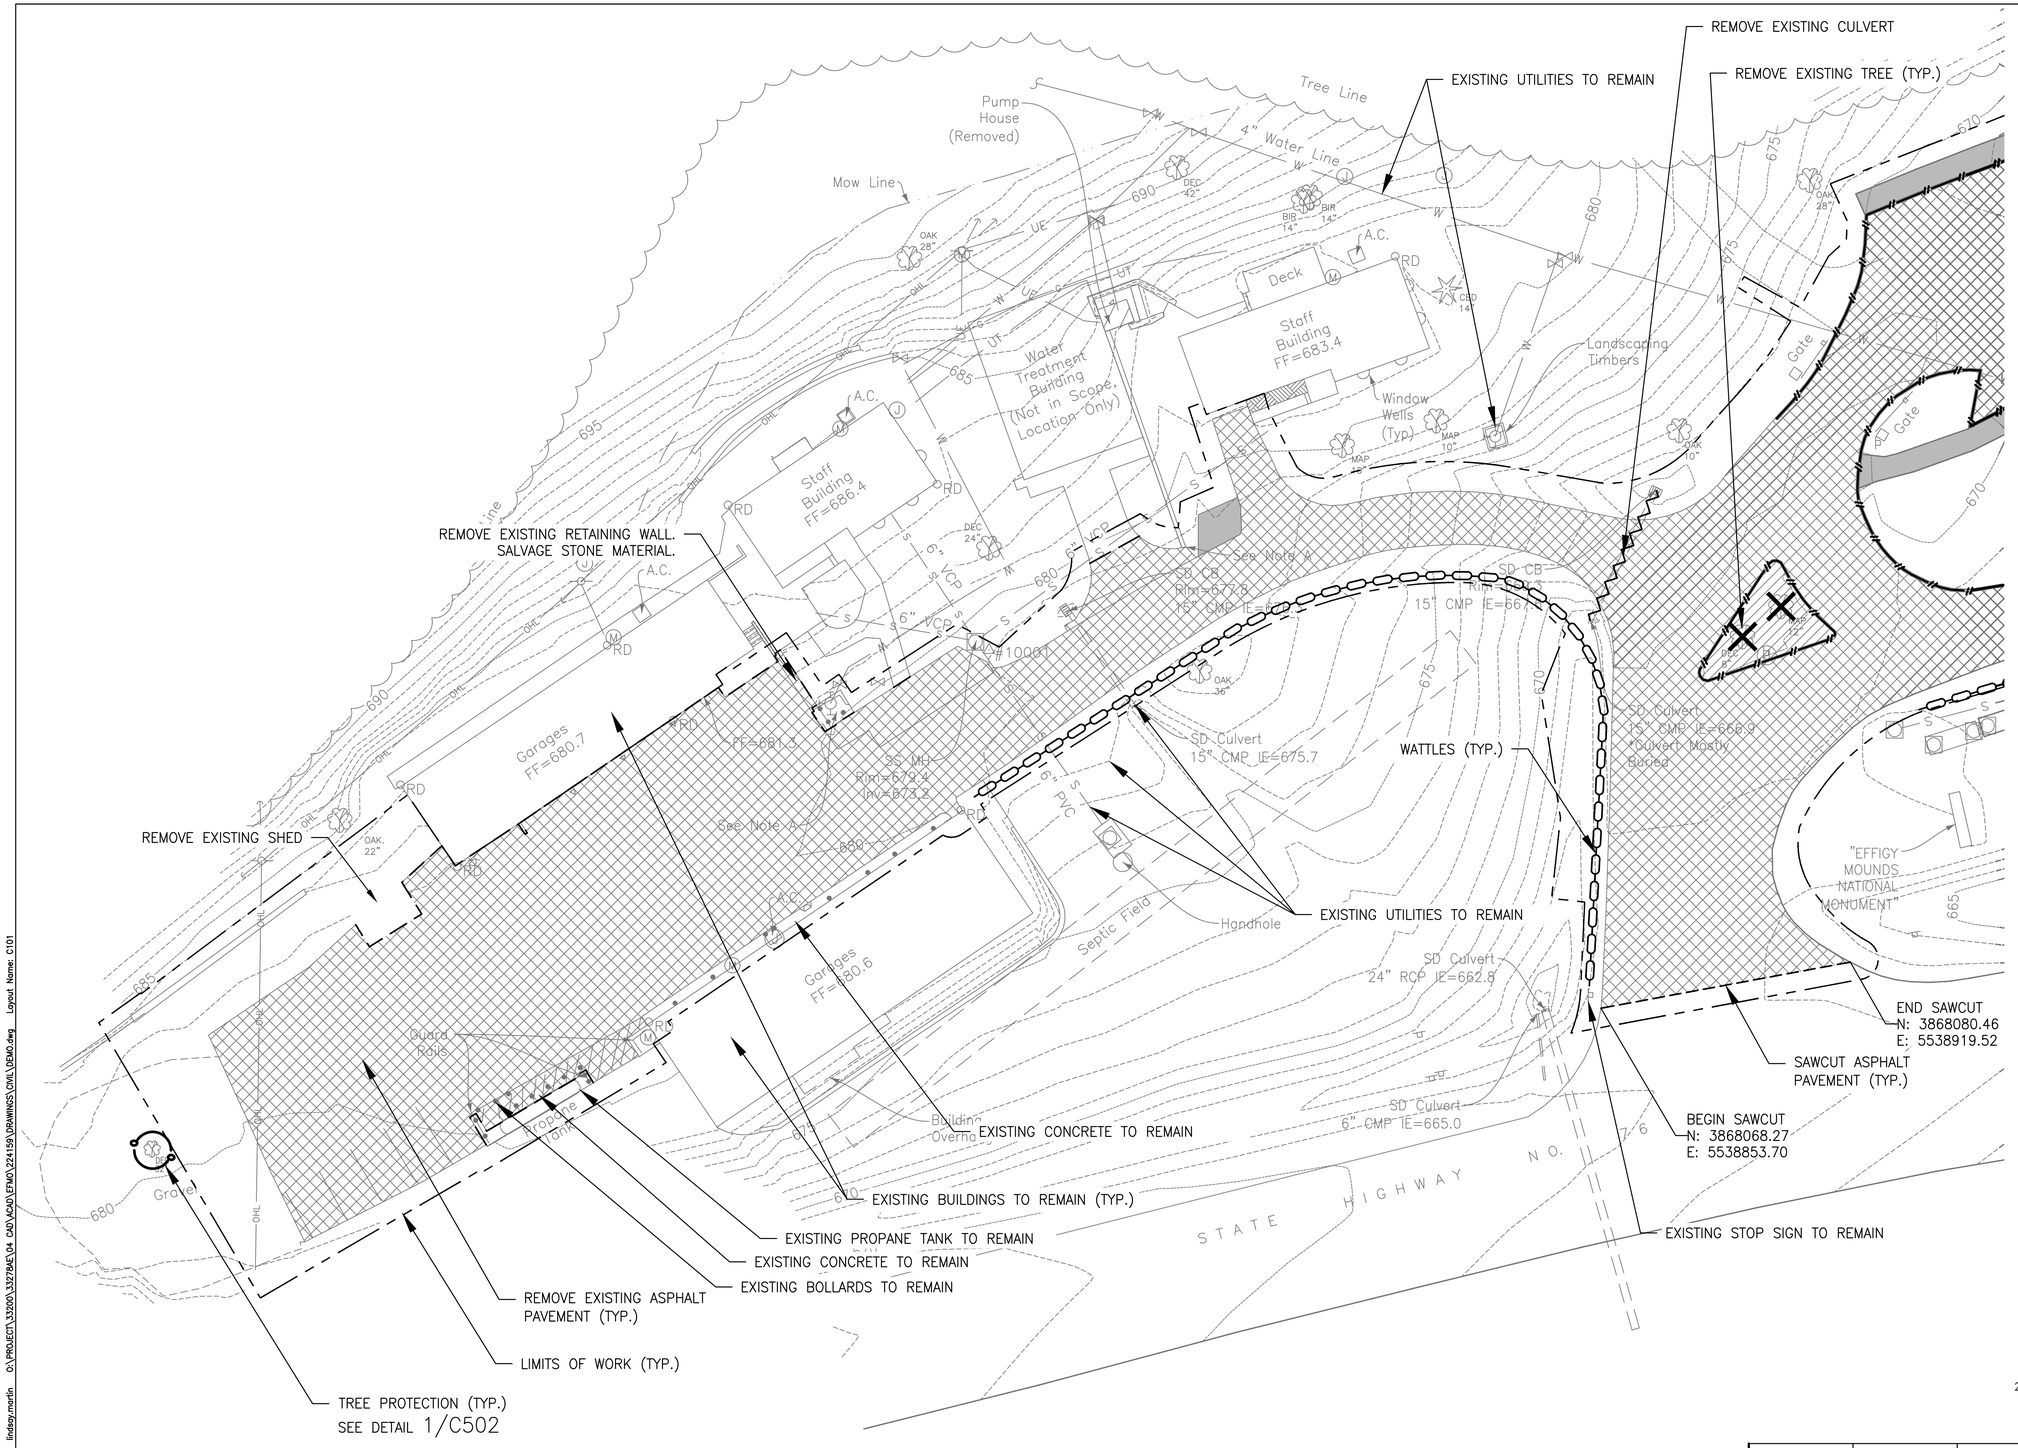

LEGEND

- ASPHALT AND BASE COURSE PAVEMENT REMOVAL
- CONCRETE PAVEMENT REMOVAL
- PLANTER ISLAND REMOVAL
- STRUCTURE REMOVAL
- LIMITS OF WORK
- SAWCUT ASPHALT PAVEMENT
- CURB REMOVAL
- TREE PROTECTION FENCING
- STORM DRAIN REMOVAL
- WATTLES
- TREE, STUMP, ROOT SYSTEM AND ROOT BALL REMOVAL

TESC/DEMOLITION NOTES

1. CONTRACTOR SHALL BE RESPONSIBLE FOR EXISTING DRAINAGE THROUGH THE SITE DURING CONSTRUCTION.
2. PROTECT EXISTING UTILITIES, SIGNAGE, AND FEATURES IN PLACE NOT CALLED OUT FOR REMOVAL OR RELOCATION.
3. CONTRACTOR SHALL PROVIDE EROSION CONTROL MAINTENANCE DURING CONSTRUCTION AND SHALL REMOVE EROSION CONTROL MEASURES AFTER CONSTRUCTION.
4. CONTRACTOR IS RESPONSIBLE FOR VERIFYING LOCATION OF UNDERGROUND UTILITIES.
5. PLACE TREE PROTECTION FENCING AS REQUIRED TO PROTECT EXISTING VEGETATION NOT CALLED OUT FOR REMOVAL. TREE PROTECTION SHALL BE INSTALLED PRIOR TO ANY SITE ACTIVITY AND SHALL REMAIN IN PLACE THROUGHOUT CONSTRUCTION.
6. REMOVE AND SALVAGE ALL EXISTING PICNIC TABLES, TRASH RECEPTACLES, AND BENCHES WITHIN PROJECT LIMITS OF WORK AND PROVIDE TO THE PARK.
7. ALL TREES TO BE REMOVED SHALL BE MARKED BY THE CONTRACTOR AND APPROVED BY THE CO BEFORE ANY REMOVAL ACTIVITIES CAN OCCUR.

20' 0' 20' 40'
SCALE OF FEET

EMILY A. MAGGIO P30482 IOWA LICENSED PROFESSIONAL ENGINEER

DESIGNED: LM, CS DRAWN: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C101	TITLE OF SHEET: TESC & DEMOLITION PLAN I EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 192943 PMIS/PKG NO. 224159 SHEET 8 OF 39

Plotted: May 22, 2026 - 2:15pm lindsey.martin O:\PROJECT\332020\332784\CI\04 CAD\ACAD\ETMX\224159\DRAWINGS\CIVIL\DEMO.dwg Layout Name: C101

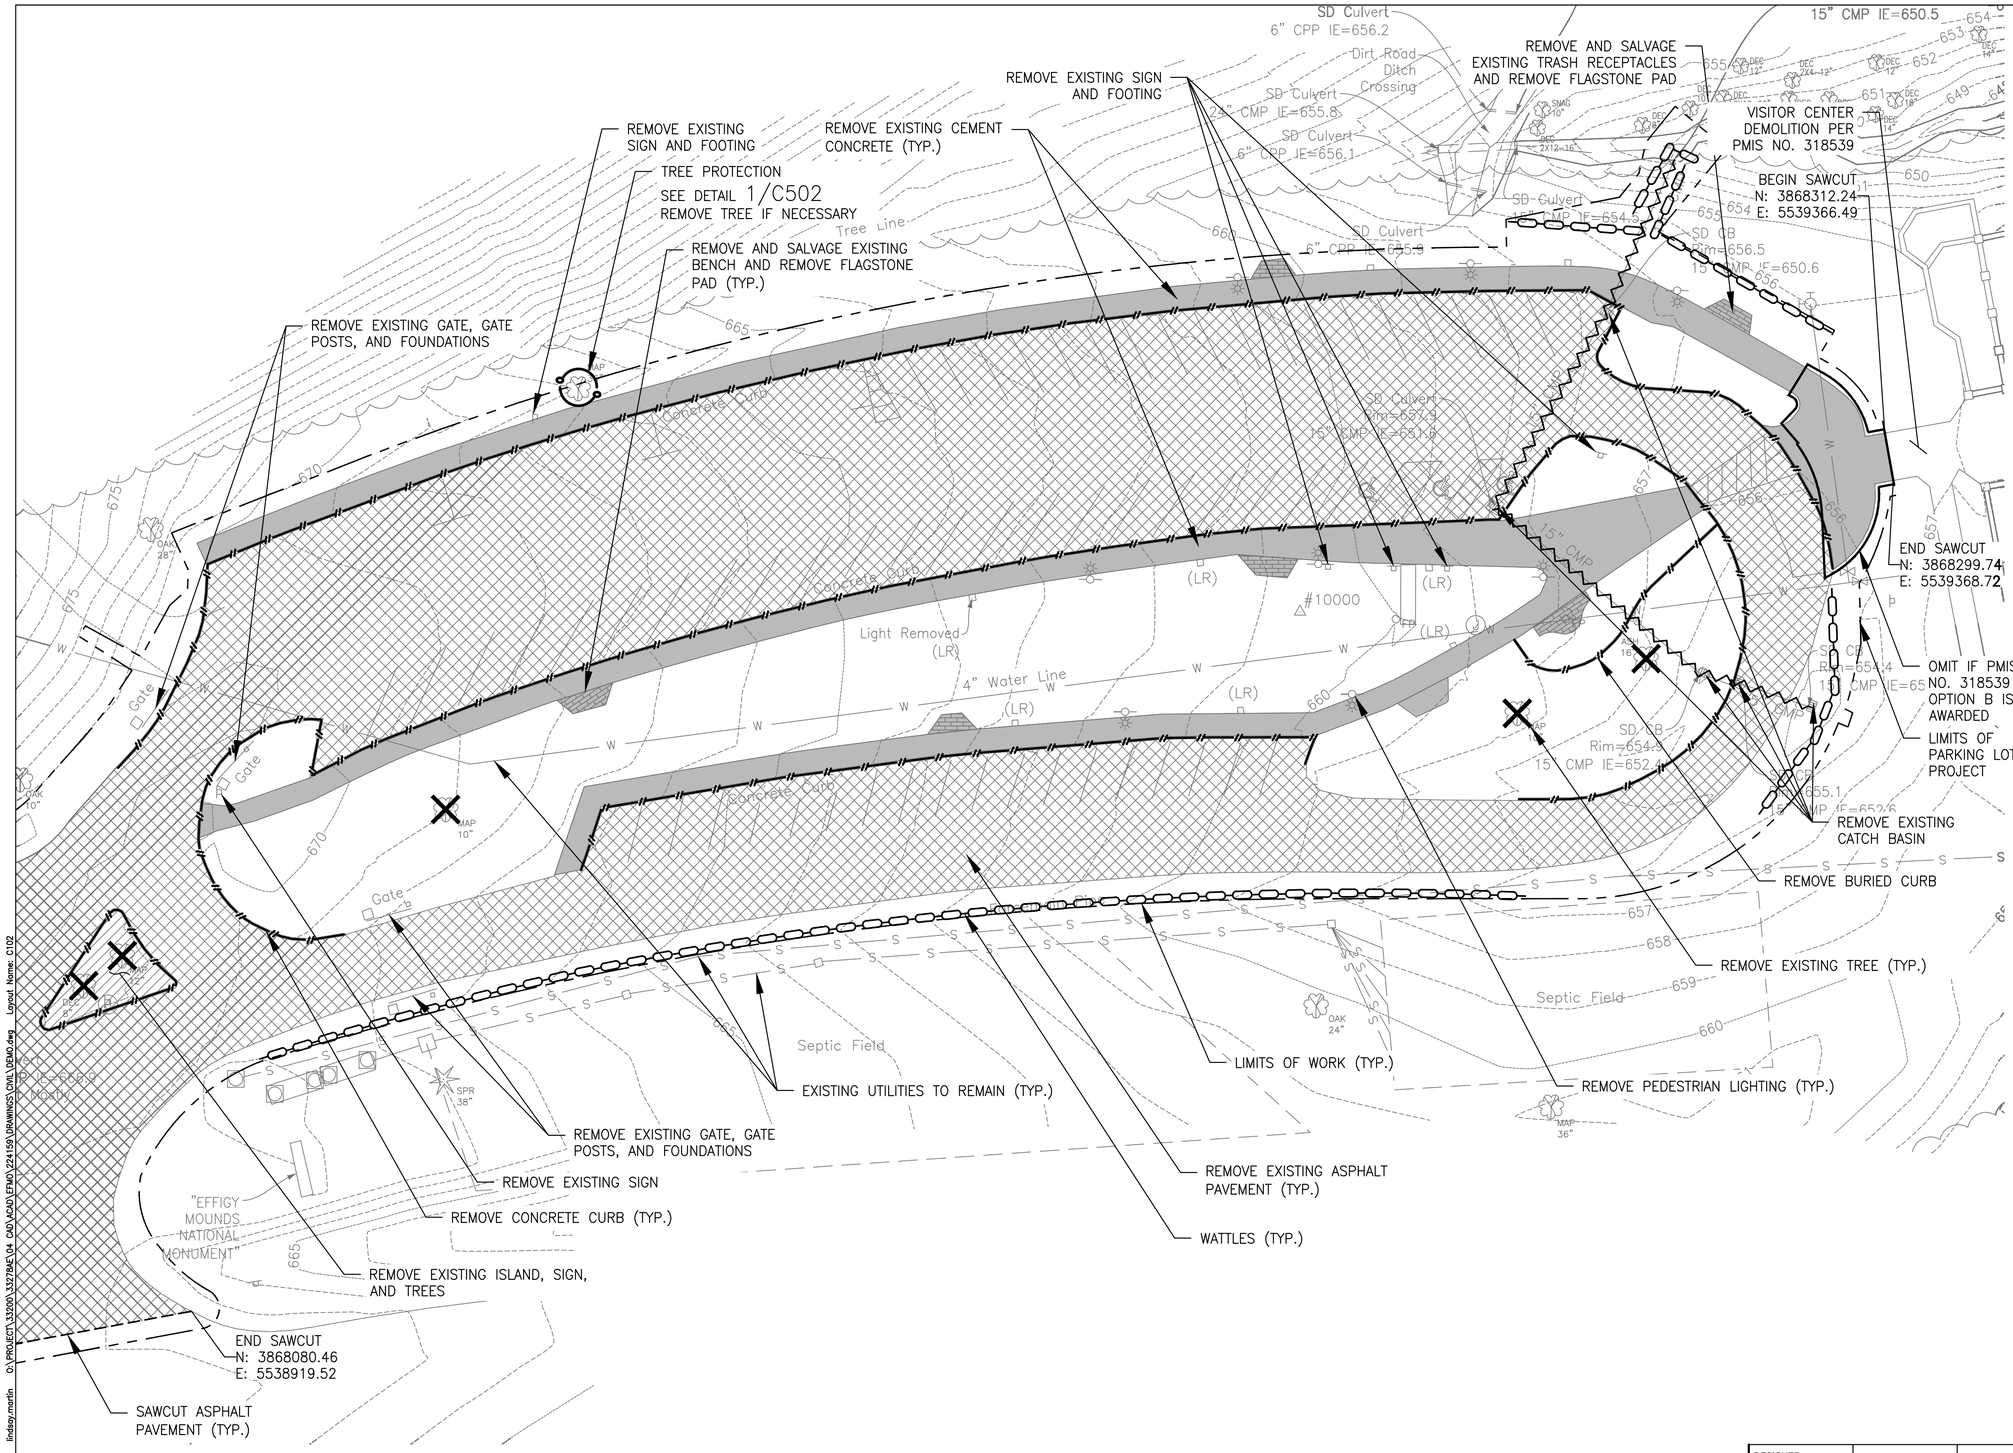

LEGEND

- ASPHALT AND BASE COURSE PAVEMENT REMOVAL
- CONCRETE PAVEMENT REMOVAL
- PLANTER ISLAND REMOVAL
- STRUCTURE REMOVAL
- LIMITS OF WORK
- SAWCUT ASPHALT PAVEMENT
- CURB REMOVAL
- TREE PROTECTION FENCING
- STORM DRAIN REMOVAL
- WATTLES
- TREE, STUMP, ROOT SYSTEM AND ROOT BALL REMOVAL

TESC/DEMOLITION NOTES

1. CONTRACTOR SHALL BE RESPONSIBLE FOR EXISTING DRAINAGE THROUGH THE SITE DURING CONSTRUCTION.
2. PROTECT EXISTING UTILITIES, SIGNAGE, AND FEATURES IN PLACE NOT CALLED OUT FOR REMOVAL OR RELOCATION.
3. CONTRACTOR SHALL PROVIDE EROSION CONTROL MAINTENANCE DURING CONSTRUCTION AND SHALL REMOVE EROSION CONTROL MEASURES AFTER CONSTRUCTION.
4. CONTRACTOR IS RESPONSIBLE FOR VERIFYING LOCATION OF UNDERGROUND UTILITIES.
5. PLACE TREE PROTECTION FENCING AS REQUIRED TO PROTECT EXISTING VEGETATION NOT CALLED OUT FOR REMOVAL. TREE PROTECTION SHALL BE INSTALLED PRIOR TO ANY SITE ACTIVITY AND SHALL REMAIN IN PLACE THROUGHOUT CONSTRUCTION.
6. REMOVE AND SALVAGE ALL EXISTING PICNIC TABLES, TRASH RECEPTACLES, AND BENCHES WITHIN PROJECT LIMITS OF WORK AND PROVIDE TO THE PARK.
7. REFERENCE LIGHT DEMOLITION SHEET ED100 FOR ALL PEDESTRIAN LIGHTING REMOVAL.
8. ALL TREES TO BE REMOVED SHALL BE MARKED BY THE CONTRACTOR AND APPROVED BY THE CO BEFORE ANY REMOVAL ACTIVITIES CAN OCCUR.

20' 0' 20' 40'
SCALE OF FEET

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
CADD ZS, CS	C102	TESC & DEMOLITION PLAN II	394 192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 9 OF 39

Plotted: May 22, 2026 – 2:29pm lindsey.martin O:\PROJECT\33500\332784C\04 CAD\ACAD\CPMO\224159\DRAWINGS\CIVIL\CP&O.dwg Layout Name: C102

AUTO SPRINKLER
UTILITY POLE
GUY ANCHOR
ELECTRIC METER
ELECTRIC JUNCTION BOX
GAS METER
COMMUNICATION JUNCTION BOX
SIGN
BOLLARD
DECIDUOUS TREE
EVERGREEN TREE
SPOT ELEVATION
CONCRETE SURFACE
BITUMINOUS SURFACE
RETAINING WALLS
LANDSCAPE WOODCHIPS

MINOR (1') CONTOUR LINE

CMP CORRUGATED METAL PIPE
PVC POLYVINYL CHLORIDE PIPE
RCP REINFORCED CONCRETE PIPE
VCP VITRIFIED CLAY PIPE

C201

C202

STAFF BUILDING
STAFF BUILDING
GARAGE
GARAGE
OHL
SD
R=44.0'
R=3.0'
R=23.0'
R=23.0'
R=29.0'
R=27.9'
R=25.6'
R=12.0'
R=24.0'
R=12.0'
R=25.5'
R=58.5'
R=30.0'
R=30.0'
R=4.0'
VISITOR CENTER
Patio
Pavement Break
1"X1" Cor
Support

40' 0' 40' 80'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
E30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
CADD: ZS, CS	C200	SITE PLAN KEY MAP	394 / 192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 10 OF 39

Plotted: May 22, 2026 – 2:15pm lindsey.martin G:\PROJECT\33200\332784E\04 CAD\ACAD\EFMO\224159\DRAWINGS\OHL\KEY MAP AND SITE PLAN 1-1.dwg Layout Name: C200

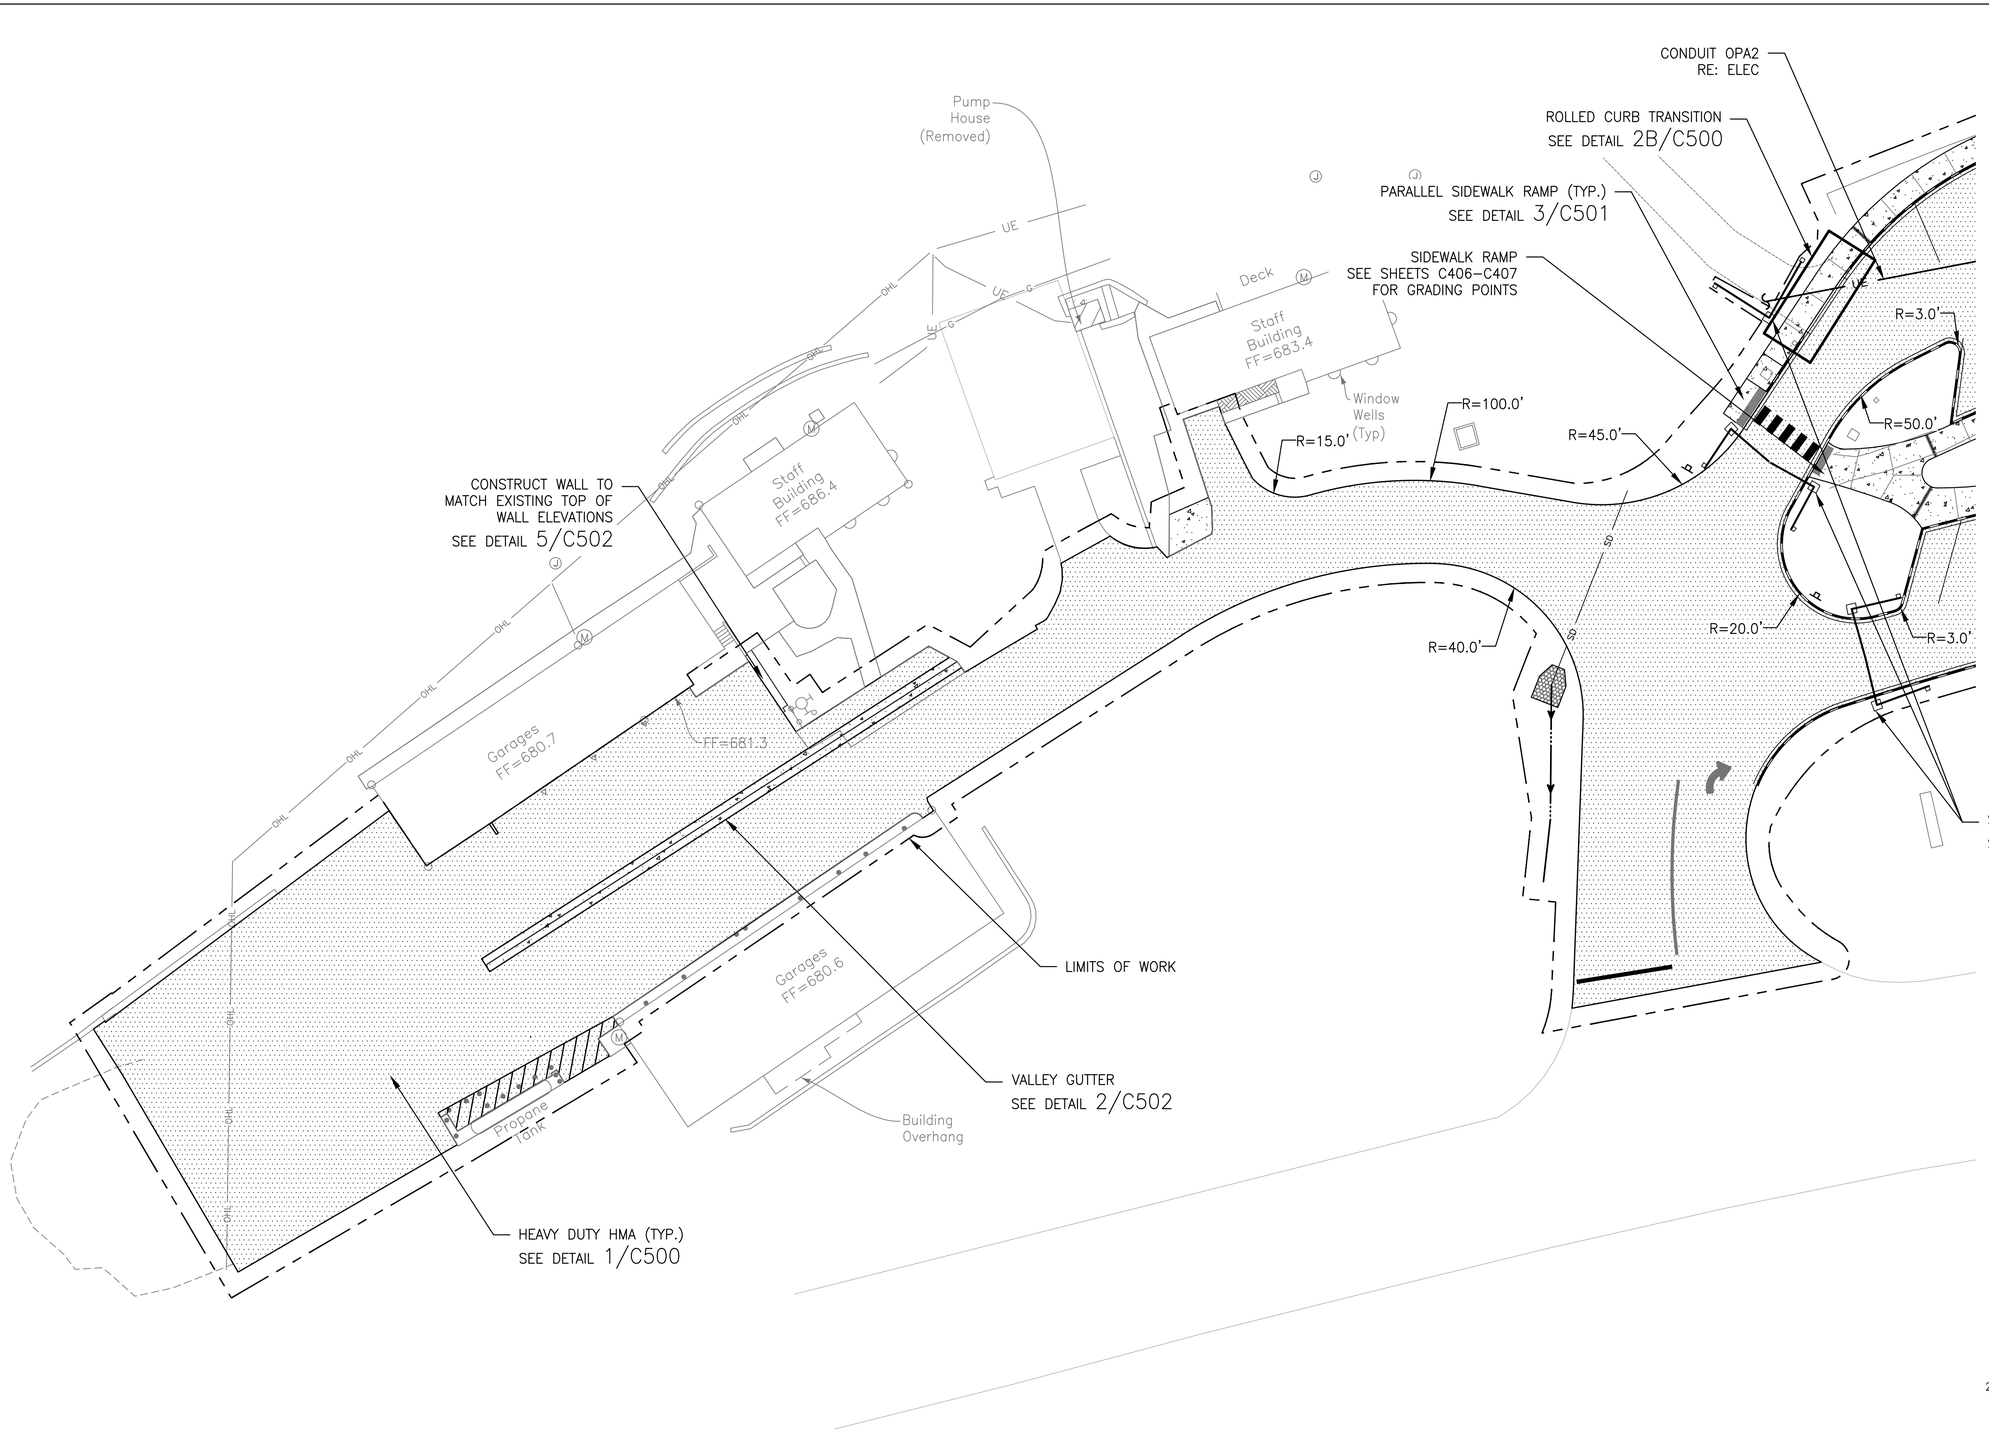

LEGEND

- HEAVY DUTY HMA
- CONCRETE PAVEMENT
- CONCRETE SIDEWALK
- CONCRETE CURB AND GUTTER
- SLOPED BACK CURB AND GUTTER
- SWING GATE
- LIMITS OF WORK
- EXPANSION AND ISOLATION JOINT
- CONTROL JOINT

NOTES:

1. SEE SHEET C203 FOR SIGNING AND STRIPING PLAN.
2. SEE SHEET C300 FOR ACCESSIBILITY PLAN.
3. SEE SHEETS L101–L102 FOR LANDSCAPE PLANS.
4. SEE SHEETS C401–C405 FOR GRADING AND DRAINAGE PLANS WITH LAYOUT CONTROL POINTS. SEE SHEETS C406–C407 FOR CONTROL POINTS.

20' 0' 20' 40'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS CADD: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C201	TITLE OF SHEET: SITE PLAN I EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 192943 PMIS/PKG NO. 224159 SHEET 11 OF 39

Plotted: May 22, 2026 – 2:16pm lindsey.martin O:\PROJECT\33200\33278A\V04 CAD\VCAD\EFMO\224159\DRAWINGS\CIVIL\KEY MAP AND SITE PLAN I–II.dwg Layout Name: C201

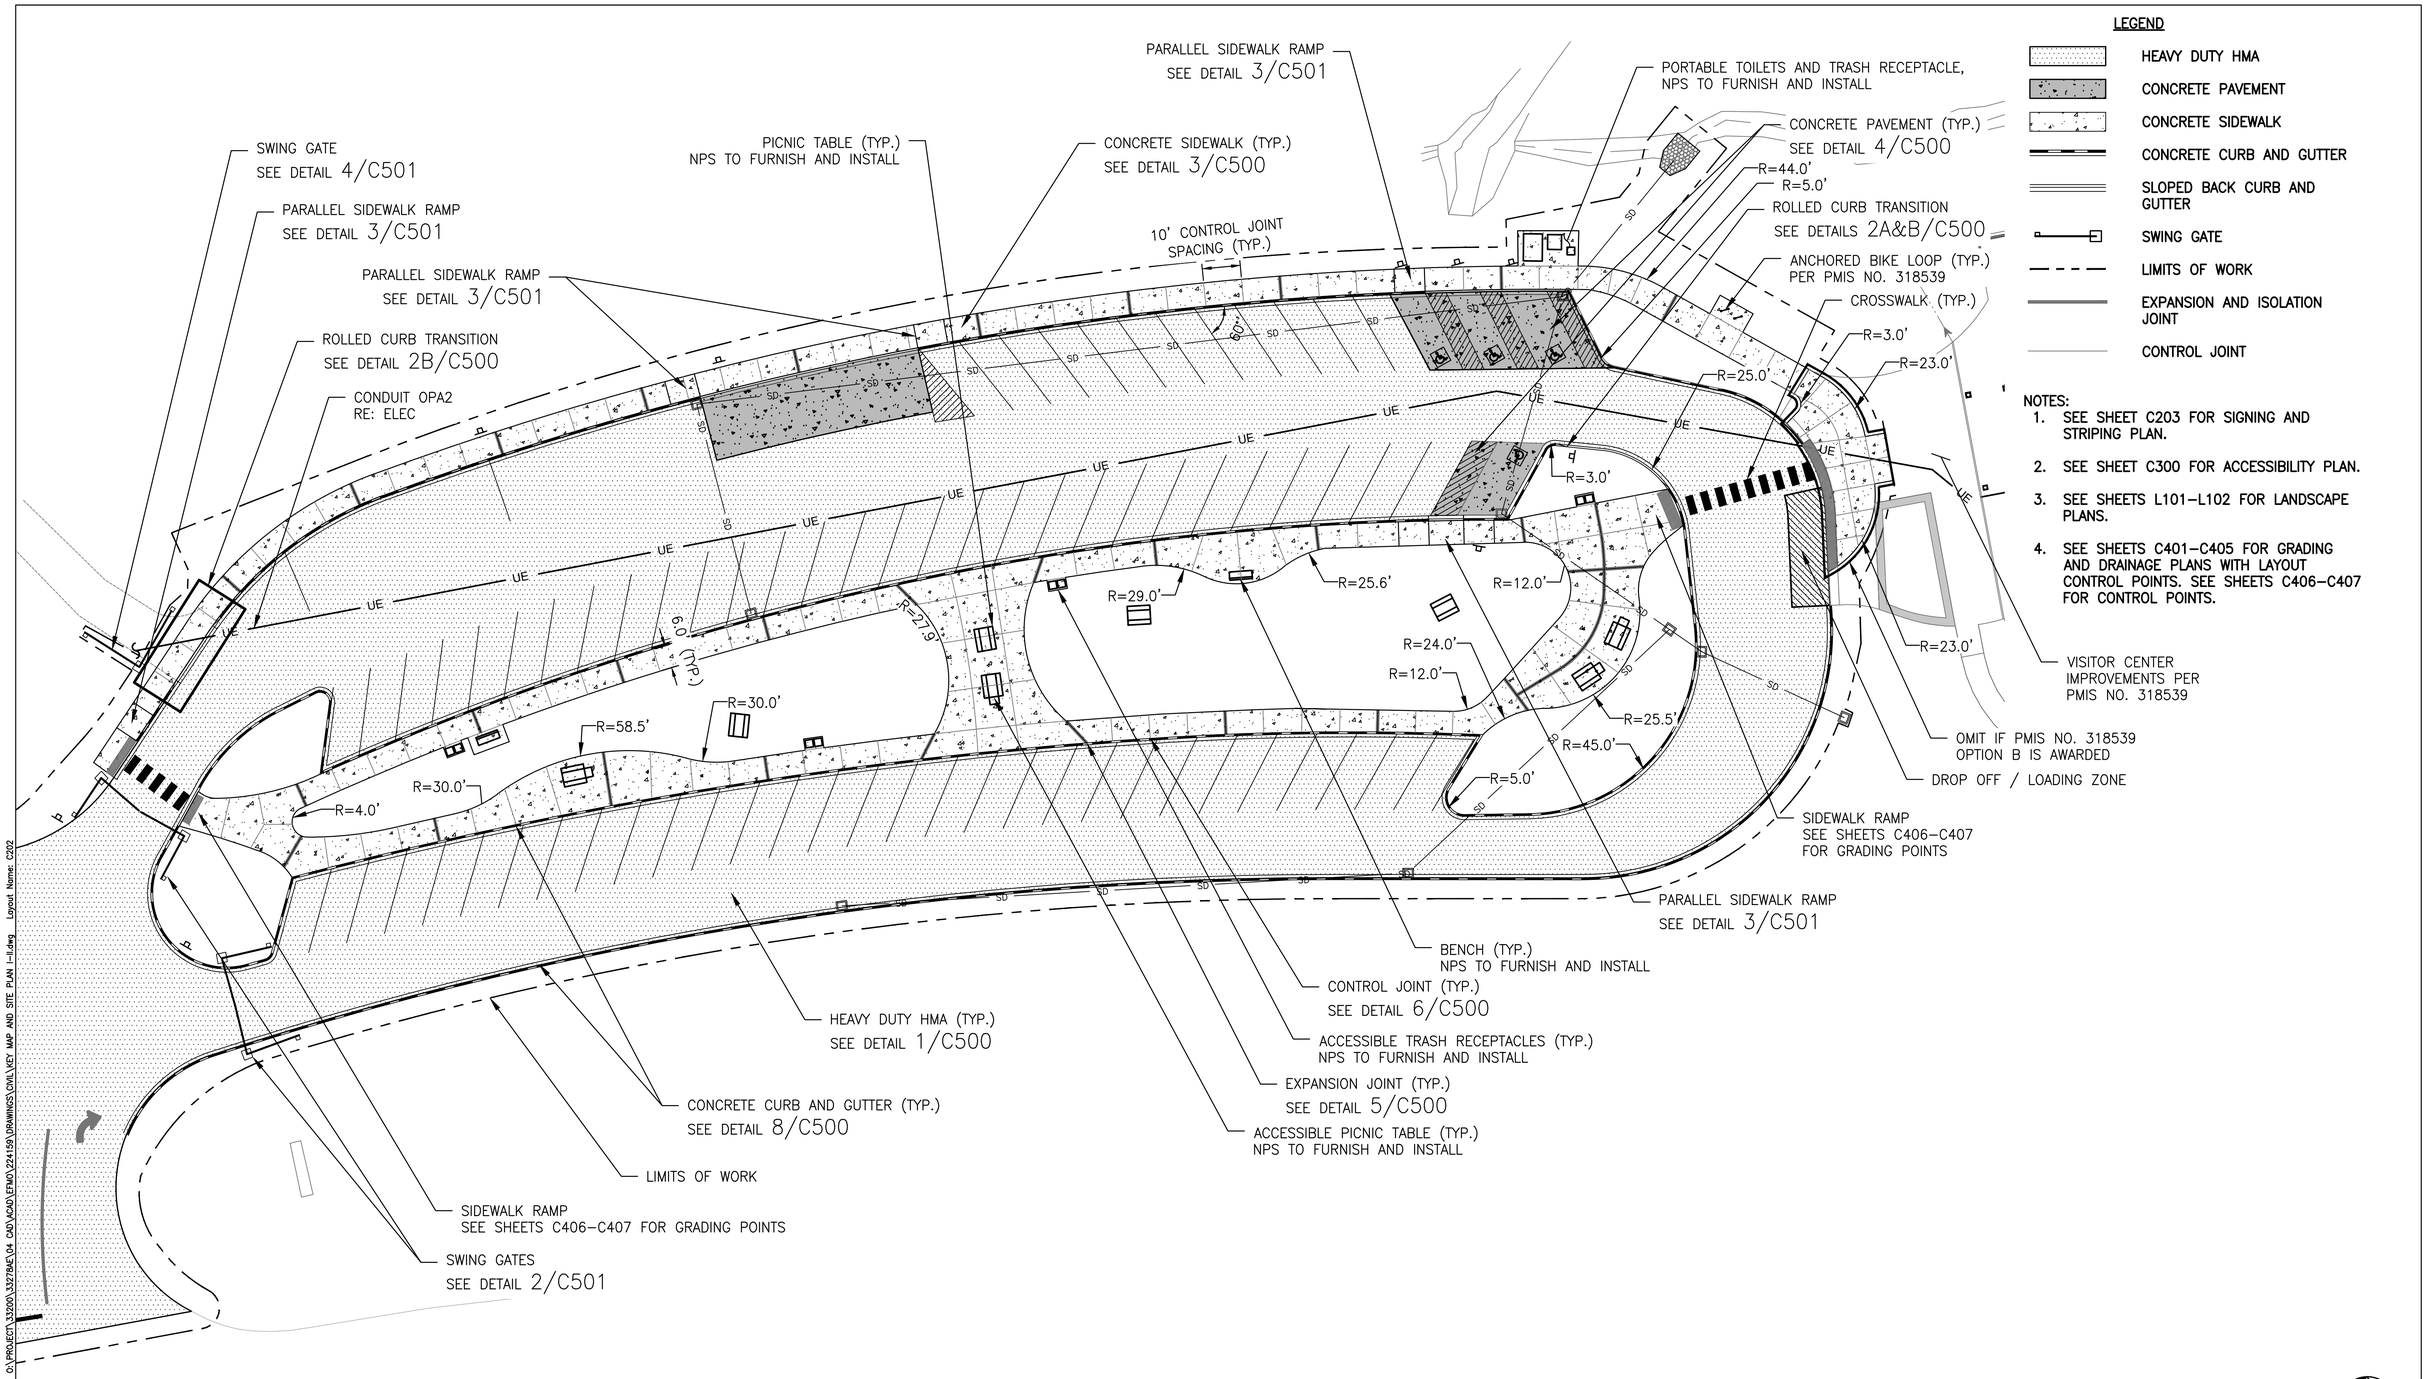

20' 0' 20' 40'
SCALE OF FEET

EMILY A. MAGGIO P30462 IOWA LICENSED PROFESSIONAL ENGINEER

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: SITE PLAN II	DRAWING NO. 394 / 192943
DRAFTED: ZS, CS	C202		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 12 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 - 2:19pm lindsay.martin O:\PROJECT\332900\332784\04 CAD\ACAD\FMO\224159\DRAWINGS\CIVIL\CIT MAP AND SITE PLAN I-II.dwg Layout Name: C202

NOTE: ALL DIMENSIONS SHOWN ARE FROM CENTER TO CENTER OF PAVEMENT MARKING LINE AND/OR FROM FACE OF CURB.

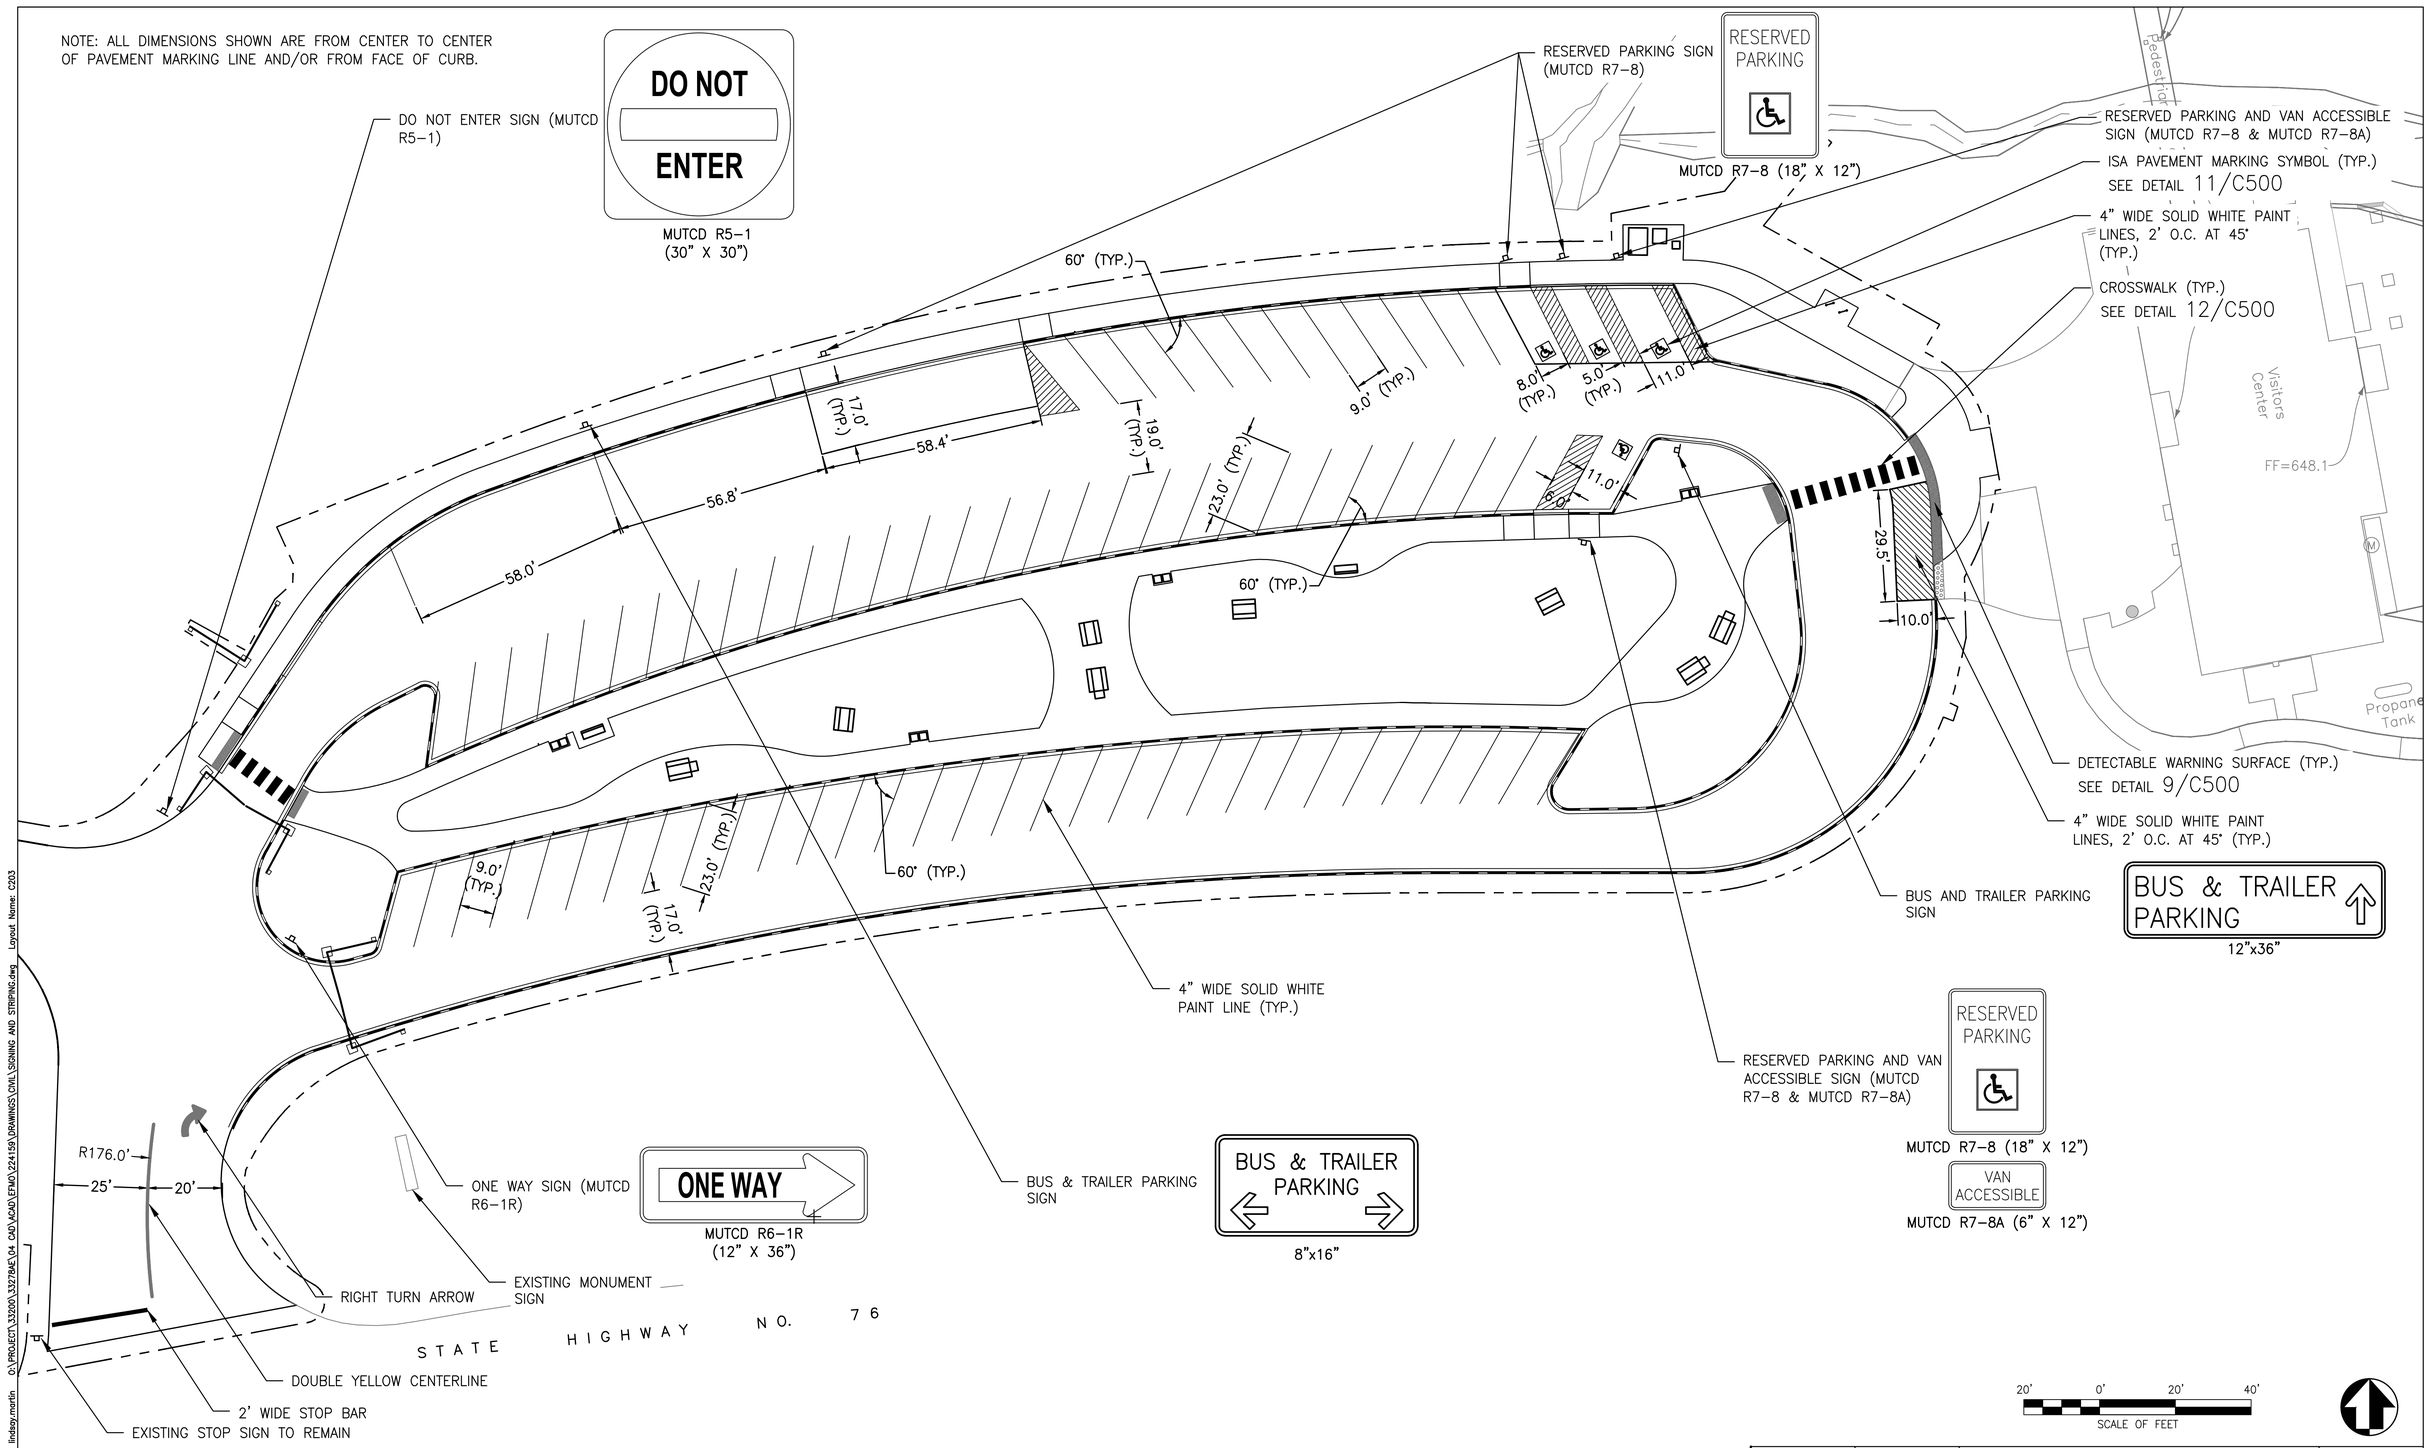

20' 0' 20' 40'
SCALE OF FEET

EMILY A. MAGGIO — LICENSED PROFESSIONAL ENGINEER — P30482 — IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: SIGNAGE AND STRIPING PLAN	DRAWING NO. 394 / 192943
CADD: ZS, CS	C203		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 13 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 - 2:09pm lindsey.martin G:\PROJECT\332000\332784E\04 CAD\ACAD\ETMO\224159\DRAWINGS\CIVIL\SIGNING AND STRIPING.dwg Layout Name: C203

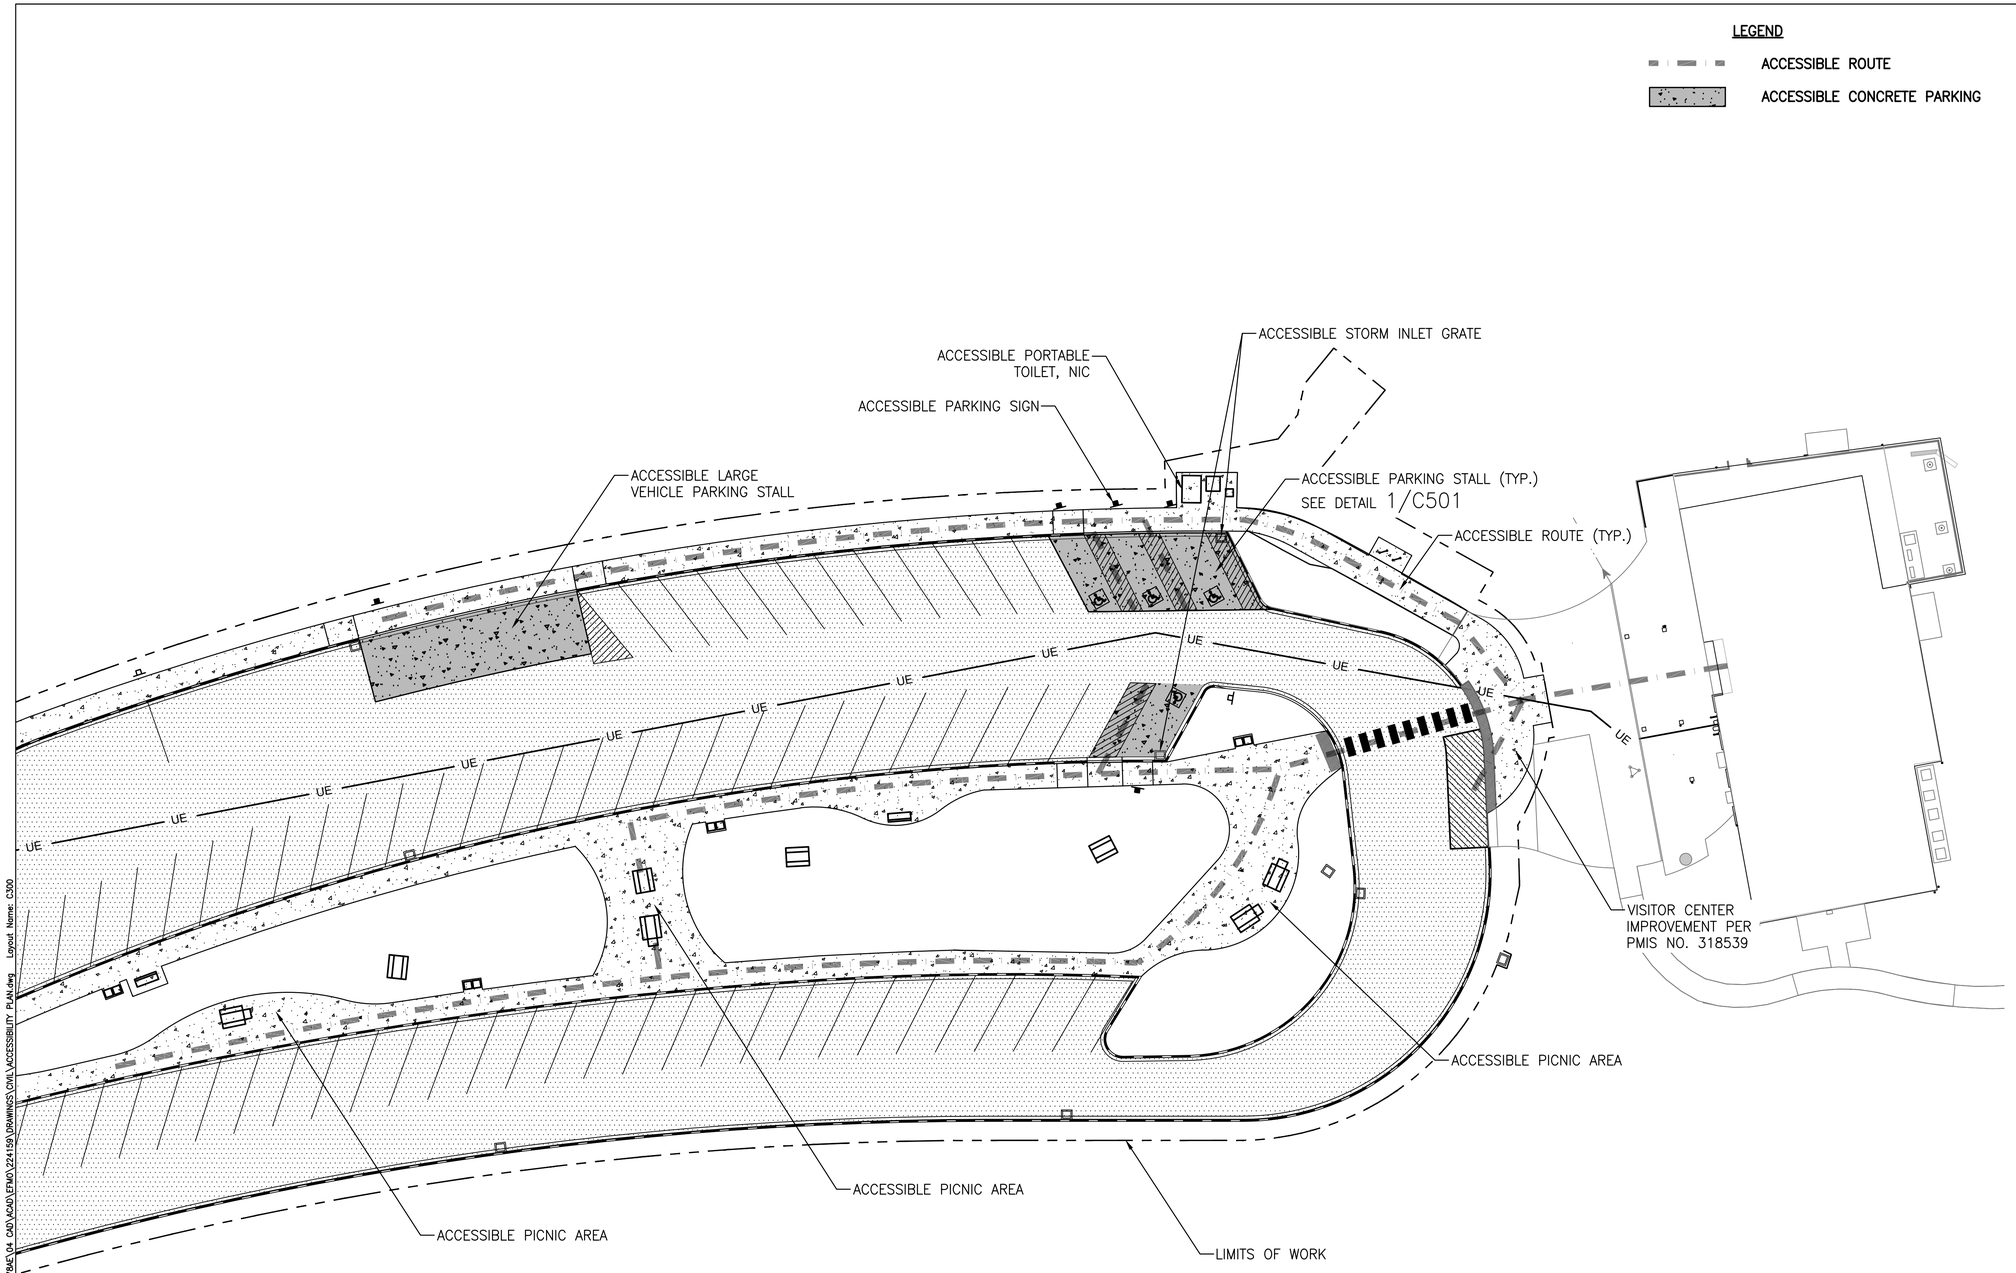

SITE ACCESSIBILITY REQUIREMENTS

SLOPE

1. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
2. LANDINGS, ACCESSIBLE PARKING STALLS, PARKING ACCESS AISLES, CLEAR SPACE, AND TURNING SPACE SHALL NOT EXCEED 1.5% SLOPE IN ANY DIRECTION.
3. RAMPS SHALL NOT EXCEED A 7.5% RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.

CHANGES IN LEVEL

4. VERTICAL CHANGES IN LEVEL SHALL NOT EXCEED ¼–INCH.
5. CHANGES IN LEVEL ARE NOT PERMITTED AT LANDINGS, CLEAR SPACE, OR TURNING SPACE AREAS.
6. CHANGES IN LEVEL OTHER THAN THE RUNNING SLOPE AND CROSS SLOPE ARE NOT PERMITTED ON RAMP RUNS.

CLEAR WIDTH

7. THE CLEAR WIDTH OF WALKING SURFACES SHALL BE 36" MINIMUM.
8. AN ACCESSIBLE ROUTE WITH A CLEAR WIDTH LESS THAN 60 INCHES SHALL PROVIDE PASSING SPACES AT INTERVALS OF 200 FEET MAXIMUM. PASSING SPACES SHALL BE EITHER: A SPACE 60 INCHES MINIMUM BY 60 INCHES MINIMUM; OR AN INTERSECTION OF TWO WALKING SURFACES PROVIDING A T–SHAPED SPACE COMPLYING WITH THE REQUIREMENTS BELOW, WHERE THE BASE AND ARMS OF THE T–SHAPED SPACE EXTEND 48 INCHES MINIMUM BEYOND THE INTERSECTION.

TURNING SPACE

9. A CIRCULAR TURNING SPACE SHALL BE A 67" MINIMUM DIAMETER.
10. A T–SHAPED TURNING SPACE SHALL BE 60" WIDE MINIMUM WITH ARMS AND BASE OF THE T–SHAPED SPACE 36" WIDE MINIMUM.

RAMPS

11. RAMPS SHALL HAVE LANDINGS AT THE TOP AND BOTTOM OF EACH RAMP RUN. THE LANDING CLEAR WIDTH SHALL BE AT LEAST AS WIDE AS THE WIDEST RAMP RUN LEADING TO IT.
12. RAMPS WITH A RISE GREATER THAN 6" SHALL HAVE HANDRAILS.

STORM INLET GRATES

13. OPENINGS SHALL NOT ALLOW PASSAGE OF A SPHERE MORE THAN 1/2–INCH DIAMETER.
14. ELONGATED OPENINGS SHALL BE PLACED SO THAT THE LONG DIMENSION IS PERPENDICULAR TO THE DOMINANT DIRECTION OF TRAVEL.
15. VERTICAL CHANGES IN LEVEL SHALL NOT EXCEED 1/4–INCH.

10' 0' 10' 20'
SCALE OF FEET

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS CADD: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C300	TITLE OF SHEET: ACCESSIBILITY PLAN EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 / 192943 PMIS/PKG NO. 224159 SHEET 14 OF 39

Plotted: May 22, 2026 – 2:06pm lindsey.martin O:\PROJECT\33200\33278AC\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\ACCESSIBILITY PLAN.dwg Layout Name: C300

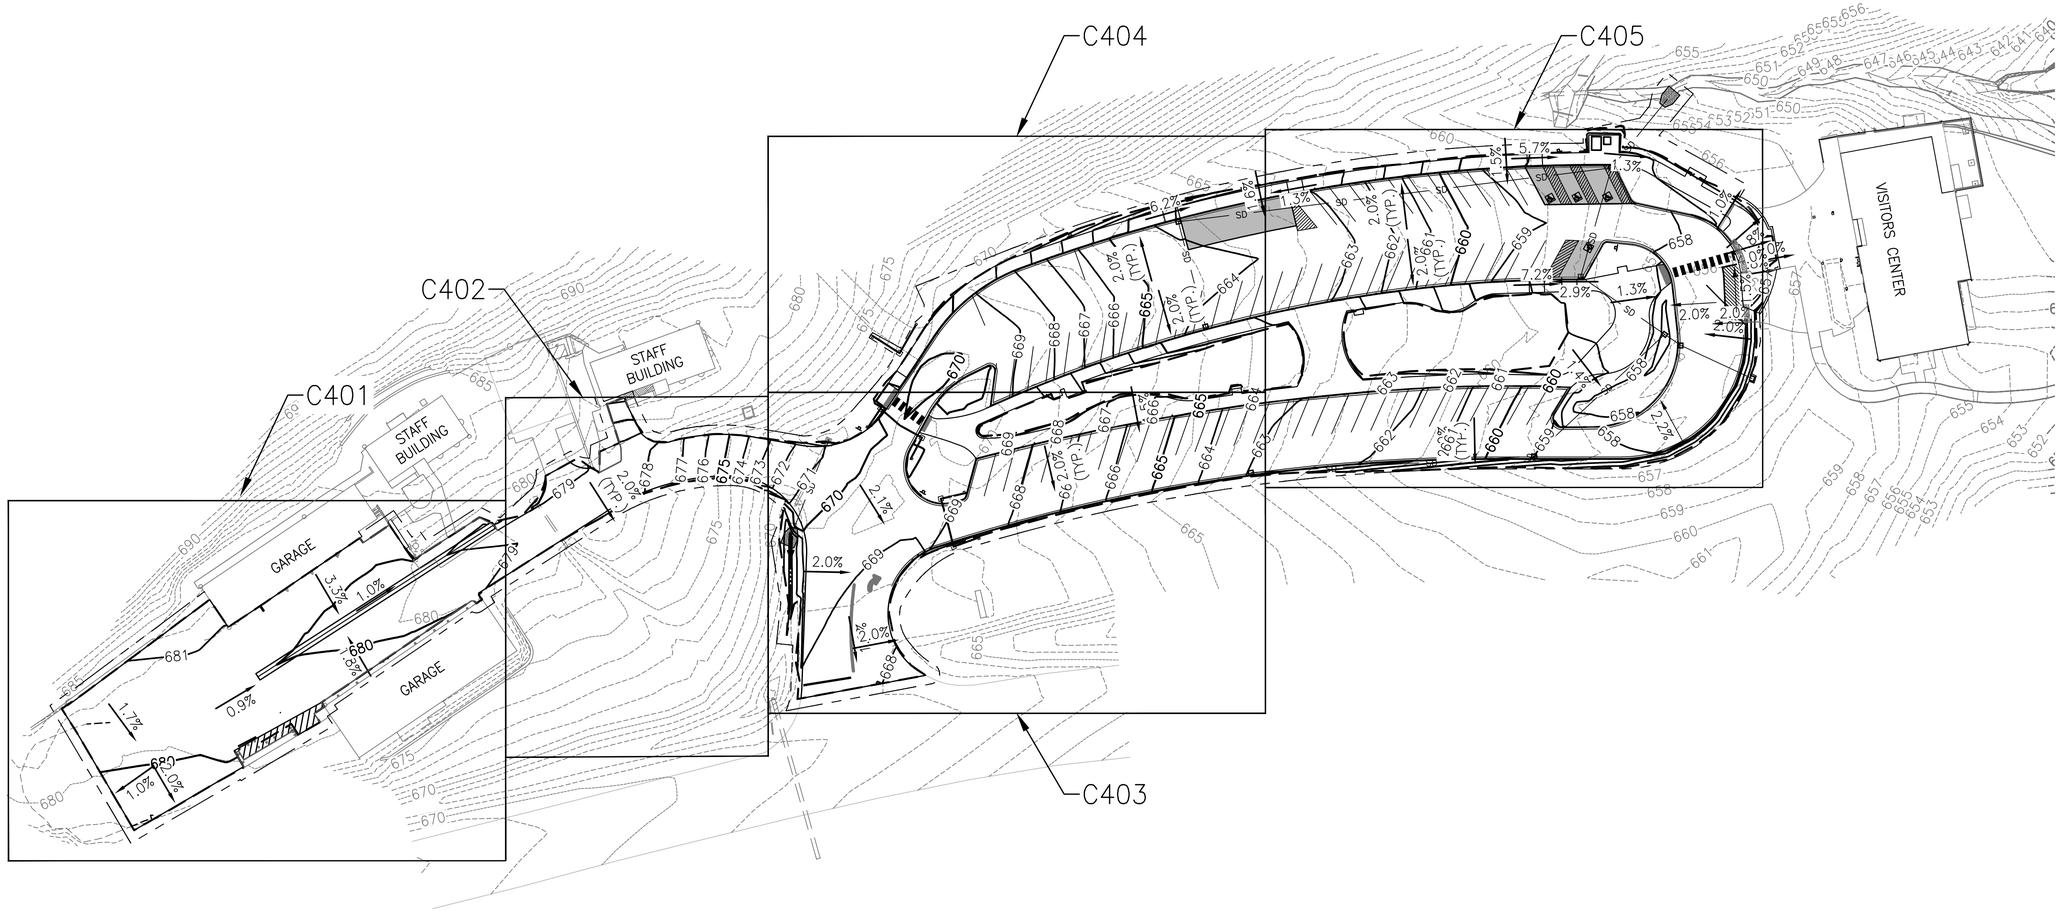

40' 0' 40' 80'

SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30402
IOWA

DESIGNED: LM, CS CADD: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C400	TITLE OF SHEET GRADING & DRAINAGE KEY MAP EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 192943 PMIS/PKG NO. 224159 SHEET 15 OF 39

Plotted: May 22, 2026 - 2:10pm lindsay.martin O:\PROJECT\33200\33278AE\04 CAD\ACAD\EPMO\224159\DRAWINGS\CIVIL\KEY MAP & GRADING & DRAINAGE PLAN H-V.dwg Layout Name: C400

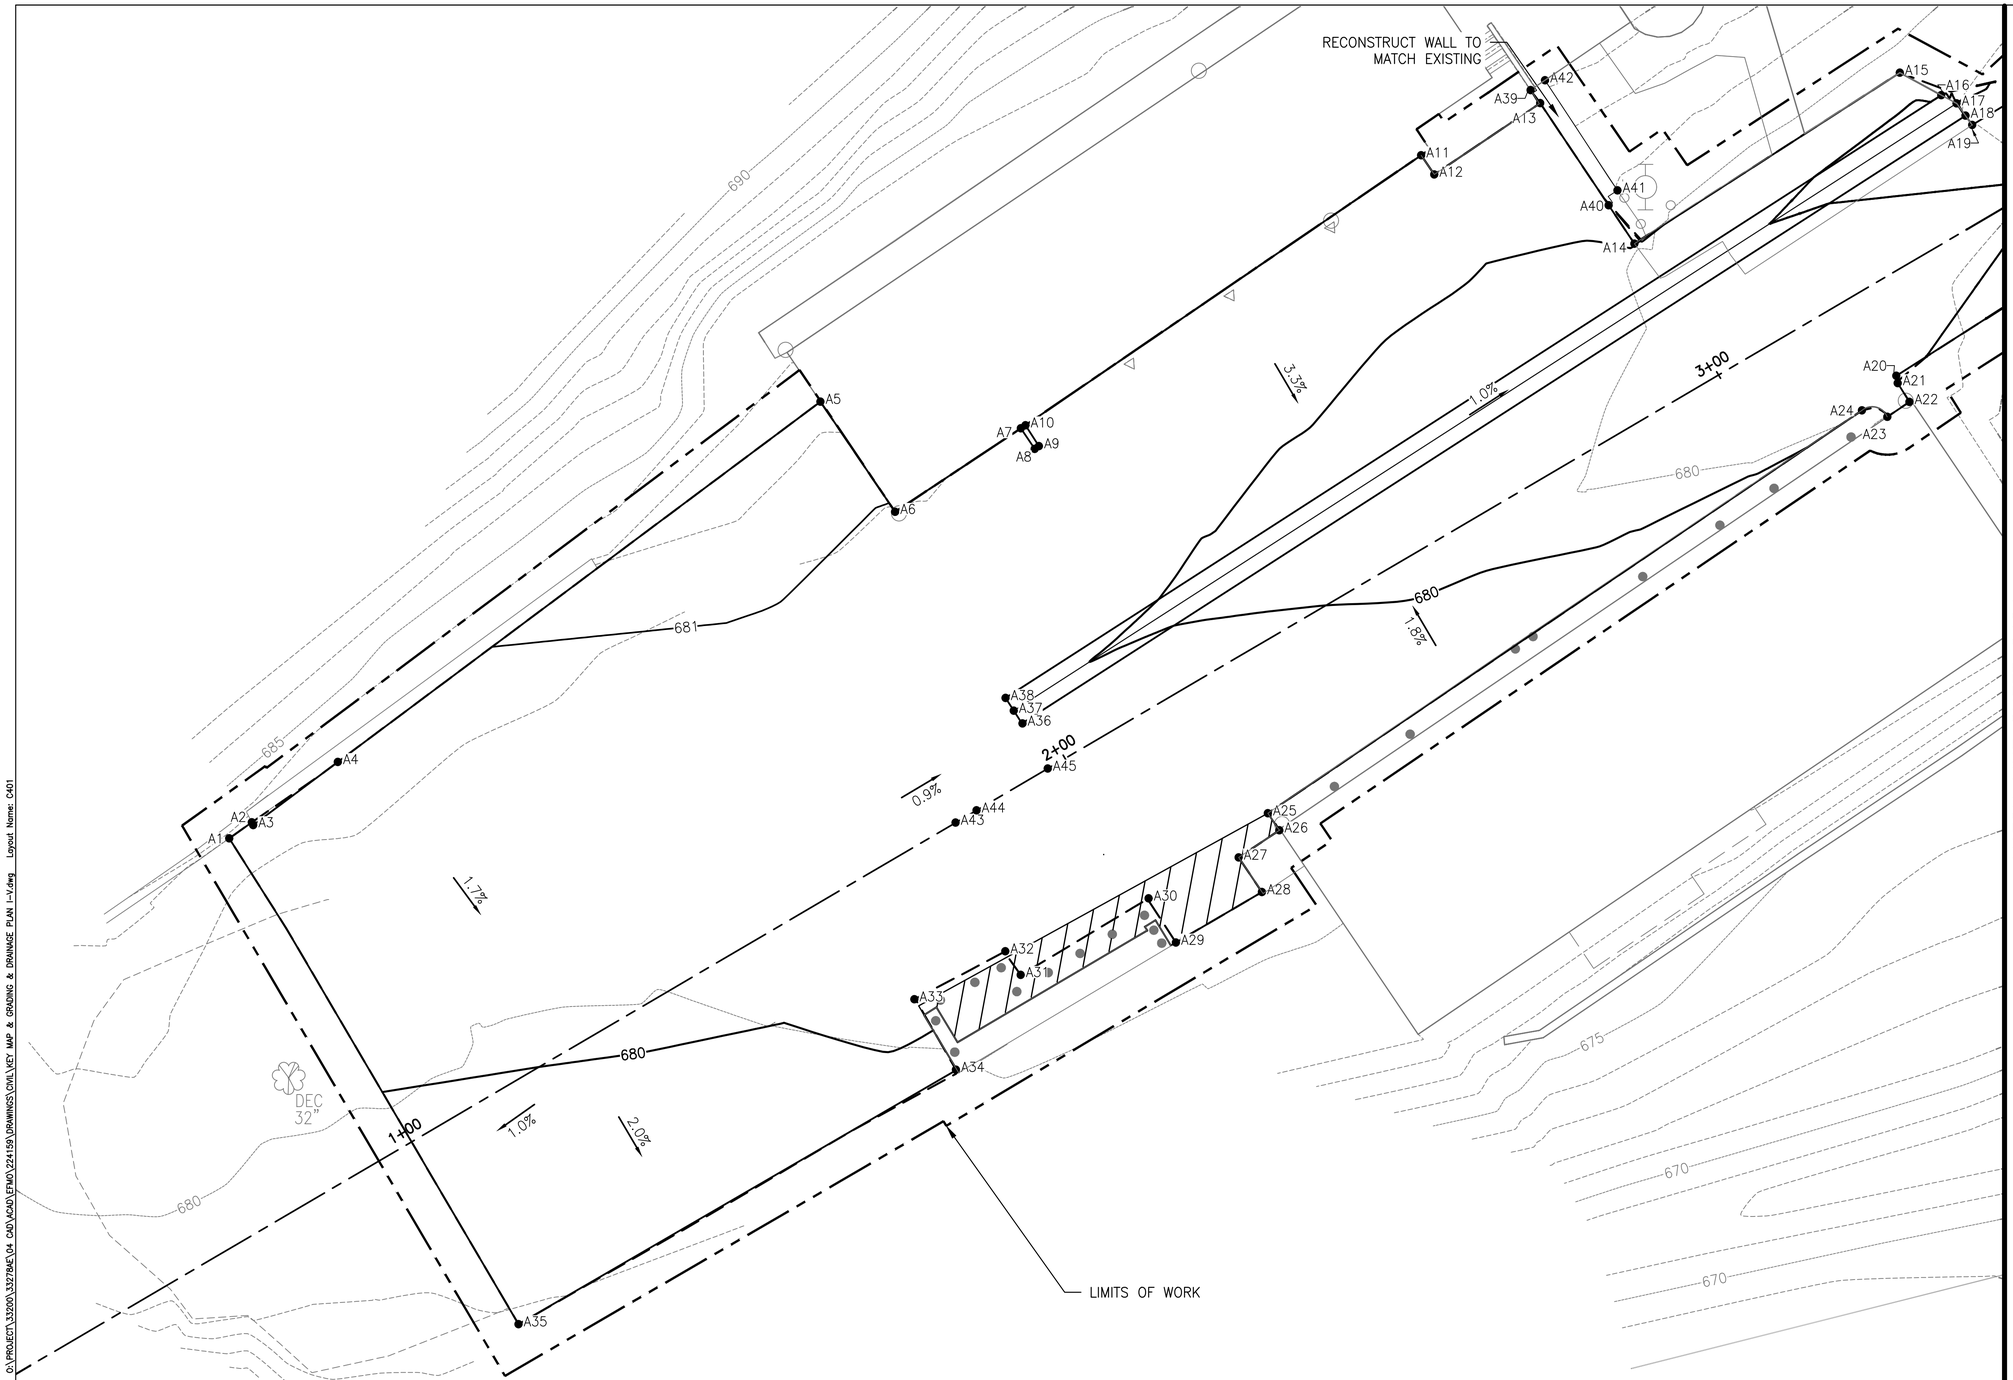

GRADING NOTES

1. LANDINGS, ACCESSIBLE PARKING STALLS, AND PARKING ACCESS AISLES SHALL NOT EXCEED 1.5% SLOPE IN ANY DIRECTION.
2. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
3. SEE SHEETS C408–C409 FOR PARKING LOT PLAN AND PROFILE VIEWS.
4. SEE SHEETS C410–C411 FOR STORM PLAN & PROFILE VIEWS.
5. SEE SHEETS C406–C407 FOR LAYOUT CONTROL POINT TABLES.
6. SEE SHEET C503 FOR TYPICAL SECTIONS.

10' 0' 10' 20'
SCALE OF FEET

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS DRAFTED: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C401	TITLE OF SHEET: GRADING AND DRAINAGE PLAN I EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 / 192943 PMIS/PKG NO. 224159 SHEET 16 OF 39

Plotted: May 22, 2026 – 2:10pm lindsay.martin G:\PROJECT\332000\332784E\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\CIVIL MAP & GRADING & DRAINAGE PLAN I-V.dwg Layout Name: C401

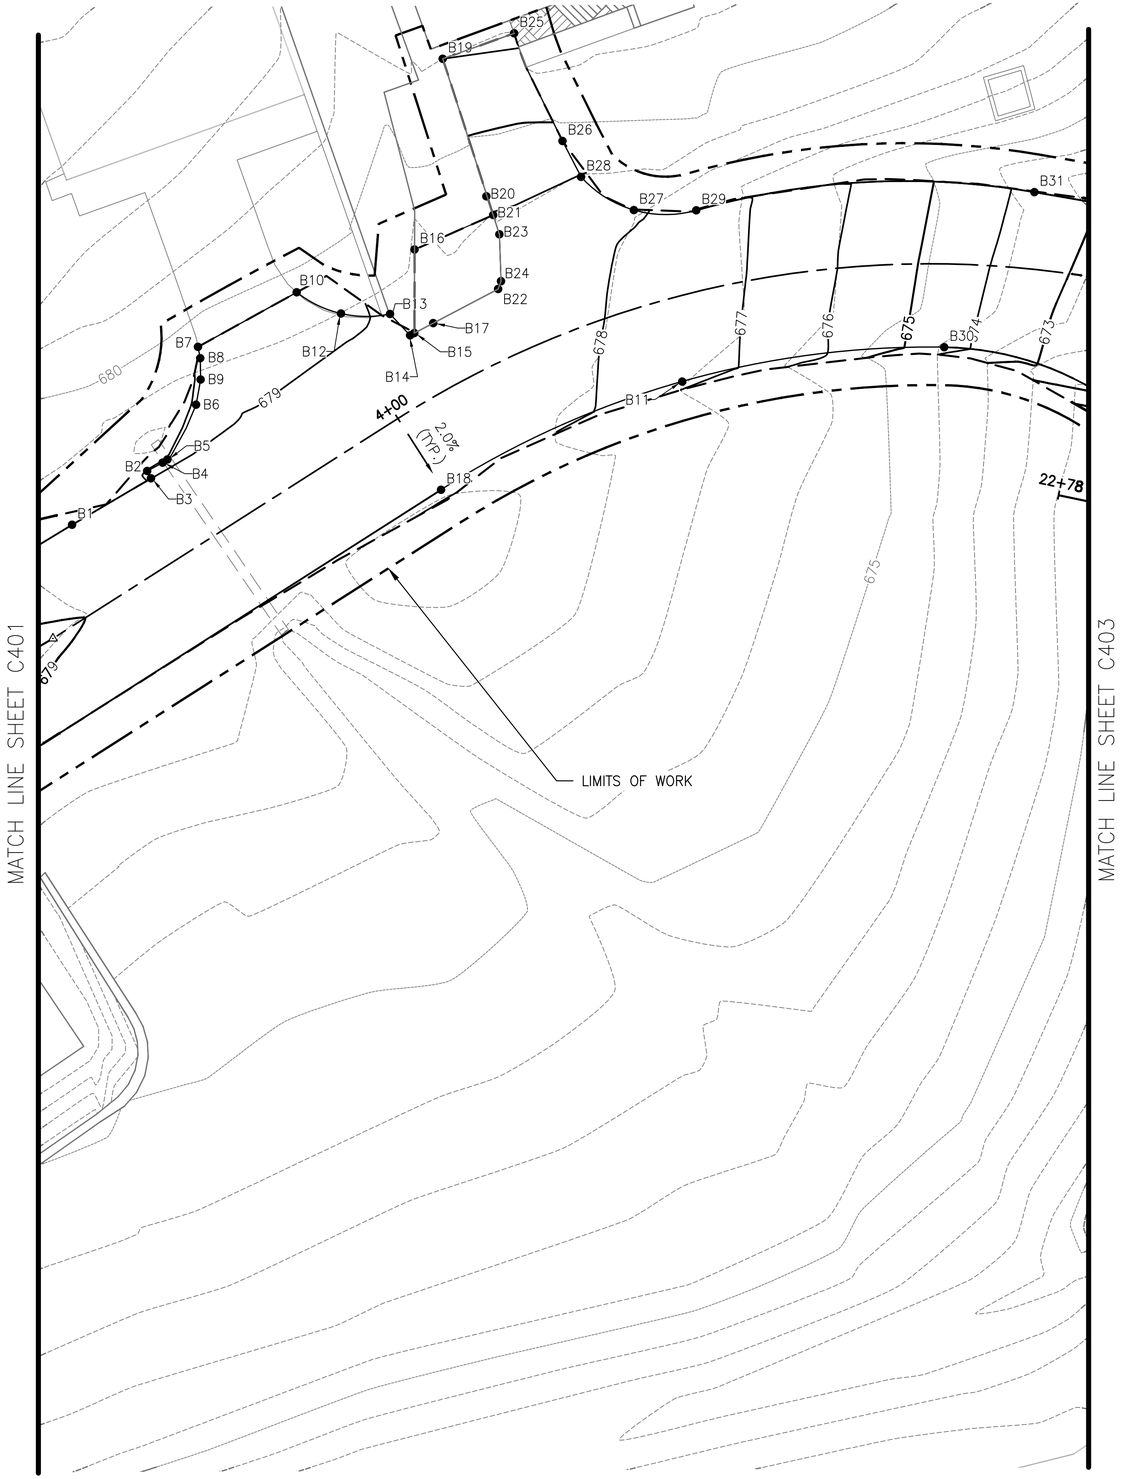

GRADING NOTES

1. LANDINGS, ACCESSIBLE PARKING STALLS, AND PARKING ACCESS AISLES SHALL NOT EXCEED 1.5% SLOPE IN ANY DIRECTION.
2. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
3. SEE SHEETS C408–C409 FOR PARKING LOT PLAN AND PROFILE VIEWS.
4. SEE SHEETS C410–C411 FOR STORM PLAN & PROFILE VIEWS.
5. SEE SHEETS C406–C407 FOR LAYOUT CONTROL POINT TABLES.
6. SEE SHEET C503 FOR TYPICAL SECTIONS.

10' 0' 10' 20'
SCALE OF FEET

EMILY A. MAGGIO
P30482
LICENSED PROFESSIONAL ENGINEER
IOWA

DESIGNED: LM, CS DRAWN: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C402	TITLE OF SHEET GRADING AND DRAINAGE PLAN II EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 192943 PMIS/PKG NO. 224159 SHEET 17 OF 39

Plotted: May 22, 2026 - 2:19pm lindsey.martin O:\PROJECT\33200\33278AE\04 CAD\ACAD\ETMV\224159\DRAWINGS\CIVIL\KEY MAP & GRADING & DRAINAGE PLAN I-V.dwg Layout Name: C402

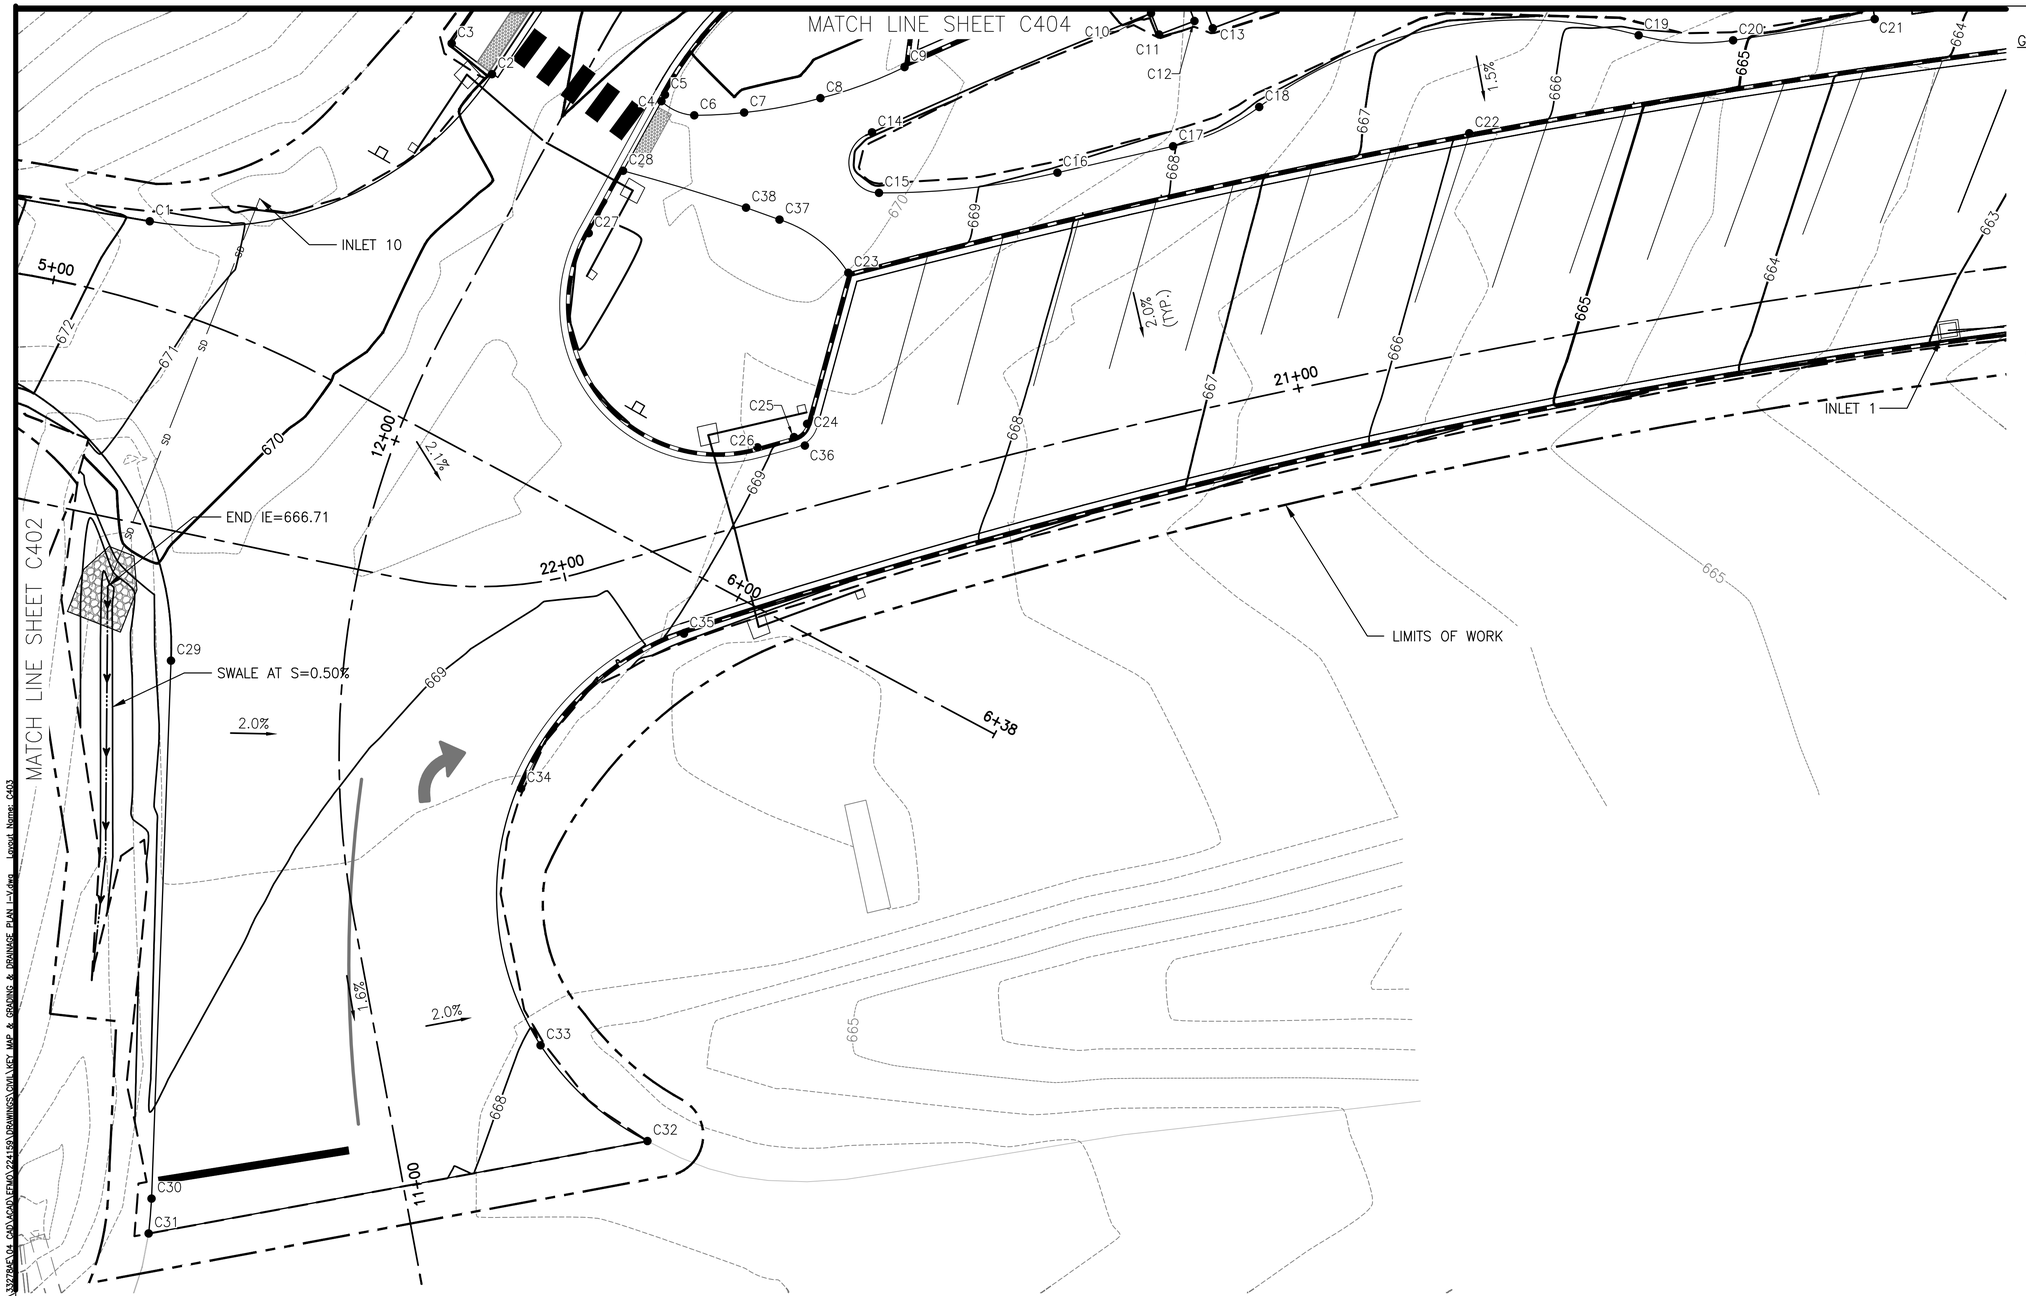

GRADING NOTES

1. LANDINGS, ACCESSIBLE PARKING STALLS, AND PARKING ACCESS AISLES SHALL NOT EXCEED 1.5% SLOPE IN ANY DIRECTION.
2. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
3. SEE SHEETS C408–C409 FOR PARKING LOT PLAN AND PROFILE VIEWS.
4. SEE SHEETS C410–C411 FOR STORM PLAN & PROFILE VIEWS.
5. SEE SHEETS C406–C407 FOR LAYOUT CONTROL POINT TABLES.
6. SEE SHEET C503 FOR TYPICAL SECTIONS.

10' 0' 10' 20'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
DADD: ZS, CS	C403	GRADING AND DRAINAGE PLAN III	394 / 192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 18 OF 39

Plotted: May 22, 2026 - 2:16pm lindsay.martin O:\PROJECT\33200\33280\04-CAD\XSD\EFMO\224159\DGN\MISC\GNLXRF MJP & GRADING & DRAINAGE PLAN L-V.dwg Layout Name: C403

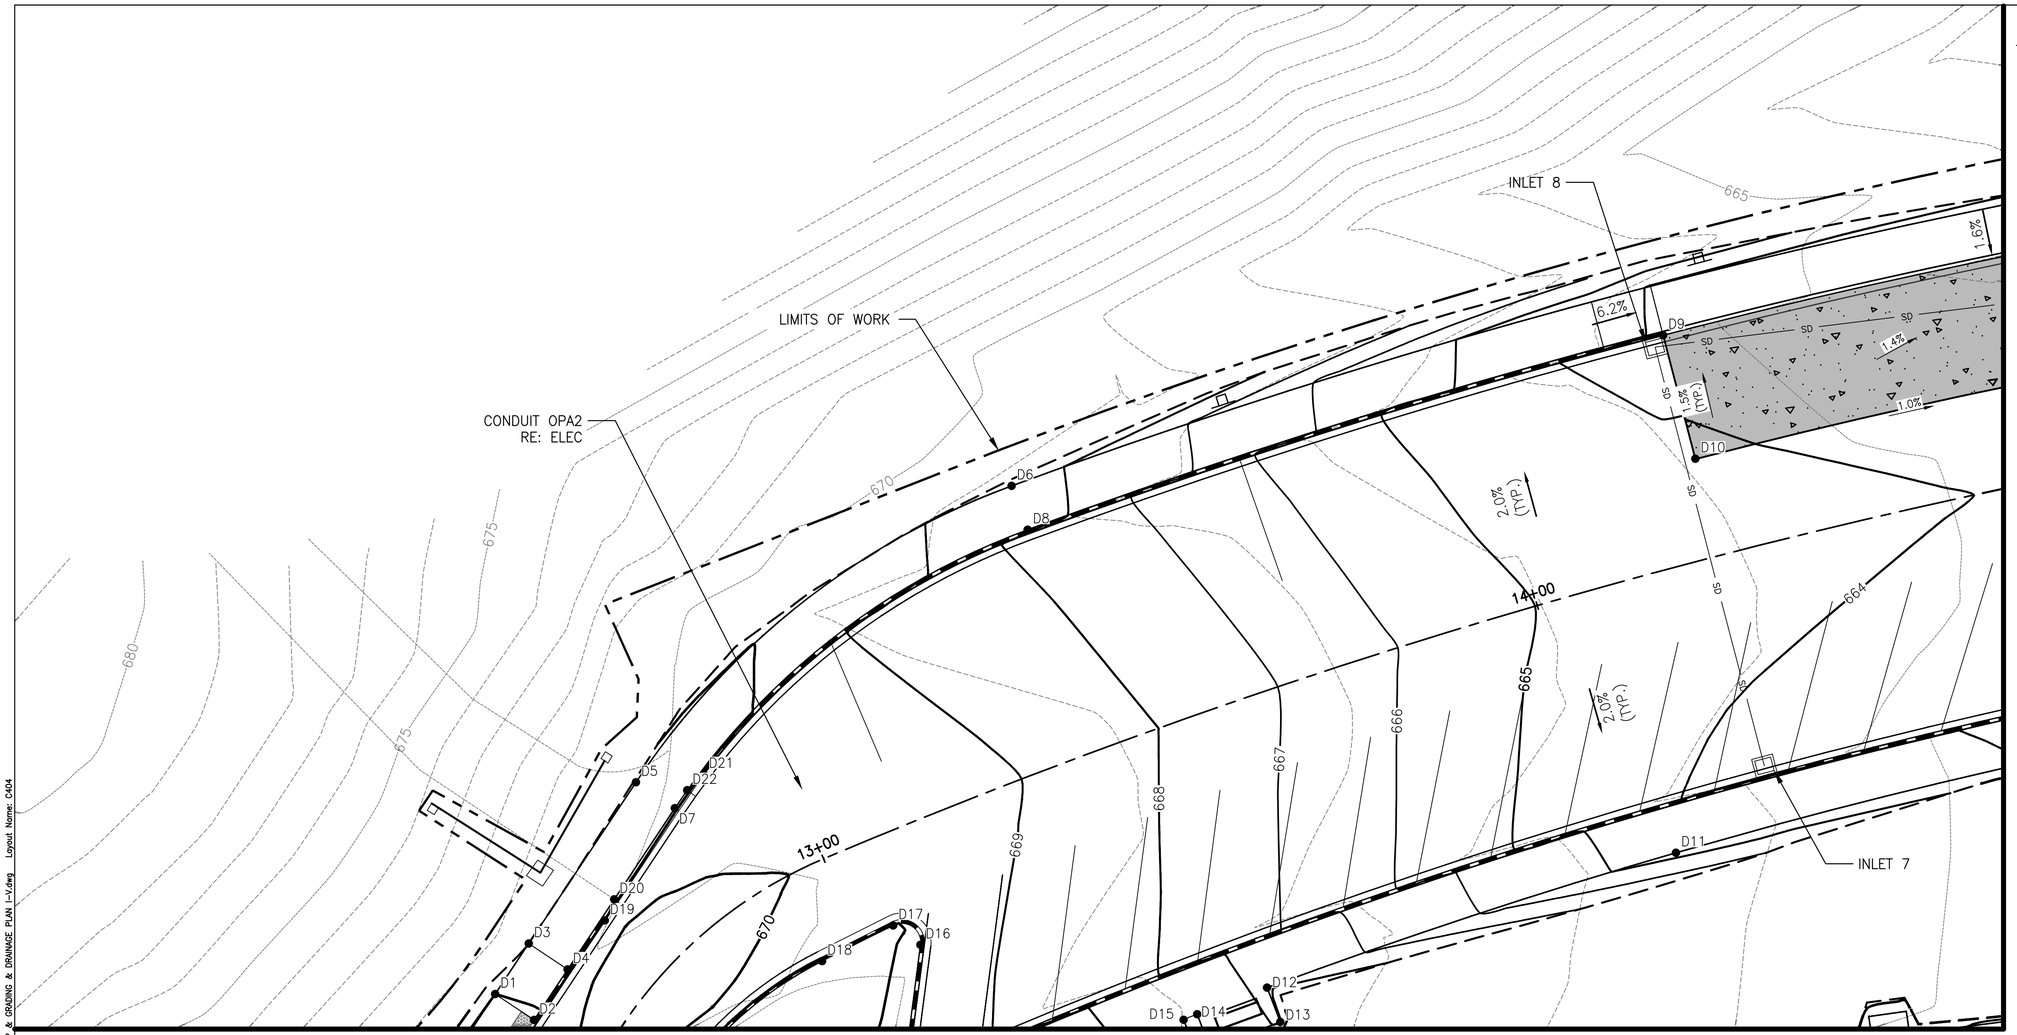

MATCH LINE SHEET C403

MATCH LINE SHEET C405

GRADING NOTES

1. LANDINGS, ACCESSIBLE PARKING STALLS, AND PARKING ACCESS AISLES SHALL NOT EXCEED 1.5% SLOPE IN ANY DIRECTION.
2. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
3. SEE SHEETS C408–C409 FOR PARKING LOT PLAN AND PROFILE VIEWS.
4. SEE SHEETS C410–C411 FOR STORM PLAN & PROFILE VIEWS.
5. SEE SHEETS C406–C407 FOR LAYOUT CONTROL POINT TABLES.
6. SEE SHEET C503 FOR TYPICAL SECTIONS.

10' 0' 10' 20'
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C404	TITLE OF SHEET: GRADING AND DRAINAGE PLAN IV	DRAWING NO. 394 / 192943
CADD: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 19 OF 39
DATE: 5/29/2026			

Plotted: May 22, 2026 - 2:20pm lindsay.martin G:\PROJECT\33200\332784E\04 CAD\ACAD\EPMO\224159\DRAWINGS\CIVIL\KEY MAP & GRADING & DRAINAGE PLAN I-V.dwg Layout Name: C404

GRADING NOTES

1. LANDINGS, ACCESSIBLE PARKING STALLS, AND PARKING ACCESS AISLES SHALL NOT EXCEED 1.5% SLOPE IN any DIRECTION.
2. ABA WALKWAYS SHALL NOT EXCEED A 4.0% MAXIMUM RUNNING SLOPE AND A 1.5% MAXIMUM CROSS SLOPE.
3. SEE SHEETS C408–C409 FOR PARKING LOT PLAN AND PROFILE VIEWS.
4. SEE SHEETS C410–C411 FOR STORM PLAN & PROFILE VIEWS.
5. SEE SHEETS C406–C407 FOR LAYOUT CONTROL POINT TABLES.
6. SEE SHEET C503 FOR TYPICAL SECTIONS.

LIMITS OF WORK

INLET 9

INLET 6

INLET 5

INLET 4

INLET 3

INLET 2

CONDUIT OPA2
RE: ELEC

VISITOR CENTER IMPROVEMENTS PER PMIS NO. 318539

OMIT IF PMIS NO. 318539 OPTION B IS AWARDED

MATCH LINE SHEET C404

15+00

16+00

17+00

18+00

19+00

20+00

SCALE OF FEET 10' 0' 10' 20'

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C405	TITLE OF SHEET GRADING AND DRAINAGE PLAN V	DRAWING NO. 394 192943
CADD ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 20 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 – 2:12pm

LAYOUT CONTROL POINTS				
POINT	NORTHING	EASTING	DESCRIPTION	ELEV
A1	3868062.78	5538463.44	EDGE OF ASPHALT	680.77'
A2	3868064.90	5538466.41	EDGE OF ASPHALT	680.79'
A3	3868064.54	5538466.60	EDGE OF ASPHALT	680.79'
A4	3868072.88	5538477.77	EDGE OF ASPHALT	680.85'
A5	3868120.41	5538541.46	EDGE OF ASPHALT	681.50'
A6	3868105.88	5538551.32	EDGE OF ASPHALT	680.96'
A7	3868116.90	5538567.91	EDGE OF ASPHALT	680.73'
A8	3868114.19	5538569.74	EDGE OF ASPHALT	680.68'
A9	3868114.55	5538570.30	EDGE OF ASPHALT	680.58'
A10	3868117.30	5538568.52	EDGE OF ASPHALT	680.73'
A11	3868152.94	5538620.75	EDGE OF ASPHALT	680.70'
A12	3868150.41	5538622.47	EDGE OF ASPHALT	680.57'
A13	3868159.82	5538636.46	EDGE OF ASPHALT	680.54'
A14	3868141.27	5538648.89	TOP OF WALL	680.02'
A15	3868163.84	5538683.91	EDGE OF ASPHALT	679.56'
A16	3868160.87	5538689.40	VALLEY GUTTER	679.16'
A17	3868159.79	5538691.40	VALLEY GUTTER	678.29'
A18	3868158.17	5538692.59	VALLEY GUTTER	678.79'
A19	3868156.94	5538693.47	EDGE OF ASPHALT	678.82'
A20	3868123.83	5538683.46	EDGE OF ASPHALT	679.26'
A21	3868122.86	5538683.65	EDGE OF ASPHALT	679.17'
A22	3868120.39	5538685.19	EDGE OF ASPHALT	679.62'
A23	3868118.41	5538682.27	EDGE OF ASPHALT	679.65'
A24	3868119.28	5538678.92	EDGE OF ASPHALT	679.96'
A25	3868066.09	5538600.52	EDGE OF ASPHALT	680.35'
A26	3868063.85	5538602.02	EDGE OF ASPHALT	680.44'
A27	3868060.26	5538596.65	EDGE OF ASPHALT	680.56'
A28	3868055.70	5538599.73	EDGE OF ASPHALT	680.52'
A29	3868049.04	5538588.37	EDGE OF ASPHALT	680.48'
A30	3868054.86	5538584.77	EDGE OF ASPHALT	680.50'
A31	3868044.77	5538567.89	EDGE OF ASPHALT	680.39'
A32	3868047.88	5538565.85	EDGE OF ASPHALT	680.43'
A33	3868041.55	5538553.86	EDGE OF ASPHALT	680.22'
A34	3868032.25	5538559.34	EDGE OF ASPHALT	679.72'
A35	3867998.66	5538501.62	EDGE OF ASPHALT	679.28'
A36	3868077.96	5538568.13	VALLEY GUTTER	680.14'
A37	3868079.64	5538566.98	VALLEY GUTTER	680.10'
A38	3868081.32	5538565.90	VALLEY GUTTER	680.18'
A39	3868161.54	5538635.20	TOP OF WALL	686.12'
A40	3868146.34	5538645.49	EDGE OF ASPHALT	680.19'
A41	3868148.30	5538646.66	TOP OF WALL	680.98'
A42	3868162.83	5538637.09	TOP OF WALL	683.81'
A43	3868064.86	5538559.30	TRANSISTION POINT	680.30'
A44	3868066.48	5538562.07	TRANSISTION POINT	680.30'
A45	3868072.00	5538571.47	TRANSISTION POINT	680.28'

LAYOUT CONTROL POINTS				
POINT	NORTHING	EASTING	DESCRIPTION	ELEV
B1	3868162.22	5538702.20	EDGE OF ASPHALT	678.78'
B2	3868169.32	5538712.11	EDGE OF ASPHALT	679.09'
B3	3868168.35	5538712.62	EDGE OF ASPHALT	679.06'
B4	3868170.42	5538714.15	EDGE OF ASPHALT	679.15'
B5	3868170.83	5538714.79	EDGE OF ASPHALT	679.17'
B6	3868178.07	5538718.56	EDGE OF ASPHALT	679.37'
B7	3868185.71	5538718.82	EDGE OF ASPHALT	679.56'
B8	3868184.20	5538719.12	EDGE OF ASPHALT	679.53'
B9	3868181.39	5538719.17	EDGE OF ASPHALT	679.46'
B10	3868192.91	5538731.85	EDGE OF ASPHALT	679.68'
B11	3868181.12	5538782.73	EDGE OF ASPHALT	677.48'
B12	3868190.10	5538737.69	EDGE OF ASPHALT	679.31'
B13	3868190.04	5538744.17	EDGE OF ASPHALT	???'
B14	3868187.23	5538746.83	EDGE OF ASPHALT	678.67'
B15	3868187.52	5538747.38	EDGE OF CONCRETE/ASPHALT	678.66'
B16	3868198.55	5538747.41	EDGE OF CONCRETE	678.82'
B17	3868188.83	5538749.87	EDGE OF ASPHALT	678.64'
B18	3868166.84	5538750.91	EDGE OF ASPHALT	678.34'
B19	3868223.72	5538751.12	EDGE OF ASPHALT	681.00'
B20	3868205.56	5538756.88	EDGE OF ASPHALT	679.25'
B21	3868203.10	5538757.78	EDGE OF CONCRETE/ASPHALT	678.96'
B22	3868193.34	5538758.44	EDGE OF CONCRETE/ASPHALT	678.53'
B23	3868200.55	5538758.60	EDGE OF CONCRETE/ASPHALT	678.82'
B24	3868194.36	5538758.82	EDGE OF CONCRETE/ASPHALT	678.55'
B25	3868227.08	5538760.55	EDGE OF ASPHALT	681.12'
B26	3868212.87	5538766.93	EDGE OF ASPHALT	679.66'
B27	3868203.76	5538776.35	EDGE OF ASPHALT	678.21'
B28	3868208.14	5538769.37	EDGE OF ASPHALT	678.96'
B29	3868203.72	5538784.59	EDGE OF ASPHALT	677.49'
B30	3868185.65	5538817.31	EDGE OF ASPHALT	674.40'
B31	3868206.12	5538829.21	EDGE OF ASPHALT	673.71'

LAYOUT CONTROL POINTS				
POINT	NORTHING	EASTING	DESCRIPTION	ELEV
C1	3868201.85	5538853.85	EDGE OF ASPHALT	671.78'
C2	3868221.26	5538899.00	EDGE OF SIDEWALK	669.79'
C3	3868225.31	5538893.69	EDGE OF SIDEWALK	669.89'
C4	3868217.70	5538921.37	EDGE OF SIDEWALK	669.90'
C5	3868218.56	5538921.84	TOP OF CURB	669.90'
C6	3868215.84	5538925.71	EDGE OF SIDEWALK	669.89'
C7	3868216.21	5538932.29	EDGE OF SIDEWALK	669.88'
C8	3868218.10	5538942.36	EDGE OF SIDEWALK	669.86'
C9	3868222.20	5538953.46	EDGE OF SIDEWALK	669.84'
C10	3868229.30	5538985.98	EDGE OF CONCRETE PAD	668.80'
C11	3868226.50	5538987.05	EDGE OF CONCRETE PAD	668.85'
C12	3868228.28	5538991.72	EDGE OF CONCRETE PAD	668.59'
C13	3868227.33	5538994.13	EDGE OF CONCRETE PAD	668.52'
C14	3868213.59	5538949.17	EDGE OF SIDEWALK	669.76'
C15	3868205.61	5538950.09	EDGE OF SIDEWALK	669.45'
C16	3868208.26	5538973.63	EDGE OF SIDEWALK	668.62'
C17	3868211.76	5538988.90	EDGE OF SIDEWALK	668.01'
C18	3868216.93	5539000.26	EDGE OF SIDEWALK	667.58'
C19	3868226.41	5539050.34	EDGE OF SIDEWALK	665.60'
C20	3868225.74	5539062.80	EDGE OF SIDEWALK	665.08'
C21	3868228.54	5539081.50	EDGE OF SIDEWALK	664.37'
C22	3868213.47	5539027.98	TOP OF CURB	666.41'
C23	3868195.05	5538946.03	TOP OF CURB	669.49'
C24	3868175.12	5538940.60	TOP OF CURB	669.41'
C25	3868173.37	5538938.86	TOP OF CURB	669.43'
C26	3868172.03	5538934.05	TOP OF CURB	669.55'
C27	3868200.29	5538911.77	TOP OF CURB	670.22'
C28	3868208.51	5538916.30	TOP OF CURB	669.79'
C29	3868143.86	5538856.64	EDGE OF ASPHALT	669.70'
C30	3868072.88	5538854.07	EDGE OF ASPHALT	668.85'
C31	3868068.27	5538853.70	EDGE OF ASPHALT	668.80'
C32	3868080.46	5538919.52	EDGE OF ASPHALT	667.74'
C33	3868093.11	5538905.42	EDGE OF ASPHALT	667.94'
C34	3868127.00	5538902.84	TOP OF CURB	668.99'
C35	3868147.43	5538924.34	TOP OF CURB	669.46'
C36	3868172.24	5538940.30	EDGE OF HEAVY DUTY ASPHALT	668.89'
C37	3868202.07	5538936.95	EDGE OF SIDEWALK	669.63'
C38	3868203.65	5538932.53	EDGE OF SIDEWALK	669.69'

Plotted: May 22, 2026 – 2:09pm lindsey.martin C:\PROJECT\33200\332784E\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\KEY MAP & GRADING & DRAINAGE PLAN 1-4.dwg Layout Name: C406

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C406	TITLE OF SHEET: LAYOUT AND ELEVATION TABLES I	DRAWING NO. 394 / 192943
CADD: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 21 OF 39
DATE: 5/29/2026			

LAYOUT CONTROL POINTS				
POINT	NORTHING	EASTING	DESCRIPTION	ELEV
D1	3868234.49	5538899.79	EDGE OF SIDEWALK	670.00'
D2	3868231.07	5538904.93	TOP OF CURB	669.88'
D3	3868241.15	5538904.22	TOP OF RAMP	670.52'
D4	3868237.73	5538909.36	TOP OF RAMP	670.43'
D5	3868262.42	5538918.37	EDGE OF SIDEWALK	670.43'
D6	3868301.54	5538967.95	EDGE OF SIDEWALK	668.40'
D7	3868259.01	5538923.51	TOP OF CURB	670.30'
D8	3868295.75	5538970.07	TOP OF CURB	668.31'
D9	3868321.43	5539053.93	TOP OF CURB	663.85'
D10	3868305.12	5539058.19	ACCESSIBLE PARKING	664.08'
D11	3868253.14	5539055.64	EDGE OF SIDEWALK	664.67'
D12	3868235.33	5539001.67	EDGE OF CONCRETE PAD	667.86'
D13	3868230.81	5539003.41	EDGE OF CONCRETE PAD	667.95'
D14	3868231.82	5538992.44	EDGE OF CONCRETE PAD	668.44'
D15	3868231.08	5538990.65	EDGE OF CONCRETE PAD	668.54'
D16	3868240.98	5538955.92	TOP OF CURB	669.89'
D17	3868243.54	5538952.32	TOP OF CURB	670.07'
D18	3868238.83	5538942.94	TOP OF CURB	670.30'
D19	3868244.20	5538914.26	SLOPED CURB TRANSITION	669.95'
D20	3868246.98	5538915.51	SLOPED CURB TRANSITION	670.44'
D21	3868263.49	5538927.31	SLOPED CURB TRANSITION	669.75'
D22	3868261.37	5538925.14	SLOPED CURB TRANSITION	670.25'

LAYOUT CONTROL POINTS				
POINT	NORTHING	EASTING	DESCRIPTION	ELEV
E1	3868334.27	5539111.34	ACCESSIBLE PARKING	663.26'
E2	3868317.81	5539115.18	ACCESSIBLE PARKING	663.51'
E3	3868356.32	5539269.67	EDGE OF CONCRETE PAD	658.38'
E4	3868365.65	5539269.61	EDGE OF CONCRETE PAD	658.52'
E5	3868365.65	5539285.71	EDGE OF CONCRETE PAD	658.38'
E6	3868356.31	5539285.53	EDGE OF CONCRETE PAD	658.24'
E7	3868350.70	5539307.94	EDGE OF SIDEWALK	657.94'
E8	3868329.06	5539346.46	EDGE OF SIDEWALK	657.64'
E9	3868322.64	5539342.52	EDGE OF SIDEWALK	657.71'
E10	3868346.04	5539300.25	EDGE OF SIDEWALK	658.04'
E11	3868350.12	5539288.16	EDGE OF SIDEWALK	658.13'
E12	3868350.18	5539283.19	TOP OF CURB	658.16'
E13	3868332.45	5539291.95	TOP OF CURB	658.80'
E14	3868329.48	5539295.02	ACCESSIBLE PARKING	658.31'
E15	3868328.88	5539246.43	ACCESSIBLE PARKING	658.81'
E16	3868348.79	5539235.85	ACCESSIBLE PARKING	658.50'
E17	3868309.74	5539257.24	ACCESSIBLE PARKING	658.71'
E18	3868309.43	5539279.72	SLOPED CURB TRANSITION	658.46'
E19	3868307.89	5539276.79	TOP OF CURB	658.47'
E20	3868289.73	5539266.74	ACCESSIBLE PARKING	658.31'
E21	3868289.55	5539246.06	ACCESSIBLE PARKING	658.43'
E22	3868281.68	5539158.36	TOP OF CURB	662.59'
E23	3868266.95	5539110.93	EDGE OF SIDEWALK	663.96'
E24	3868272.82	5539141.86	EDGE OF SIDEWALK	663.41'
E25	3868277.07	5539170.32	EDGE OF SIDEWALK	662.08'
E26	3868274.38	5539186.87	EDGE OF SIDEWALK	661.27'
E27	3868276.94	5539207.87	EDGE OF SIDEWALK	660.12'
E28	3868281.84	5539219.02	EDGE OF SIDEWALK	659.58'
E29	3868283.40	5539271.26	EDGE OF SIDEWALK	658.73'
E30	3868263.34	5539280.50	EDGE OF SIDEWALK	658.66'
E31	3868297.43	5539309.17	EDGE OF SIDEWALK	657.68'
E32	3868287.84	5539313.21	EDGE OF SIDEWALK	657.39'
E33	3868292.76	5539285.17	EDGE OF CONCRETE PAD	658.52'
E34	3868296.66	5539289.51	EDGE OF CONCRETE PAD	658.47'
E35	3868295.71	5539284.60	EDGE OF CONCRETE PAD	658.54'
E36	3868282.75	5539307.17	EDGE OF CONCRETE PAD	658.02'
E37	3868280.34	5539304.94	EDGE OF SIDEWALK	658.15'
E38	3868268.82	5539301.62	EDGE OF SIDEWALK	658.35'
E39	3868239.57	5539277.29	EDGE OF SIDEWALK	659.04'
E40	3868232.66	5539260.46	TOP OF CURB	659.67'

POINT	NORTHING	EASTING	DESCRIPTION	ELEV
E41	3868248.46	5539266.99	EDGE OF SIDEWALK	659.31'
E42	3868242.62	5539261.54	EDGE OF SIDEWALK	659.57'
E43	3868238.80	5539252.55	EDGE OF SIDEWALK	659.97'
E44	3868239.56	5539210.81	EDGE OF SIDEWALK	661.50'
E45	3868236.23	5539150.44	EDGE OF SIDEWALK	663.27'
E46	3868232.84	5539115.60	EDGE OF SIDEWALK	663.61'
E47	3868231.91	5539176.40	TOP OF CURB	662.68'
E48	3868194.86	5539219.22	TOP OF CURB	659.82'
E49	3868218.44	5539251.69	TOP OF CURB	659.62'
E50	3868211.58	5539255.59	TOP OF CURB	659.07'
E51	3868211.81	5539272.59	TOP OF CURB	658.57'
E52	3868261.17	5539316.21	TOP OF CURB	657.58'
E53	3868194.86	5539287.22	TOP OF CURB	658.16'
E54	3868262.75	5539352.16	TOP OF CURB	657.82'
E55	3868270.77	5539351.81	TOP OF CURB	657.79'
E56	3868296.13	5539302.49	ACCESSIBLE RAMP	658.25'
E57	3868283.30	5539307.74	ACCESSIBLE RAMP	657.98'
E58	3868289.24	5539263.30	ACCESSIBLE RAMP	658.76'
E59	3868283.17	5539263.48	ACCESSIBLE RAMP	658.85'
E60	3868289.20	5539255.30	ACCESSIBLE RAMP	658.51'
E61	3868282.93	5539255.49	ACCESSIBLE RAMP	658.75'
E62	3868282.65	5539246.25	ACCESSIBLE RAMP	658.53'
E63	3868289.05	5539246.06	ACCESSIBLE RAMP	658.43'
E64	3868282.42	5539238.26	ACCESSIBLE RAMP	659.11'
E65	3868288.82	5539238.07	ACCESSIBLE RAMP	659.00'
E66	3868355.52	5539236.95	ACCESSIBLE RAMP	659.07'
E67	3868355.83	5539244.95	ACCESSIBLE RAMP	658.62'
E68	3868349.35	5539237.17	ACCESSIBLE RAMP	658.98'
E69	3868349.67	5539245.16	ACCESSIBLE RAMP	658.52'
E70	3868350.15	5539285.48	ACCESSIBLE RAMP	658.14'
E71	3868348.96	5539293.34	ACCESSIBLE RAMP	658.09'
E72	3868355.56	5539294.60	ACCESSIBLE RAMP	658.13'
E73	3868212.45	5539250.90	EDGE OF HEAVY DUTY ASPHALT	658.98'
E74	3868315.12	5539115.81	EDGE OF HEAVY DUTY ASPHALT	663.56'
E75	3868293.72	5539290.08	EDGE OF CONCRETE	658.44'
E76	3868308.62	5539282.60	SLOPED CURB TRANSITION	658.93'
E77	3868307.60	5539292.59	SLOPED CURB AND GUTTER	658.83'
E78	3868254.54	5539316.94	LOW POINT	657.07'
E79	3868317.80	5539343.48	EDGE OF SIDEWALK	657.57'
E80	3868314.75	5539340.56	EDGE OF SIDEWALK	657.64'

OMIT IF PMIS NO. 318539
OPTION B IS AWARDED

POINT	NORTHING	EASTING	DESCRIPTION	ELEV
E81	3868309.20	5539344.65	WARNING SURFACE	657.42'
E82	3868310.63	5539346.70	WARNING SURFACE	657.36'
E83	3868290.72	5539350.92	WARNING SURFACE	657.29'
E84	3868290.83	5539353.42	WARNING SURFACE	657.26'
E85	3868275.65	5539351.59	EDGE OF SIDEWALK	657.74'
E86	3868276.01	5539352.23	EDGE OF SIDEWALK–PC	657.74'
E87	3868277.13	5539354.03	WARNING SURFACE	657.67'
E88	3868285.66	5539361.48	EDGE OF SIDEWALK	657.31'
E89	3868298.83	5539363.80	EDGE OF SIDEWALK	656.87'
E90	3868299.74	5539368.72	EDGE OF SIDEWALK–MATCH EX.	656.67'
E91	3868312.24	5539366.49	EDGE OF SIDEWALK–MATCH EX.	656.76'
E92	3868311.32	5539361.33	EDGE OF SIDEWALK	656.74'
E93	3868320.58	5539357.31	EDGE OF SIDEWALK	657.12'
E94	3868327.08	5539349.99	EDGE OF SIDEWALK–PT	657.49'

OMIT IF PMIS NO. 318539
OPTION B IS AWARDED

Plotted: May 22, 2026 – 2:11pm lindsey.martin G:\PROJECT\33000\332794C\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\KEY MAP & GRADING & DRAINAGE PLAN 1-4.dwg Layout Name: C407

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C407	TITLE OF SHEET: LAYOUT AND ELEVATION TABLES II	DRAWING NO. 394 192943
CADD: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 22 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

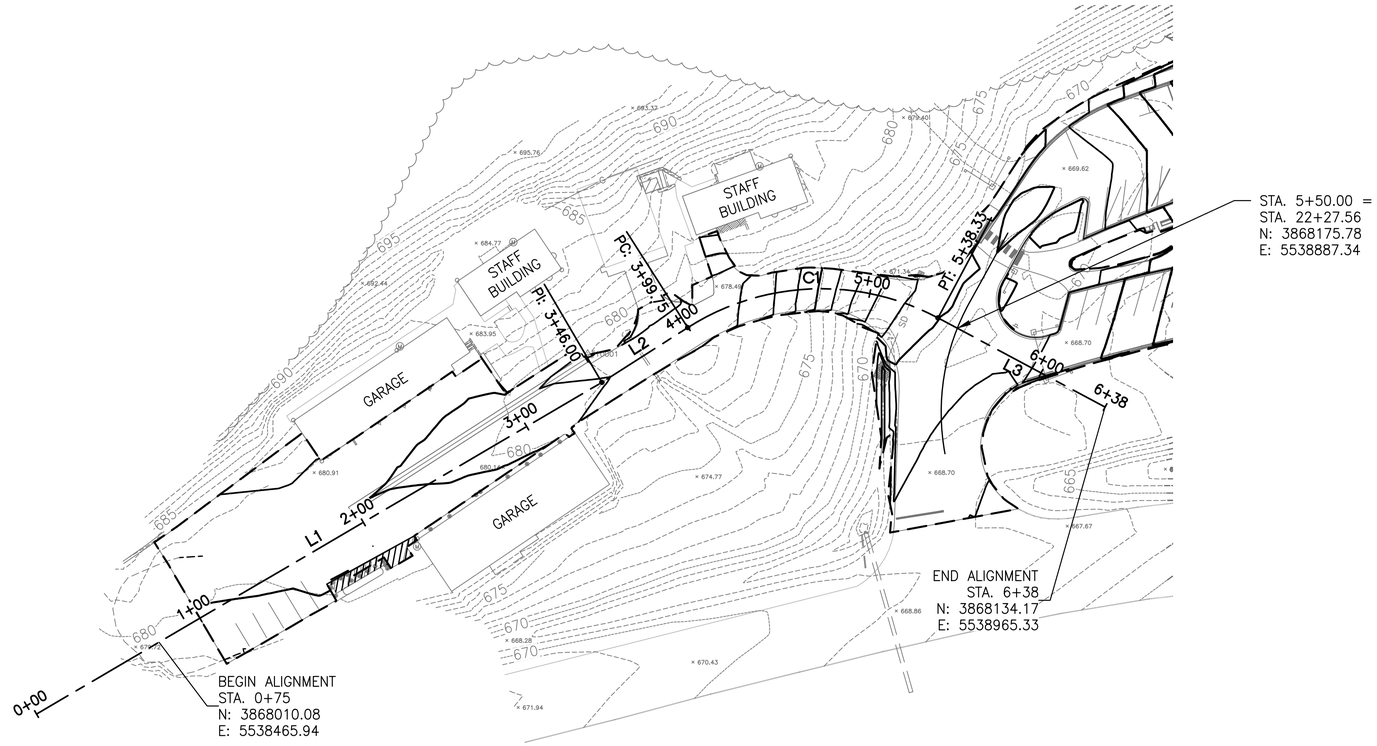

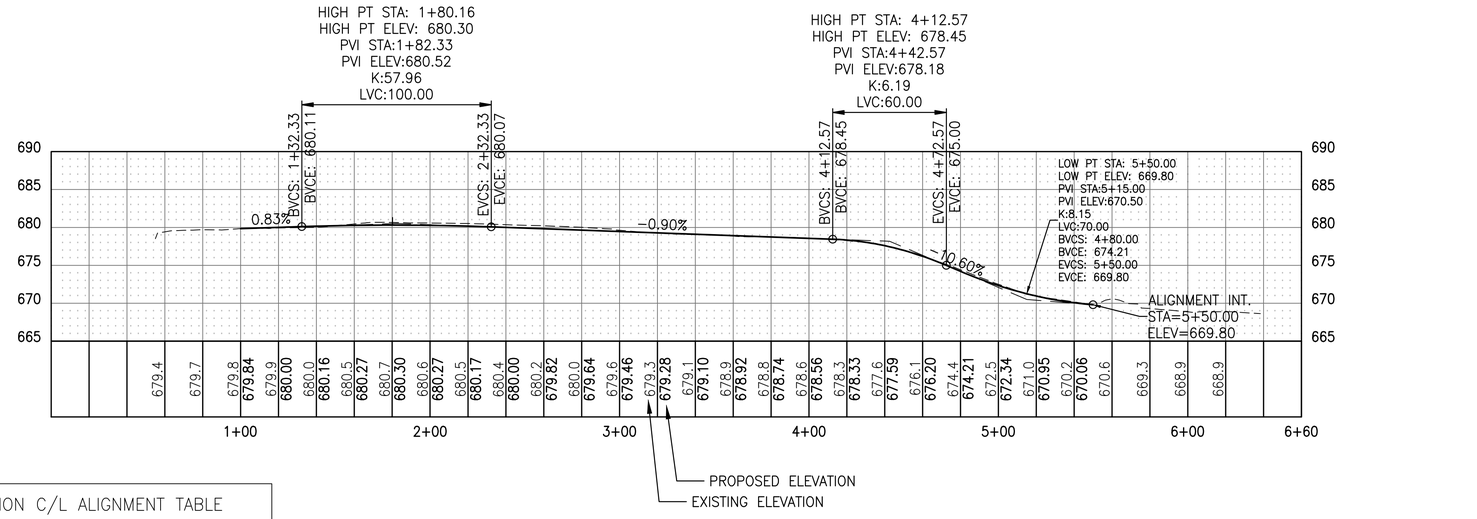

CONSTRUCTION C/L ALIGNMENT TABLE					
NUMBER	STATION	LENGTH	RADIUS	BEARING	DELTA
L1	0+00.00	346.00'		N59°35'55"E	
L2	3+46.00	53.75'		N57°28'26"E	
C1	3+99.75	138.58'	131.00'	N87°46'43"E	60°36'35"
L3	5+38.33	100.00'		S61°54'59"E	

HORZ. 40' 0' 40' 80'

VERT. 10' 0' 10' 20'

SCALE OF FEET

Know what's below. Call 811 before you dig.

EMILY A. MAGGIO — LICENSED PROFESSIONAL ENGINEER — IOWA

DESIGNED: LM, CS	SUB SHEET NO. C408	TITLE OF SHEET: PARKING LOT PLAN & PROFILE VIEW I	DRAWING NO. 394
CADD: ZS, CS			192943
TECH REVIEW: EM, KK			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 23 OF 39

Plotted: May 22, 2026 - 2:15pm lindsay.martin O:\PROJECT\33200\33278A\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\PARKING LOT PLAN AND PROFILE.dwg Layout Name: C408

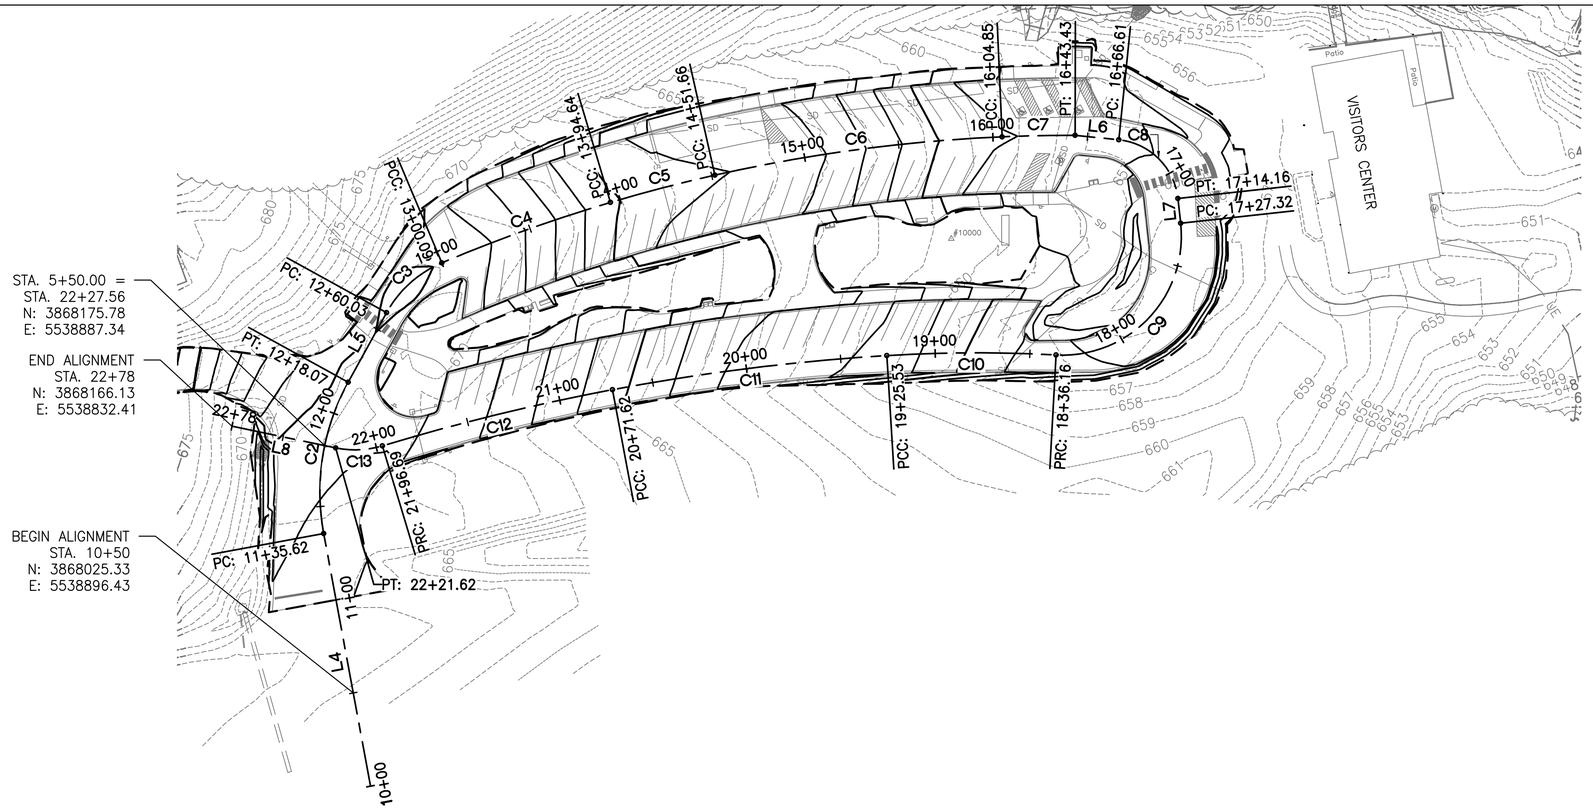

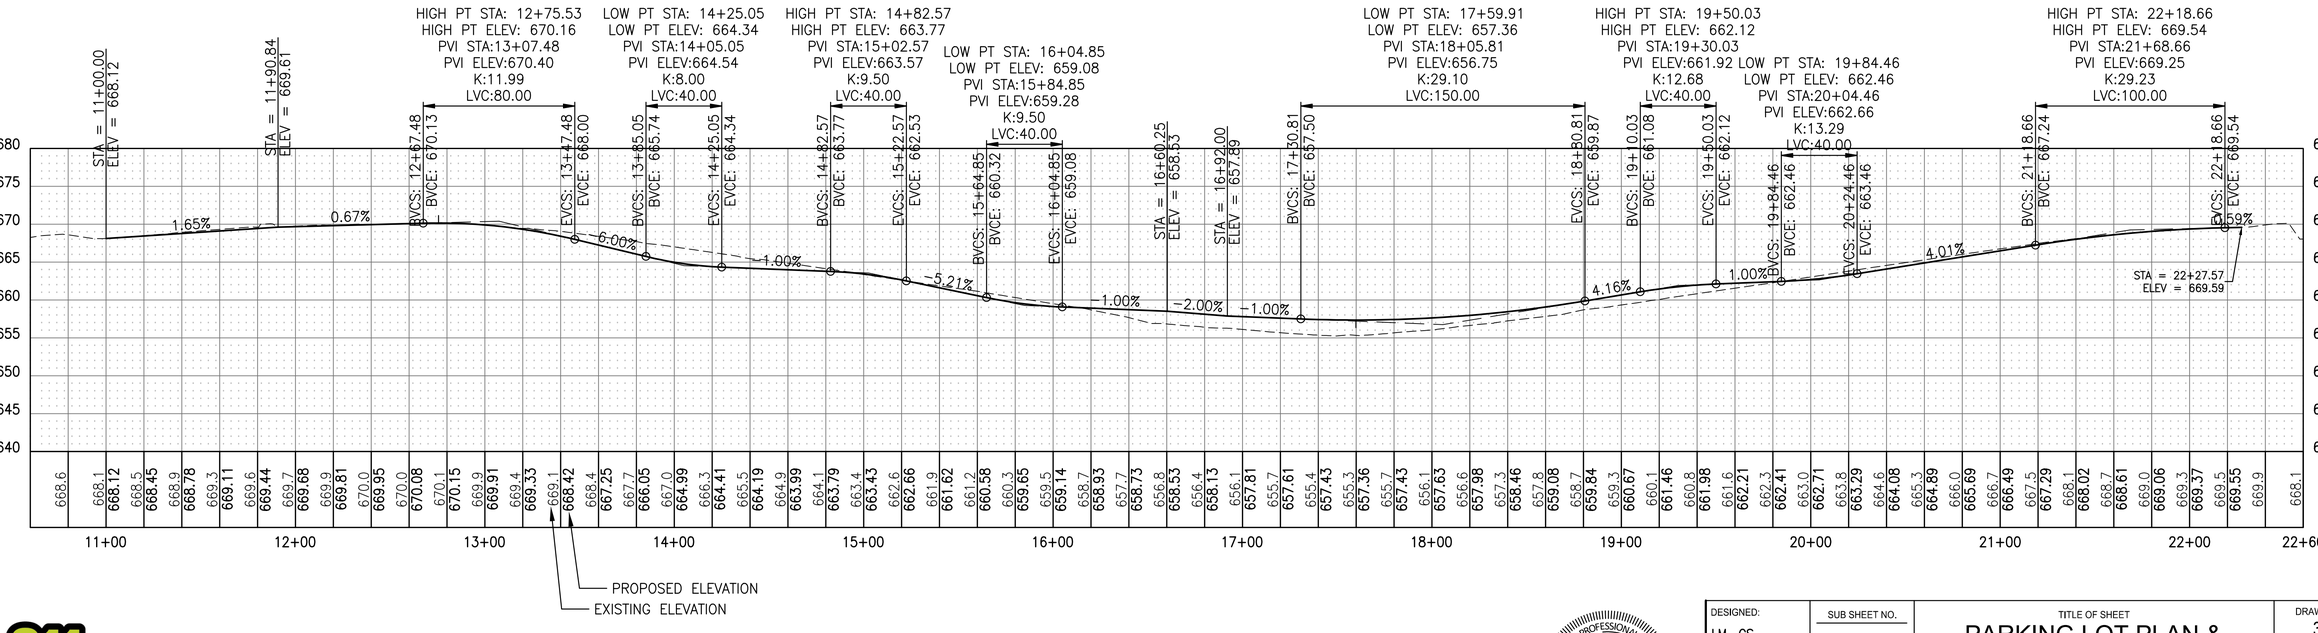

CONSTRUCTION C/L ALIGNMENT TABLE					
NUMBER	STATION	LENGTH	RADIUS	BEARING	DELTA
L4	10+00.00	135.62'		N10°29'47"W	
C2	11+35.62	82.45'	120.00'	N9°11'16"E	39°22'05"
L5	12+18.07	41.96'		N28°52'18"E	
C3	12+60.03	40.06'	60.00'	N47°59'58"E	38°15'20"
C4	13+00.09	94.55'	856.25'	N70°17'27"E	6°19'37"
C5	13+94.64	57.02'	856.25'	N75°21'43"E	3°48'55"
C6	14+51.66	153.18'	856.25'	N82°23'41"E	10°15'01"
C7	16+04.85	38.58'	856.25'	N88°48'39"E	2°34'54"
L6	16+43.43	23.19'		S84°06'30"E	
C8	16+66.61	47.55'	35.00'	S45°11'29"E	77°50'03"
L7	17+14.16	13.16'		S6°16'27"E	
C9	17+27.32	108.85'	62.75'	S43°25'09"W	99°23'12"
C10	18+36.16	89.36'	773.08'	S89°48'04"W	6°37'23"
C11	19+25.53	146.10'	1171.27'	S82°54'45"W	7°08'49"
C12	20+71.62	125.07'	1171.28'	S76°16'49"W	6°07'04"
C13	21+96.69	24.93'	50.00'	S87°30'25"W	28°34'16"
L8	22+21.62	55.94'		N78°12'27"W	

HORZ. 40' 0' 40' 80'
VERT. 10' 0' 10' 20'
SCALE OF FEET

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P30462
TOWA

DESIGNED:	LM, CS
DADD	ZS, CS
TECH REVIEW:	EM, KK
DATE:	5/29/2026

SUB SHEET NO. C409

TITLE OF SHEET
PARKING LOT PLAN & PROFILE VIEW II

EFFIGY MOUNDS NATIONAL MONUMENT

DRAWING NO. 394 / 192943
PMIS/PKG NO. 224159
SHEET 24 OF 39

Know what's below. Call 811 before you dig.

Plotted: May. 22, 2026 - 2:14pm lindsey.martin O:\PROJECT\33200\339784\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\PARKING LOT PLAN AND PROFILE.dwg Layout Name: C409

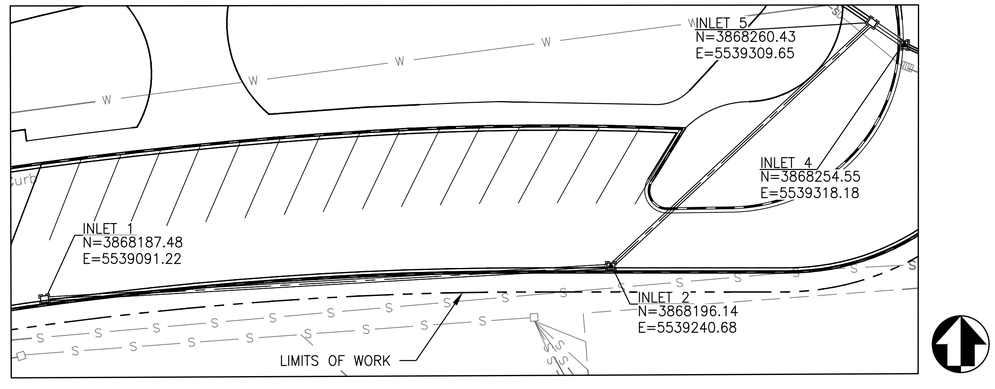

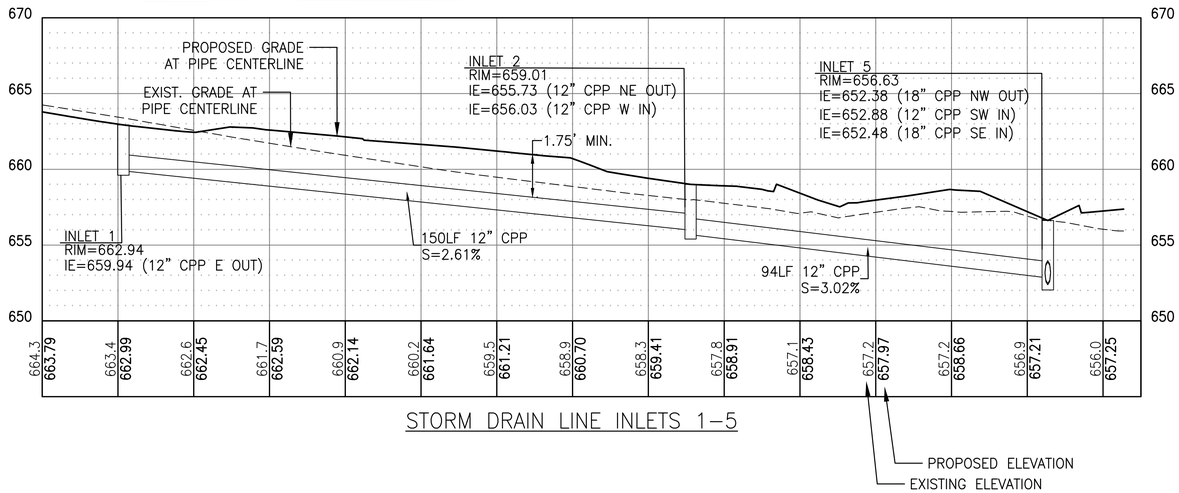

STORM DRAIN LINE INLETS 1–5

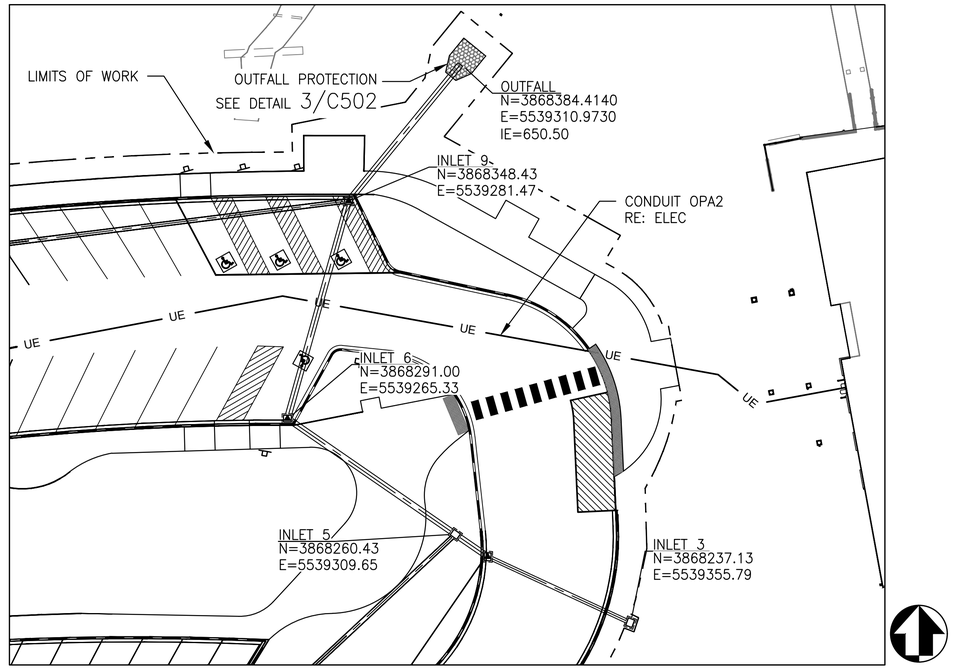

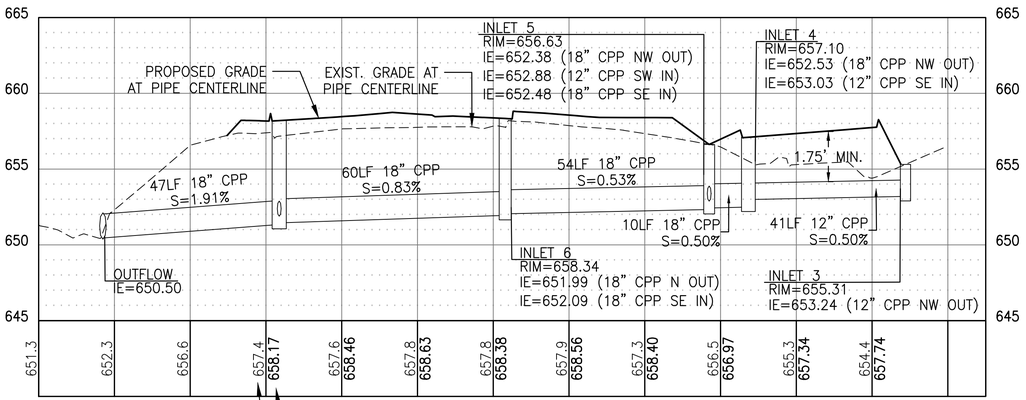

STORM DRAIN LINE INLETS 3–6, 9

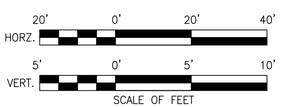

Know what's below. Call 811 before you dig.

EMILY A. MAGGIO — LICENSED PROFESSIONAL ENGINEER — IOWA

DESIGNED: LM, CS CADD: ZS, CS TECH REVIEW: EM, KK DATE: 5/29/2026	SUB SHEET NO. C410	TITLE OF SHEET: DRAINAGE PLAN AND PROFILE I EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 / 192943 PMIS/PKG NO. 224159 SHEET 25 OF 39

Plotted: May 22, 2026 - 2:19pm lindsey.martin O:\PROJECT\33200\33278AE\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\STORM PLAN AND PROFILE 1.dwg Layout Name: C410

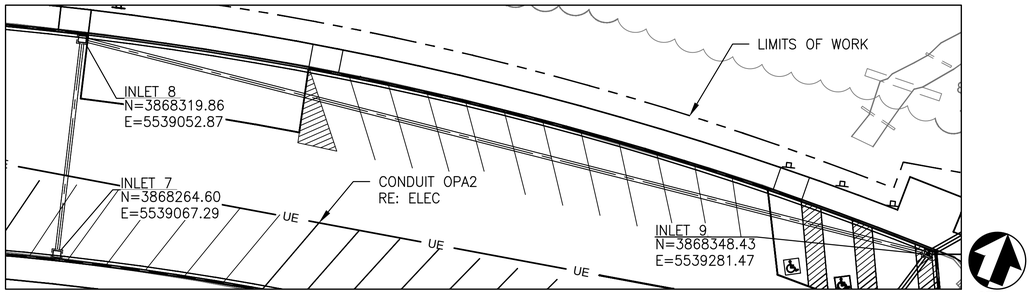

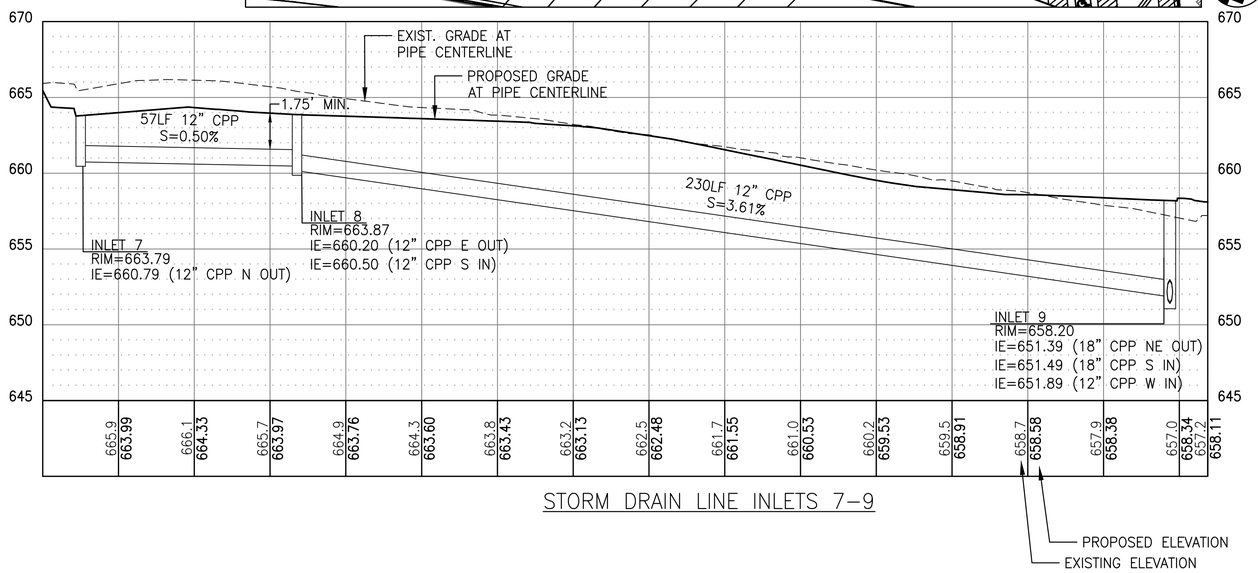

STORM DRAIN LINE INLETS 7–9

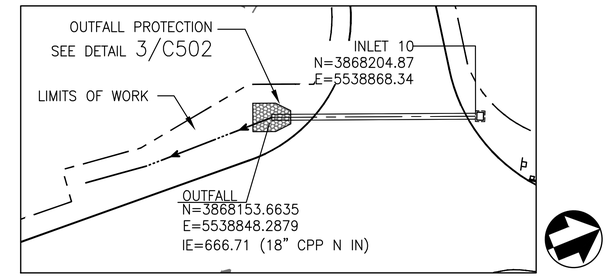

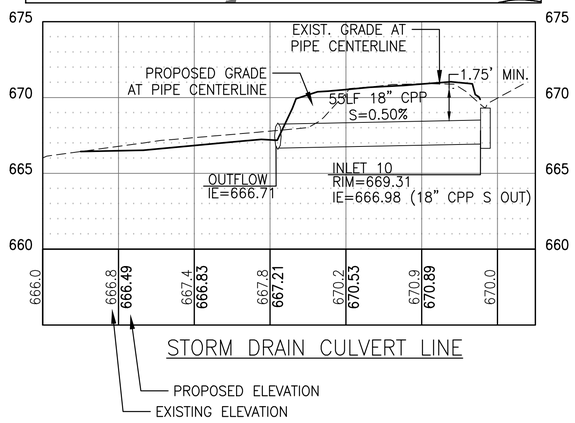

STORM DRAIN CULVERT LINE

20' 0' 20' 40'
HORZ.
5' 0' 5' 10'
VERT.
SCALE OF FEET

Know what's below. Call 811 before you dig.

EMILY A. MAGGIO
LICENSED PROFESSIONAL ENGINEER
P24162
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO. 394 / 192943
CADD: ZS, CS	C411	DRAINAGE PLAN AND PROFILE II	PMIS/PKG NO. 224159
TECH REVIEW: EM, KK		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 26 OF 39
DATE: 5/29/2026			

Plotted: May 22, 2026 – 2:18pm lindsey.martin O:\PROJECT\332001\332784\01_CAD\ACAD\ETMP\224159\DRAWINGS\CIVIL\STORM PLAN AND PROFILE 1.dwg Layout Name: C411

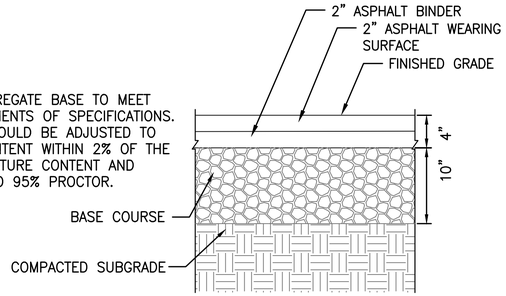

NOTES:
1. CLASS 2 AGGREGATE BASE TO MEET THE REQUIREMENTS OF SPECIFICATIONS.
2. SUBGRADE SHOULD BE ADJUSTED TO MOISTURE CONTENT WITHIN 2% OF THE OPTIMUM MOISTURE CONTENT AND COMPACTED TO 95% PROCTOR.

1 C500 HEAVY DUTY HMA
NTS

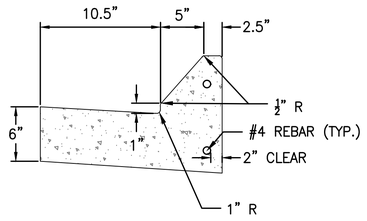

2A C500 SLOPED BACK CURB & GUTTER
NTS

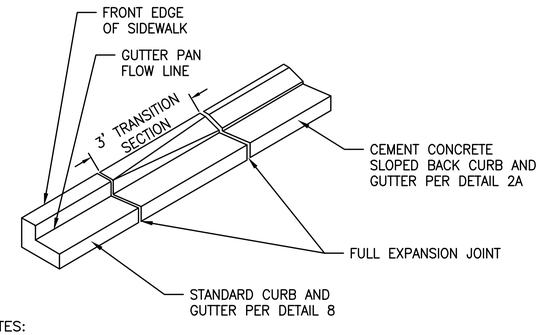

NOTES:
1. ALIGN THE BACK OF CURB, TRANSITION, AND ROLLED CURB PARALLEL TO FRONT EDGE OF SIDEWALK

2B C500 CURB TRANSITION TO CURB AND GUTTER
NTS

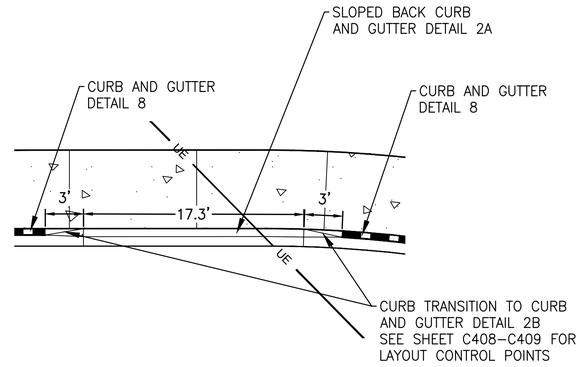

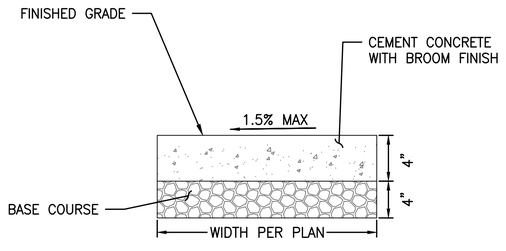

NOTES:
1. COLOR: NATURAL COLOR
2. FINISH: MEDIUM BROOM

3 C500 CONCRETE SIDEWALK
NTS

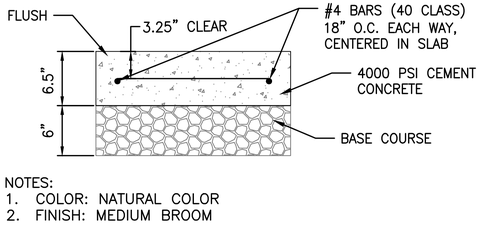

NOTES:
1. COLOR: NATURAL COLOR
2. FINISH: MEDIUM BROOM

4 C500 CONCRETE PAVEMENT (ABA PARKING) AND PORT A POTTY PAD
NTS

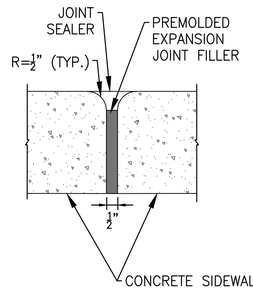

5 C500 EXPANSION JOINT
NTS

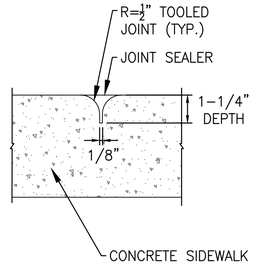

6 C500 CONTROL JOINT
NTS

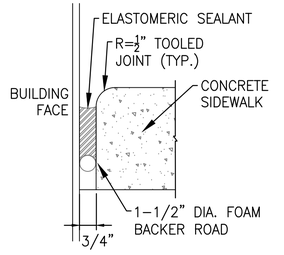

7 C500 ISOLATION JOINT
NTS

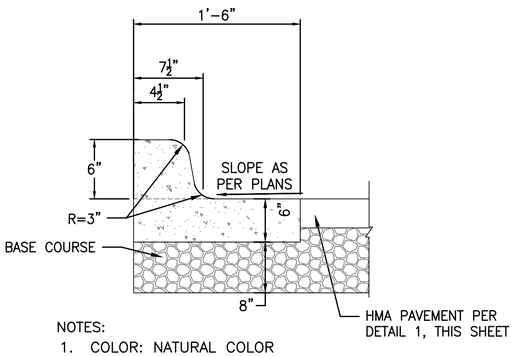

NOTES:
1. COLOR: NATURAL COLOR
2. FINISH: BROOM FINISH

8 C500 CONCRETE CURB AND GUTTER
NTS

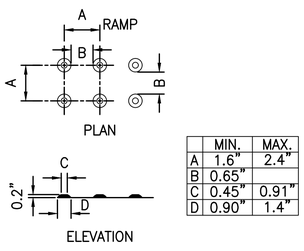

	MIN.	MAX.
A	1.6"	2.4"
B	0.65"	
C	0.45"	0.91"
D	0.90"	1.4"

9 C500 DETECTABLE WARNING SURFACE
NTS

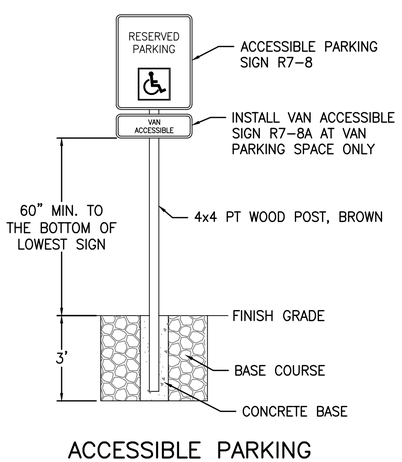

ACCESSIBLE PARKING

10 C500 SIGN INSTALLATION
NTS

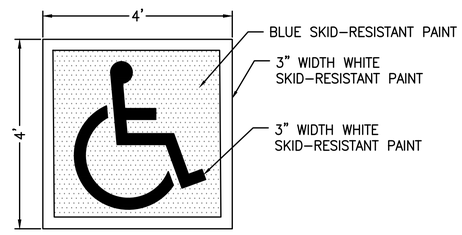

11 C500 ISA PAVEMENT MARKING SYMBOL
NTS

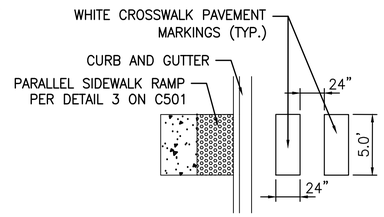

12 C500 CROSSWALK MARKINGS
NTS

Plotted: May 22, 2026 – 2:16pm lindsey.martin O:\PROJECT\33200\332784\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\DETAILS.dwg Layout Name: C500

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO.	TITLE OF SHEET: DETAILS I	DRAWING NO. 394 192943
CADD: ZS, CS	C500		PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 27 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

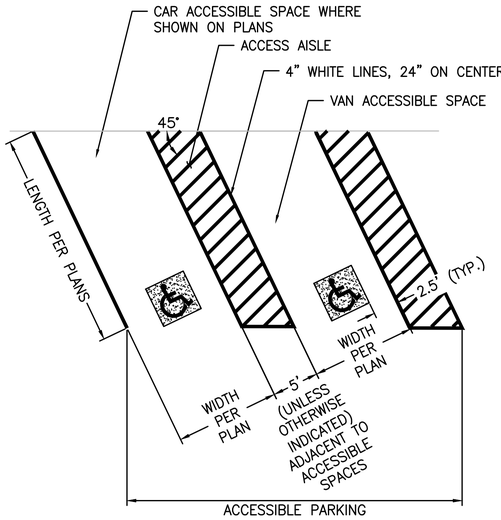

NOTES:

1. SYMBOLS & PARKING STALLS SHALL CONFORM TO THE REQUIREMENTS OF THE UNITED STATES ACCESS BOARD GUIDELINES AND STANDARDS.
2. PAVEMENT STRIPING SHALL BE LOCATED FULLY ON CONCRETE SLAB AND SHALL NOT OVERLAP SURFACING MATERIALS.
3. ALL STRIPING SHALL BE 4" WIDE SOLID WHITE PAVEMENT MARKINGS UNLESS OTHERWISE NOTED.
4. 1.5% MAXIMUM ALLOWABLE SLOPE IN ANY DIRECTION WITHIN ACCESSIBLE PARKING SPACES AND AISLES. CONTRACTOR SHALL CHECK SLOPES WITH A 2' SMART LEVEL ON A 2'x2' GRID TAKEN IN BOTH DIRECTIONS. CONTRACTOR SHALL PROVIDE A RECORD OF THE MEASURED SLOPES TO CO.

1 C501 60° ACCESSIBLE PARKING STALL LAYOUT
NTS

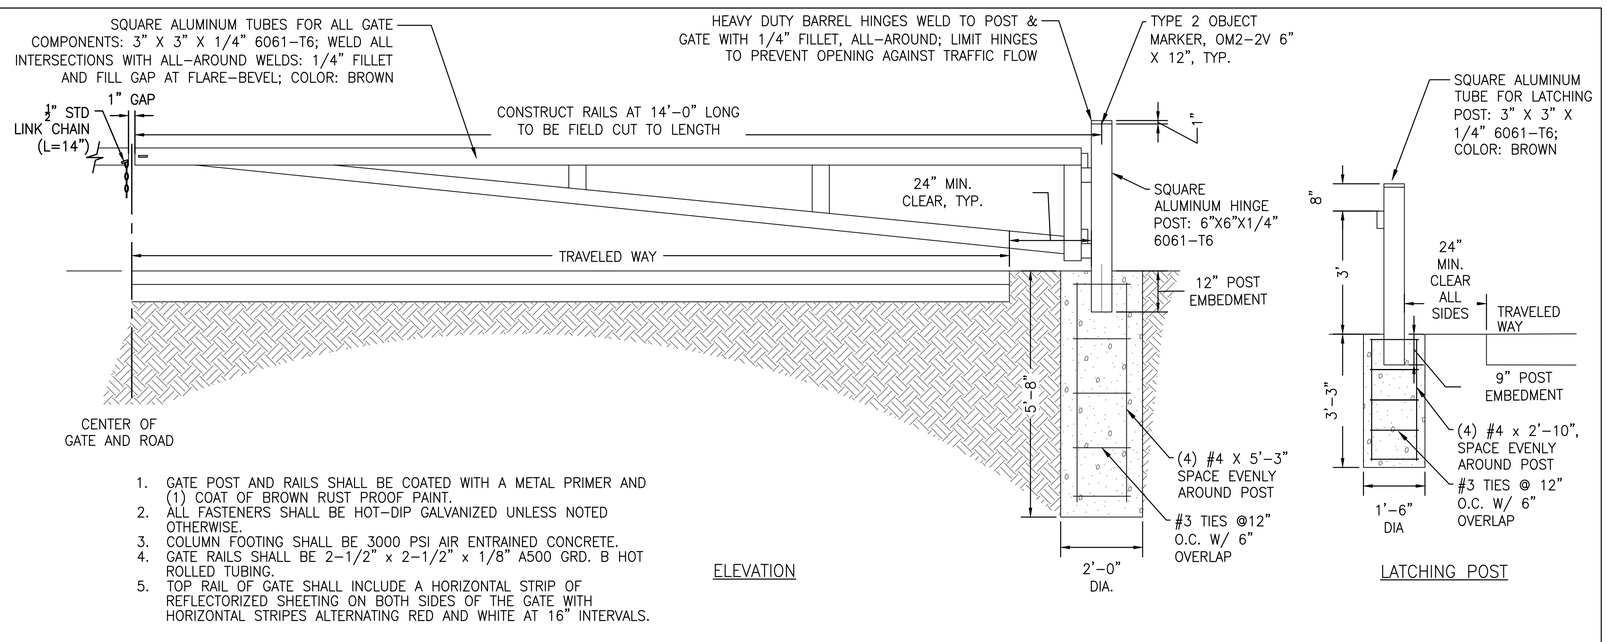

1. GATE POST AND RAILS SHALL BE COATED WITH A METAL PRIMER AND (1) COAT OF BROWN RUST PROOF PAINT.
2. ALL FASTENERS SHALL BE HOT-DIP GALVANIZED UNLESS NOTED OTHERWISE.
3. COLUMN FOOTING SHALL BE 3000 PSI AIR ENTRAINED CONCRETE.
4. GATE RAILS SHALL BE 2-1/2" x 2-1/2" x 1/8" A500 GRD. B HOT ROLLED TUBING.
5. TOP RAIL OF GATE SHALL INCLUDE A HORIZONTAL STRIP OF REFLECTORIZED SHEETING ON BOTH SIDES OF THE GATE WITH HORIZONTAL STRIPES ALTERNATING RED AND WHITE AT 16" INTERVALS.

2 C501 SWING GATE
NTS

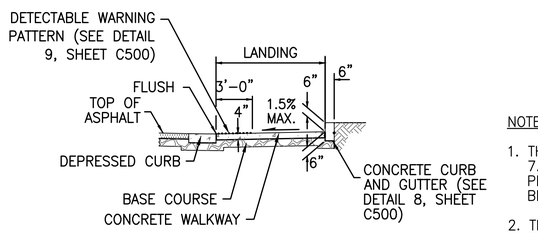

SECTION (A)

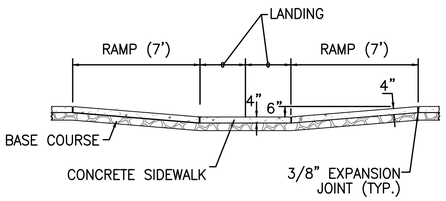

SECTION (B)

NOTES

1. THE MAXIMUM ALLOWABLE RAMP SLOPE IS 7.5% GRADE. FLATTER RAMP SLOPES ARE PERMISSIBLE. FIELD VERIFY THE FORMS BEFORE POURING CONCRETE.
2. THE RAMP CROSS SLOPE SHALL NOT EXCEED 1.5%.
3. THE BOTTOM OF THE RAMP SHALL HAVE A LEVEL AREA, (NOT IN EXCESS OF 1.5% IN ANY DIRECTION), 4' x 4'.
4. AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
5. CURB IS SHOWN, SEE THE PLANS FOR THE CURB DESIGN SPECIFIED.

3 C501 PARALLEL SIDEWALK RAMP
NTS

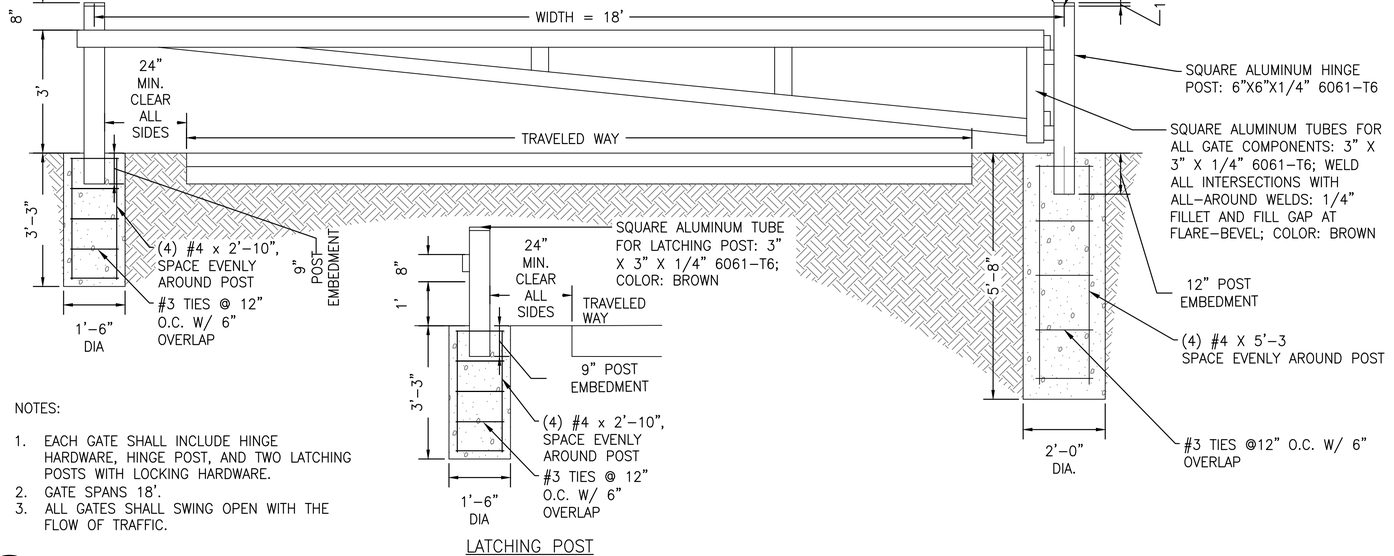

NOTES:

1. EACH GATE SHALL INCLUDE HINGE HARDWARE, HINGE POST, AND TWO LATCHING POSTS WITH LOCKING HARDWARE.
2. GATE SPANS 18'.
3. ALL GATES SHALL SWING OPEN WITH THE FLOW OF TRAFFIC.

4 C501 SINGLE SWING GATE
NTS

EMILY A. MAGGIO, P0982, LICENSED PROFESSIONAL ENGINEER, IOWA

DESIGNED: LM, CS	SUB SHEET NO. C501	TITLE OF SHEET: DETAILS II	DRAWING NO. 394 / 192943
DRAWN: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 28 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: Jul 09, 2026 - 5:25pm lindsey.martin O:\PROJECT\332001\332794E\04 CAD\ACAD\EFMO\224159\DRAWINGS\DWL\DETAILS.dwg Layout Name: C501

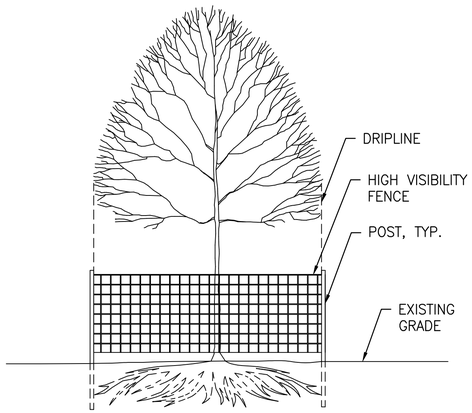

1 C502 TREE PROTECTION
NTS

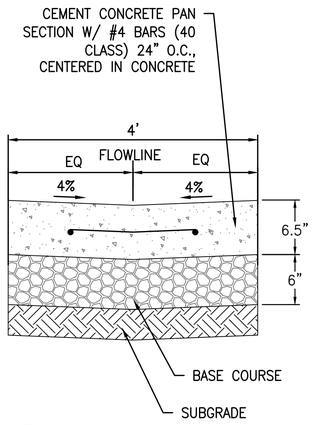

2 C502 VALLEY GUTTER
NTS

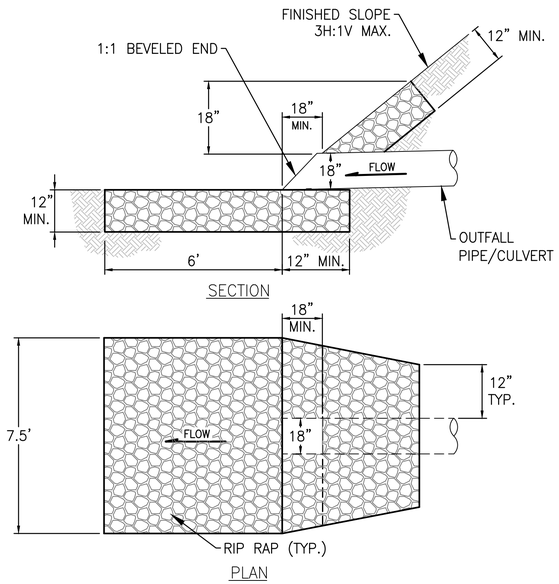

3 C502 OUTFALL PROTECTION
NTS

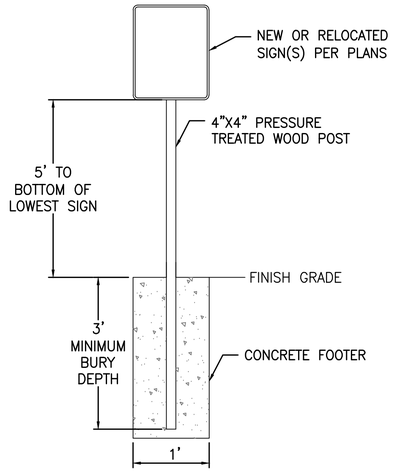

4 C502 SIGN INSTALLATION
NTS

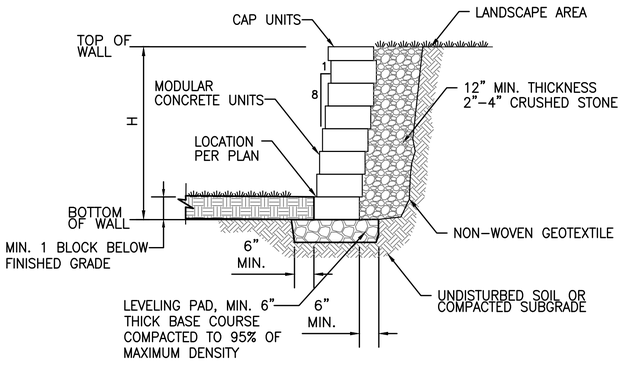

5 C502 BLOCK WALL
NTS

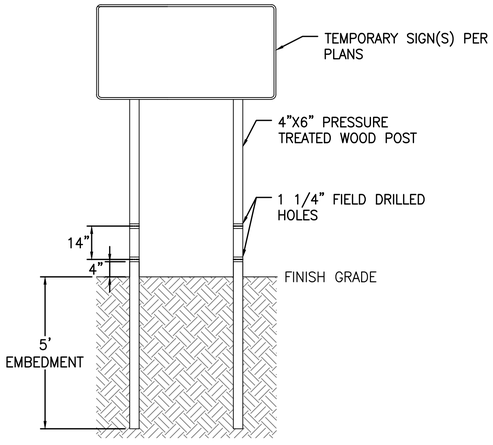

NOTES:
1. FOR DURATIONS MORE THAN 3 CONSECUTIVE CALENDAR DAYS, MOUNT THE SIGNS ON FIXED POSTS. FOR DURATIONS 3 CONSECUTIVE CALENDAR DAYS OR LESS, MOUNT THE SIGNS ON FIXED POSTS OR MOVABLE SKIDS.
2. SIGN INSTALLATION TO COMPLY WITH IOWA DOT ARTICLE 2524.03, B.

6 C502 TEMPORARY SIGN INSTALLATION
NTS

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C502	TITLE OF SHEET DETAILS III	DRAWING NO. 394 / 192943
CADD: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 29 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May. 22, 2026 - 2:07pm lindsey.martin O:\PROJECT_13200_13278\04_CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\DETAILS.dwg Layout Name: C502

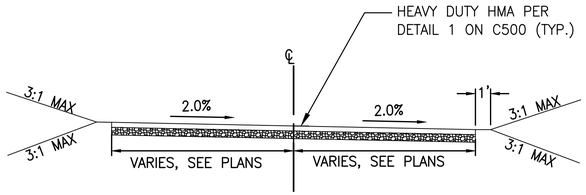

STA 1+00 TO 1+97
STA 3+45 TO 5+20

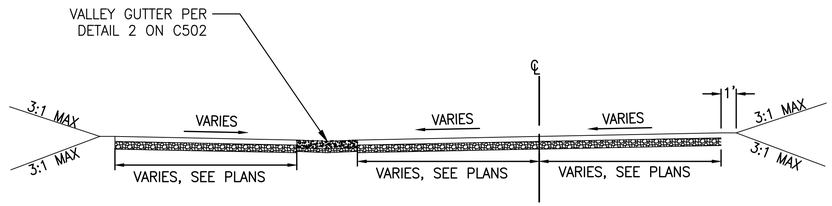

STA 1+97 TO 3+45

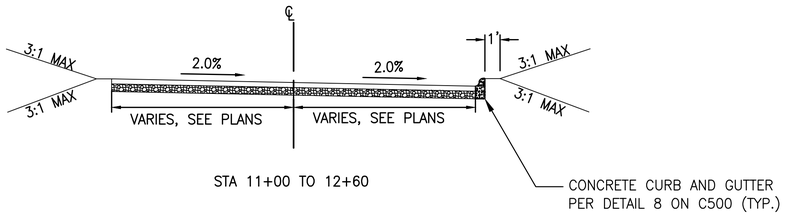

STA 11+00 TO 12+60

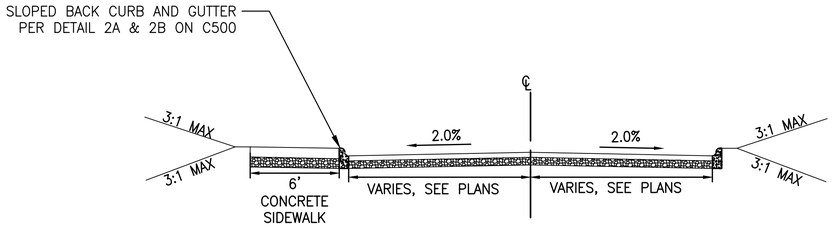

STA 12+60 TO 13+05

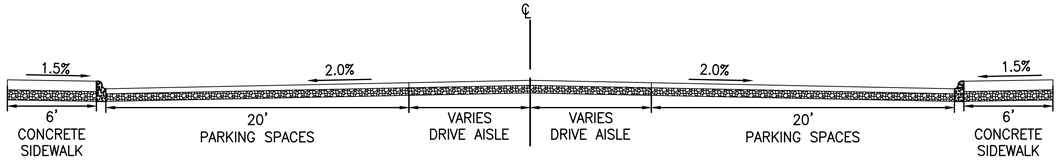

STA 13+05 TO 16+10

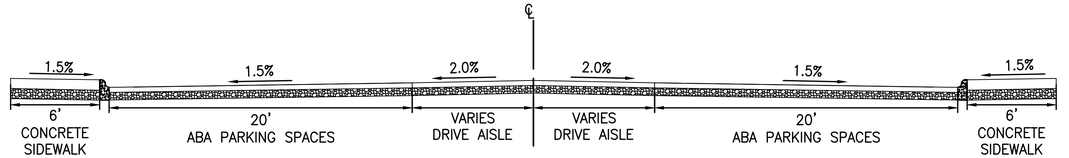

STA 16+10 TO 16+45

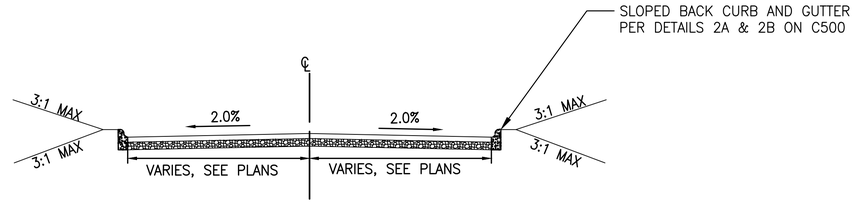

STA 16+45 TO 17+00

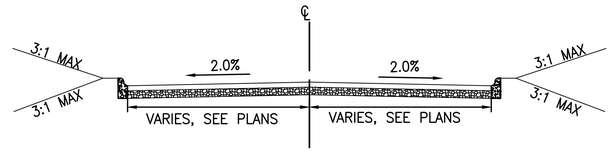

STA 17+00 TO 18+55

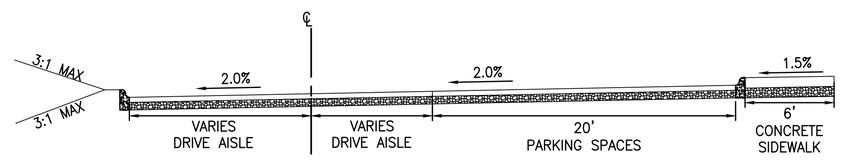

STA 18+55 TO 21+65

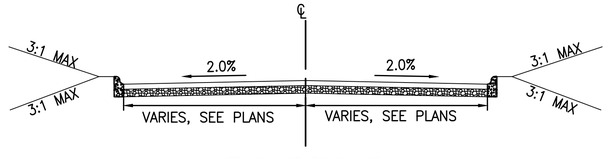

STA 21+65 TO 21+90

LICENSED PROFESSIONAL ENGINEER
EMILY A. MAGGIO
P30462
IOWA

DESIGNED: LM, CS	SUB SHEET NO. C503	TITLE OF SHEET SECTIONS	DRAWING NO. 394 192943
CADD: ZS, CS			PMIS/PKG NO. 224159
TECH REVIEW: EM, KK			SHEET 30 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 – 2:09pm lindsey.martin O:\PROJECT\33200\332784E\04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\SECTIONS.dwg Layout Name: C503

L102

L101

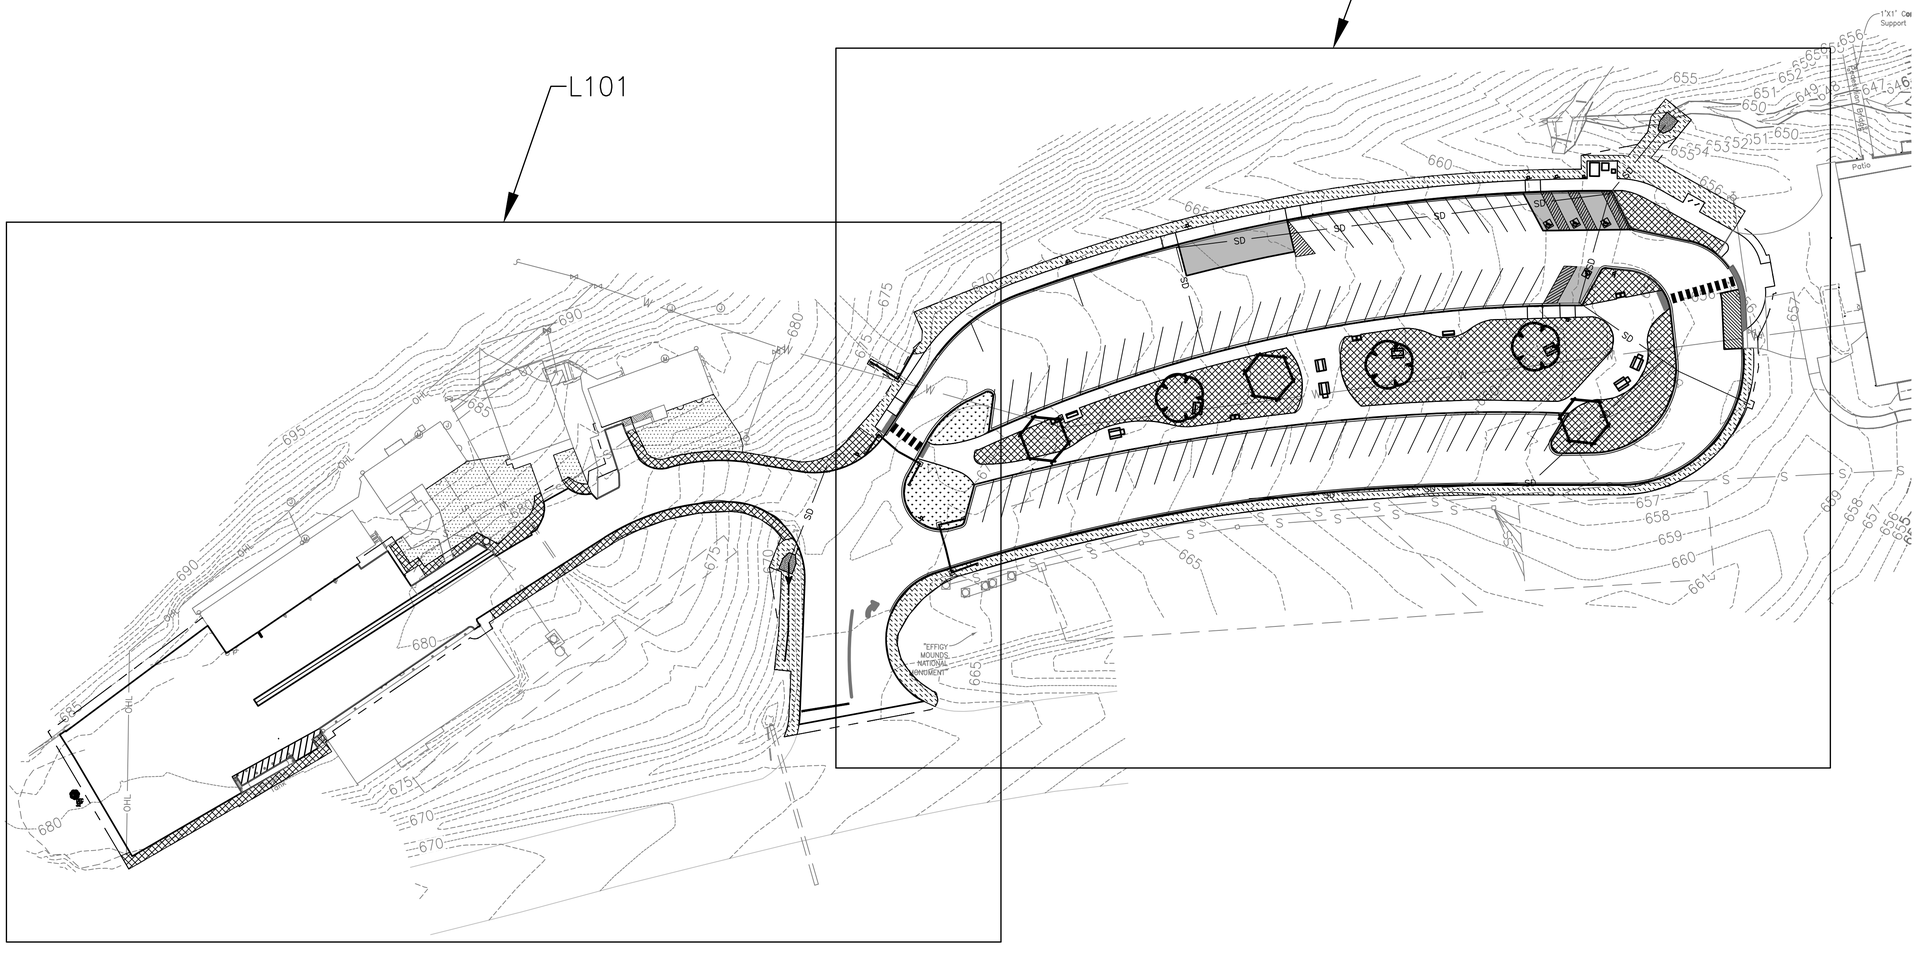

20' 0' 20' 40'

SCALE OF FEET

STATE OF IOWA
LINDSAY MARTIN
LANDSCAPE ARCHITECT
No. LA00875
MY LICENSE RENEWAL DATE IS JUNE 30, 2027
PAGES OR SHEETS COVERED BY THIS SEAL:
ALL LANDSCAPE ARCHITECTURAL SHEETS

5/29/2026

DESIGNED: LM	SUB SHEET NO.	TITLE OF SHEET: LANDSCAPE PLAN KEY MAP	DRAWING NO. 394 / 192943
CADD: RC	L100		PMIS/PKG NO. 224159
TECH REVIEW: LM, KB			SHEET 31 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 - 2:19pm lindsay.martin G:\PROJECT\33200\33278AE\04 CAD\ACAD\EFMO\224159\DRAWINGS\LANDSCAPE\LANDSCAPE PLAN.dwg Layout Name: L100

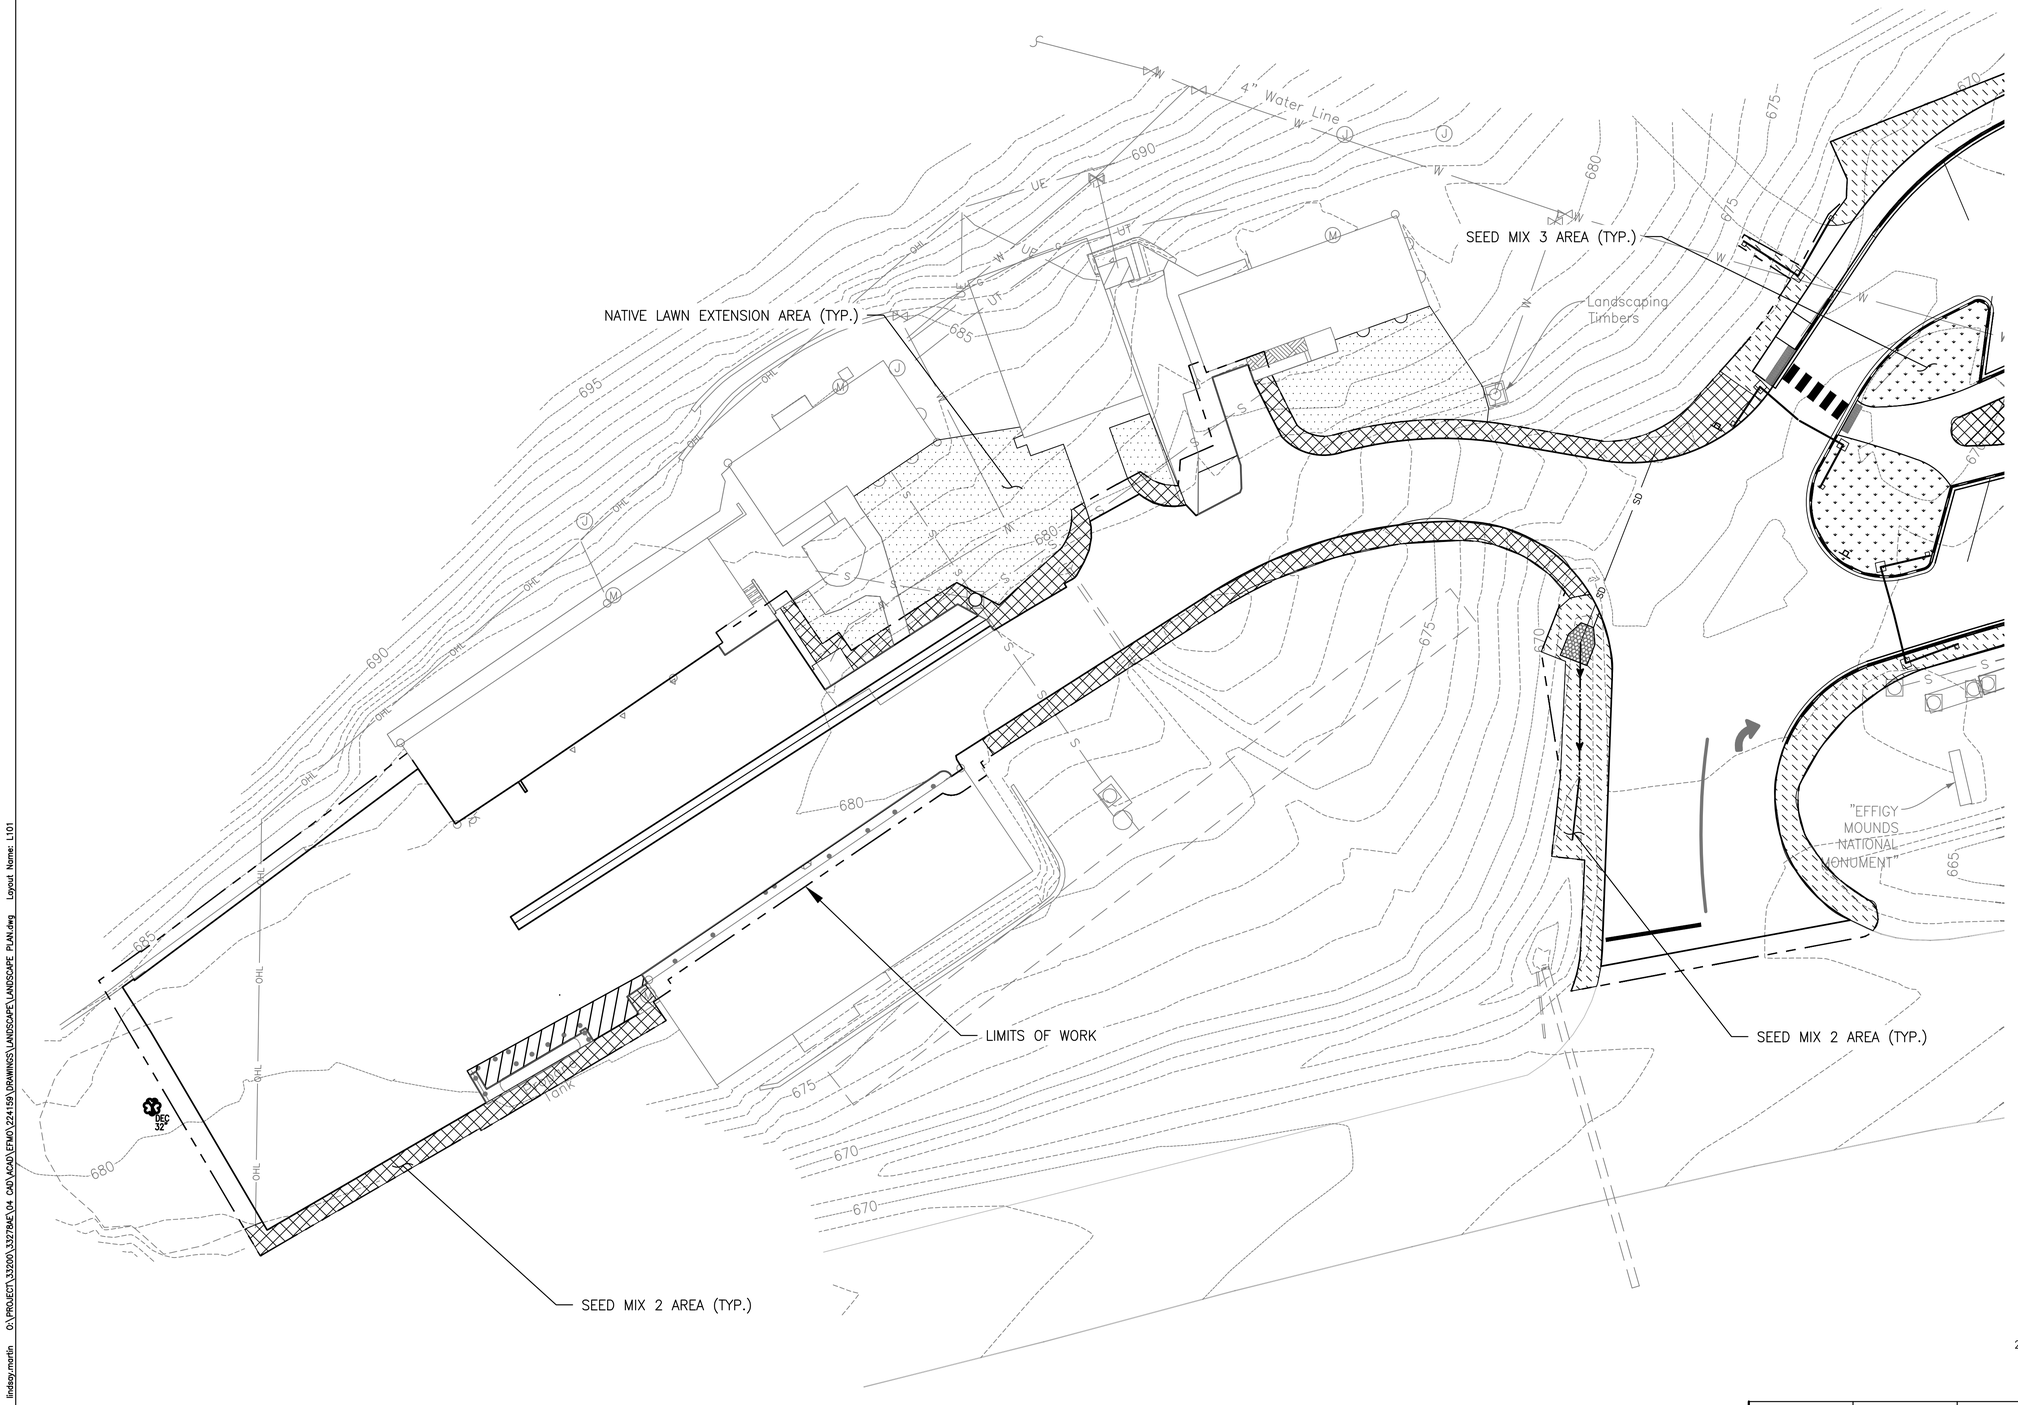

LEGEND

- SEED MIX 1
- SEED MIX 2
- SEED MIX 3
- NATIVE LAWN EXTENSION
- LIMITS OF WORK

20' 0' 20' 40'
SCALE OF FEET

STATE OF IOWA
LINDSAY MARTIN
LANDSCAPE ARCHITECT
No. LA00875
PROFESSIONAL LANDSCAPE ARCHITECT
5/29/2026

DESIGNED: LM	SUB SHEET NO.	TITLE OF SHEET: LANDSCAPE PLAN I	DRAWING NO. 394 / 192943
CADD: RC	L101		PMIS/PKG NO. 224159
TECH REVIEW: LM, KB			SHEET 32 OF 39
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	

Plotted: May 22, 2026 - 2:13pm lindsay.martin O:\PROJECT\33200\33278AE\04 CAD\ACAD\EPMO\224159\DRAWINGS\LANDSCAPE\LANDSCAPE PLAN.dwg Layout Name: L101

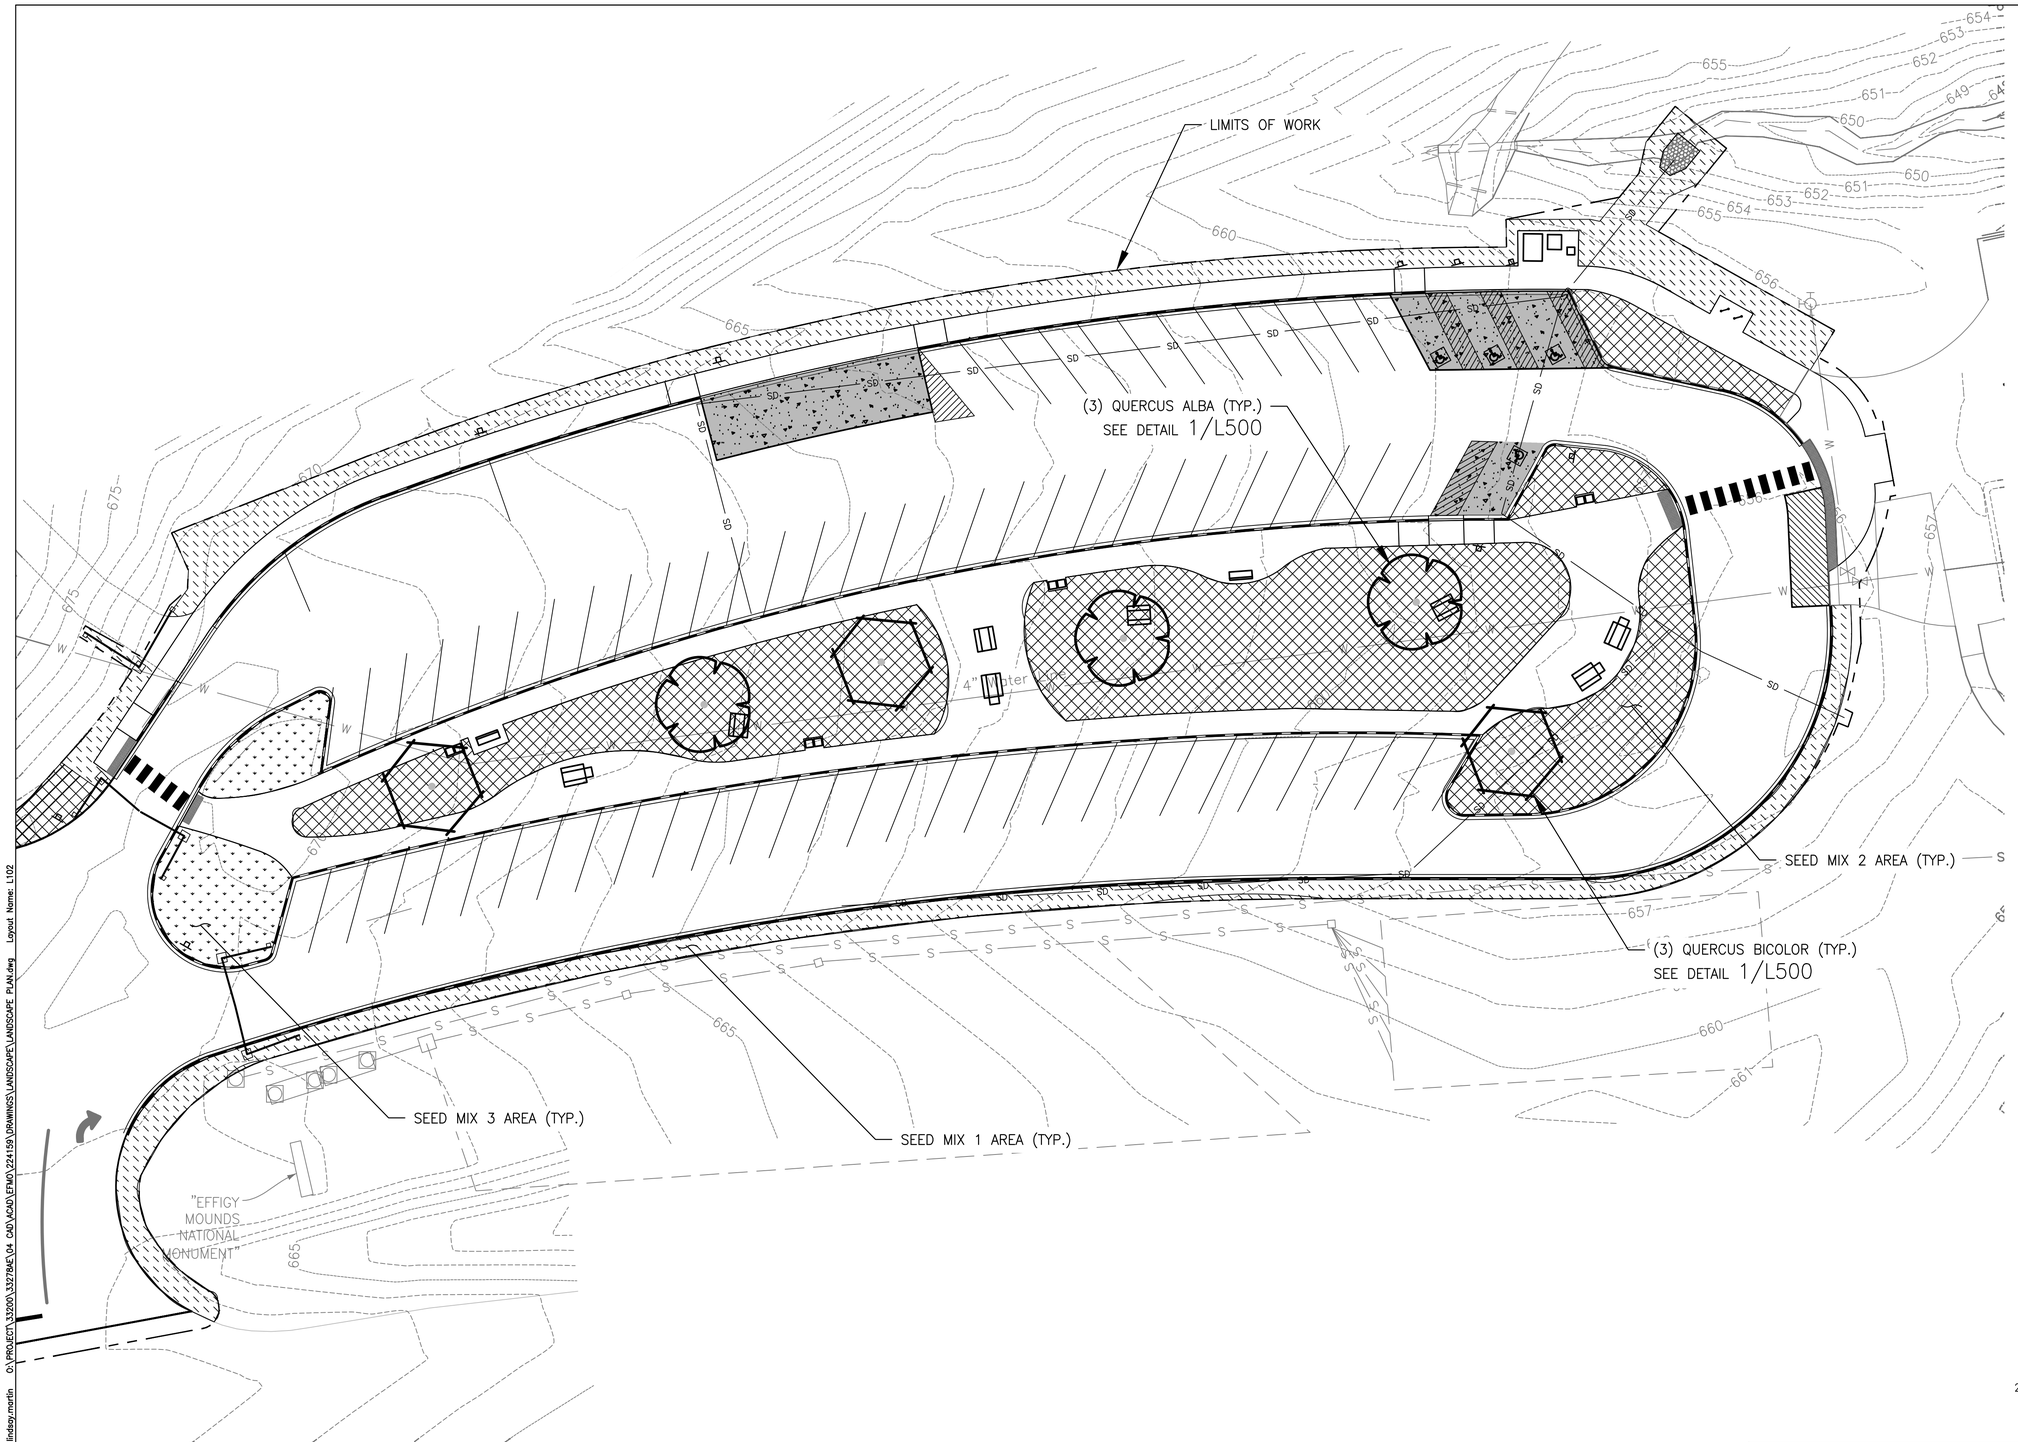

LEGEND

- SEED MIX 1
- SEED MIX 2
- SEED MIX 3
- NATIVE LAWN EXTENSION
- LIMITS OF WORK

20' 0' 20' 40'
SCALE OF FEET

STATE OF IOWA
LINDSAY MARTIN
LANDSCAPE ARCHITECT
No. LA00575
PROFESSIONAL LANDSCAPE ARCHITECT
5/29/2026

DESIGNED: LM	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
CADD RC	L102	LANDSCAPE PLAN II	394 / 192943
TECH REVIEW: LM, KB			PMIS/PKG NO. 224159
DATE: 5/29/2026		EFFIGY MOUNDS NATIONAL MONUMENT	SHEET 33 OF 39

Plotted: May 22, 2026 - 2:17pm lindsay.martin O:\PROJECT\335000\335784E\04 CAD\MCAD\EFMO\224159\DRAWINGS\LANDSCAPE\LANDSCAPE PLAN.dwg Layout Name: L102

PLANTING SCHEDULE

TREES	QTY	BOTANICAL / COMMON NAME	CONT
	3	QUERCUS ALBA / WHITE OAK	3"
	3	QUERCUS BICOLOR / SWAMP WHITE OAK	3"

GROUND COVERS	QTY	
	7,933 SF	SEED MIX 1 NON–NATIVE TURF REPLACEMENT
	15,214 SF	SEED MIX 2 – FURNISHED BY NPS NATIVE TURF REPLACEMENT–MOWED FREQUENTLY
	1,558 SF	SEED MIX 3 – FURNISHED BY NPS NATIVE TURF REPLACEMENT–MOWED INFREQUENTLY
	3,506	NATIVE LAWN EXTENSION – FURNISHED BY NPS SEED MIX 2 NATIVE TURF REPLACEMENT–MOWED FREQUENTLY

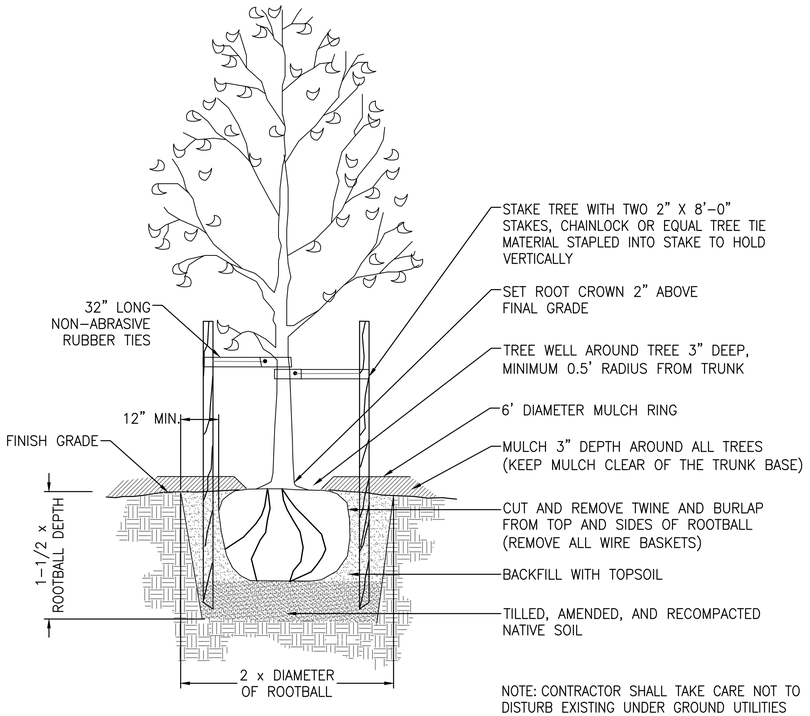

NOTE: CONTRACTOR SHALL TAKE CARE NOT TO DISTURB EXISTING UNDER GROUND UTILITIES WITHIN THE TREE PITS. DEPTH OF TREE PIT SHALL BE MODIFIED IN ORDER TO AVOID CONFLICT WITH EXISTING UTILITIES.

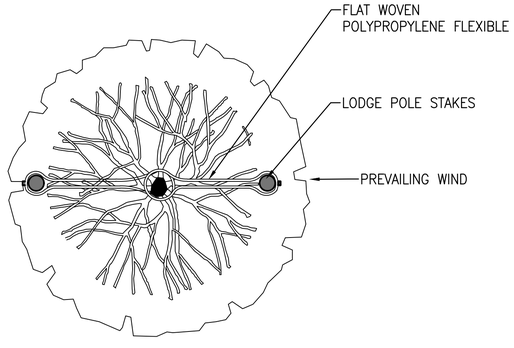

PLAN VIEW

1 L500 TREE PLANTING
NTS

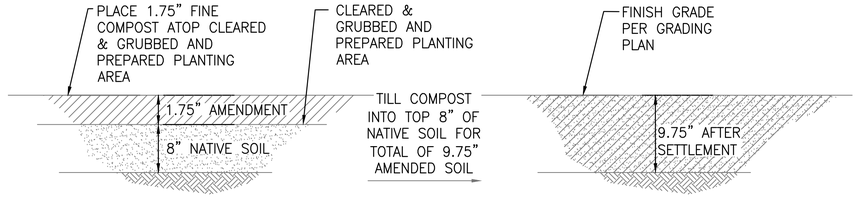

NOTE: ALL AREAS SHOWN FOR TREE PLANTINGS AND SEEDING THE SOIL SHALL BE PREPARED ACCORDING TO THIS DETAIL PRIOR TO PLANTING.

2 L500 SOIL PREPARATION
NTS

STATE OF IOWA — LINDSAY MARTIN — LANDSCAPE ARCHITECT No. LA00575 — PROFESSIONAL LANDSCAPE ARCHITECT
5/29/2026

DESIGNED:	LM
DRAWN:	RC
TECH REVIEW:	LM, KB
DATE:	5/29/2026

SUB SHEET NO. L500

TITLE OF SHEET
LANDSCAPE DETAILS

EFFIGY MOUNDS NATIONAL MONUMENT

DRAWING NO.	394 192943
PMIS/PKG NO.	224159
SHEET	34 OF 39

Plotted: May 22, 2026 – 2:08pm lindsey.martin O:\PROJECT\33200\33278\C04 CAD\ACAD\EFMO\224159\DRAWINGS\CIVIL\LANDSCAPE DETAILS.dwg Layout Name: L500

ELECTRICAL GENERAL NOTES

1. THE CONTRACTOR SHALL PROVIDE ALL LABOR AND MATERIAL NECESSARY FOR A COMPLETE AND FUNCTIONING ELECTRICAL SYSTEM.
2. MATERIALS AND INSTALLATION SHALL COMPLY WITH CODES, LAWS AND ORDINANCES OF FEDERAL, STATE AND LOCAL GOVERNING BODIES HAVING JURISDICTION. CODES FOR THIS SCOPE OF WORK INCLUDE THE 2024 IBC AND IEBC, 2024 IECC, 2023 NEC, 2024 IFC, AND 2016 ASHRAE 90.1.
3. MATERIALS AND EQUIPMENT SHALL BE LISTED AND/OR LABELED BY U.L., ETL, CSA OR ANOTHER RECOGNIZED TESTING LAB.
4. ALL WORK REQUIRED FOR THE INSTALLATION AS SHOWN ON DRAWINGS INCLUDING LABOR, EQUIPMENT AND MATERIALS SHALL BE IN STRICT COMPLIANCE WITH THE BUILDING STANDARDS, EXCEPT AS NOTED OTHERWISE.
5. THE CONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS, GOVERNMENTAL FEES, TAXES AND LICENSES NECESSARY FOR THE PROPER EXECUTION AND COMPLETION OF THE ELECTRICAL WORK.
6. THE CONTRACTOR SHALL PREPARE AND SUBMIT TO GOVERNMENTAL AGENCIES AND UTILITY COMPANIES SHOP DRAWINGS, WHICH ARE REQUIRED BY THESE AGENCIES, FOR THEIR APPROVAL.
7. THE CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER OF ANY MATERIALS OR APPARATUS BELIEVED TO BE INADEQUATE, UNSUITABLE, IN VIOLATION OF LAWS, ORDINANCES, RULES OR REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
8. FOR ALL JOBS THAT INCLUDE DEMOLITION WORK BY THE ELECTRICAL CONTRACTOR, DURING AND AFTER DEMOLITION, EC SHALL MAINTAIN CIRCUIT CONTINUITY TO ALL EXISTING DEVICES THAT ARE TO REMAIN. EC SHALL REMOVE, RELOCATE, AND/OR REWORK ANY CONDUIT AND WIRING TO FACILITATE THE NEW CONSTRUCTION SCOPE OF WORK.
9. THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE BUILDING STANDARDS AND LOCAL CONDITIONS RELATING TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
10. ALL MATERIALS, AND EQUIPMENT SHALL BE ERECTED, INSTALLED, CONNECTED, CLEANED, ADJUSTED, TESTED, CONDITIONED, AND PLACED IN SERVICE IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS AND RECOMMENDATIONS.
11. ALL CUTTING, DRILLING AND PATCHING OF MASONRY, STEEL OR IRON WORK BELONGING TO THE BUILDING MUST BE DONE BY THIS CONTRACTOR IN ORDER THAT THEIR WORK MAY BE PROPERLY INSTALLED, BUT UNDER NO CONDITIONS MAY STRUCTURAL WORK BE CUT, EXCEPT AT THE DIRECTION OF THE CONTRACTING OFFICER OR THEIR REPRESENTATIVE.
12. ALL MATERIAL, EQUIPMENT, WIRING DEVICES, ETC. SHALL BE NEW, UNLESS SPECIFICALLY INDICATED AS EXISTING TO BE REUSED.
13. CONTRACTOR SHALL OBTAIN AND VERIFY EXACT UTILITY COMPANY DRAWINGS AND REQUIREMENTS. ELECTRICAL CONTRACTOR IS TO SUBMIT A COMPLETE CONSTRUCTION DRAWING SET TO THE ELECTRICAL UTILITY COMPANY WITHIN 10 DAYS OF AWARD OF CONTRACT. COORDINATE TIMELINE OF THE REVIEW, APPROVAL, ALL ASSOCIATED DOWN TIME, CONSTRUCTION SCHEDULING, DELIVERY, AND INSTALLATION OF THE UTILITY TRANSFORMER. NOTIFY THE CONTRACTING OFFICER OF SCHEDULING CONFLICTS.
14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL COORDINATION WITH, APPROVAL FROM, AND ASSOCIATED FEES REQUIRED BY THE POWER UTILITY COMPANY (ALLAMAKEE-CLAYTON ELECTRIC COOPERATIVE, JASON TROENDLE 1.563.605.6018, JTROENDLE@ACREC.COOP). CONTRACTOR SHALL CARRY THE FOLLOWING ALLOWANCE TO COVER THE COSTS OF THE CONNECTION TO THE UTILITY PROVIDER. ALLOWANCE IS TO BE $75,000.00.
15. ALL NEW CIRCUIT BREAKERS FOR NEW OR EXISTING PANELBOARDS SHALL MATCH EXISTING BUILDING PANELBOARD MANUFACTURER AND BREAKER TYPE. THE CONTRACTOR SHALL PROVIDE NEW TYPE WRITTEN PANEL DIRECTORIES FOR ALL NEW PANELS AND EXISTING PANELS WHICH HAVE CHANGED. PANELBOARD SHALL BE MARKED WHERE THE SOURCE OF POWER SUPPLY ORIGINATES AND THEIR LISTED AMPERE RATING.
16. DO NOT SHARE NEUTRAL CONDUCTORS FOR MULTIWIRE BRANCH CIRCUITS. WHERE SHARED NEUTRAL CONDUCTORS ARE REQUIRED (SUCH AS POWERED FURNITURE SYSTEMS), HANDLE TIES SHALL BE PROVIDED ON THE CIRCUIT BREAKERS, WITH SHARED NEUTRALS, SUCH THAT IT WILL SIMULTANEOUSLY DISCONNECT ALL UNGROUNDED CONDUCTORS. ALL HANDLE TIES ARE REQUIRED TO BE INDICATED ON THE PANELBOARD SHOP DRAWINGS.
17. SHOULD ACTUAL FIELD CONDITIONS REQUIRE CIRCUIT DESIGNATIONS INDICATED ON PLANS TO VARY, ELECTRICAL CONTRACTOR SHALL PROVIDE EQUIPMENT LABELS AND CIRUIT DIRECTORIES TO MATCH INSTALLED CONDITIONS IN COMPLIANCE WITH NEC 408.4. MODIFIED CIRCUIT DESCRIPTION AND NUMBER USED SHALL BE INDICATED ON THE "AS-BUILT" DRAWINGS PROVIDED TO THE CONTRACTING OFFICER.
19. ALL SERVICE EQUIPMENT SHALL BE LEGIBLY MARKED IN THE FIELD BY THE ELECTRICAL CONTRACTOR WITH THE MAXIMUM AVAILABLE FAULT CURRENT AS INDICATED WITHIN THESE DOCUMENTS. THE FIELD MARKING(S) SHALL COMPLY WITH ELECTRICAL SPECIFICATIONS FOR READABILITY AND DURABILITY.
20. EACH SWITCH, LIGHT, RECEPTACLE AND OTHER MISCELLANEOUS DEVICE SHALL BE PROVIDED WITH A GALVANIZED OR PRESSED STEEL OUTLET BOX OF THE KNOCKOUT TYPE, OF NOT LESS THAN NO. 14 U.S. GAUGE STEEL. CONDUITS SHALL BE FASTENED WITH LOCKNUTS AND BUSHINGS AND ALL UNUSED KNOCKOUTS MUST BE LEFT SEALED. THERE MUST BE SUFFICIENT ROOM FOR WIRES AND BUSHINGS AND DEEP BOXES SHALL BE INSTALLED WHERE REQUIRED. BOXES SHALL BE SECURELY AND ADEQUATELY SUPPORTED.
21. IN EXPOSED AND SUSPENDED CEILING APPLICATIONS, ROUTE CONDUIT AS CLOSE TO STRUCTURAL SLAB OR DECK AS POSSIBLE, AND SUPPORT CONDUIT AND JUNCTION BOXES DIRECTLY FROM THE STRUCTURAL SLAB, DECK, OR FRAMING PROVIDED FOR THAT PURPOSE. LIGHTING BRANCH CIRCUIT CONDUITS SHALL NOT BE CLIPPED TO THE CEILING SYSTEM UNLESS IT HAS BEEN SPECIFICALLY DESIGNED FOR THAT PURPOSE.
22. ALL EXPOSED CONDUIT SHALL BE CONCEALED TO THE GREATEST EXTENT POSSIBLE, AND SHALL BE INSTALLED PARALLEL AND CLOSE TO STRUCTURAL MEMBERS. GENERAL CONTRACTOR SHALL PAINT CONDUIT TO MATCH ADJACENT FINISHES.
23. WHERE FLOOR FITTINGS REQUIRE PENETRATION OF THE FLOOR SLAB, THEY SHALL BE STANDARD DEVICE LISTED BY UL FOR THE PURPOSE AND HAVE A UL FIRE RATING EQUAL TO THE FLOOR RATING. FLOOR SERVICE BOXES SHALL BE MODULAR, ADJUSTABLE FLUSH TYPE, DUAL SERVICE UNITS SUITABLE FOR WIRING METHOD USED. COMPARTMENT BARRIERS SHALL SEPARATE POWER FROM LOW VOLTAGE CABLING. PROVIDE RECTANGULAR SERVICE PLATE WITH SATIN FINISH.
24. LUMINAIRES SHOWN AS SHADED SHALL BE PROVIDED WITH EMERGENCY BATTERY BACKUP POWER. EMERGENCY LUMINAIRES SHALL SENSE UNSWITCHED POWER TO THE SPACE AND OPERATE AUTOMATICALLY UPON LOSS OF NORMAL POWER. ALL SHADED LUMINAIRES WITH LED SOURCES SHALL BE PROVIDED WITH 90 MINS OF BACKUP POWER VIA INTEGRAL BATTERY OR EXTERNAL MINI/MICRO INVERTERS AS SPECIFIED IN THE LUMINAIRE SCHEDULE. ALL EMERGENCY LUMINAIRES WITH INTEGRAL BATTERY, EMERGENCY LIGHTING UNITS, AND INVERTERS SHALL HAVE INTEGRAL OR REMOTE TEST SWITCHES WITH VISIBLE INDICATOR LIGHTS, AS INDICATED IN THE FIXTURE SCHEDULE. THE EMERGENCY BATTERY OR INVERTER SHALL BE CONNECTED TO THE UNSWITCHED LEG OF THE LIGHTING CIRCUIT INDICATED TO DETECT THE LOSS OF NORMAL POWER.
25. UNLESS OTHERWISE NOTED, LUMINAIRES DESIGNATED AS NIGHT LIGHT (NL) SHALL BE CONNECTED AHEAD OF LOCAL SWITCHING AND REMAIN ON 24 HOURS A DAY.
26. ALL DIMMED LIGHTING CIRCUITS ARE TO RECEIVE DEDICATED NEUTRALS. DO NOT SHARE NEUTRALS ON DIMMED LIGHTING CIRCUITS.
27. PROVIDE CONTRACTING OFFICER WITH A COMPLETE LISTING OF ALL LAMPS UTILIZED ON THE PROJECT INCLUDING MANUFACTURER AND CATALOG INFORMATION. PROVIDE A SUGGESTED SOURCE, INCLUDING CONTACT NAME AND PHONE NUMBER, FOR REORDERING.
28. THE CONTRACTOR SHALL VERIFY THE CEILING TYPE BEFORE ORDERING LIGHTING FIXTURES.
29. ROUGH-IN FOR MECHANICAL EQUIPMENT SHALL ONLY OCCUR AFTER MECHANICAL EQUIPMENT SUBMITTALS ARE THOROUGHLY REVIEWED FOR CHANGES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
30. EC SHALL COORDINATE ELECTRIC WATER COOLER RECEPTACLE PLACEMENT SUCH THAT THE RECEPTACLE IS ACCESSIBLE WITHIN THE WATER COOLER SHROUD, YET CONCEALED BY THE SHROUD PER NEC 422.33(A). PROVIDE 5mA GFCI CIRCUIT BREAKER IN ELECTRICAL PANEL PER NEC SECTION 422.
31. THE POWER AND CONTROL REQUIREMENTS FOR ALL EQUIPMENT CONNECTIONS SHALL BE CONFIRMED WITH APPROVED SHOP DRAWINGS PRIOR TO ELECTRICAL ROUGH-IN. FINAL POWER REQUIREMENTS, DIMENSIONED ROUGH-IN LOCATIONS, LOW VOLTAGE SYSTEM CONNECTIONS, ETC. SHALL BE CONFIRMED AND MODIFIED AS REQUIRED.
32. ALL DEVICES IN OR ABOVE COUNTERS SHALL HAVE LOCATIONS AND MOUNTING HEIGHTS CONFIRMED WITH ARCHITECTURAL ELEVATIONS PRIOR TO ROUGH-IN. ANY ADJUSTMENTS TO MOUNTING HEIGHTS REQUIRED BY LACK OF COORDINATION WILL BE AT THE CONTRACTOR'S EXPENSE.
33. G.C. SHALL INCLUDE IN THEIR COST THE REMOVAL OF ALL EXISTING ELECTRICAL DEVICES, CONDUITS, FIXTURES AND EQUIPMENT. TURN EQUIPMENT OVER TO CONTRACTING OFFICER AS INDICATED OR RECYCLE/DISCARD ALL EQUIPMENT AS REQUIRED. E.C. SHALL BE RESPONSIBLE FOR DISCONNECTING PRIMARY SERVICE AND TEMPORARY POWER.

LICENSED PROFESSIONAL ENGINEER
05/22/2026
JEFF MULLIKIN
P25384
IOWA

	DESIGNED: JR/JM/TW CADD AE DESIGN TECH REVIEW: MRS/ESN DATE: 5/29/2026	SUB SHEET NO. E 000	TITLE OF SHEET ELECTRICAL COVER SHEET I EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 194248 PMIS/PKG NO. 224159 SHEET 35 OF 39

5/22/2026 12:51:07 PM Autodesk Docs://2025-110 NPS EFMO Visitor Center DD-CD/6782.00 - NPS EFMO Effigy Mounds Visitor Center Renovation - Electrical Central - E24.rvt

5/22/2026 12:51:08 PM Autodesk Docs://2025-110 NPS EFMO Visitor Center DD-CD/6782.00 - NPS EFMO Effigy Mounds Visitor Center Renovation - Electrical Central - E24.rvt

APPLICABLE CODES

ELECTRICAL
2023 NATIONAL ELECTRICAL CODE (NEC) (NFPA 70)
BUILDING
2024 INTERNATIONAL BUILDING CODE (IBC)
2024 INTERNATIONAL EXISTING BUILDING CODE (IEBC)
ENERGY
2024 INTERNATIONAL ENERGY CONSERVATION CODE (IECC)
FIRE
2024 INTERNATIONAL FIRE CODE (IFC)

ABBREVIATIONS

A	AMPERE(S)
AC	ABOVE COUNTER
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AHJ	AUTHORITY HAVING JURISDICTION
AIC	AMPERES INTERRUPTING CAPACITY
ATS	AUTOMATIC TRANSFER SWITCH
BFF	BELOW FINISHED FLOOR
BOF	BOTTOM OF FIXTURE
C	CONDUIT
CATV	CABLE TELEVISION
CB	CIRCUIT BREAKER
CCT	CORRELATED COLOR TEMPERATURE
CLG	CEILING
CO	CONTRACTING OFFICER
CT	CURRENT TRANSFORMER
DED	DEDICATED CIRCUIT
DISC	DISCONNECT
DW	DISHWASHER
DWG(S)	DRAWING(S)
(E)	EXISTING TO REMAIN
EC	ELECTRICAL CONTRACTOR
EF	EXHAUST FAN
(EL)	EXISTING LOCATION
(ER)	EXISTING TO BE RELOCATED
EM	EMERGENCY
EPO	EMERGENCY POWER OFF
EWC	ELECTRIC WATER COOLER
(R)	EXISTING TO BE REMOVED
F	FUSE
FLA	FULL LOAD AMPS
GD	GARBAGE DISPOSAL
G	GROUND
GC	GENERAL CONTRACTOR
GFI	GROUND FAULT CIRCUIT INTERRUPTER
HP	HORSEPOWER
IDF	INTERMEDIATE DISTRIBUTION FACILITY
IG	ISOLATED GROUND
ISC	SHORT CIRCUIT CURRENT
KVA	KILOVOLT AMPERE(S)
KW	KILOWATT(S)
LTG	LIGHTING
MCA	MINIMUM CIRCUIT AMPERE(S)
MCB	MAIN CIRCUIT BREAKER
MDP	MAIN DISTRIBUTION CENTER
MDF	MAIN DISTRIBUTION FACILITY
MLO	MAIN LUGS ONLY
MTS	MANUAL TRANSFER SWITCH
MW	MICROWAVE
NC	NORMALLY CLOSED
NL	NIGHT LIGHT - SEE GENERAL NOTES
NO	NORMALLY OPEN
OAE	OR APPROVED EQUAL
OFH	OVERALL FIXTURE HEIGHT
OH	OVERHEAD
P	POLE
PART	PARTIAL CIRCUIT
PH	PHASE
PNL	PANEL
RCPT	RECEPTACLE
REF	REFRIGERATOR
RFD	RECESSED FIXTURE DEPTH
(RL)	RELOCATED LOCATION
SPD	SURGE PROTECTION DEVICE
SM	SURFACE-MOUNTED
UC	UNDER COUNTER/CABINET
UG	UNDERGROUND
UON	UNLESS OTHERWISE NOTED
V	VOLT(S)
W	WATT(S) OR WIRE
WFD	WALL FIXTURE DEPTH
WG	WIRE GUARD
WP	WEATHERPROOF
XFMR	TRANSFORMER

DISTRIBUTION AND RACEWAY

- MDC — MAIN DISTRIBUTION CENTER (MDC)
- SURFACE MTD PANELBOARD
- RECESSED PANELBOARD
- T — TRANSFORMER
- BRANCH CIRCUIT HOMERUN
- CONDUIT CONCEALED IN FLOOR OR UNDERGROUND
- CONDUIT EXPOSED OR CONCEALED IN WALL OR CEILING
- RACEWAY UP
- RACEWAY DOWN
- CAPPED CONDUIT
- CURRENT TRANSFORMER
- CIRCUIT BREAKER SWITCH
- FUSED SWITCH
- GROUNDING ELECTRODE CONDUCTOR
- M — METER
- GFP — GROUND FAULT PROTECTION

LIGHTING FIXTURES

- A 1 a — LUMINAIRE TYPE, REFERENCING LUMINAIRE SCHEDULE, TYPICAL ALL FIXTURES. SUBSCRIPT, IF SHOWN, REFERENCES WALL SWITCH OR RELAY/ZONE CONTROL
- WALL MOUNTED LUMINAIRE
- SURFACE OR PENDANT MOUNTED LUMINAIRE
- RECESSED LUMINAIRE
- RECESSED DOWNLIGHT LUMINAIRE
- SURFACE CEILING LUMINAIRE
- PENDANT LUMINAIRE
- ARROW INDICATES DIRECTIONAL LUMINAIRE
- MONOPOINT LUMINAIRE
- SURFACE OR PENDANT TRACK LUMINAIRE REFER TO FIXTURE SCHEDULE FOR HEAD QTY.
- LED TAPE LUMINAIRE
- FESTOON LIGHTING
- RECESSED MULTI-HEAD LUMINAIRE
- FLOOR OR TABLE LAMP
- EXIT LUMINAIRE - SHADED INDICATES FACE / DIRECTIONAL ARROWS AS SHOWN
- BATTERY PACK EMERGENCY LUMINAIRE
- HATCH INDICATES EMERGENCY LUMINAIRE
- K — PORCELAIN KEYLESS LAMP HOLDER
- STEP LIGHT TYPE LUMINAIRE
- IN-GRADE UPLIGHT
- BOLLARD LUMINAIRE
- PEDESTRIAN POLE OR POST TOP LUMINAIRE
- EXTERIOR AREA LIGHT

SYMBOLS

- X — POOL EQUIPMENT SCHEDULE NOTATION
- X — KITCHEN EQUIPMENT SCHEDULE NOTATION
- X / X — MECHANICAL EQUIPMENT SCHEDULE NOTATION
- X — DETAIL NOTE
- X — DELTA REVISION NOTE
- X — ELECTRICAL WIRE SIZE
- T1 — LIGHTING CONTROLS SEQUENCE OF OPERATION

LICENSED PROFESSIONAL ENGINEER — 05/22/2026 — JEFF MULLIKIN P25384 — KANSAS

DESIGNED: JR/JM/TW	SUB SHEET NO.	TITLE OF SHEET: ELECTRICAL COVER SHEET II	DRAWING NO. 394 194248
DRAWN: AE DESIGN	E 001	EFFIGY MOUNDS NATIONAL MONUMENT	PMIS/PKG NO. 224159
TECH REVIEW: MRS/ESN			SHEET 36 OF 39
DATE: 5/29/2026			

5/22/2026 12:51:08 PM Autodesk Docs://2025-110 NPS EFMO Visitor Center DD-CD/6782.00 - NPS EFMO Effigy Mounds Visitor Center Renovation - Electrical Central - E24.rvt

ELECTRICAL DEMOLITION REQUIREMENTS

1.	THE BASIS OF THESE DRAWINGS WERE SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND VARIOUS OTHER SOURCES. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT THE ACTUAL CONDITIONS. HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE BUILDING/NPS STANDARDS RELATING TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
2.	THE ELECTRICAL CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER OF ANY MATERIALS OR APPARATUS BELIEVED TO BE INADEQUATE, UNSUITABLE, IN VIOLATION OF LAWS, ORDINANCES, RULES OR REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
3.	THE ELECTRICAL CONTRACTOR SHALL INCLUDE IN THEIR COST THE REMOVAL OF ALL EXISTING ELECTRICAL DEVICES, CONDUITS, FIXTURES AND EQUIPMENT. DISCARD ALL EQUIPMENT AS REQUIRED, UNLESS NOTED OTHERWISE.
4.	EXISTING DEVICES NOT NOTED AS EXISTING (E) OR INDICATED ON PLANS SHALL REMAIN, AS THEY PRESENTLY EXIST. FOR DEMOLISHED DEVICES IN WALLS WHICH ARE TO REMAIN, THE ELECTRICAL CONTRACTOR SHALL INSTALL A BLANK FACE PLATE ON THE BACKBOX.
5.	THE DEMOLITION OF SOME DEVICES MAY INTERRUPT POWER TO DEVICES DOWN STREAM. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR REWORKING THESE CIRCUITS TO MAINTAIN POWER TO DOWN STREAM DEVICES WHICH WILL REMAIN.
6.	ALL UNENERGIZED/DEMOLISHED CIRCUITRY SHALL HAVE CONDUCTORS REMOVED FROM CONDUIT AND CONDUIT SHALL BE MARKED "EMPTY" WITH INDELIBLE MARKER.

LIGHTING DEMOLITION NOTES

A.	ALL EXISTING LIGHTING FIXTURES AND DEVICES SHALL BE REMOVED INCLUDING ASSOCIATED CONTROLS, CONDUIT, AND WIRING BACK TO SOURCE UNLESS NOTED OTHERWISE.

1 ED1.00 ELECTRICAL SITE LIGHTING DEMOLITION PLAN
SCALE A

SCALE: A 8 0 8 16
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER 05/22/2026 JEFF MULLIKIN P25384 IOWA

DESIGNED: JR/JM/TW CADD AE DESIGN TECH REVIEW: MRS/ESN DATE: 5/29/2026	SUB SHEET NO. ED 100	TITLE OF SHEET ELECTRICAL SITE LIGHTING DEMOLITION PLAN EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 194248 PMIS/PKG NO. 224159 SHEET 37 OF 39	

5/22/2026 12:51:09 PM Autodesk Docs://2025-110 NPS EFMO Visitor Center DD-CD/6782.00 - NPS EFMO Effigy Mounds Visitor Center Renovation - Electrical Central - E24.rvt

GENERAL NOTES

A.	REFER TO VISITOR CENTER PLANS FOR ADDITIONAL INFORMATION ON TIMER SWITCH DEVICE ASSOCIATED WITH 'EM1' SEQUENCE OF OPERATIONS.
B.	REFER TO VISITOR CENTER PLANS FOR ADDITIONAL CIRCUITING INFORMATION.

KEYNOTE LEGEND

KEY VALUE	KEYNOTE TEXT
S4	REFER TO VISITOR CENTER CONSTRUCTION DRAWINGS (PMIS 318539) FOR CIRCUITING INFORMATION. ROUTE 3/4" CONDUIT INTO MECH 001 WITH THE INTENT TO CIRCUIT SITE LIGHTING TO NEW PANEL 'D' UNDER THE VISITOR CENTER SCOPE.
S7	APPROXIMATE 800' ROUTING OF UNDERGROUND CONDUIT FROM VISITOR CENTER TO MAINTENANCE FACILITY FOR FUTURE FIRE ALARM CABLING.

SITE SEQUENCE OF OPERATIONS

THE FOLLOWING CONTROL SEQUENCE OF OPERATIONS ARE UTILIZED IN THIS PLAN. REFER TO PLAN AND/OR ZONE/RELAY SCHEDULE FOR SPECIFIC ASSOCIATED SEQUENCE.

EM1

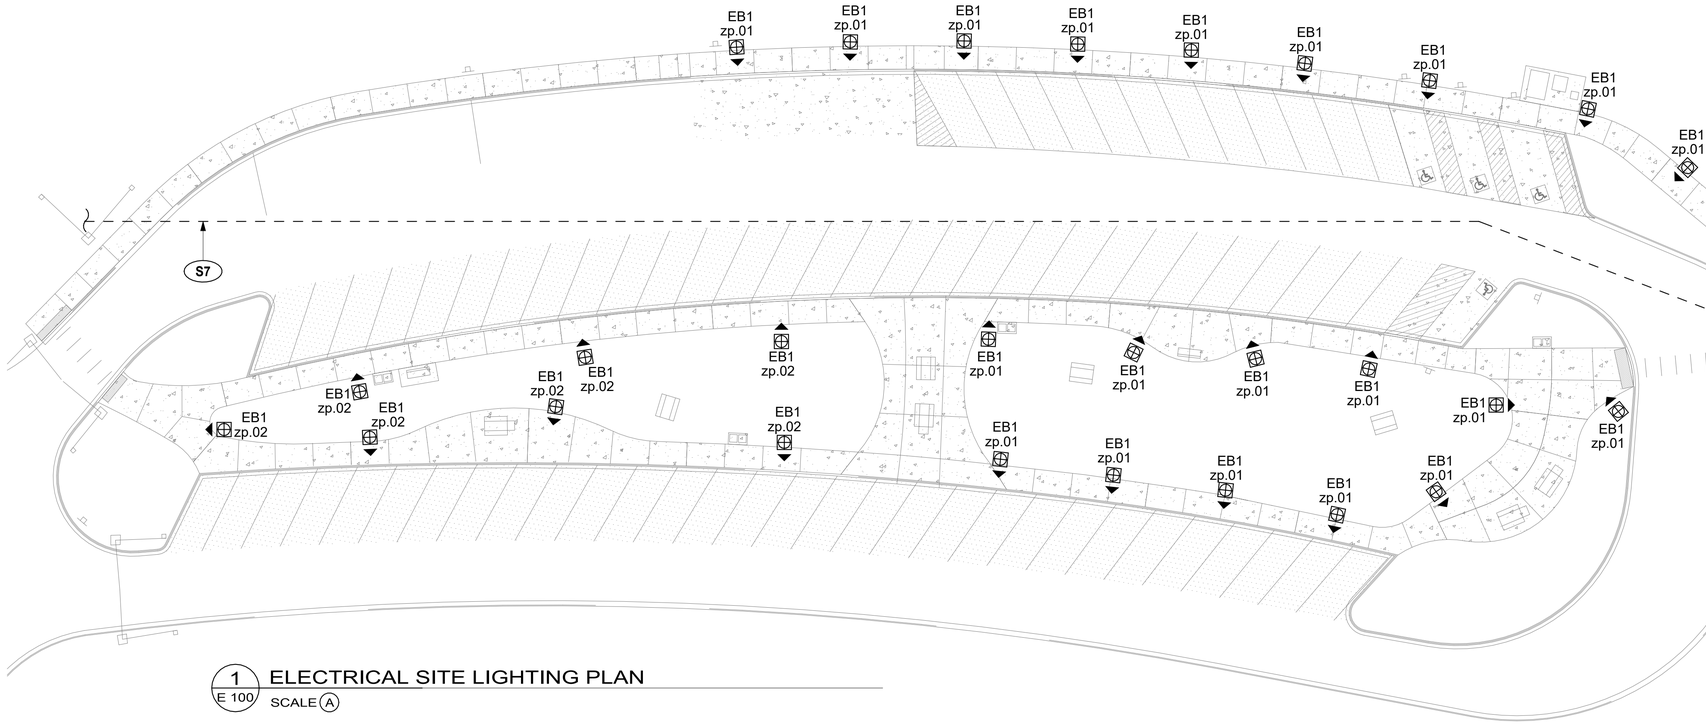

1 / E 100 ELECTRICAL SITE LIGHTING PLAN
SCALE A

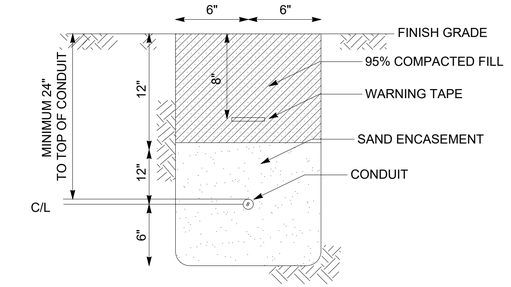

4 / E 100 TRENCH DETAIL
NOT TO SCALE

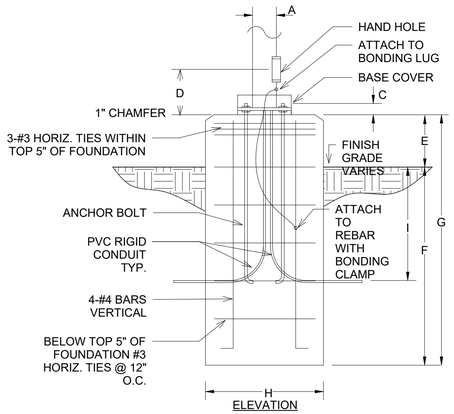

ELEVATION



TOP VIEW

POLE KEY	OVERALL HEIGHT	A	ANCHOR BOLT DATA (B) (SIZE) (C) (D)	E	F	G	H	I
EB1	3' - 6"	8"	PER MANUFACTURER	0' - 2"	2' - 6"	2' - 8"	12"	24"

NOTE: COORDINATE FINAL MOUNTING REQUIREMENTS AND DETAILS WITH BOLLARD MANUFACTURER.

3 / E 100 BOLLARD BASE DETAIL
NOT TO SCALE

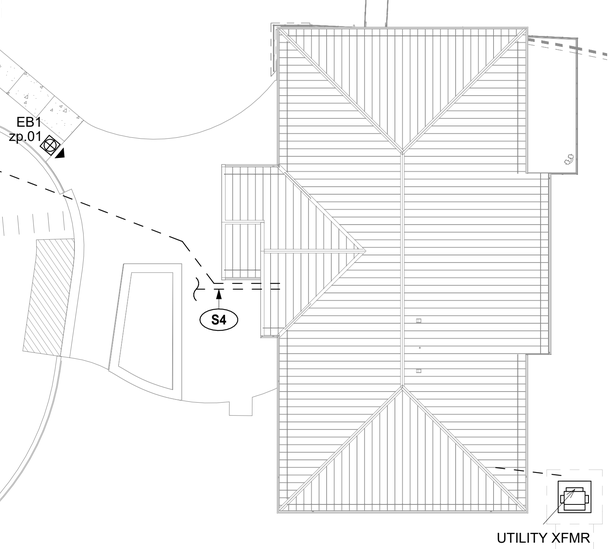

SCALE: A
8 0 8 16
SCALE OF FEET

LICENSED PROFESSIONAL ENGINEER
05/22/2026
JEFF MULLIKIN
P23384
IOWA

DESIGNED: JR/JM/TW DADD AE DESIGN TECH REVIEW: MRS/ESN DATE: 5/29/2026	SUB SHEET NO. E 100	TITLE OF SHEET: ELECTRICAL SITE LIGHTING PLAN EFFIGY MOUNDS NATIONAL MONUMENT	DRAWING NO. 394 194248 PMIS/PKG NO. 224159 SHEET 38 OF 39

5/22/2026 12:51:10 PM Autodesk Docs://2025-110 NPS EFMO Visitor Center DD-CD/6782.00 - NPS EFMO Effigy Mounds Visitor Center Renovation - Electrical Central - E24.rvt

LIGHTING FIXTURE SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	CATALOG NUMBER	LAMP QUAN.	LAMP WATTAGE	LAMP / CCT / CRI	MAX WATTAGE	LUMEN OUTPUT	DIMMING CAPABILITY	FIXTURE FINISH	MOUNTING	BOF/RFD/OFH	NOTES
EB1	PARKING LOT LED BOLLARD, 42" TALL, 8" DIAMETER, ASYMMETRIC DISTRIBUTION, ROUND TOP	LITHONIA	KBA8-LED-12C-350-30K-ASY-MVOLT-DBLXD	1	16 W	LED / 3000K / 80	16 VA	1126	SWITCHING	BLACK	GRADE	42" OFH	1

LIGHTING SEQUENCE OF OPERATION

CONTROL SEQUENCE	ON	OFF	SENSOR TYPE	TIME OUT	DIMMING	CONTROLLED RECEPTACLE	DAYLIGHT HARVESTING	TARGET ILLUMINANCE (FC)	NOTES
EM1	MANUAL ON TIMER SWITCH, 2 HR MAXIMUM OVERRIDE	AUTOMATIC OFF VIA TIMER SWITCH, MANUAL OVERRIDE	NONE	30 MIN, 1 HR, 2 HR	SWITCHING	NO	NO	--	

LIGHTING ZONE SCHEDULE

ZONE ID	ZONE DESCRIPTION	DIMMING / SWITCHING	VOLTAGE	PANEL-CIRCUIT	ZONE LOAD	CONTROL SEQUENCE
zp.01	PARKING LOT BOLLARDS - E	SWITCHING	120 V	D-2	336 VA	EM1
zp.02	PARKING LOT BOLLARDS - W	SWITCHING	120 V	D-2	112 VA	EM1

NOTE: REFERENCE VISITOR CENTER DRAWINGS (PMIS 318539) FOR FULL PANEL SCHEDULES AND CIRCUITING INFORMATION.

LIGHTING CONTROL NOTES

	GENERAL CONTROL NOTES
G1	THE LIGHTING CONTROL SYSTEM CONSISTS OF THE FOLLOWING: a. NETWORKED WIRELESS DISTRIBUTED LIGHTING CONTROLS
G2	ALTERNATE MANUFACTURER'S WILL BE REVIEWED ACCORDING TO THE NOTES PROVIDED IN THE LIGHTING FIXTURE SCHEDULE.
G3	ALL WIRING DIAGRAMS WITHIN THESE DRAWINGS ARE PROVIDED TO COMMUNICATE THE DESIGN INTENT. SYSTEM SHALL BE WIRED ACCORDING TO THE APPROVED SHOP DRAWINGS.
G4	ALL STRUCTURED CABLE WIRING SHOWN ON RISER DIAGRAMS IS INTENDED TO BE BY CONTROL MANUFACTURER APPROVED STANDARD STRUCTURED CABLING, UNLESS OTHERWISE NOTED. EC SHALL PROVIDE ALL CABLING WITHIN THE LIGHTING CONTROL SYSTEM, CABLING BETWEEN THE NETWORKED HEAD-END AND THE BUILDINGS COMMUNICATION NETWORK SHALL BE PROVIDED BY THE LOW VOLTAGE CONTRACTOR/CONTRACTING OFFICER.
G5	ALL MANUALLY DIMMED LIGHT LOADS SHALL BE CAPABLE OF DIMMING LIGHTS TO OFF SETTING. DIMMING COMPATIBILITY BETWEEN THE CONTROLS AND LIGHT FIXTURES SHALL BE COORDINATED BY THE EC TO ENSURE THAT LIGHTING IS ABLE TO DIM TO LEVEL NOTED ON LIGHTING FIXTURE SCHEDULE.
G6	LIGHTING CONTROL SYSTEM SHALL INCLUDE A MINIMUM OF (4) HOURS OF MANUFACTURER'S REPRESENTATIVE TIME ON SITE FOR SYSTEM CHECK-OUT AND OWNER TRAINING. ELECTRICAL CONTRACTOR SHALL VIDEO RECORD TRAINING SESSION AND PROVIDE COPY OF VIDEO TO OWNER AS PART OF PROJECT COMPLETION SUBMITTALS.
G7	ALL DIGITAL SWITCHES FOR OVERRIDE CONTROL OF LIGHTING CONTROL SYSTEM(S) SHALL HAVE A MAXIMUM SETTING OF 2 HOURS PER IECC REQUIREMENTS.
G8	WHERE APPLICABLE, WALLSTATIONS WITH MORE THAN ONE GANG SHALL BE CONGREGATED TOGETHER UNDER A SINGLE FACEPLATE, UON.
	NETWORKED WIRELESS DISTRIBUTED LIGHTING CONTROLS
N1	REFER TO ELECTRICAL LIGHTING LAYOUTS FOR LAYOUT OF DEVICES CONNECTED TO DISTRIBUTED LIGHTING CONTROL SYSTEM. DISTRIBUTED COMPONENTS ARE INDICATED IN THE "LIGHTING CONTROL DEVICE" SCHEDULE, THESE COMPONENTS START WITH THE DESIGNATION 'NW'.
N2	DISTRIBUTED LIGHTING CONTROL HEAD-ENDS/HUBS SHALL BE PROVIDED BASED ON THE QUANTITY OF ZONES INDICATED IN THE 'NETWORKED LIGHTING CONTROL ZONE SCHEDULE'. COMPONENTS PROVIDED SHALL BE CAPABLE OF PROVIDING FUNCTIONALITY IN ACCORDANCE WITH 'SEQUENCE OF OPERATIONS' SCHEDULE.
N3	ALL COMPONENTS OF NETWORKED DISTRIBUTED LIGHTING CONTROL SYSTEM REQUIRING LINE VOLTAGE CONNECTIONS SHALL BE FED FROM LOCAL UNSWITCHED LIGHTING CIRCUIT.
N4	ALL REMOTE LOAD CONTROLLERS SUCH AS POWER PACKS AND RELAY DEVICES SHALL BE LOCATED IN A READILY ACCESSIBLE LOCATION.
N5	POWER REQUIREMENTS SHALL BE CONFIRMED WITH APPROVED SUBMITTAL AND CONNECTED TO NEAREST UNSWITCHED LIGHTING CIRCUIT.
N6	DISTRIBUTED LIGHTING CONTROL HEAD-END/HUBS SHALL BE EQUIPPED WITH CAPABILITY FOR PROGRAMMATIC AND ZONING SOFTWARE EXPANSION FOR A MINIMUM OF 20% ADDITIONAL SPARE CAPACITY.

LIGHTING FIXTURE GENERAL NOTES

A.	BOF = BOTTOM OF FIXTURE HEIGHT, RFD = RECESSED FIXTURE DEPTH, OFH = OVERALL FIXTURE HEIGHT
B.	LUMENS LISTED ARE DELIVERED LUMENS, NOT INITIAL.
C.	FOR ALL SPECIFIED LUMINAIRES, THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL MOUNTING HARDWARE, ACCESSORIES, COMPONENTS, LEADER/JUMPER CABLES, WIRE FEED, CONNECTORS, END CAPS, REMOTE POWER SUPPLIES, AND ANY OTHER NECESSARY COMPONENT AS REQUIRED FOR INSTALLING A SECURE AND FULLY FUNCTIONAL SYSTEM.
D.	THE CONTRACTOR SHALL VERIFY THE CEILING TYPE BEFORE ORDERING LIGHT FIXTURES TO ENSURE COMPATIBILITY WITH SPECIFIED FIXTURES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
E.	ALL FINISH SELECTIONS SHALL BE VERIFIED BY THE CONTRACTING OFFICER AS PART OF THE SUBMITTAL PROCESS. UNLESS OTHERWISE NOTED, EC SHALL ASSUME STANDARD LUMINAIRE FINISH OPTION FOR PRICING.
F.	ALL MOUNTING HEIGHTS SHALL BE VERIFIED WITH ARCHITECTURAL ELEVATIONS PRIOR TO ANY ROUGH-IN.
G.	SPECIFICATIONS DO NOT INCLUDE FIXTURE QUANTITIES, FINAL DIMENSIONS WITH ARCHITECTURAL FINISHES, WEIGHTS OR GAUGES, FABRICATION PROCESSES, CONSTRUCTION MEANS OR METHODS, SAFETY PRECAUTIONS, ALL OF WHICH ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
H.	LIGHTING FIXTURE SCHEDULE DIMMING COLUMN INDICATES DIMMING CAPABILITIES OF THE FIXTURES BASED ON THE SPECIFIED DRIVER. LIGHTING ZONE SCHEDULE INDICATES ASSOCIATED DIMMING PROTOCOL CAPABILITIES/REQUIREMENTS SHOULD THE ZONES UTILIZE DIMMING. INTENT TO UTILIZE DIMMING IN SPECIFIC AREAS IS DEFINED/IDENTIFIED PER ROOM BY AS NOTED IN THE LIGHTING SEQUENCE OF OPERATION SCHEDULE. THOUGH FIXTURES/ZONES MAY BE DIMMING CAPABLE BASED ON THE SPECIFIED HARDWARE, SEQUENCE OF OPERATION SCHEDULE TAKES PRECEDENT AS RELATED TO UTILIZATION/PROGRAMMING NEEDS PER SPACE.
I.	FOR LUMINAIRES SPECIFIED WITH 0-10V DIMMING, 0-10V DIMMING DRIVER(S) REQUIRE ADDITIONAL LOW VOLTAGE CONTROL WIRES IN ADDITION TO STANDARD WIRING FOR POWER.
J.	EXTERIOR LUMINAIRES SHALL BE COLD WEATHER RATED FOR 0 DEG. F / -18 DEG. C., AND RATED FOR OUTDOOR USE.
K.	REMOTE DRIVER(S)/TRANSFORMER(S) SHALL BE LOCATED IN A CONCEALED, ACCESSIBLE, AND VENTILATED LOCATION AS PROPOSED BY THE EC AND APPROVED BY THE CONTRACTING OFFICER. REFER TO THE MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR MINIMUM REQUIRED CLEARANCES FROM ADJACENT MATERIALS, AND WIRING REQUIREMENTS TO PREVENT VOLTAGE DROP. DO NOT EXCEED MANUFACTURER'S RECOMMENDATIONS REGARDING WIRE GAGE AND MAXIMUM WIRE RUN LENGTHS.

LIGHTING FIXTURE SPECIFIC NOTES

1.	CONFIRM FINISH WITH CONTRACTING OFFICER PRIOR TO PROCUREMENT.

LIGHTING CONTROLS NAMING CONVENTION

SYSTEM TYPE:
N = NETWORKED
R = ROOM CONTROLLER
W = WIRELESS
- THE ABSENCE OF LETTERS UNDER 'SYSTEM TYPE' INDICATES A WIRED STANDALONE SYSTEM
- THE ABSENCE OF 'W' MEANS THE SYSTEM IS WIRED

SENSOR TYPE:
O = OCCUPANCY
V = VACANCY
P = PHOTOCELL

DEVICES:
D = DIMMER
S = SWITCH
H = HUB
U = UNIQUE DEVICE TYPE

NUMBERING:
1,**2**,**3**... = QUANTITY AS REQUIRED FOR DIFFERENT HARDWARE, DEVICE CHARACTERISTICS, OR MOUNTING CONDITIONS.

LICENSED PROFESSIONAL ENGINEER 05/22/2026 JEFF MULLIKIN P25364 IOWA

DESIGNED:	JR/JM/TW
CADD	AE DESIGN
TECH REVIEW:	MRS/ESN
DATE:	5/29/2026
SUB SHEET NO.	E 500
TITLE OF SHEET	ELECTRICAL LIGHTING SCHEDULES
	EFFIGY MOUNDS NATIONAL MONUMENT
DRAWING NO.	394 194248
PMIS/PKG NO.	224159
SHEET	39 OF 39