B422 KITCHENETTE RENO
MANSFIELD LAHM ANG BASE

INDEX OF DRAWINGS


G101	COVER SHEET
AD101	DEMO PLAN
A101	RENO PLAN
E101	ELECTRICAL PLAN

GENERAL NOTES

Renovate the B422 kitchenette including selective demolition, partition reconfiguration, new casework, countertop, sink, resilient tile flooring, painting, ceiling modifications, LED lighting replacement, and associated electrical, communications, and mechanical adjustments.

1. Contractor shall field verify existing conditions and dimensions prior to construction.
2. Contractor shall coordinate required utility interruptions and access requirements with the Government prior to execution.
3. Contractor shall protect adjacent finishes, equipment, and building systems from damage during construction.
4. Patch and restore surfaces disturbed by the work to match adjacent existing conditions where applicable.
5. Existing appliances shall be removed by the Government unless noted otherwise.
6. Communications outlets and associated devices shall be relocated or modified only if impacted by the work.
7. Electrical work shall include required branch circuit modifications and a new circuit for countertop/appliance receptacles.


PROJECT LOCATION

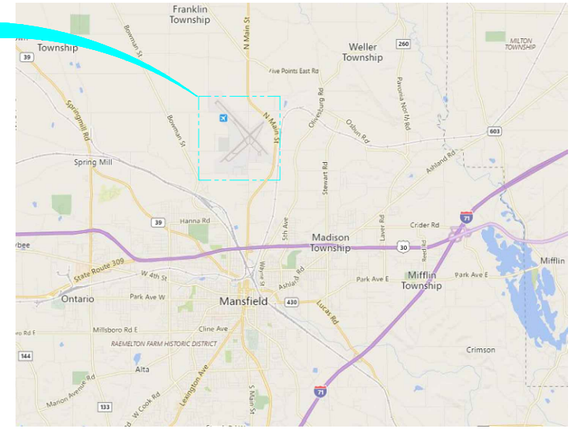

VICINITY MAP

NTS

N

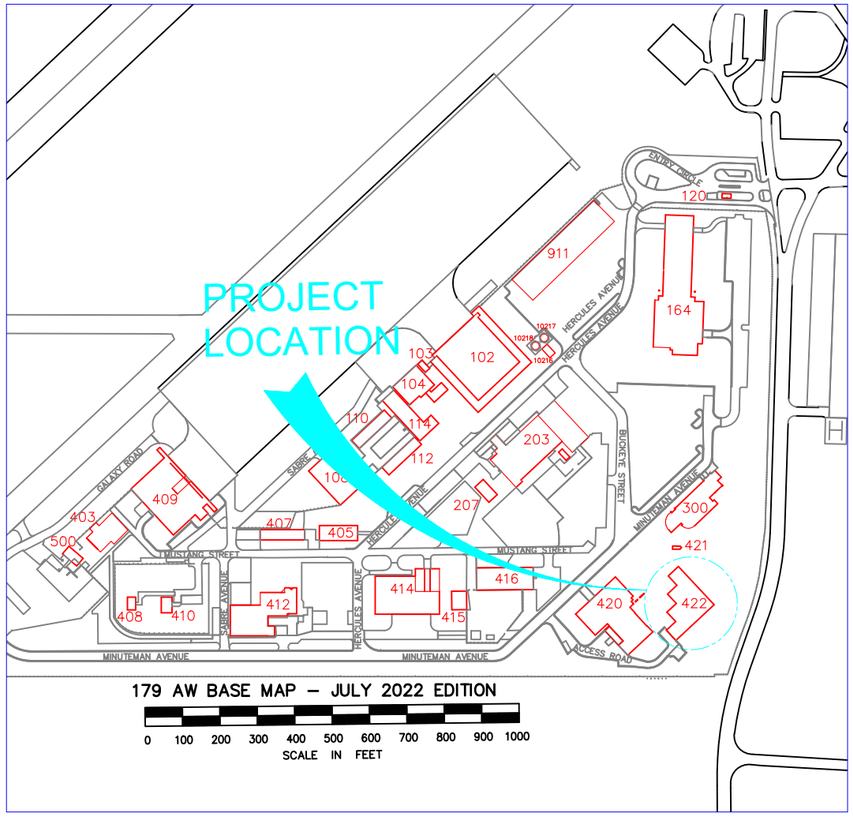

SITE MAP

NTS

N


179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B422 KITCHENETTE RENO

COVER SHEET

PROJ #:	PBXP272018
DRAWN:	CMM
CHECKED:	XXX
DATE:	11/5/26
SCALE:	NTS

G101

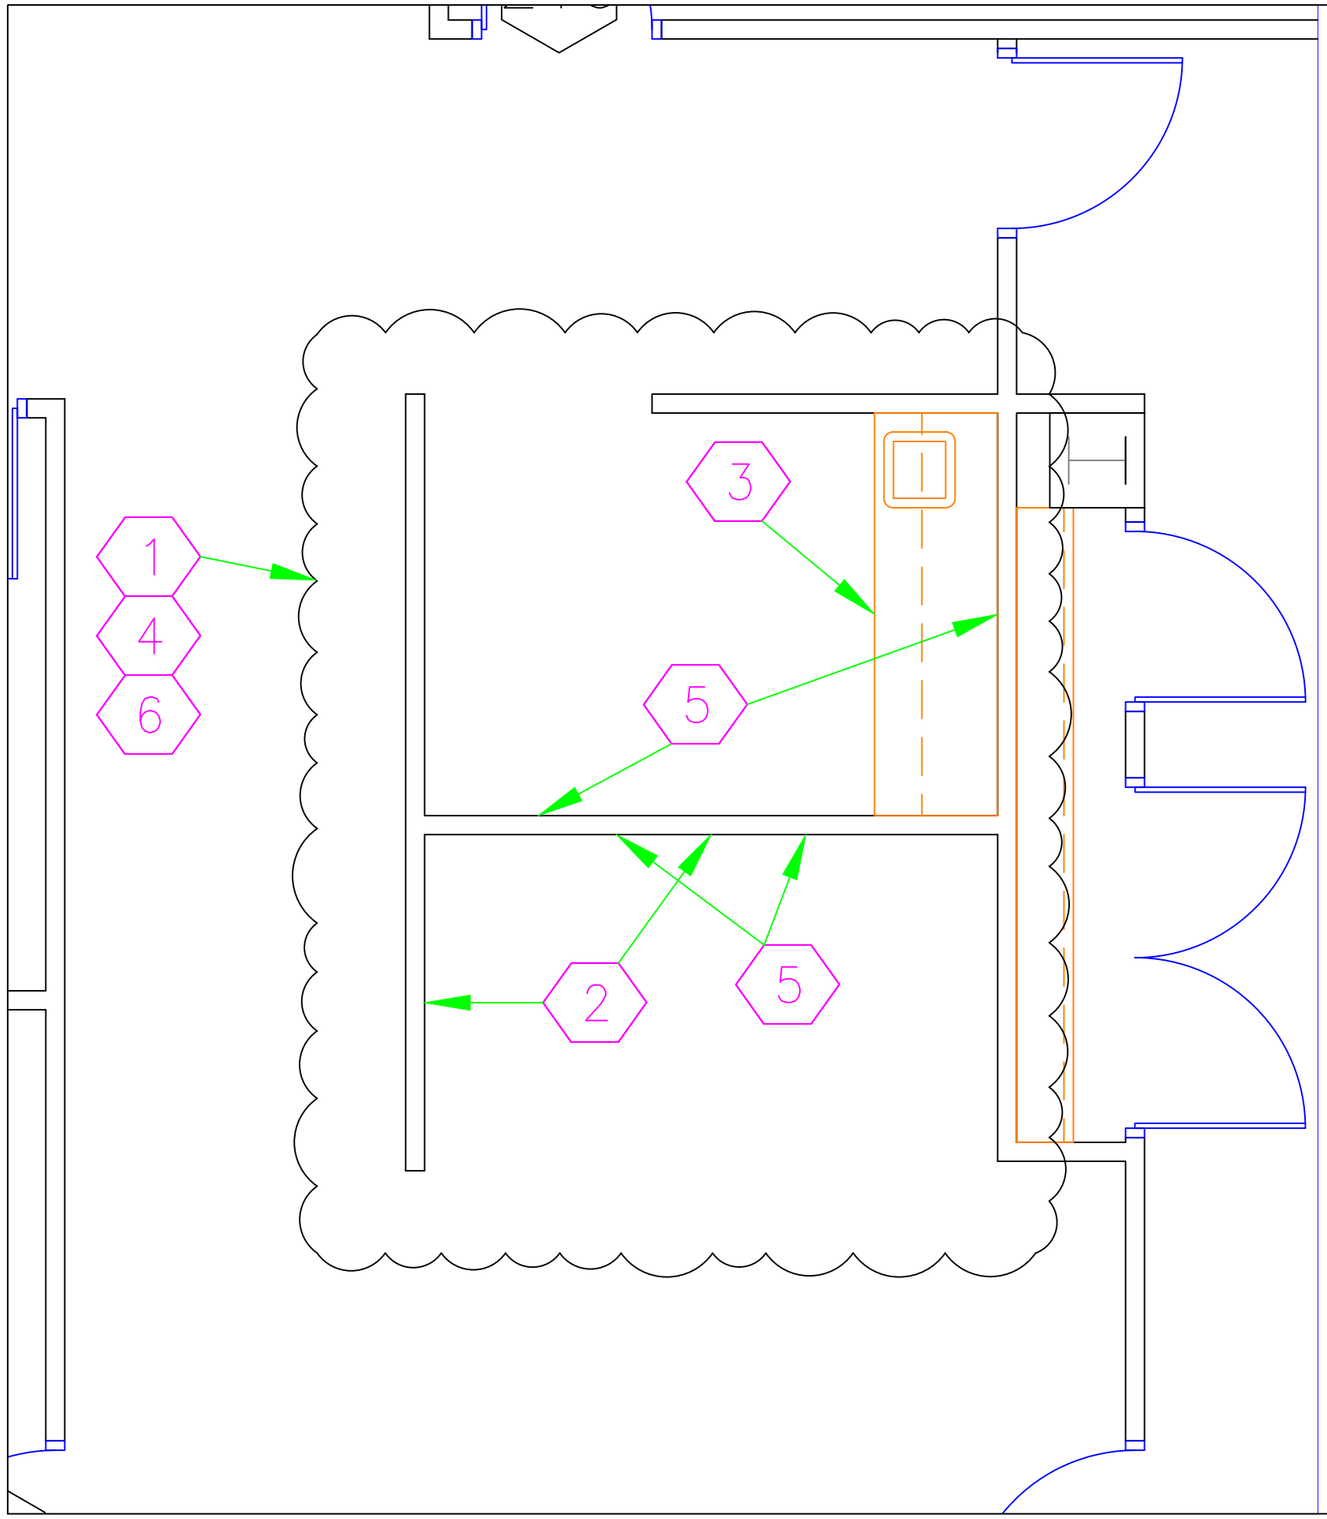

CODED NOTES

1. Area of renovation.
2. Demolish existing half-height wall and full-height wall as indicated to accommodate new layout.
3. Remove existing casework, countertop, sink, faucet, and upper cabinets.
4. Remove existing floor finish and cove base within renovation limits.
5. Remove/relocate devices affected by demolition. Refer to electrical drawings.
6. Modify suspended ceiling grid/tile as required for wall demolition and reconstruction.


179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B422 KITCHENETTE RENO

DEMO PLAN

PROJ #:	PBXP272018
DRAWN:	CMM
CHECKED:	XXX
DATE:	11/5/2026
SCALE:	NTS

AD101

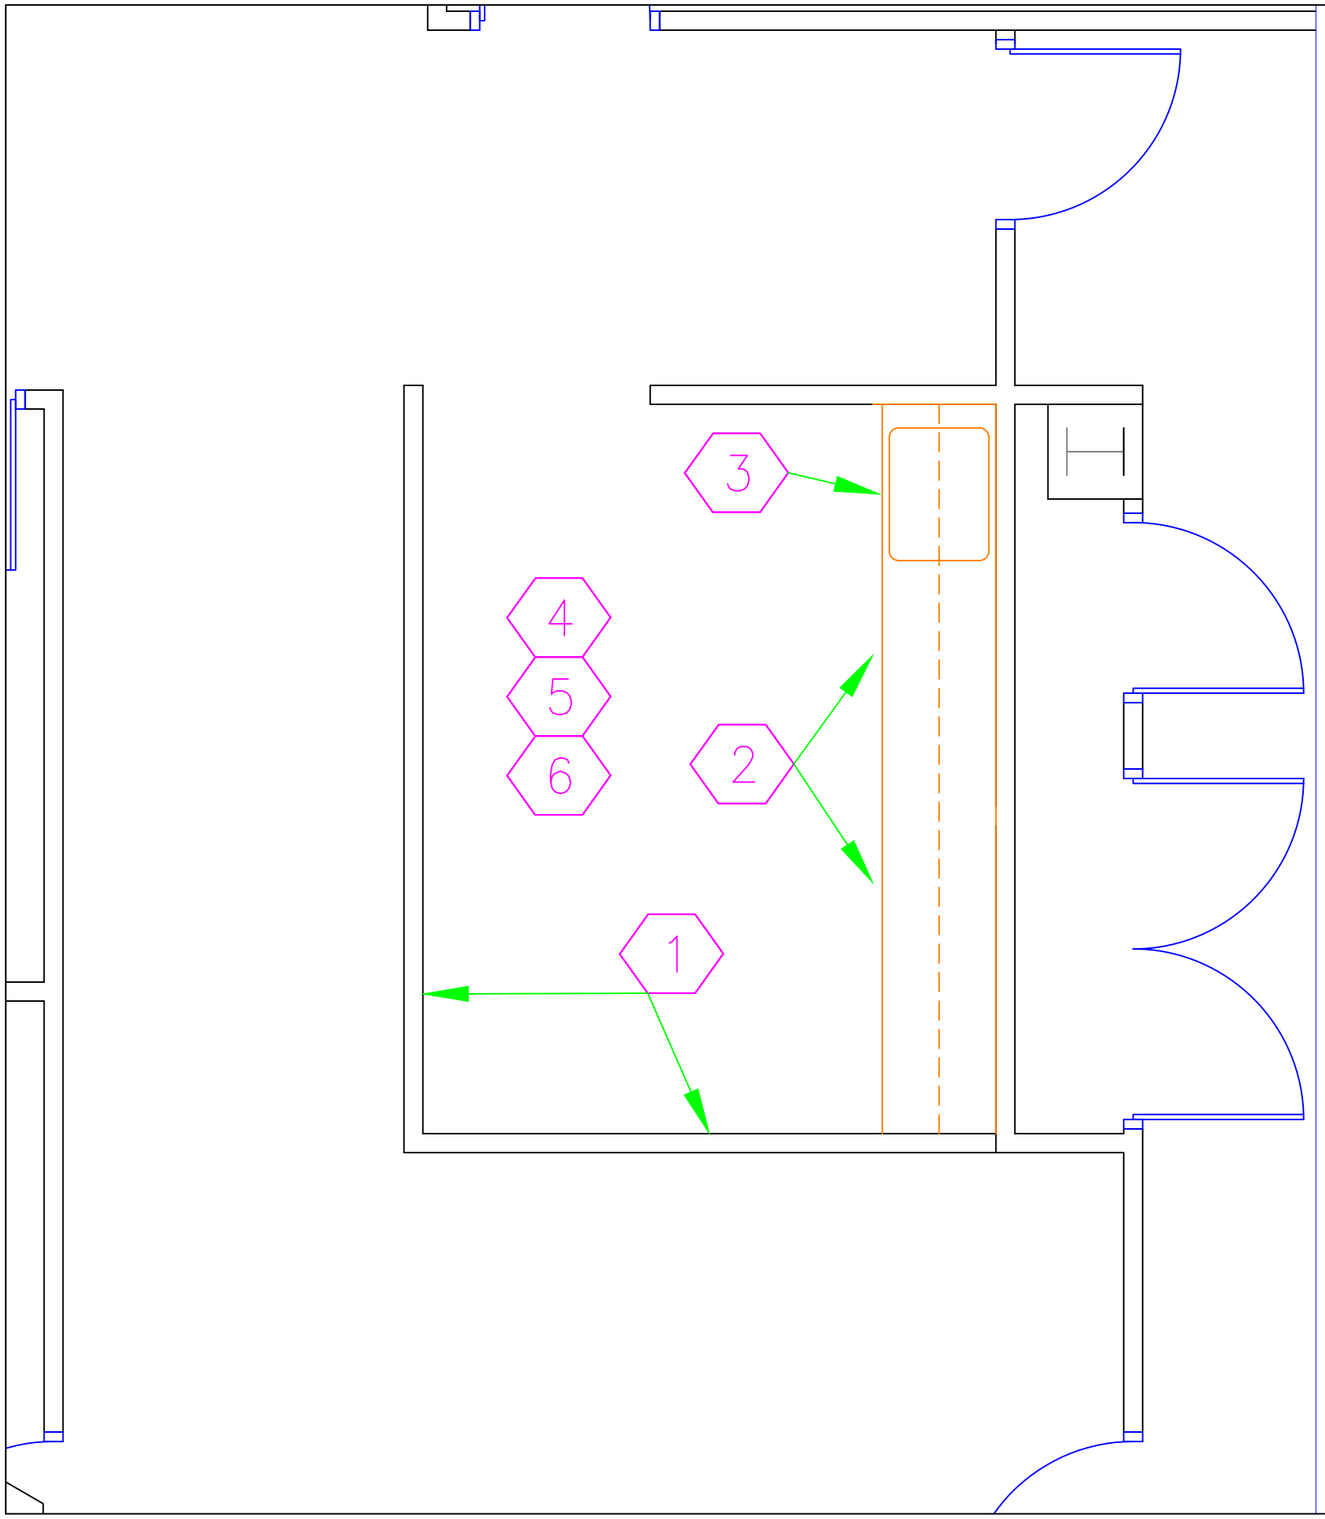

CODED NOTES

1. Provide new full-height partition wall as indicated.
2. Provide new casework, solid surface countertop, and 4-inch backsplash.
3. Provide new single-bowl sink and gooseneck faucet.
4. Provide new resilient tile flooring and cove base within renovation limits.
5. Prepare and paint walls throughout renovated room.
6. Modify suspended ceiling grid/tile as required to complete the work.


179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B422 KITCHENETTE RENO

RENO PLAN

PROJ #:	PBXP272018
DRAWN:	CMM
CHECKED:	XXX
DATE:	11/5/2026
SCALE:	NTS

A101

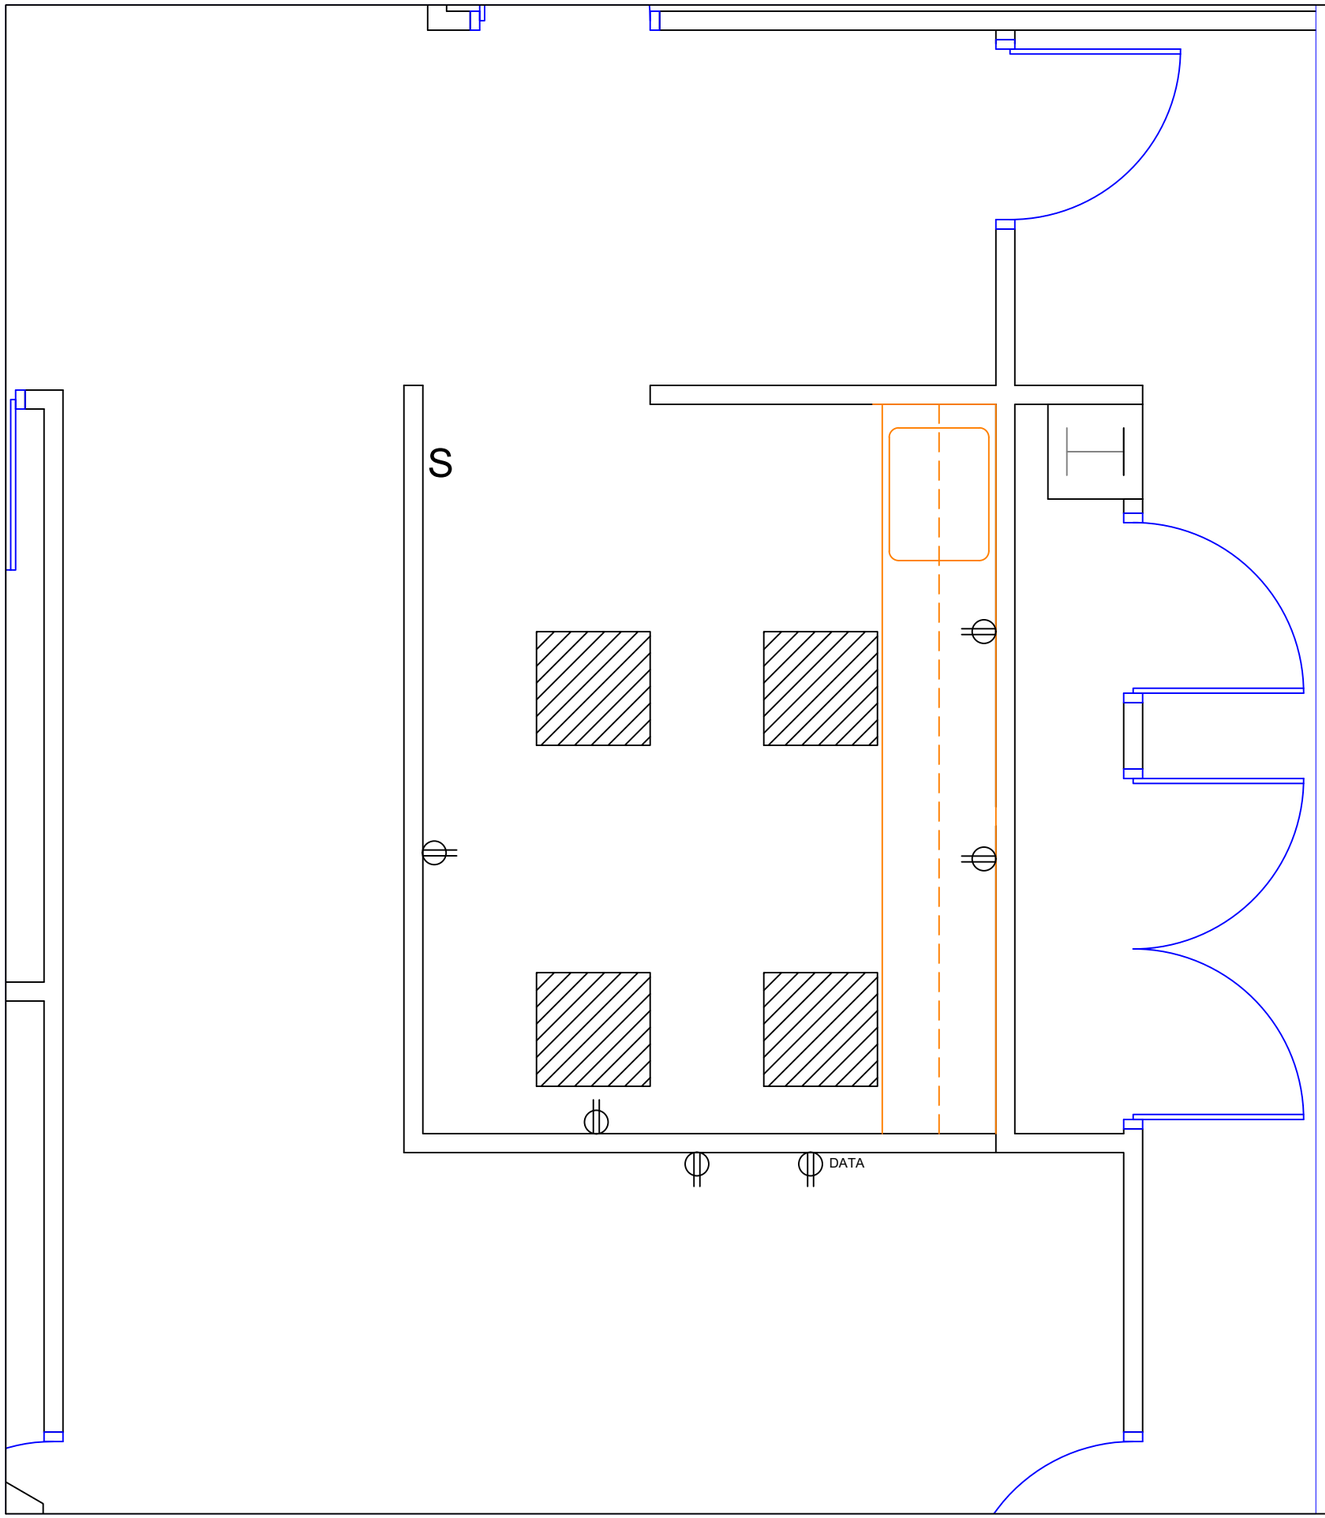

CODED NOTES

1. Provide new receptacles and associated branch circuitry as indicated.
2. Provide GFCI protection for countertop receptacles where required.
3. Provide one new branch circuit for countertop/appliance receptacles.
4. Relocate existing devices impacted by renovation as required.
5. Replace existing light fixtures within the renovated kitchenette with new 2x2 LED fixtures.
6. Modify associated wiring, devices, and connections as required for a complete and operational installation.
7. Coordinate exact device locations with Government prior to rough-in.

179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B422 KITCHENETTE RENO

ELECTRCICAL PLAN

PROJ #:	PBXP272018
DRAWN:	CMM
CHECKED:	XXX
DATE:	11/5/2026
SCALE:	NTS

E101