B300 BDOC RENOVATION
MANSFIELD LAHM ANG BASE

INDEX OF DRAWINGS


G101 COVER SHEET
A101 ARCHITECTURAL NOTES
E101 ELECTRICAL NOTES

GENERAL NOTES

Renovate the B300 BDOC and Battlestaff spaces including selective demolition, wall repair, painting, resilient tile flooring replacement, limited suspended ceiling restoration, and associated electrical and communications pathway modifications to support revised room use and Government-furnished equipment.

1. Contractor shall field verify existing conditions and dimensions prior to construction.
2. Contractor shall coordinate required utility interruptions and access requirements with the Government prior to execution.
3. Contractor shall protect adjacent finishes, equipment, and building systems from damage during construction.
4. Patch and restore surfaces disturbed by the work to match adjacent existing conditions where applicable.
5. Communications cabling and final terminations shall be by others unless noted otherwise.
6. Government-furnished equipment shown or referenced on the drawings shall be installed by others unless noted otherwise..


PROJECT LOCATION

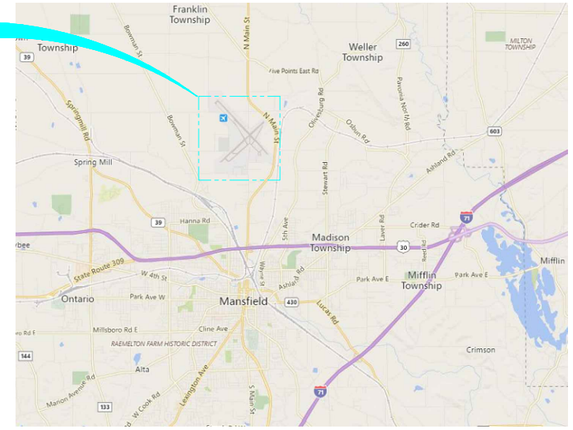

VICINITY MAP

NTS

N

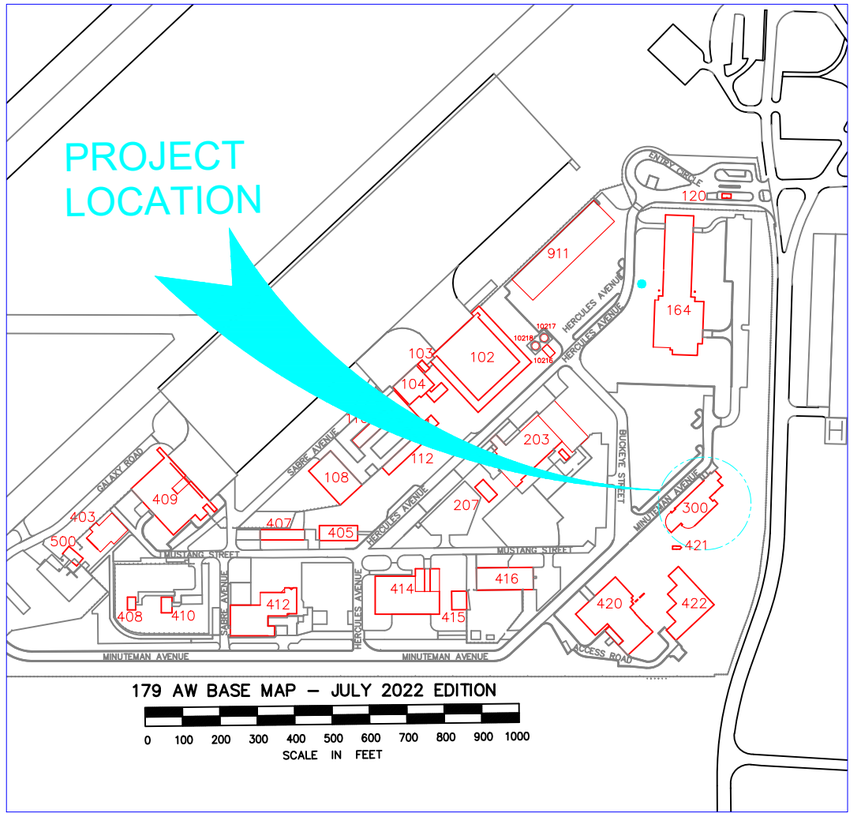

SITE MAP

NTS

N


179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B300 BDOC RENOVATION

COVER SHEET

PROJ #:	PBXP272019
DRAWN:	CMM
CHECKED:	XXX
DATE:	10/29/26
SCALE:	NTS

G101

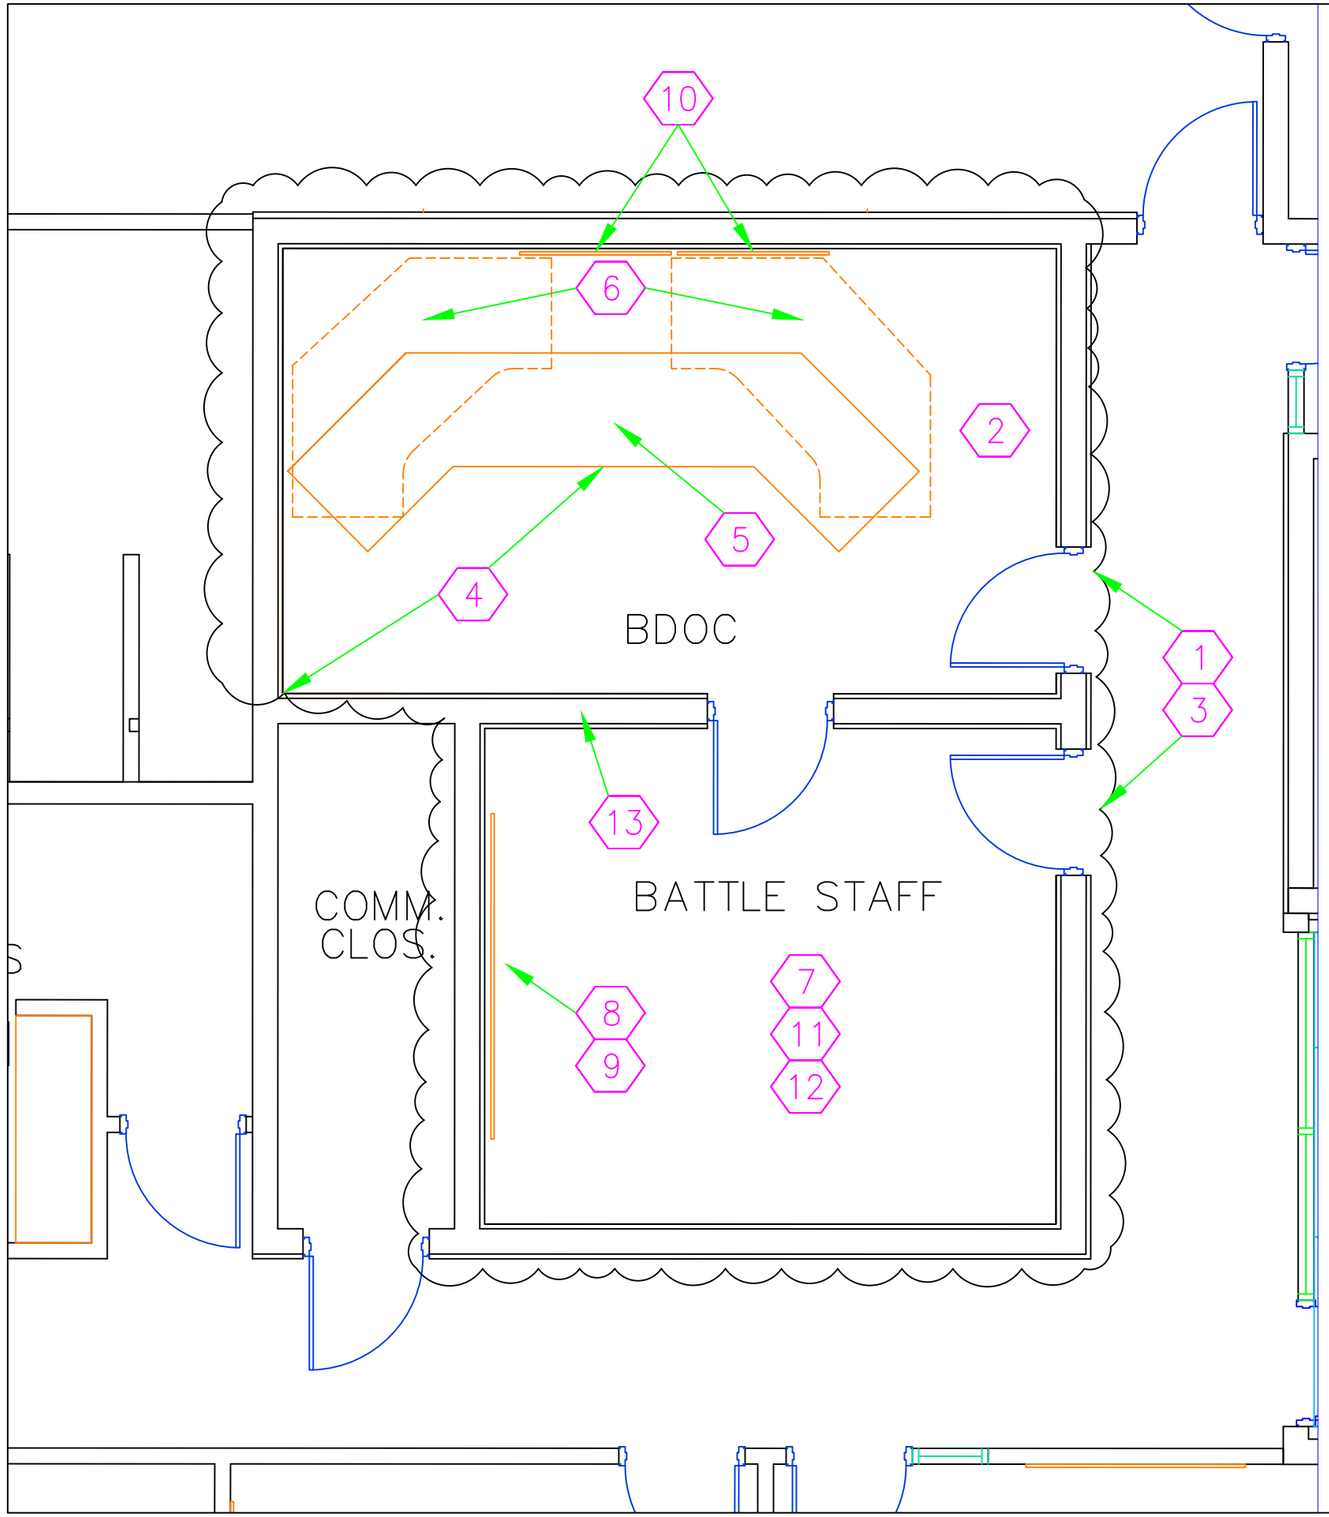

CODED NOTES

1. Area of renovation.
2. Remove existing floor finish as required, prepare substrate, furnish and install new resilient tile flooring and cove base in the BDOC.
3. Prepare and repaint walls throughout
4. Remove existing BDOC controller desk and associated obsolete floor-fed utility components. Refer to E101.
5. Existing communications floor penetration to remain; coordinate capping and protection with project requirements.
6. Government-furnished controller desk footprint shown for reference; final installation by others.
7. Remove lower 48 inches of wall finish materials and provide new gypsum wallboard, finishing, and preparation for paint as indicated.
8. Remove and dispose of existing projector screen and associated mounting components.
9. Restore suspended ceiling grid/tile and provide limited replacement ACT as required to complete the work.
10. Remove and reinstall existing wall-mounted monitors and associated mounting hardware at revised mounting elevation as indicated.
11. Remove existing floor finish as required, prepare substrate, furnish and install new carpet tile flooring and cove base in the Battlestaff room.
12. Remove existing recessed can light fixtures and restore affected ceiling surfaces and finishes to match adjacent conditions.
13. Provide acoustical sealing at openings


179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B300 BDOC RENOVATION

ARCHITECTURAL NOTES

PROJ #:	PBXP272019
DRAWN:	CMM
CHECKED:	XXX
DATE:	10/29/26
SCALE:	NTS

A101

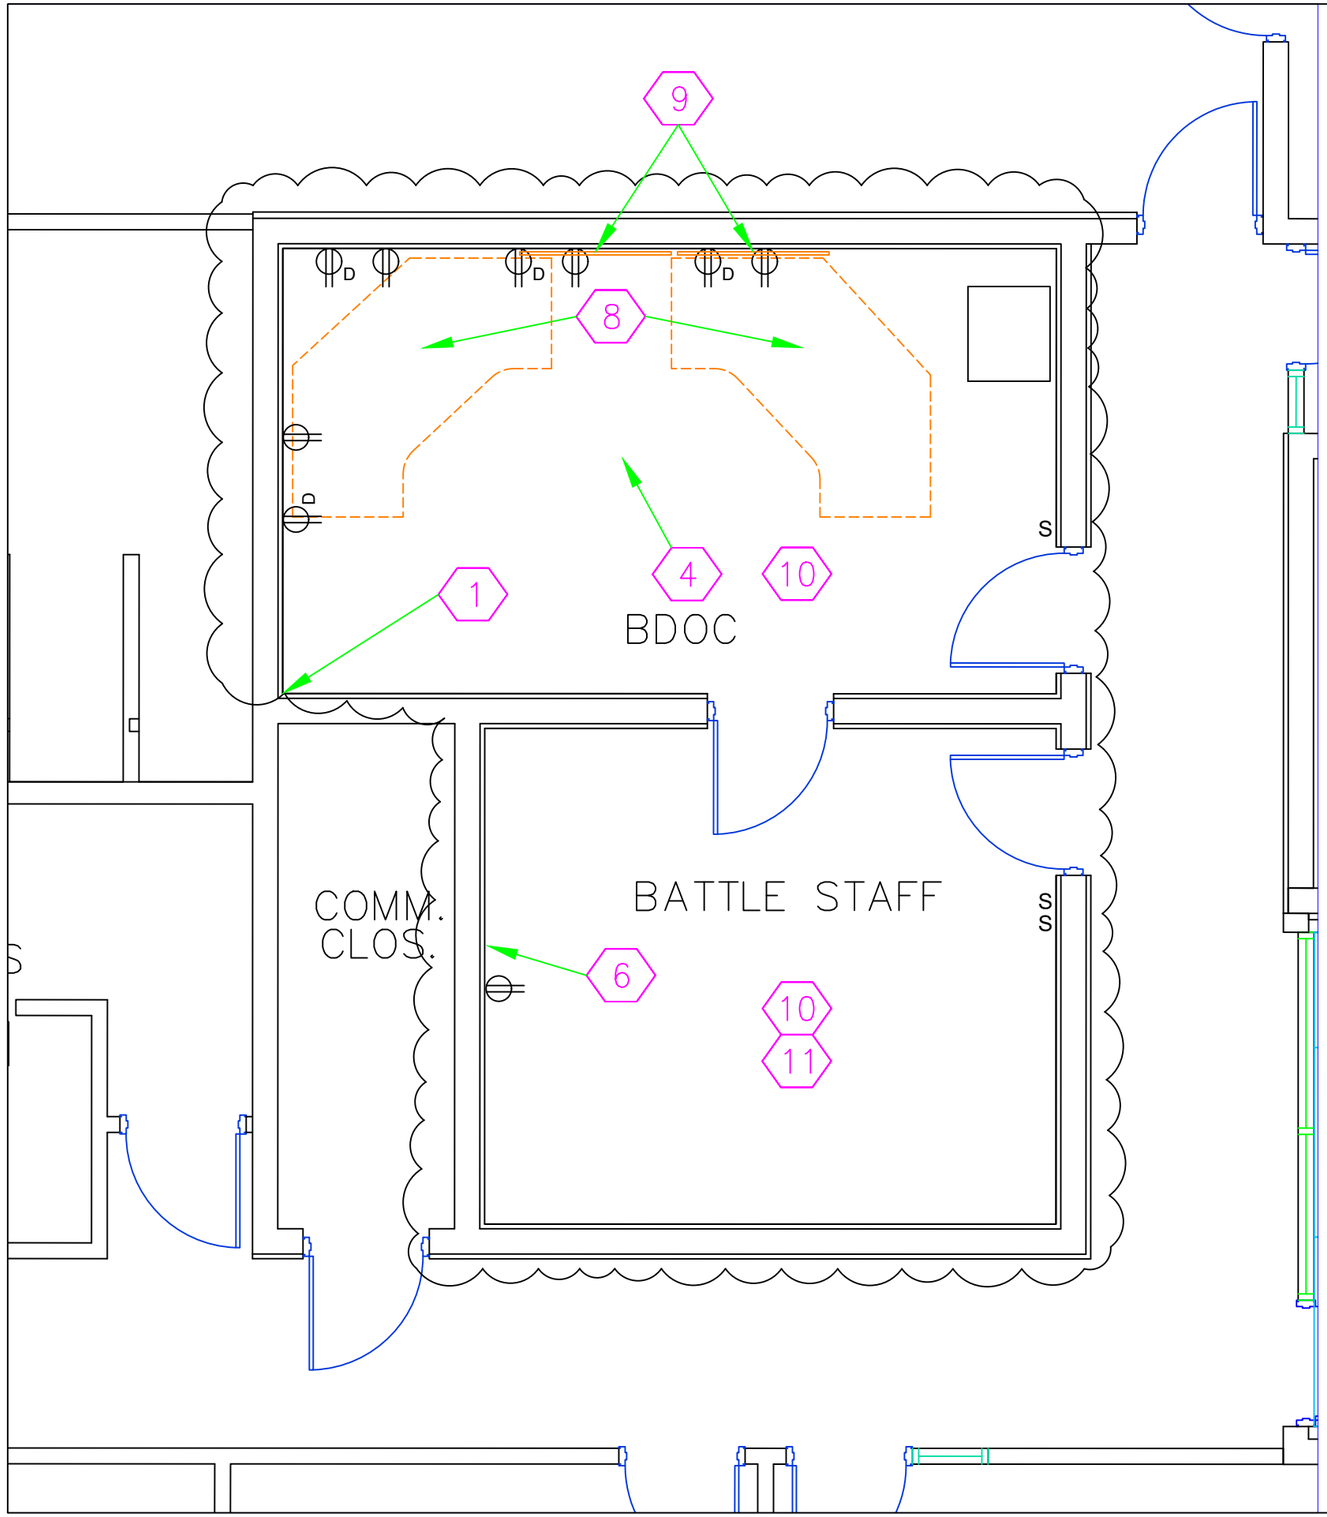

CODED NOTES

1. Remove existing floor-fed utility components associated with the existing BDOC controller desk arrangement, including junction box, exposed whips, and miscellaneous devices no longer required.
2. Relocate existing branch circuitry and provide new flush-mounted receptacles at the BDOC desk wall as indicated.
3. Provide communications pathway rough-in and outlet boxes within finished wall surfaces at the BDOC desk wall as indicated. Communications cabling and terminations shall be by others unless noted otherwise.
4. Existing communications floor penetration to remain, coordinate capping and protection with project requirements. Coordinate with A101.
5. Provide one new recessed receptacle at the Battlestaff presentation wall for Government-furnished monitor.
6. Provide surface-mounted cable management raceway at the Battlestaff presentation wall for HDMI and associated low-voltage cabling as indicated.
7. Coordinate exact device locations with Government prior to rough-in.
8. Final connection of Government-furnished desks, monitor, UPS units, and user equipment shall be by others unless noted otherwise.
9. Remove and reinstall existing wall-mounted monitors and associated mounting hardware at revised mounting elevation as indicated.
10. Remove existing recessed can light fixtures and modify associated switching/circuitry as required to leave remaining lighting safe and operational.
11. Option #1: Replace existing 2x4 light fixtures with dimmable LED fixtures or LED retrofit kits and modify associated lighting controls, switching, and circuitry as required.

179TH CIVIL ENGINEERING SQUADRON
MANSFIELD-LAHM AIR NATIONAL GUARD BASE
1947 HARRINGTON MEMORIAL ROAD
MANSFIELD, OH 44903

B300 BDOC RENOVATION

ELECTRICAL NOTES

PROJ #:	PBXP272019
DRAWN:	CMM
CHECKED:	XXX
DATE:	10/29/26
SCALE:	NTS

E101