8R MID FIELD RVR AND 15L RO RVR ACCESS ROAD CONSTRUCTION, George Bush Intercontinental, Houston, TX (VS 15),(RLIM 5)

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION

ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

FA-19200 PC BASED RVR SYSTEM
COVER SHEET

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY	APPROVED BY
	BRIAN JOHNSTON DO NOT SIGN	RICHARD BELLOWS DO NOT SIGN
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH

DESIGNED	BJ	ISSUED BY	DATE 03/11/2025	JCN 1404792
DRAWN	BJ	ENGINEERING SERVICES NAVAIDS	DRAWING NO IAH-1404792-G001	REV
CHECKED	RB			

ISSUED FOR:

$FILESS $DATES $TIMES $NAMES

EDMS:IAH-1404792-g001.dwg

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

DRAWING LIST

IAH-1404792-G001	COVER SHEET
IAH-1404792-G002	INDEX AND SYMBOLS
IAH-1404792-G003	GENERAL PLAN
IAH-1404792-G004	CONSTURCTION SAFETY AND PHASING PLAN 1
IAH-1404792-G005	CONSTURCTION SAFETY AND PHASING PLAN 2
IAH-1404792-C020	RWY 8R MIDFIELD RVR ACCESS ROAD
IAH-1404792-C022	RWY 15L RO RVR ACCESS ROAD DETAILS

ABBREVIATIONS

SYMBOLS LEGEND

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION

ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

FA-19200 PC BASED RVR SYSTEM
INDEX AND SYMBLOS

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY: BRIAN JOHNSTON (DO NOT SIGN)	APPROVED BY: RICHARD BELLOWS (DO NOT SIGN)
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH
DESIGNED BJ	ISSUED BY: ENGINEERING SERVICES NAVAIDS	DATE 03/11/2025 — JCN 1404792
DRAWN BJ		DRAWING NO IAH-1404792-G002 — REV
CHECKED RB		

ISSUED FOR:

$FILES$
$DATES$
$TIMES$
$NAMES$

EDMS-lah-1404792-g002.dwg

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

SITE SUMMARY:
1. 8R MID POINT RVR
1.1. PAVE CONCRETE ACCESS ROAD OFF OF TAXIWAY TO EXISTING RVR EQUIPMENT.
2. 15L ROLLOUT RVR
2.1. CREATE GRAVEL ACCESS ROAD TO TAXIWAY WP

ELEV 91
087.6°
9000 X 150
267.7°
26R
15L
NE BRIDGE
FIRE STATION
FH BRIDGE
ILS HOLD
LAHSO
ELEV 94
ELEV 95
ELEV 92
CC 087.6°
9402 X 150
CC 267.7°
EAST CARGO
EAST BRIDGE
TWR 424
HANGARS
TERM A
TERM B
TERM C
TERM D
TERM E
CENTRAL CARGO
RB BRIDGE
RA BRIDGE
SC BRIDGE
SF BRIDGE
FIRE STATION
10000 X 150
267.7°
27
ELEV 90
FBO RAMP
HANGAR
FBO RAMP
ELEV 87
33L
ELEV 85
329.7°
33R
ILS HOLD
10000 X 150
149.7°
12001 X 150
329.7°
ARROWS TO SITE LOCATIONS

0' 1,000' 2,000'
SCALE: 1" = 1,000'

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

FA-19200 PC BASED RVR SYSTEM
GENERAL PLAN

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY: BRIAN JOHNSON	APPROVED BY: RICHARD BELLOWS	
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH	
	DESIGNED BJ	ISSUED BY: ENGINEERING SERVICES NAVAIDS	DATE 03/11/2025 JCN 1404792
	DRAWN BJ		DRAWING NO IAH-1404792-G003 REV
	CHECKED RB		

DO NOT SIGN

ISSUED FOR:

$NAME$
$TIME$
$DATE$

EDM: iah-1404792-g003.dwg

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

NOTES: STAGING AREA LOCATED AT FLAT IRON LAYDOWN YARD IF PERMISSION IS RECIEVED.

1. AT 8R MID POINT RVR THE CONTRACTOR SHALL ENTER THROUGH THE GATE OFF OF ALDINE WESTFIELD ROAD AND TRAVEL DOWN THE ACCES ROAD CROSS TAXIWAY NE AND CONTINUE TILL THEY HAVE TO CROSS TAXIWAY CC.
2. AT 15RL TD RVR THE CONTRACTOR SHALL COME THROUGH FLAT IRON ENTRANCE AT SOUTH ENTRANCE OFF OF JOHN F KENNEDY BLVD AND FOLLOW THE ACCESS ROAD TO THE 15L ROLL OUT RVR.

ELEV 91
087.6°
9000 X 150
267.7°
26R
ILS HOLD
FIRE STATION
NE BRIDGE
FH BRIDGE
ELEV 94
ELEV 95
LAHS
ELEV 92
EAST CARGO
ALDINE WESTFIELD ROAD
ACCESS POINT FOR WEST SIDE OF AIRFIELD ACCESS ROAD
9402 X 150
15R
TERM A
TERM B
TERM C
TERM D
TERM E
EAST BRIDGE
TWR 424
HANGARS
CENTRAL CARGO
RA BRIDGE
RB BRIDGE
SC BRIDGE
SF BRIDGE
FIRE STATION
10000 X 150
ELEV 90
FBO RAMP
HANGAR
ELEV 87
33L
ACCESS POINT NEAR FLAT IRON FOR ACCESS ROAD
149.7°
12001 X 150
329.7°
33R
27

0' 1,000' 2,000'
SCALE: 1" = 1,000'

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

FA-19200 PC BASED RVR SYSTEM
CONSTRUCTION SAFETY AND PHASING PLAN 1

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY: BRIAN JOHNSON	APPROVED BY: RICHARD BELLOWS	
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH	
	DESIGNED BJ	ISSUED BY: ENGINEERING SERVICES NAVAIDS	DATE 03/11/2025 JCN 1404792
	DRAWN BJ		DRAWING NO IAH-1404792-G004 REV
	CHECKED RB		

ISSUED FOR:

$FILESS $DATES $TIMES $NAMES

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

EDM-Iah-1404792-g004.dwg

SAFETY PLAN

1. THE CONTRACTOR IS ADVISED THAT CERTAIN RULES AND RESTRICTIONS, AS CONTAINED IN FAA ADVISORY CIRCULAR 150/5370-2G AND AUGMENTED BY THESE PLANS AND SPECIFICATIONS, WILL APPLY TO THE WORK. CONTRACTOR SHALL COMPLY WITH ALL FAA PART 139 TRAINING REQUIREMENTS AND REGULATIONS.

2. THE CONTRACTOR SHALL FURNISH AIRCRAFT WARNING FLAGS, COLORED ORANGE AND WHITE, THREE FOOT SQUARE, FOR VEHICLES AND EQUIPMENT USE AND ONE FOOT SQUARE FOR PERSONAL USE. EACH SEPARATE GROUP OR INDIVIDUAL VEHICLE AND EQUIPMENT ITEM IN ALL WORK AREAS, REGARDLESS OF WHETHER OR NOT NEAR RUNWAYS, TAXIWAYS OR APRONS, SHALL DISPLAY A FLAG WHICH SHALL BE MAINTAINED VERTICAL AT ALL TIMES. EACH VEHICLE OR OTHER PIECE OF EQUIPMENT BELONGING TO THE CONTRACTOR SHALL HAVE A WARNING FLAG ATTACHED TO IT IN A VERTICAL AND CLEARLY VISIBLE POSITION. IN ADDITION, EACH VEHICLE AND PIECE OF EQUIPMENT SHALL HAVE A ROTATING YELLOW BEACON MOUNTED ON THE ROOF FOR USE AT ALL TIMES.

3. ELEVATED LIGHTED CROSSES WILL BE PLACED AND MAINTAINED AS NEEDED ON CLOSED RUNWAYS BY AIRPORT OPERATIONS PERSONNEL.

4. ALL LIGHTING WILL BE SHIELDED BY THE CONTRACTOR SO THAT IT DOES NOT AFFECT THE AIR TRAFFIC CONTROL TOWER OR FLIGHT CREWS.

5. LIMITS OF ACTIVE CRITICAL AREAS NEAR THE WORK AREA SHALL BE DELINEATED WITH ORANGE SNOW FENCE BY THE CONTRACTORS REGISTERED LAND SURVEYER PRIOR TO ANY CONSTRUCTION.

6. MAXIMUM EQUIPMENT HEIGHT WILL BE 25'.

AIRPORT OPERATIONS

1. ALL CONSTRUCTION WILL OCCUR WITHIN THE AIRCRAFT OPERATIONS AREA (A.O.A.). THE CONTRACTOR WILL BE REQUIRED TO OBTAIN ALL VEHICLE PASSES, PERSONNEL SECURITY BADGES, AND SATISFY ALL SECURITY REQUIREMENTS PRIOR TO BEGINNING WORK WITHIN THE RESTRICTED AREA. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FAMILIARIZE CONSTRUCTION PERSONNEL WITH ANY CHANGE IN THE REQUIREMENTS FOR ENTERING AND OPERATING WITHIN THE A.O.A.

2. THE AIRPORT WILL BE IN OPERATION WHILE CONSTRUCTION UNDER THIS CONTRACT IS TAKING PLACE. TIMING AND COORDINATION OF THE WORK IS AN ESSENTIAL FEATURE OF THIS CONTRACT AND WILL REQUIRE THE COMPLETION OF ALL WORK HEREIN SPECIFIED SO AS TO OFFER THE LEAST OBSTRUCTION AND/OR IMPEDIMENT TO AIRPORT TRAFFIC AND THE GENERAL OPERATION OF THE AIRPORT.

3. ACCESS TO FAA FACILITIES MUST BE COORDINATED WITH THE LOCAL FAA SSC OFFICE. CONTRACTOR SHALL REQUEST FAA ASSISTANCE THROUGH THE RESIDENT ENGINEER (RE) TO ACCESS TO THE FAA FACILITY 48 HOURS PRIOR TO DESIRED ACCESS TIME.

4. THE CONTRACTOR SHALL COOPERATE IN EVERY WAY WITH ANY OTHER CONTRACTOR DOING WORK ON OR ABOUT THE CONTRACT SITE TO THE MUTUAL BENEFIT OF ALL IN COMPLETING THEIR RESPECTIVE WORK. THE CONTRACTOR SHALL HANDLE CONSTRUCTION WORK AND SHALL UTILIZE HIS MACHINERY AND EQUIPMENT SUCH THAT AIRCRAFT AND VEHICLES USING THE FIELD WILL NOT BE SUBJECTED TO HAZARDS DUE TO THE CONSTRUCTION OPERATION. IN NO CASE WILL THE CONTRACTOR BE PERMITTED TO PARK VEHICLES/EQUIPMENT OR STORE MATERIALS OUTSIDE THE STAGING AREA SHOWN WITHOUT COORDINATION WITH AIRPORT OPERATIONS AND ATCT.

5. WHEN SO ORDERED BY THE RE, THE CONTRACTOR SHALL REMOVE FROM THE SITE OF THE WORK ALL EQUIPMENT, MACHINERY, AND MATERIALS.

6. THE CONTRACTOR SHALL PLAN HIS CONSTRUCTION OPERATION SO THAT MATERIAL, EQUIPMENT, SUPPLIES, AND WORKING PERSONNEL NECESSARY TO DO THE WORK SHALL ENTER AND LEAVE THE CONTRACT SITE VIA THE GATES AND ROUTES DESIGNATED. NO PERSONAL VEHICLES WILL BE PERMITTED WITHIN THE AIR OPERATIONS AREA. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONSTRUCTION, REPAIR, AND/OR MAINTENANCE OF ALL HAUL ROADS TO AND FROM THE DESIGNATED ENTRANCE TO THE VARIOUS WORK SITES.

7. NO ADDITIONAL COMPENSATION OR EXTENSION OF TIME OF COMPLETION FOR THE PROJECT, OR ANY PHASE OF THE PROJECT, WILL BE ALLOWED DUE TO THE PHASING OF THE WORK OR DUE TO NORMAL WEATHER CONDITIONS WHICH MAY IMPEDE THE PROGRESS OF THE WORK.

8. THE CONTRACTOR CANNOT CROSS ANY ACTIVE RUNWAY OR TAXIWAY TO DELIVER MATERIAL OR WORKMEN WITHOUT A BADGED ESCORT. THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT ACCESS TO CERTAIN CONTRACT AREAS MAY BE LIMITED AND/OR REFUSED FOR LIMITED PERIODS OF TIME. THE CONTRACTOR MUST COOPERATE WITH AIRPORT AUTHORITIES TO KEEP THE AIRPORT IN OPERATION.

9. THE CONTRACTOR SHALL MAKE SURE ALL TAXIWAYS, RUNWAYS, ROADS, AND APRONS THAT ARE USED OR CROSSED BY CONSTRUCTION VEHICLES BE KEPT CLEAR OF DEBRIS AT ALL TIMES. ANY AREA DAMAGED DURING CONSTRUCTION SHALL BE IMMEDIATELY RESTORED TO ITS ORIGINAL CONDITION BY THE CONTRACTOR AT THEIR OWN EXPENSE. THE CONTRACTOR SHALL PROVIDE A POWER VACUUM CLEANER ONSITE. IF MATERIAL IS TO BE HAULED ACROSS TAXIWAYS, PROVIDE A MOTORIZED VACUUM CLEANER ON SITE.

10. CONTRACTOR OPERATIONS SUCH AS TRENCHING, JACKING OF PIPE OR CASINGS, EXCAVATION FOR PAVEMENT OR STRUCTURES, SITE GRADING, AND VEHICULAR TRAFFIC OVER EARTH AREAS WILL OCCUR OVER, AROUND AND UNDER FAA FACILITIES SUCH AS EQUIPMENT HOUSES, DIRECT BURIED CABLES, AND DUCT BANKS. ALL THESE FACILITIES ARE CRITICAL TO THE OPERATION OF THE AIR TRAFFIC CONTROL FUNCTION OF THE AIRPORT AND THEIR FAILURE DUE TO CONSTRUCTION ACTIVITY MAY CAUSE DISRUPTION TO AIRPORT OPERATIONS. NO REQUIREMENTS OF THIS CONTRACT WITH RESPECT TO PRECAUTIONS REQUIRED OR OMITTED TO BE REQUIRED SHALL BE DEEMED TO LIMIT OR IMPAIR ANY OBLIGATIONS ASSUMED BY THE CONTRACTOR UNDER OR IN CONNECTION WITH THIS CONTRACT, AND THE CONTRACTOR SHALL AT ALL TIMES MAINTAIN ADEQUATE PROTECTION TO SAFEGUARD AIRCRAFT, THE PUBLIC AND ALL PERSONS ENGAGED IN THE WORK AND SHALL TAKE SUCH PRECAUTIONS AS WILL ACCOMPLISH SUCH END, WITHOUT INTERFERENCE TO AIRCRAFT, THE PUBLIC, OR MAINTENANCE AND OPERATIONS OF THE AIRPORT.

CONSTRUCTION ACTIVITY

1. OPEN TRENCHES, EXCAVATIONS, AND STOCKPILED MATERIAL AT THE CONSTRUCTION SITE SHALL BE PROMINENTLY MARKED WITH BARRICADES AND LIGHTED WITH RED LIGHT UNITS (ACCEPTABLE TO AIRPORT OPERATIONS AND THE FAA) DURING HOURS OF RESTRICTED VISIBILITY AND/OR DARKNESS. UNDER NO CIRCUMSTANCES ARE FLARE POTS TO BE USED.

2. THE CONTRACTOR WILL BE LIABLE TO AN ASSESSMENT BY THE AIRPORT AUTHORITY PER EACH AND EVERY OCCURRENCE WHERE AN EMPLOYEE OR PIECE OF EQUIPMENT IS WITHIN THE RESTRICTED ZONES OF TAXIWAYS OR RUNWAYS WITHOUT WRITTEN PERMISSION OF THE RE. THESE ASSESSMENTS WILL BE DEDUCTED FROM MONIES OWED THE CONTRACTOR UNDER THIS CONTRACT. IN ADDITION, ANY FINES LEVIED BY THE FAA OR THE AIRPORT AUTHORITY BECAUSE OF IMPROPER CONDUCT BY THE CONTRACTOR WILL BE FORWARDED FOR PAYMENT BY THE CONTRACTOR.

3, ALL CRANES MUST BE EQUIPPED WITH OBSTRUCTION LIGHTS AT NIGHT AND A FLAG DURING DAY TIME. HOWEVER PRIOR TO CONSTRUCTION, THE ENGINEER SHALL FILE FOR FAA FORM 7460-1 FOR CRANE HEIGHT AND THE CONTRACTOR SHALL REQUEST FROM OPERATIONS A DAILY NOTICE TO AIRMEN (NOTAM).

4. NO EXCAVATION SHALL REMAIN OPEN AFTER ANY WORK SHIFT. IN ADDITION, THE AREA SHALL BE RETURNED TO WITHIN 3 INCHES OR A MAXIMUM 5% SLOPE OF EXISTING OR FINISHED GRADE, AS APPROPRIATE AND IN ACCORDANCE WITH AC 150/5300-13, AT THE END OF A WORK SHIFT, SO THAT THERE ARE NO SUDDEN GRADE DIFFERENTIALS AND AS APPROVED BY THE RE WITHIN THE PROJECT AREA. REGARDLESS, THE CONTRACTOR SHALL RESTORE THE SITE AT THE END OF EACH WORK SHIFT AS DIRECTED BY THE RE.

5. THE CONTRACTOR MUST MAINTAIN DRAINAGE TO PREVENT PONDING OR FLOODING DURING THE PERIOD OF CONSTRUCTION.

STAGING AREA

1. THE CONTRACTOR SHALL STORE ALL EQUIPMENT, VEHICLES, AND MATERIALS ONLY IN THOSE STAGING AREAS SHOWN ON THE DRAWINGS OR AS DESIGNATED BY THE RE.

STAGING AREA COORDINATES


1. 29° 57' 34.19" N
   95° 20' 8.77" W
   ELEV = 527'
2. 29° 57' 34.39" N
   95° 20' 8.3" W
   ELEV = 527'
3. 29° 57' 33.96" N
   95° 20' 8.1" W
   ELEV = 527'
4. 29° 57' 33.79" N
   95° 20' 8.58" W
   ELEV = 527'

UTILITIES

1. ALL EXISTING UTILITIES SERVING THE AIRPORT MUST REMAIN IN CONTINUOUS OPERATION DURING THE PROSECUTION OF THE WORK. THESE UTILITIES INCLUDE, BUT ARE NOT LIMITED TO CITY, FAA, TELCO, GAS, POWER, CONTROL AND COMMUNICATIONS CABLES, WATER AND FUEL LINES AND SEWER AND DRAINAGE LINES. THE CONTRACTOR MUST CONTACT THE OWNERS OF ALL UTILITIES PRIOR TO THE START OF THE WORK SO THAT THE OWNERS MAY LOCATE AND STAKE THEIR UTILITIES. THE CONTRACTOR MUST NOTIFY THE RE IN WRITING, 48 HOURS PRIOR TO NEEDING THE UTILITY OWNER TO LOCATE THE UTILITY.

2. ANY CABLE OR OTHER EXISTING UTILITY LINE THAT IS DAMAGED DURING THE PERFORMANCE OF THIS CONTRACT WILL BE REPAIRED IMMEDIATELY BY THE CONTRACTOR, UNDER THE OWNER'S DIRECTION, AND AT THE CONTRACTOR'S EXPENSE. DURING THE PERIOD OF TIME THAT THE CABLES OR UTILITIES ARE OUT OF SERVICE DUE TO THE CONTRACTOR'S OPERATIONS, ALL CONTRACT WORK MUST BE SUSPENDED UNLESS OTHERWISE DIRECTED BY THE CONTRACTING OFFICER IN WRITING. THE CONTRACTOR WILL HALT ALL OPERATIONS UNTIL SERVICE IS RESTORED. THE CONTRACTOR WILL NOT BE ALLOWED TO MAKE CLAIMS FOR EXTRA COSTS OR TIME EXTENSIONS DUE TO SUCH STOPPAGE OF WORK.

3. EXISTING CONDITIONS TAKEN FROM THE BEST AVAILABLE SURVEY. INFORMATION SHOWN CONCERNING FEATURES AND UTILITIES IS NOT GUARANTEED TO BE ALL INCLUSIVE OR CORRECT. THE CONTRACTOR WILL VERIFY THE FEATURES PRIOR TO CONSTRUCTION. EXISTING UTILITIES MUST BE MAINTAINED IN SERVICE AT ALL TIMES. THE LOCATION, MATERIAL, AND DIMENSIONS OF EXISTING FACILITIES AND OBSTRUCTIONS ARE BASED UPON AVAILABLE RECORDS AND ARE SHOWN ON THE PLANS STRICTLY AS AN AID TO THE CONTRACTOR, BUT MUST NOT BE CONSTRUED AS BEING ABSOLUTELY ACCURATE, CORRECT, OR COMPLETE. ALL STRUCTURES ABOVE OR BELOW GROUND THAT ARE ENCOUNTERED DURING CONSTRUCTION MUST BE PROPERLY SUPPORTED AND PROTECTED. THE CONTRACTOR WILL MAKE ALL ARRANGEMENTS WITH THE CONTRACTING OFFICER FOR THE

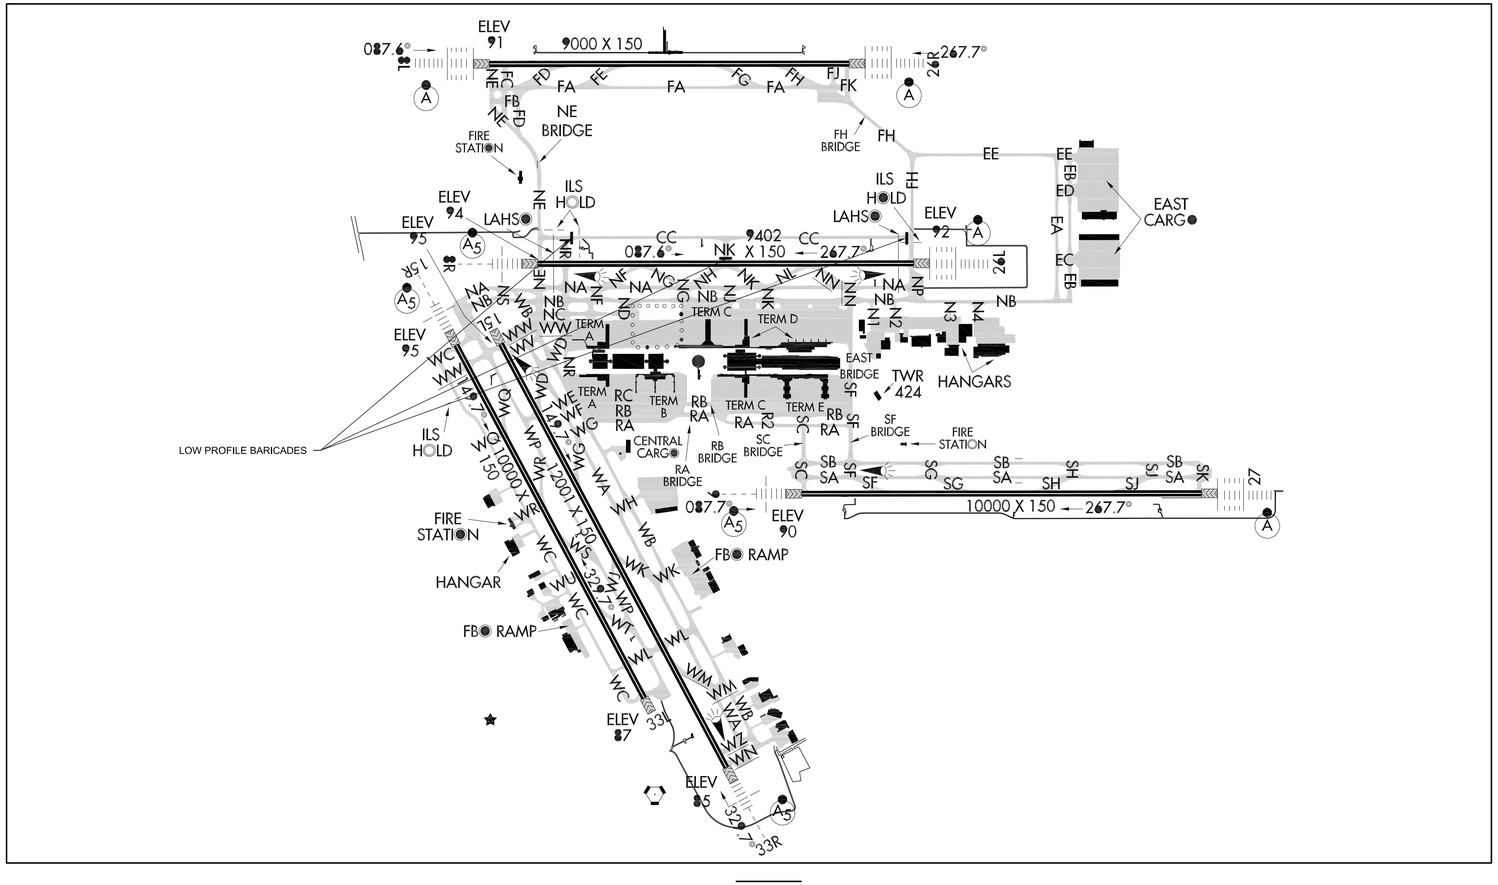

4. RELOCATION OF SUCH STRUCTURES. IF DAMAGED DURING CONSTRUCTION, THE CONTRACTOR WILL MAKE REPAIRS OR PAY FOR REPAIRS TO THE STRUCTURE TO THE SATISFACTION OF THE COR. NO EXTRA PAYMENT WILL BE MADE FOR ANY SUCH INTERFERENCE OR OBSTRUCTION.

5. THE CONTRACTOR MUST LAY OUT THE LOCATION OF ALL NEW ITEMS FOR REVIEW BY THE RE. NO ITEM WILL BE CONSTRUCTED UNTIL THE LOCATION IS APPROVED BY THE RE.

6. THE CONTRACTOR WILL NOT START ANY WORK WHICH MAY AFFECT EXISTING CITY, FAA, AT&T, CECO, GAS, OR OTHER PRIVATE UTILITY CABLES, PIPELINES, OR SEWERS UNTIL THE RE HAS REVIEWED THE PROCEDURES FOR PROTECTION OF THE UTILITY.

7. ALL AIRFIELD LIGHTING DAMAGED BY CONSTRUCTION OPERATIONS WILL BE REPAIRED OR REPLACED BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF AIRPORT OPERATIONS.


8. THE CONTRACTOR MUST MARK EXPOSED UTILITY LINES WITH AN ADEQUATE AMOUNT OF FLUORESCENT PAINT. THE RE RESERVES THE RIGHT TO REQUEST THE PLACEMENT OF ADDITIONAL PAINT TO CLEARLY IDENTIFY THE UTILITY FOR WORKERS. INSTALL PROTECTIVE ORANGE SNOW FENCE TO FURTHER DEMARCATE PROTECTED UTILITIES.

9. THE CONTRACTOR MUST REQUEST THAT FAA UTILITY LINES BE LOCATED AT LEAST 48 HOURS PRIOR TO DIGGING. WHEN DIGGING WITHIN 5' OF UTILITIY MARKINGS, THE CONTRACTOR MUST EXCAVATE BY HAND-DIGGING.


10. IF NIGHT WORK IS REQUIRED, THE CONTRACTOR MUST PROVIDE AN ADEQUATE NUMBER OF LIGHT PLANTS TO PROPERLY ILLUMINATE WORK AREAS DURING NIGHT WORK OR DURING LOW-LIGHT HOURS. THE CONTRACTOR MUST TAKE EXTRA PRECAUTIONS TO ENSURE THAT MORE THAN SUFFICIENT LIGHT IS AVAILABLE WHEN EXCAVATING NEAR EXISTING UTILITIES. THE RE WILL HAVE THE FINAL DETERMINATION ON WHETHER OR NOT ARTIFICIAL LIGHTING IS NEEDED, AND IF THE ARTIFICIAL LIGHT PROVIDED IS SUFFICIENT.

11. A TOOLBOX SAFETY MEETING SHALL BE HELD EACH DAY AT START OF WORK. EVERY TOOLBOX SAFETY MEETING MUST INCLUDE A DISCUSSION OF WHERE THE EXISTING UTILITIES WITHIN THE CURRENT WORK ZONE ARE LOCATED, THE TYPE, SIZE AND NUMBER OF UTILITIES PRESENT, AND THE CONTRACTOR'S PLAN TO PROTECT AND AVOID THESE UTILITIES.

12. ALL ITEMS PROPOSED FOR DEMOLITION MUST BE MARKED BY THE CONTRACTOR FOR REVIEW BY THE RE. NO ITEM WILL BE DEMOLISHED UNTIL APPROVED BY THE RE.

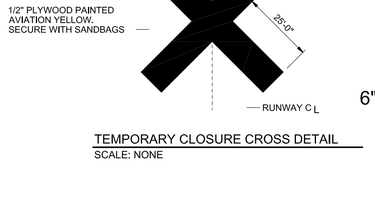

TEMPORARY CLOSURE CROSS DETAIL
SCALE: NONE

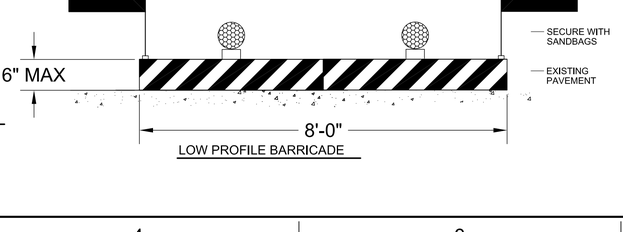

LOW PROFILE BARRICADE

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

FA-19200 PC BASED RVR SYSTEM
CONSTRUCTION SAFETY AND PHASING PLAN 2

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY	APPROVED BY
	BRIAN JOHNSTON DO NOT SIGN	RICHARD BELLOWS DO NOT SIGN
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH

DESIGNED	BJ	ISSUED BY	DATE	03/11/2025	JCN 1404792
DRAWN	BJ	ENGINEERING SERVICES NAVAIDS	DRAWING NO	IAH-1404792-G005	REV
CHECKED	RB				

ISSUED FOR:


$FILESS
$DATES
$TIMES
$NAMES


EDMS lah~1404792~g005.dwg

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

NOTES:

1. CONTRACTOR SHALL SEED TO BRING THE SITE BACK UP TO ORIGINAL CONDITION.
2. COORDINATE ALL ACTIVITIES WITH AIRPORT OPERATIONS.
3. PLACE BARRICADES AS SHOWN IN G004 BEFORE BEGINNING CONSTRUCTION ACTIVITIES.

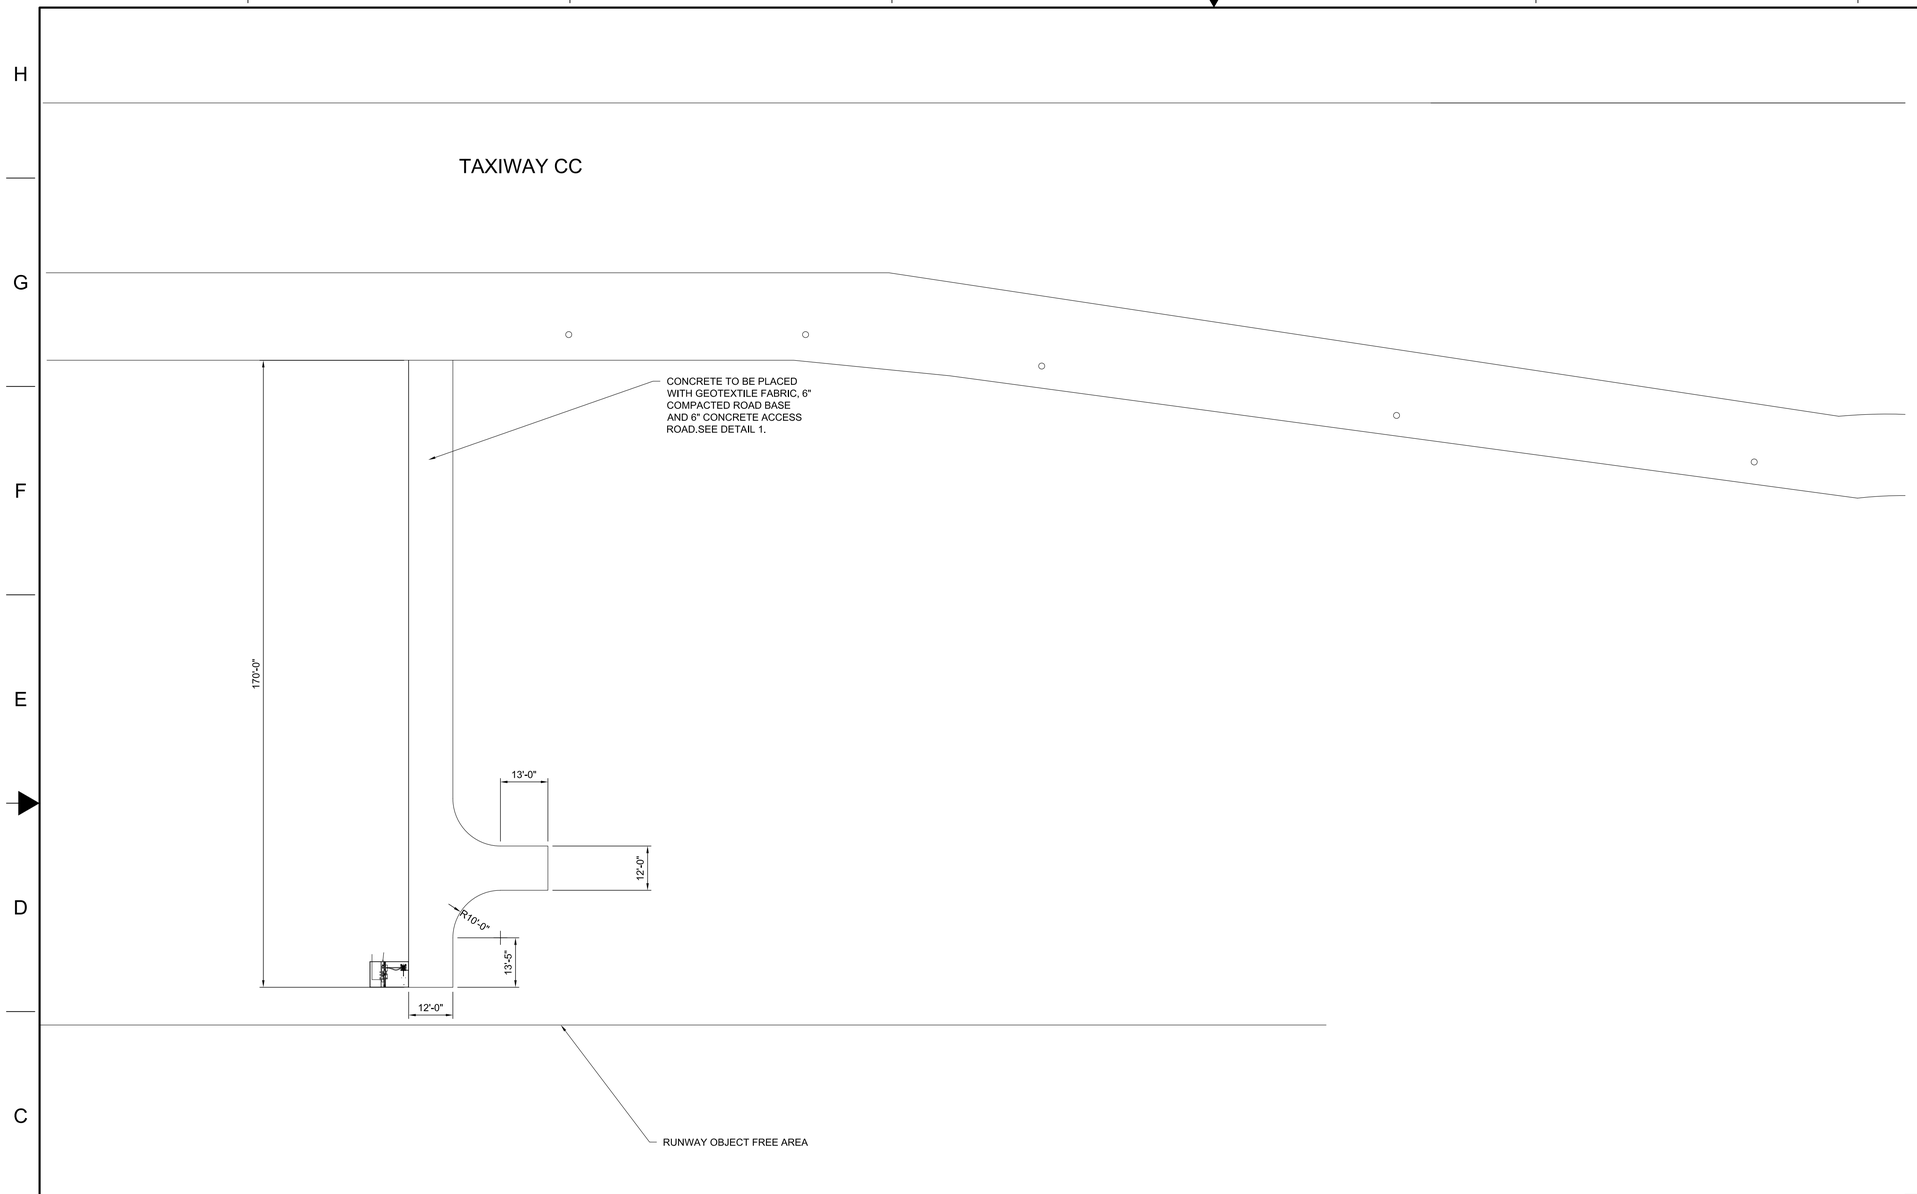

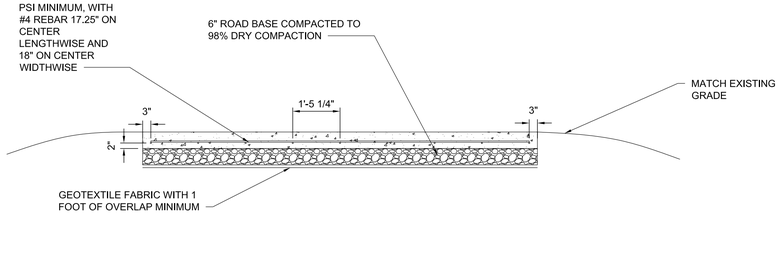

1 / C020 CONCRETE ROAD CROSS SECTION
NTS

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR
RWY 8R MIDFIELD RVR ACCESS ROAD

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY: BRIAN JOHNSON (DO NOT SIGN)	APPROVED BY: RICHARD BELLOWS (DO NOT SIGN)	
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH	
	DESIGNED BJ	ISSUED BY: ENGINEERING SERVICES NAVAIDS	DATE 03/11/2025 JCN 1404792
	DRAWN BJ		DRAWING NO IAH-1404792-C020 REV
	CHECKED RB		

ISSUED FOR: CONSTRUCTION

$NAMES $TIMES $DATES $FILESS

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

EDMS: IAH-1404792-C020.dwg

NOTES:


1. CONTRACTOR SHALL SEED TO BRING THE SITE BACK UP TO ORIGINAL CONDITION.
2. COORDINATE ALL ACTIVITIES WITH AIRPORT OPERATIONS.

APROXIMATELY 900 FEET OF GRAVEL ACCESS ROAD TO BE ADDED TO EXISTING TREAD MARKS ON GRASS USING DETAIL 1 ON THIS PAGE.

RUNWAY SAFETY AREA

RUNWAY OBJECT FREE AREA

900' IN LENGTH FOLLOWING THE ROAD

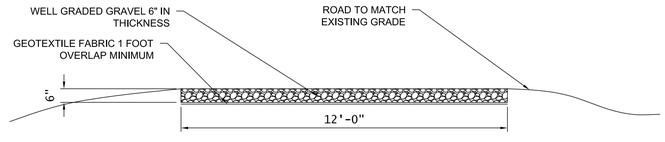

1 / C022 GRAVEL ROAD CROSS SECTION
NTS

0' 1,000' 2,000'
SCALE: 1" = 1,000'

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

RVR

RWY 15L RO RVR ACCESS ROAD DETAILS

HOUSTON — GEORGE BUSH INTERCONTINENTAL/HOUSTON AIRPORT — TX

REVIEWED BY	SUBMITTED BY	APPROVED BY
	BRIAN JOHNSTON DO NOT SIGN	RICHARD BELLOWS DO NOT SIGN
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH

DESIGNED	BJ	ISSUED BY	DATE	JCN
DRAWN	BJ	ENGINEERING SERVICES NAVAIDS	03/11/2025	1404792
CHECKED	RB		DRAWING NO	REV
			IAH-1404792-C022	

ISSUED FOR:

$NAME$ $TIME$ $FILESS $DATE$

EDM# lah-1404792-c022.dwg

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM