



DRAFT

STATEMENT OF OBJECTIVES

TELECOMM CONDUIT INSTALL

CUSTOMER NAME	129TH RESCUE WING
PROJECT NAME	TELECOMM CONDUIT INSTALL
CIPS REQ#	QMRA-2019-00001
LOCATION	680 MACON RD., MOFFETT ANGB, CA 94035
AUTHOR(S)	THOMAS A. COURCHAINE, MSgt, CA ANG

Telecomm Conduit Install
for the 129th Communications Squadron

Background

The 129th Communications Squadron (129 CS) will be receiving new fiber optic cable infrastructure in support of building 653 that will terminate inside room 21A. However, it has been previously confirmed that additional conduit is necessary to pull the cable into the building and ultimately inside Rm 21A. All work accomplished in accordance with this Statement of Objectives (SOO) shall be performed on behalf of the 129 CS, located at Moffett Air National Guard Base, Santa Clara County CA 94035.

Overall Objective(s)

The objective of this effort is to engineer, furnish & install (EF&I) a new inside plant (ISP) telecomm conduit that the 129 CS will use to support the future install of a new outside plant (OSP) fiber optic cable (FOC). The primary necessity of this effort is to ensure that an ISP telecomm conduit pathway is already in place and available for use prior to the onset of the forthcoming OSP FOC install inside Rm 21A.

Technical Objectives

The following information is provided for additional clarification of the aforementioned objective(s).

- EF&I one (1) new ISP telecomm conduit in Bldg 653 that extends between rooms 16A & 21A.

  NOTE: All work to accomplish these objectives will occur at the following approximate location:

  Lat: 37°24’47.71”N, Long: -122°02’19.39”W.

Engineering Objectives

- EF&I all equipment and material necessary to provide the 129 CS with a new telecomm conduit that includes/retains the same or better specifications and capabilities as those listed below:
  - Material/composite: steel
  - Length: Approx. 50ft.
  - Diameter/width: 3in.
- The conduit shall be straight without any bends, be one continuous length from end to end, and shall be installed above the existing hard-cap ceiling.

Government Furnished Equipment

- There is/will not be any relevant Government Furnished Equipment (GFE) for this project.

Logistics Objectives

- The Contractor shall be responsible for the on-site coordination of the install with all applicable third parties and agencies (i.e. Base Civil Engineering & Wing Safety) prior to any work being performed.
- The Contractor shall coordinate with 129 CS to gain access to each respective area where work will be performed.
- The Contractor shall be responsible for the acquisition/rental and delivery of all tools & support equipment and tools necessary to perform the installation.
- The Contractor shall be responsible for shipment and delivery charges of all associated equipment. The

DRAFT

Contractor shall ensure delivery of all equipment and services performed in support of the project will occur at the following address:

129 CS/SCXP
Attn: MSgt Thomas Courchaine
680 Macon Road, Rm 66
Moffett ANGB, CA 94035

Security Requirements


The Contractor shall comply with the Computer Security Act of 1987 and all Department of DoD and USAF requirements for access to Sensitive but Unclassified Information in the event that such access is deemed necessary in order to satisfy the objectives outlined in this SOO. All Contractor personnel performing work under this SOO shall be United States citizens and have at least a national background check IAW Air Force Directive 31-101 before access to the work location can be granted and any work is started. The Contractor shall be responsible for coordinating with the 129 CS and all applicable third-party agencies and tenants on all security requirements necessary to gain access to the base and all areas impacted by the execution of this project. The Contractor shall provide the necessary security clearance information to the 129 CS no later than two weeks prior to installation commencement for contractor personnel being granted access to any work locations.

Attachments

The diagram(s)/visual aid(s) that follow are provided to assist the Contractor in defining the scope of the requirement.


DRAFT

Diagram 1

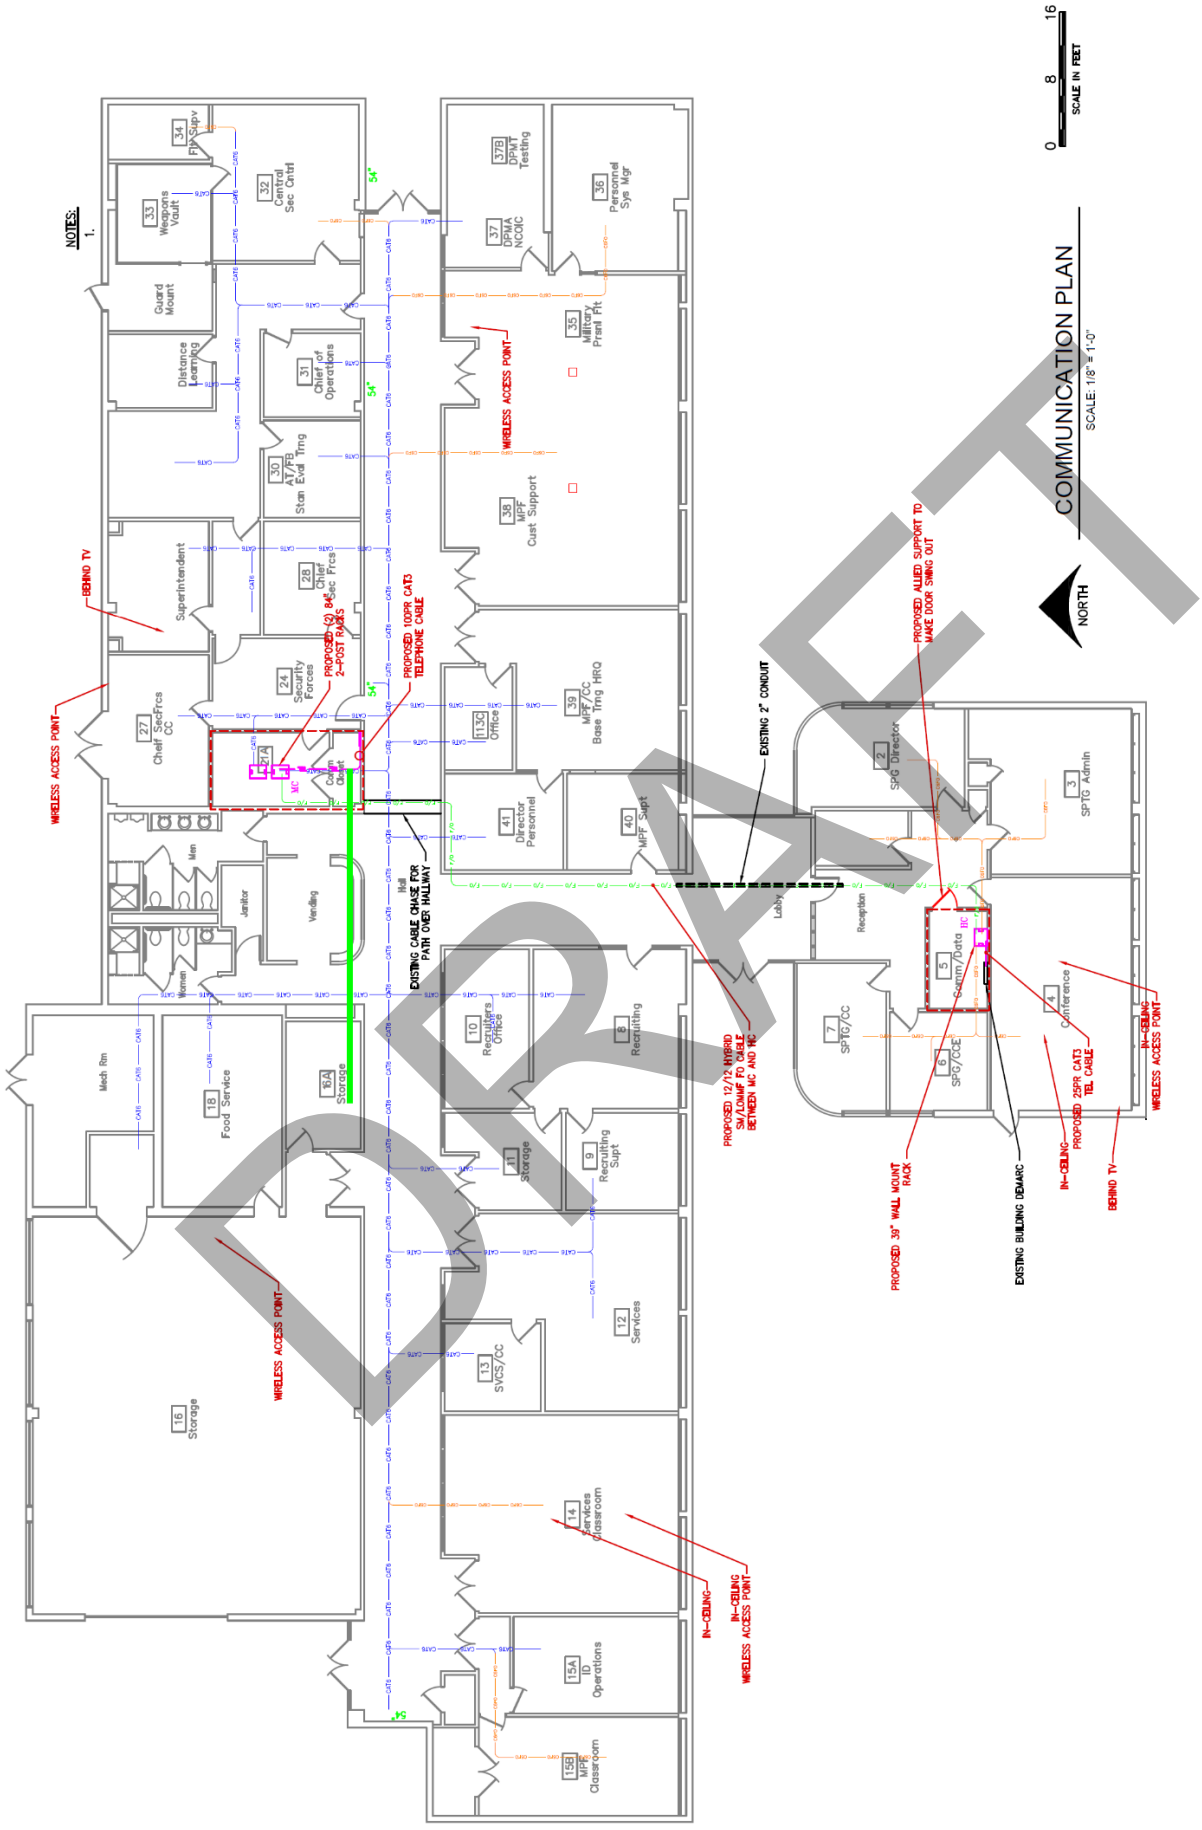


DRAFT

Visual Aid 1, Rm 21A

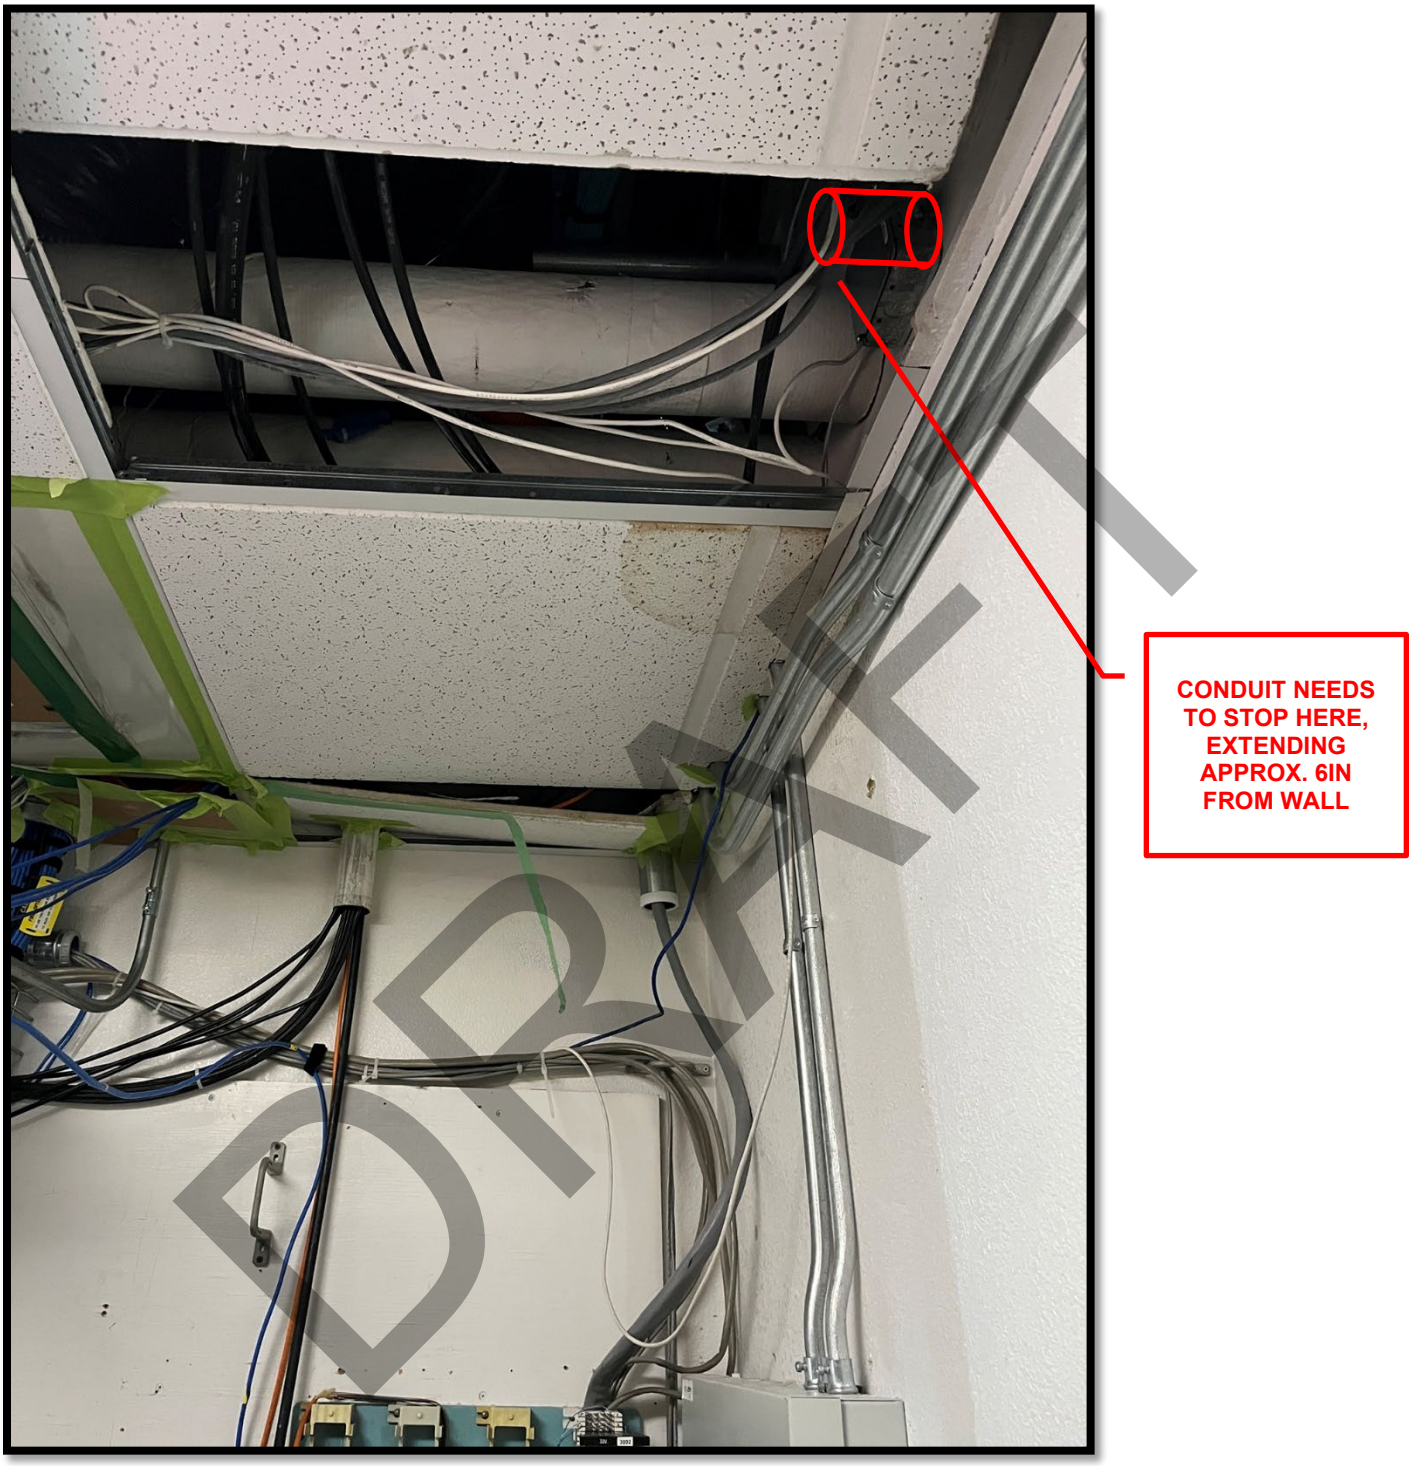


DRAFT

Visual Aid 2, Rm 21A

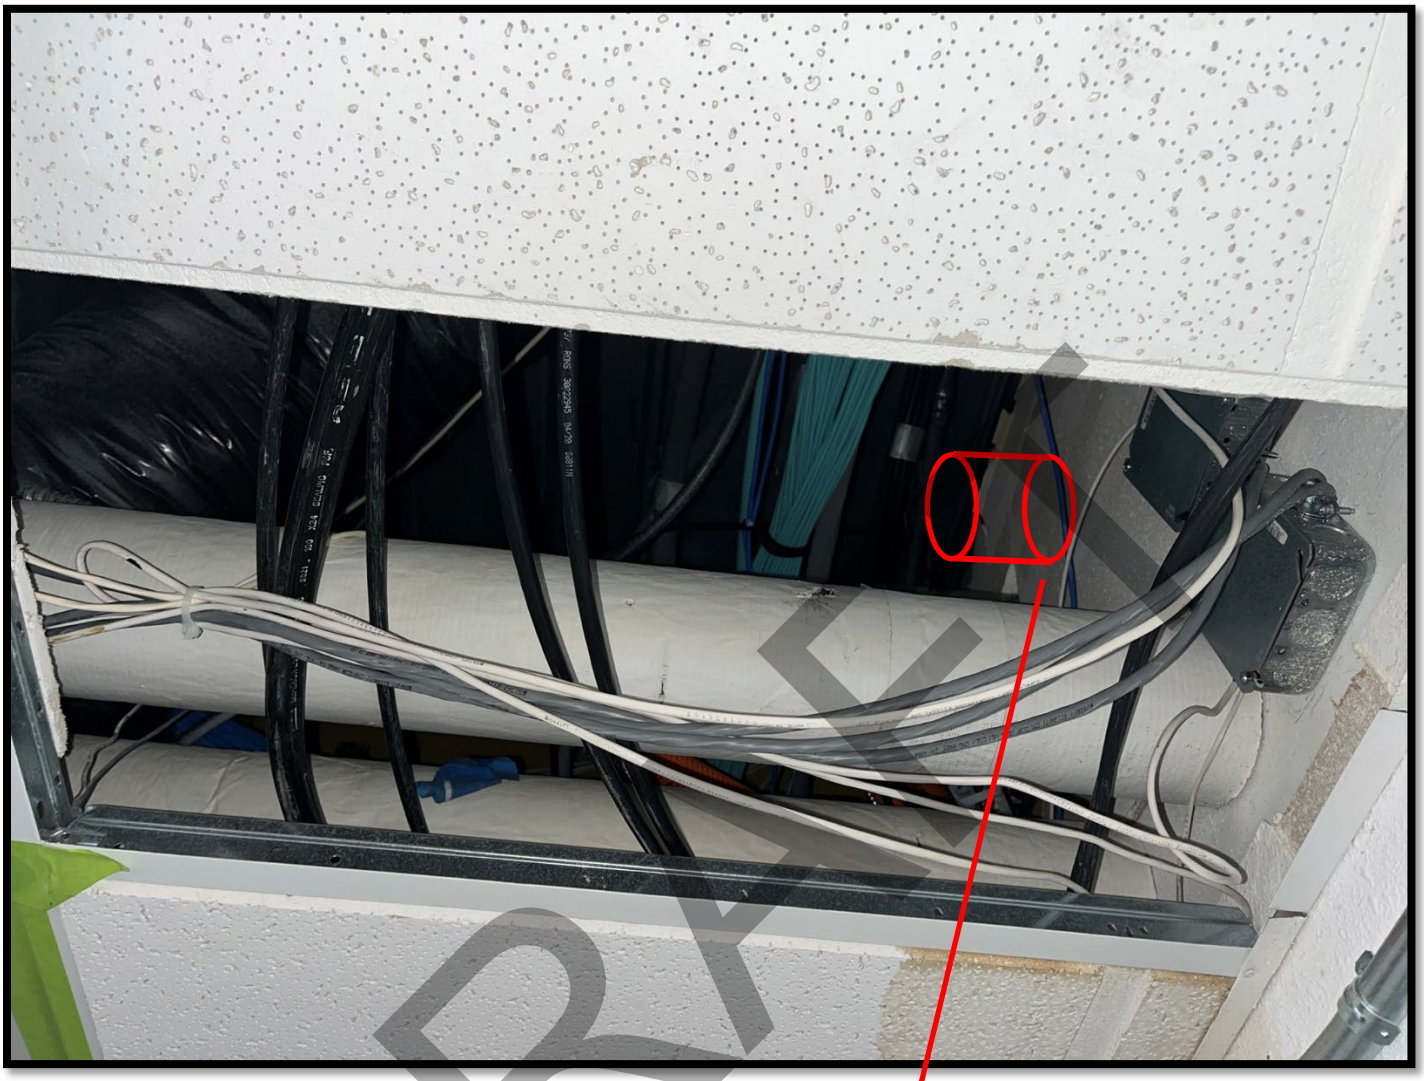


DRAFT

Visual Aid 3, Rm 16A

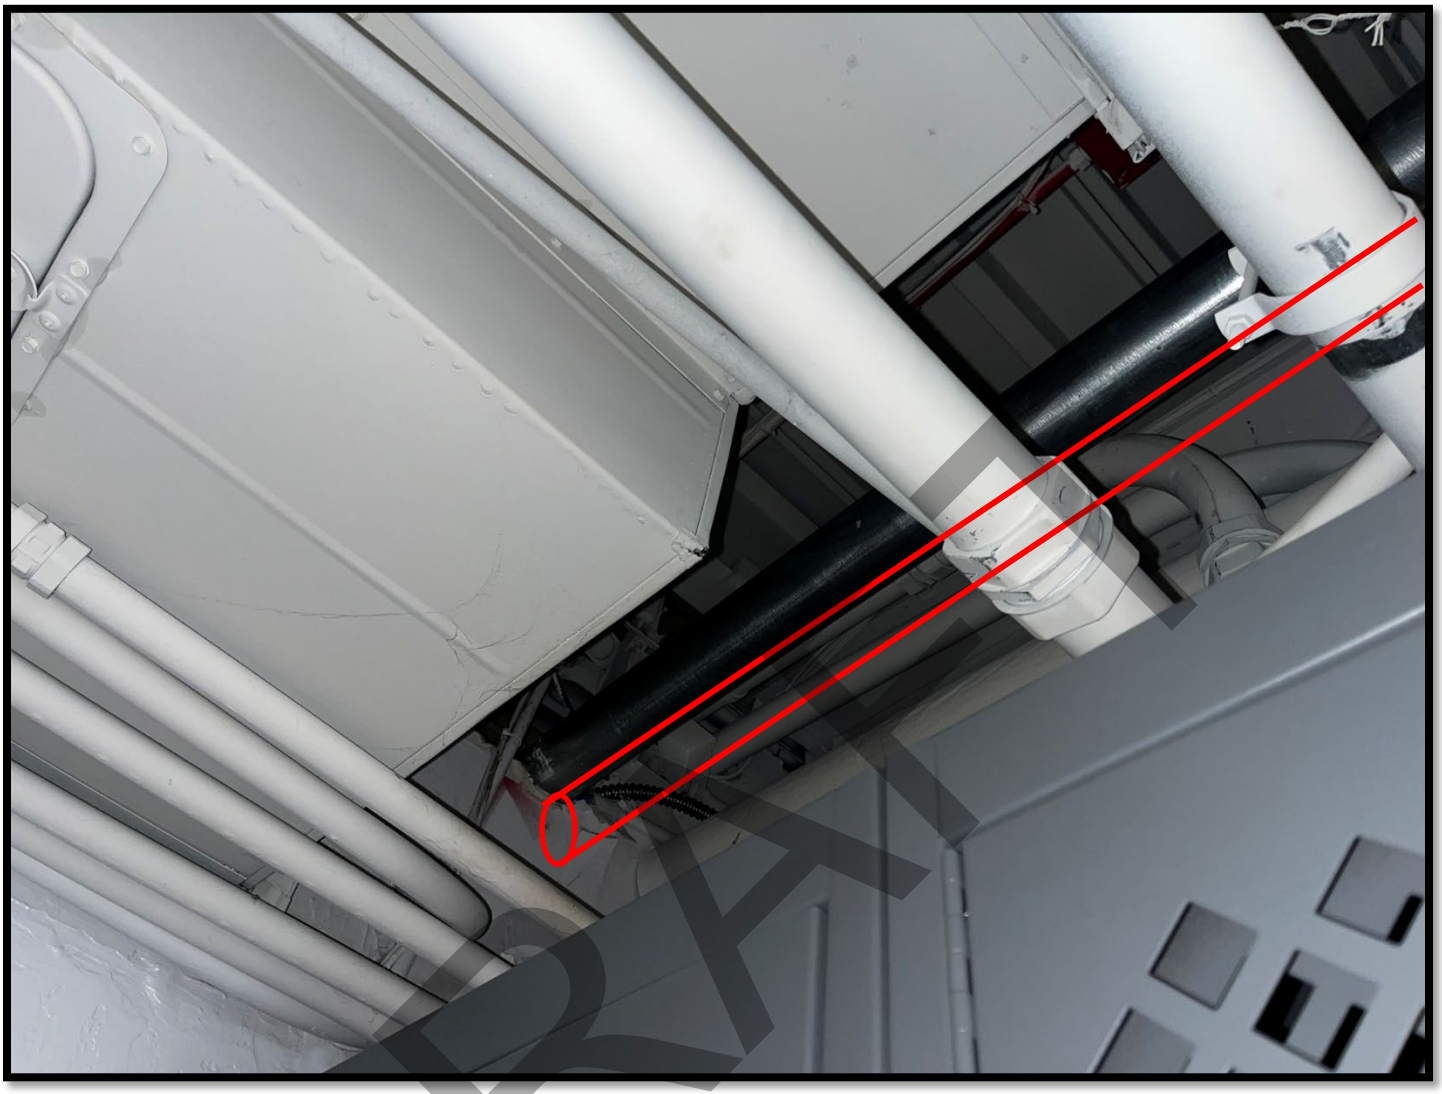

DRAFT

Visual Aid 4, Rm 16A

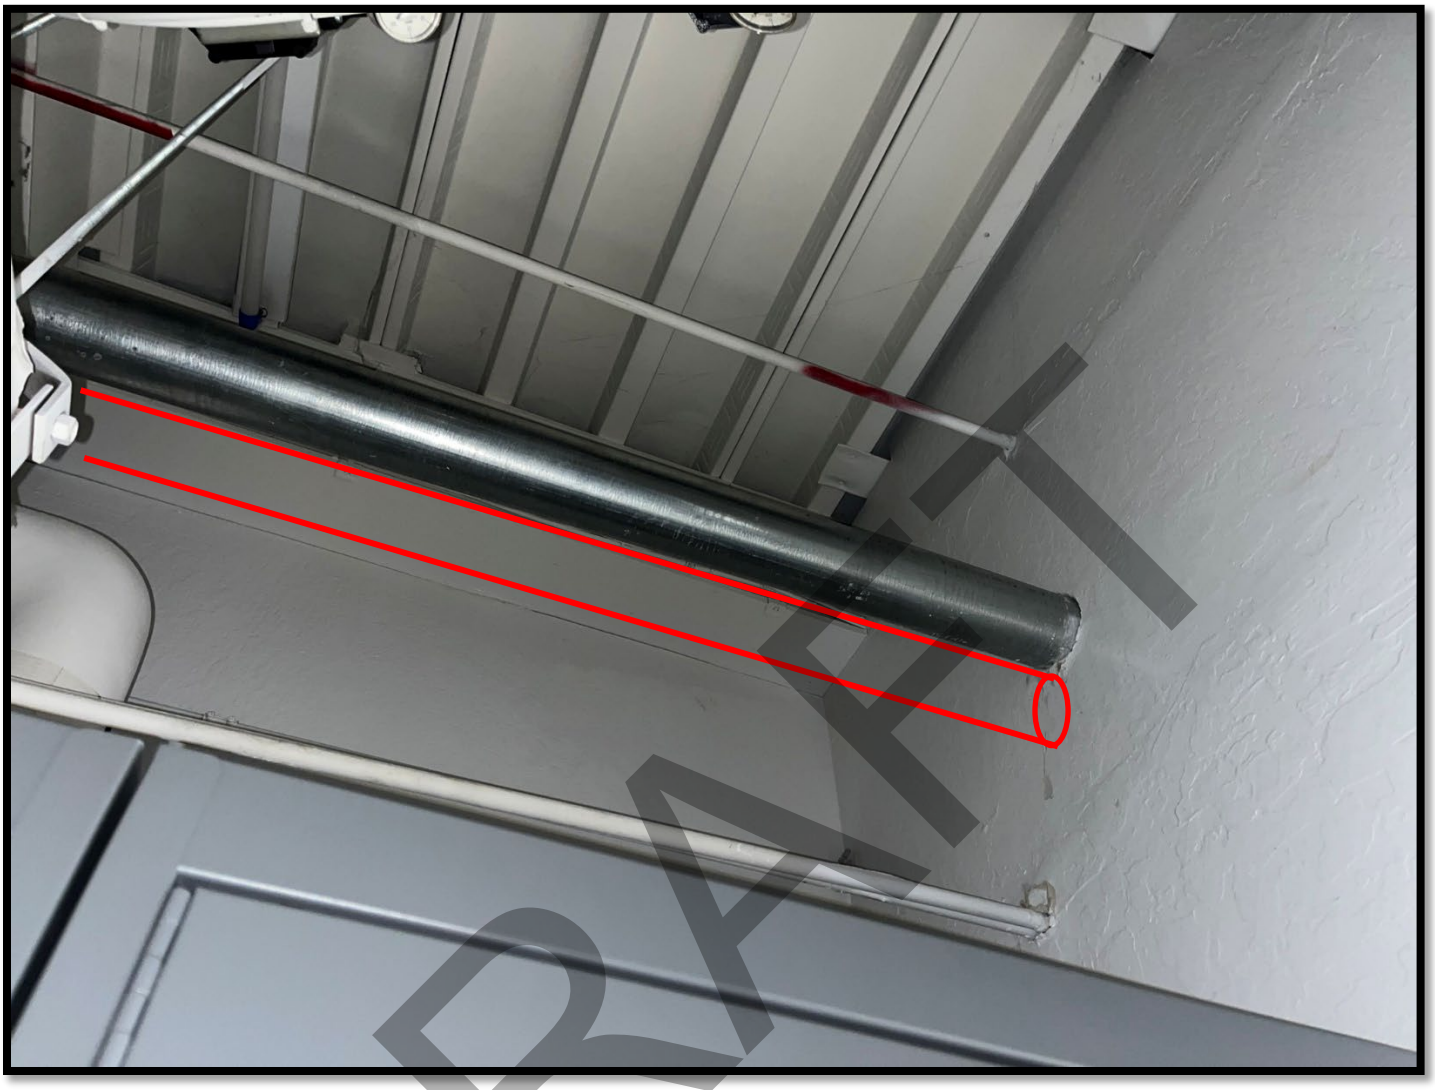


DRAFT

Visual Aid 5, Rm 16A



DRAFT

Visual Aid 6, Rm 16A

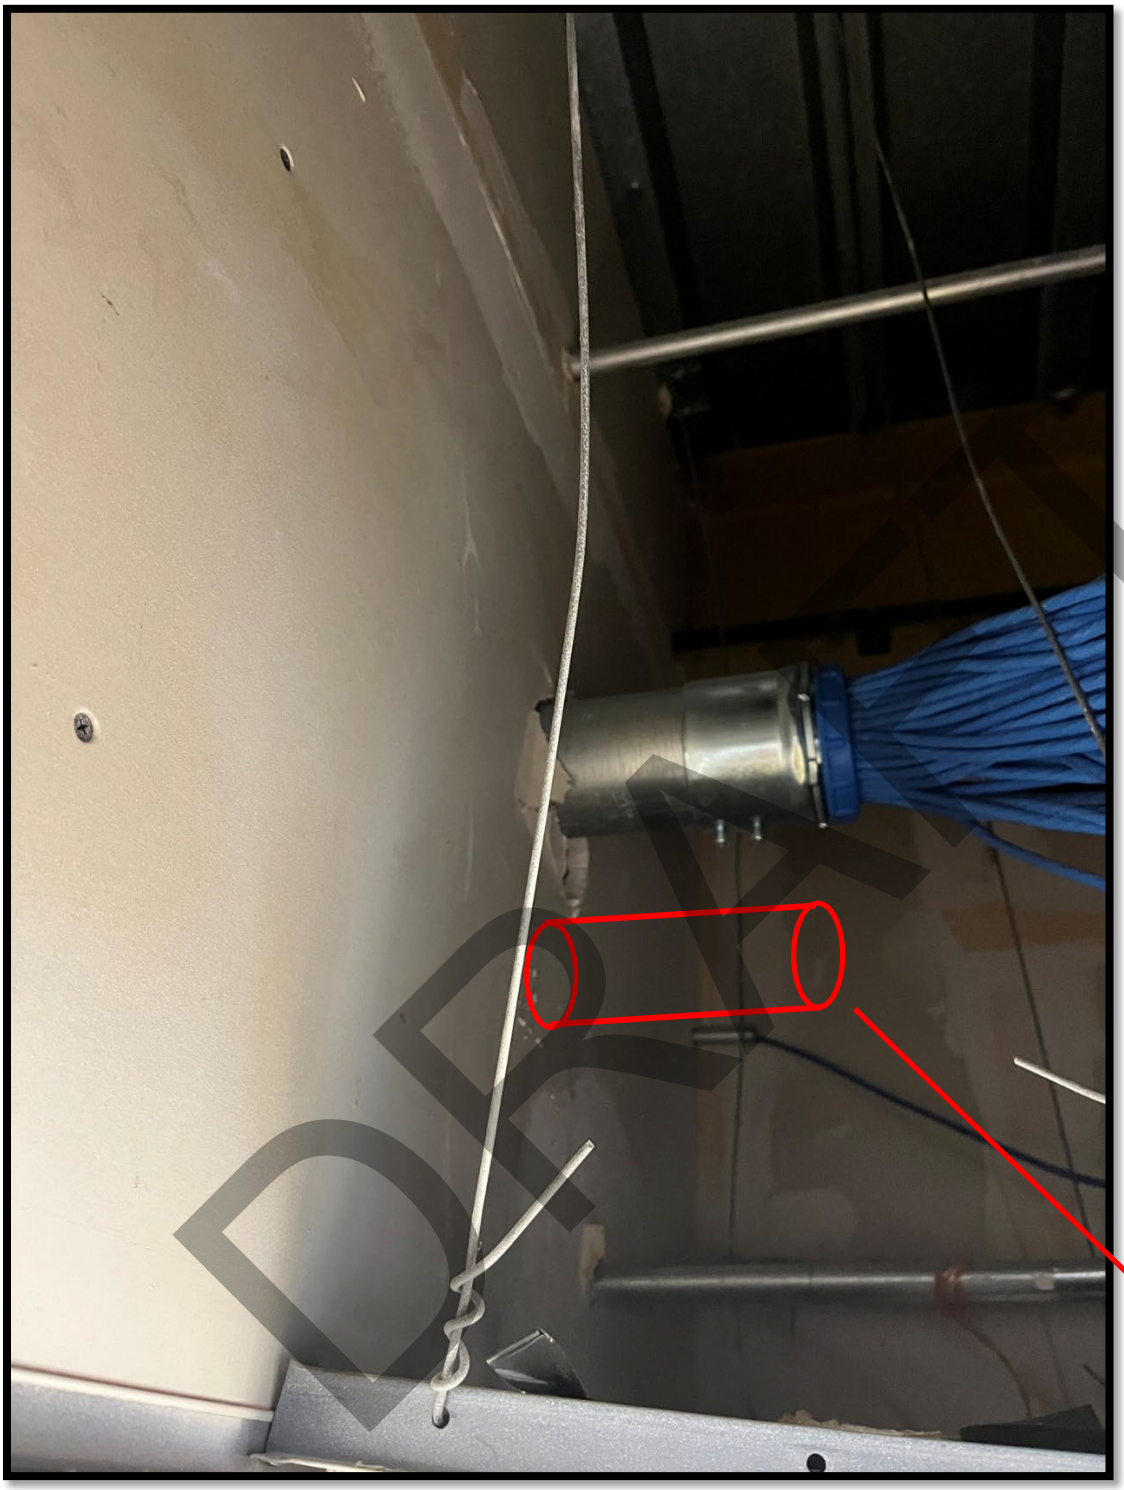

DRAFT