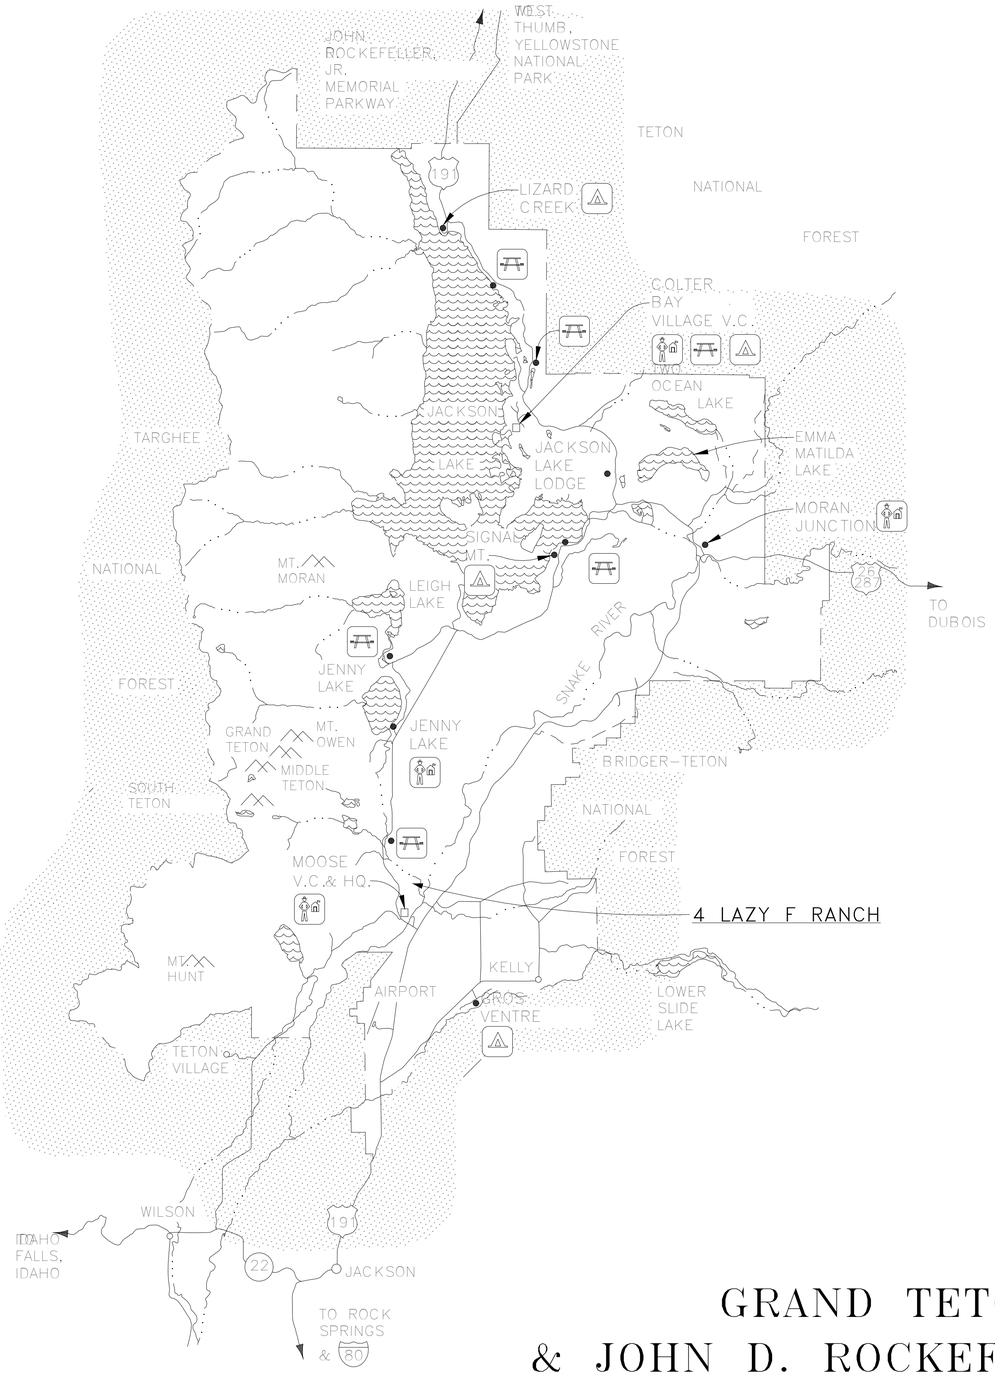

LEGEND

- PARK BOUNDARY
- STATE LINE
- COUNTY LINE
- PAVED ROAD
- TRAIL
- CREEK
- VISITOR CENTER
- RANGER STATION
- CAMPGROUND
- FIRE LOOKOUT
- INFORMATION CENTER

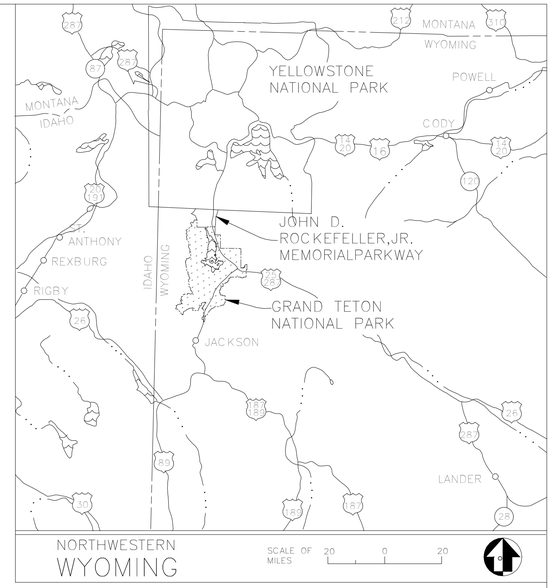

PROJECT DIRECTORY

CLIENT
NATIONAL PARK SERVICE
DENVER SERVICE CENTER
GRAND TETON NATIONAL PARK
CONTACT: JOEL HOLTROP (720) 545-6204
JOEL_HOLTROP@NPS.GOV

ARCHITECT AND HISTORIC PRESERVATION
HENNEBERY EDDY ARCHITECTS, INC
109 NORTH ROUSE AVE
BOZEMAN, MT 59715
P: (406)585-1112
CONTACT: WILL IVES
WIVES@HENNEBERYEDDY.COM

CIVIL ENGINEER
MORRISON-MAIERLE
2880 TECHNOLOGY BLVD W
BOZEMAN, MT 59715
CONTACT: CELINE SAUCIER
CSAUCIER@M-M.NET

LANDSCAPE ARCHITECT
DHM DESIGN
113 EAST OAK. ST., STE. 4B
BOZEMAN, MONTANA 59715
CONTACT: EILEEN KEMP
EKEMP@DHMDESIGN.COM

MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION ENGINEER
MORRISON-MAIERLE
2880 TECHNOLOGY BLVD W
BOZEMAN, MT 59715
CONTACT: JOE HUGHES, PE
JHUGHES@M-M.NET

STRUCTURAL ENGINEER
DCI ENGINEERS
1060 FOWLER AVENUE, SUITE 202
BOZEMAN, MT 59718
CONTACT: SAMANTHA FOX
SFOX@DCI-ENGINEERS.COM

HAZARDOUS MATERIALS
TETRA TECH
BILLINGS, MONTANA ECA OFFICE
7100 COMMERCIAL AVE., SUITE 4
BILLINGS, MT 59101
CONTACT: ROGER W. HERMAN
ROGER.HERMAN@TETRATECH.COM

COST ESTIMATOR
ARCHITECTURAL COST CONSULTANTS, LLC
8060 SOUTHWEST PFAFFLE ST. SUITE 110
PORTLAND, OREGON 97223
CONTACT: SETH PSZCZOLKOWSKI
SETHP@ARCHCOST.COM

GRAND TETON NATIONAL PARK & JOHN D. ROCKEFELLER MEMORIAL PARKWAY

SCALE OF MILES
4 0 4 8
4 0 4 8 12
SCALE OF KILOMETERS

BASIC DATA: 389/20,011A 9/77; 389/80,018; REVISED & REDRAWN 11/98.SGS. WFLHD BUILDINGS REVISED 5/21.

A/E FIRM - 140P2022D0023

PRIME/ARCH:	CIVIL:	STRUCTURAL:	COST ESTIMATOR:
HENNEBERY EDDY ARCHITECTS BOZEMAN, MT	MORRISON-MAIERLE BOZEMAN, MT	DCI ENGINEERS BOZEMAN, MT	ARCH COST CONSULTANTS PORTLAND, OR
LANDSCAPE ARCH:	MEP:	HAZARDOUS MATERIALS:	
DHM DESIGN BOZEMAN, MT	MORRISON-MAIERLE BOZEMAN, MT	TETRA TECH BILLINGS, MT	

Mark	Sheet	REVISION	Date	Initial

QUALITY DESIGN CERTIFICATION
- ☐ Prepared in Accordance with Design Development (Title I) _____ Drawing No.
  OR
- ☐ Variance from Design Development (Title I) Approved by Superintendent on _____ Date
  OR
- ☐ Construction Drawing Not Preceded by Design Development (Title I)

Project Manager _____ Date

FINAL CONSTRUCTION DOCUMENTS

UNITED STATES
DEPARTMENT OF THE INTERIOR

NATIONAL PARK SERVICE
DENVER SERVICE CENTER

TITLE OF PROJECT
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING
LOCATION WITHIN PARK
4 LAZY F RANCH
NAME OF PARK
GRAND TETON NATIONAL PARK
REGION: INTERMOUNTAIN
COUNTY: TETON
STATE: WYOMING

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 1 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RVH2MWNM9RYKQ3\66849093-78fe-47a3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7133866a545.rvt

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
000 OVERALL	
000 GENERAL	
000 G000	OVERALL – COVER
000 G001	OVERALL – DRAWING INDEX
000 G002	OVERALL – DRAWING INDEX
000 G003	OVERALL – DRAWING INDEX
000 G004	OVERALL – GENERAL NOTES
000 G005	OVERALL – ACCESSIBILITY DIAGRAMS
000 G006	OVERALL – ACCESSIBILITY DIAGRAMS
000 G007	OVERALL – GENERAL INFO AND CODE SUMMARY
000 G008	OVERALL – PROJECT OVERVIEW SITE PLAN
000 CIVIL	
000 C001	OVERALL – GENERAL NOTES
000 C002	OVERALL – EXISTING SITE OVERVIEW
000 C003	OVERALL – EXISTING SITE – 4 LAZY F RANCH
000 C004	OVERALL – EXISTING SITE – MOOSE SEWER SYSTEM
000 C100	OVERALL – SITE PLAN
000 C101	OVERALL – ENLARGED PARKING
000 C102	OVERALL – SITE DETAILS
000 C200	OVERALL – PROPOSED UTILITY PLAN
000 C201	OVERALL – WATER SYSTEM & SEWER SYSTEM
000 C202	OVERALL – POWER & FIBER
000 C203	OVERALL – WATER SYSTEM DETAILS
000 C204	OVERALL – SEWER SYSTEM DETAILS
000 C205	OVERALL – UTILITY DETAILS
000 C300	OVERALL – FORCE MAIN PLAN & PROFILE STA 0+00 – 14+00
000 C301	OVERALL – FORCE MAIN PLAN & PROFILE STA 14+00 – 27+00
000 C302	OVERALL – FORCE MAIN PLAN & PROFILE STA 27+00 – 41+50
000 C303	OVERALL – FORCE MAIN PLAN & PROFILE STA 41+50 – 55+00
000 C304	OVERALL – FORCE MAIN PLAN & PROFILE STA 55+00 – 61+00
000 C305	OVERALL – FORCE MAIN DETAILS
000 C306	OVERALL – GRAVITY SEWER MAIN PLAN & PROFILE
000 C307	OVERALL – RIVER CABIN SEWER PLAN & PROFILE
000 C308	OVERALL – NURSE'S AND GEORGE'S CABIN SEWER PLAN & PROFILE
000 C309	OVERALL – MAIN LODGE AND ICE HOUSE SEWER PLAN & PROFILE
000 C310	OVERALL – HARRY'S AND NEW CABIN SEWER PLAN & PROFILE
000 C311	OVERALL – END, MIDDLE AND OLIVIA'S CABIN SEWER PLAN & PROFILE
000 C400	OVERALL – WATER MAIN PLAN & PROFILE
000 C401	OVERALL – RIVER AND NURSE'S CABIN WATER PLAN & PROFILE
000 C402	OVERALL – GEORGE'S, MAIN LODGE AND ICE CABIN WATER PLAN & PROFILE
000 C403	OVERALL – HARRY'S AND NEW CABIN WATER PLAN & PROFILE
000 C404	OVERALL – END, MIDDLE AND OLIVIA'S CABIN WATER PLAN & PROFILE
000 LANDSCAPE	
000 L001	OVERALL – GENERAL LANDSCAPE NOTES & ABBREVIATIONS
000 L002	OVERALL – STAGING & ACCESS PLAN
000 L003	OVERALL – SITE ACCESSIBILITY PLAN
000 L100	OVERALL – SITE DEMO PLAN
000 L101	OVERALL – PARKING LOT DEMO PLAN
000 L200	OVERALL – SITE PLAN
000 L201	OVERALL – PARKING LOT SITE PLAN
000 L400	OVERALL – SITE DETAILS
000 L401	OVERALL – SITE DETAILS

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
000 L500	OVERALL – PHASE 1 SITE PLAN
000 L501	SITE PLAN – PHASE 1 00+00.00–13+00.00
000 L502	SITE PLAN – PHASE 1 13+00.00–28+00.00
000 L503	SITE PLAN – PHASE 1 28+00.00–42+00.00
000 L504	SITE PLAN – PHASE 1 42+00.00–60+00.00
000 ARCHITECTURAL	
000 A800	OVERALL – EXTERIOR WALL ASSEMBLIES
000 A801	OVERALL – ROOF ASSEMBLIES
000 A802	OVERALL – ROOF ASSEMBLIES
000 A803	OVERALL – EXTERIOR DETAILS
000 A804	OVERALL – EXTERIOR DETAILS
000 A805	OVERALL – EXTERIOR DETAILS
000 A900	OVERALL – FLOOR & INT. PARTITION ASSEMBLIES
000 A901	OVERALL – TYPICAL INTERIOR DETAILS
000 A902	OVERALL – TYPICAL INTERIOR DETAILS
000 A903	OVERALL – DOOR TYPES SCHEDULE
000 A904	OVERALL – SIGNAGE TYPES
000 STRUCTURAL	
000 S001	OVERALL – STRUCTURAL GENERAL NOTES
000 S400	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S401	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S402	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S403	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S404	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S405	OVERALL – STRUCTURAL FOUNDATION DETAILS
000 S500	OVERALL – STRUCTURAL FRAMING DETAILS
000 S501	OVERALL – STRUCTURAL FRAMING DETAILS
000 S502	OVERALL – STRUCTURAL FRAMING DETAILS
000 S503	OVERALL – STRUCTURAL FRAMING DETAILS
000 S510	OVERALL – STRUCTURAL STUD SHEARWALL DETAILS
000 S511	OVERALL – STRUCTURAL STUD SHEARWALL DETAILS
000 S520	OVERALL – STRUCTURAL STEEL DETAILS
000 MECHANICAL	
000 M001	OVERALL – MECHANICAL LEGEND & NOTES
000 M002	OVERALL – MECHANICAL DETAILS
000 ELECTRICAL	
000 E001	OVERALL – ELECTRICAL LEGENDS
000 E002	OVERALL – ELECTRICAL ONE–LINE DIAGRAMS
000 E003	OVERALL – ELECTRICAL DETAILS
000 E004	OVERALL – ELECTRICAL DETAILS
000 E100	OVERALL – ELECTRICAL SITE PLAN
000 PLUMBING	
000 P001	OVERALL – PLUMBING LEGEND & NOTES
000 P002	OVERALL – PLUMBING DETAILS
000 FIRE SUPPRESSION	
000 F001	OVERALL – GENERAL NOTES
000 F002	OVERALL – SITE PLAN
000 F003	OVERALL – DETAILS
000 F004	OVERALL – DETAILS
399 MAIN LODGE	
399 GENERAL	
399 G000	MAIN LODGE – COVER
399 G002	MAIN LODGE – CODE PLAN
399 G003	MAIN LODGE – ACCESSIBILITY PLAN
399 CIVIL	
399 C100	MAIN LODGE – SITE AND UTILITY PLAN
399 LANDSCAPE	
399 L100	MAIN LODGE – SITE DEMO PLAN
399 L200	MAIN LODGE – SITE PLAN
399 ARCHITECTURAL	
399 A100	MAIN LODGE – BASEMENT LEVEL DEMO PLAN
399 A101	MAIN LODGE – FIRST LEVEL DEMO PLAN
399 A102	MAIN LODGE – ROOF LEVEL DEMO PLAN

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
399 A103	MAIN LODGE – DEMO ELEVATIONS
399 A104	MAIN LODGE – DEMO ELEVATIONS
399 A105	MAIN LODGE – DEMO ELEVATIONS
399 A201	MAIN LODGE – BASEMENT LEVEL PLAN
399 A202	MAIN LODGE – FIRST LEVEL PLAN
399 A203	MAIN LODGE – ROOF PLAN
399 A301	MAIN LODGE – EXTERIOR ELEVATIONS
399 A302	MAIN LODGE – EXTERIOR ELEVATIONS
399 A303	MAIN LODGE – EXTERIOR ELEVATIONS
399 A401	MAIN LODGE – BUILDING SECTIONS
399 A402	MAIN LODGE – BUILDING SECTIONS
399 A501	MAIN LODGE – ENLARGED BATHROOM
399 A502	MAIN LODGE – ENLARGED BATHROOM
399 A504	MAIN LODGE – ENLARGED KITCHEN
399 A601	MAIN LODGE – REFLECTED CEILING PLAN
399 A701	MAIN LODGE – INTERIOR ELEVATIONS
399 A702	MAIN LODGE – INTERIOR ELEVATIONS
399 A703	MAIN LODGE – INTERIOR ELEVATIONS
399 A801	MAIN LODGE – EXTERIOR DETAILS
399 A802	MAIN LODGE – BULKHEAD DOOR & STAIR
399 A905	MAIN LODGE – SCHEDULES
399 A906	MAIN LODGE – INTERIOR DETAILS
399 A907	MAIN LODGE – INTERIOR DETAILS
399 A908	MAIN LODGE – INTERIOR DETAILS
399 A909	MAIN LODGE – SIGN PLAN
399 A920	MAIN LODGE – (E) CONDITION PHOTOS
399 A921	MAIN LODGE – (E) CONDITION PHOTOS
399 STRUCTURAL	
399 S201	MAIN LODGE – FOUNDATION PLAN
399 S202	MAIN LODGE – FLOOR FRAMING PLAN
399 S203	MAIN LODGE – ROOF FRAMING PLAN
399 S300	MAIN LODGE – ELEVATIONS
399 S301	MAIN LODGE – ELEVATIONS
399 MECHANICAL	
399 M001	MAIN LODGE – MECHANICAL SCHEDULES
399 M101	MAIN LODGE – MECHANICAL DEMO PLAN
399 M200	MAIN LODGE – UNDERFLOOR MECHANICAL PLAN
399 M201	MAIN LODGE – MECHANICAL PLAN
399 ELECTRICAL	
399 E001	MAIN LODGE – ELECTRICAL SCHEDULES
399 E100	MAIN LODGE – ELECTRICAL DEMO PLAN
399 E101	MAIN LODGE – BASEMENT ELECTRICAL PLAN
399 E201	MAIN LODGE – POWER AND SIGNAL PLAN
399 E301	MAIN LODGE – LIGHTING PLAN
399 PLUMBING	
399 P001	MAIN LODGE – PLUMBING SCHEDULES
399 P101	MAIN LODGE – MAIN LEVEL DEMO PLAN
399 P200	MAIN LODGE – UNDERFLOOR PLUMBING PLAN
399 P201	MAIN LODGE – PLUMBING PLAN
399 FIRE SUPPRESSION	
399 F200	MAIN LODGE – UNDERFLOOR PLAN
399 F201	MAIN LODGE – MAIN LEVEL PLAN
400 RIVER CABIN	
400 GENERAL	
400 G000	RIVER CABIN – COVER
400 CIVIL	
400 C100	RIVER CABIN – SITE AND UTILITY PLAN
400 LANDSCAPE	
400 L100	RIVER CABIN – SITE DEMO PLAN
400 L200	RIVER CABIN – SITE PLAN

INSTRUCTIONS FOR READING THIS DRAWING SET:

THE FOLLOWING DRAWING SET IS COMPRISED OF THIRTEEN (13) HISTORICALLY SIGNIFICANT BUILDINGS, EACH WITH THEIR OWN SCOPE OF WORK. THE DRAWING SET IS ORGANIZED IN (14) DIFFERENT SUBSETS:

- 000: OVERALL (APPLICABLE TO ALL STRUCTURES)
- 399: MAIN LODGE
- 400: RIVER CABIN
- 401–402: NURSE'S CABIN (CAPTURES SOW FOR 401 & 402)
- 403: 3–BAY GARAGE
- 404: GEORGE'S CABIN
- 405: MOUSE HOUSE
- 406: ICE HOUSE
- 407–409: END CABIN (CAPTURES SOW FOR 407, 408, & 409)
- 410: HARRY'S CABIN
- 416: WELL HOUSE

EACH SUBSET FOLLOWS THE FOLLOWING SHEET ORDER:

- G – GENERAL (APPLICABLE TO THE FULL SUBSET)
- C – CIVIL
- L – LANDSCAPE
- A – ARCHITECTURAL
- S – STRUCTURAL
- M – MECHANICAL
- E – ELECTRICAL
- P – PLUMBING
- F – FIRE SUPPRESSION

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
400 ARCHITECTURAL	
400 A101	RIVER CABIN – DEMO FLOOR PLANS
400 A102	RIVER CABIN – DEMO ELEVATIONS
400 A201	RIVER CABIN – FLOOR PLANS
400 A301	RIVER CABIN – EXTERIOR ELEVATIONS
400 A401	RIVER CABIN – BUILDING SECTIONS
400 A501	RIVER CABIN – ENLARGED BATHROOM
400 A601	RIVER CABIN – REFLECTED CEILING PLAN
400 A701	RIVER CABIN – INTERIOR ELEVATIONS
400 A801	RIVER CABIN – EXTERIOR DETAILS
400 A802	RIVER CABIN – EXTERIOR DETAILS
400 A905	RIVER CABIN – SCHEDULES
400 A920	RIVER CABIN – (E) CONDITION PHOTOS
400 STRUCTURAL	
400 S201	RIVER CABIN – FDN & FLOOR FRAMING PLAN
400 S202	RIVER CABIN – ROOF FRAMING PLAN
400 S300	RIVER CABIN – ELEVATIONS
400 MECHANICAL	
400 M001	RIVER CABIN – MECHANICAL SCHEDULES
400 M101	RIVER CABIN – MECHANICAL PLAN
400 ELECTRICAL	
400 E001	RIVER CABIN – ELECTRICAL SCHEDULES
400 E101	RIVER CABIN – POWER AND SIGNAL PLAN
400 E201	RIVER CABIN – LIGHTING PLAN
400 PLUMBING	
400 P001	RIVER CABIN – PLUMBING SCHEDULES
400 P101	RIVER CABIN – PLUMBING DEMO PLAN
400 P201	RIVER CABIN – PLUMBING PLAN
400 FIRE SUPPRESSION	
400 F201	RIVER CABIN – MAIN LEVEL PLAN

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KEYES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G001

TITLE OF SHEET
OVERALL – DRAWING INDEX

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 2 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
401–402 NURSES CABIN	
401 GENERAL	
401 G000	NURSE'S CABIN – COVER
401 G002	NURSE'S CABIN – ACCESSIBILITY PLAN
401 CIVIL	
401 C100	NURSE'S CABIN – SITE AND UTILITY PLAN
401 LANDSCAPE	
401 L100	NURSE'S CABIN – SITE DEMO PLAN
401 L200	NURSE'S CABIN – SITE PLAN
401 ARCHITECTURAL	
401 A101	NURSE'S CABIN – DEMO PLANS
401 A102	NURSE'S CABIN – DEMO ELEVATIONS
401 A201	NURSE'S CABIN – FLOOR PLANS
401 A301	NURSE'S CABIN – EXTERIOR ELEVATIONS
401 A401	NURSE'S CABIN – BUILDING SECTIONS
401 A501	NURSE'S CABIN – ENLARGED BATHROOM
401 A601	NURSE'S CABIN – REFLECTED CEILING PLAN
401 A701	NURSE'S CABIN – INTERIOR ELEVATIONS
401 A702	NURSE'S CABIN – INTERIOR ELEVATIONS
401 A801	NURSE'S CABIN – EXTERIOR DETAILS
401 A802	NURSE'S CABIN – EXTERIOR DETAILS
401 A905	NURSE'S CABIN – SCHEDULES
401 A906	NURSE'S CABIN – INTERIOR DETAILS
401 A920	NURSE'S CABIN – (E) CONDITION PHOTOS
401 STRUCTURAL	
401 S201	NURSE'S CABIN – FDN & FLOOR FRAMING PLAN
401 S202	NURSE'S CABIN – ROOF FRAMING PLAN
401 MECHANICAL	
401 M001	NURSE'S CABIN – MECHANICAL SCHEDULES
401 M101	NURSE'S CABIN – MECHANICAL PLAN
401 ELECTRICAL	
401 E001	NURSE'S CABIN – ELECTRICAL SCHEDULES
401 E100	NURSE'S CABIN – ELECTRICAL DEMO PLAN
401 E101	NURSE'S CABIN – ELECTRICAL RENOVATION PLAN
401 PLUMBING	
401 P001	NURSE'S CABIN – PLUMBING SCHEDULES
401 P101	NURSE'S CABIN – PLUMBING DEMO PLAN
401 P201	NURSE'S CABIN – PLUMBING PLAN
401 FIRE SUPPRESSION	
401 F101	NURSE'S CABIN – MAIN LEVEL PLAN
403 3–BAY GARAGE	
403 GENERAL	
403 G000	3–BAY GARAGE – COVER
403 CIVIL	
403 C100	3–BAY GARAGE – SITE AND UTILITY PLAN
403 LANDSCAPE	
403 L100	3–BAY GARAGE – SITE DEMO PLAN
403 L200	3–BAY GARAGE – SITE PLAN
403 ARCHITECTURAL	
403 A101	3–BAY GARAGE – DEMO PLANS
403 A102	3–BAY GARAGE – DEMO ELEVATIONS
403 A201	3–BAY GARAGE – FLOOR PLANS
403 A301	3–BAY GARAGE – EXTERIOR ELEVATIONS
403 A401	3–BAY GARAGE – BUILDING SECTION
403 A601	3–BAY GARAGE – REFLECTED CEILING PLAN
403 A701	3–BAY GARAGE – INTERIOR ELEVATIONS
403 A801	3–BAY GARAGE – EXTERIOR DETAILS
403 A905	3–BAY GARAGE – SCHEDULES
403 A920	3–BAY GARAGE – (E) CONDITION PHOTOS
403 STRUCTURAL	
403 S201	3–BAY GARAGE – FDN & ROOF FRAMING PLAN
403 S300	3–BAY GARAGE – ELEVATIONS
403 ELECTRICAL	
403 E101	3–BAY GARAGE – ELECTRICAL PLAN

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
404 GEORGE'S CABIN	
404 GENERAL	
404 G000	GEORGE'S CABIN – COVER
404 CIVIL	
404 C100	GEORGE'S CABIN – SITE AND UTILITY PLAN
404 LANDSCAPE	
404 L100	GEORGE'S CABIN & SOMKE HOUSE – SITE DEMO PLAN
404 L200	GEORGE'S CABIN & SOMKE HOUSE – SITE PLAN
404 ARCHITECTURAL	
404 A101	GEORGE'S CABIN – DEMO PLANS
404 A102	GEORGE'S CABIN – DEMO ELEVATIONS
404 A201	GEORGE'S CABIN – FLOOR PLANS
404 A301	GEORGE'S CABIN – EXTERIOR ELEVATIONS
404 A401	GEORGE'S CABIN – BUILDING SECTIONS
404 A501	GEORGE'S CABIN – ENLARGED BATHROOMS
404 A601	GEORGE'S CABIN – REFLECTED CEILING PLAN
404 A701	GEORGE'S CABIN – INTERIOR ELEVATIONS
404 A702	GEORGE'S CABIN – INTERIOR ELEVATIONS
404 A801	GEORGE'S CABIN – EXTERIOR DETAILS
404 A905	GEORGE'S CABIN – SCHEDULES
404 A920	GEORGE'S CABIN – (E) CONDITION PHOTOS
404 STRUCTURAL	
404 S201	GEORGE'S CABIN – FDN & FLOOR FRAMING PLAN
404 S202	GEORGE'S CABIN – ROOF FRAMING PLAN
404 MECHANICAL	
404 M001	GEORGE'S CABIN – MECHANICAL SCHEDULES
404 M201	GEORGE'S CABIN – MECHANICAL PLAN
404 ELECTRICAL	
404 E001	GEORGE'S CABIN – ELECTRICAL SCHEDULES
404 E100	GEORGE'S CABIN – ELECTRICAL DEMO PLAN
404 E101	GEORGE'S CABIN – ELECTRICAL RENOVATION PLAN
404 PLUMBING	
404 P001	GEORGE'S CABIN – PLUMBING SCHEDULES
404 P101	GEORGE'S CABIN – PLUMBING DEMO PLAN
404 P201	GEORGE'S CABIN – PLUMBING PLAN
404 FIRE SUPPRESSION	
404 F101	GEORGE'S CABIN – MAIN LEVEL PLAN
405 MOUSE HOUSE	
405 GENERAL	
405 G000	MOUSE HOUSE – COVER
405 CIVIL	
405 C100	MOUSE HOUSE & ICE HOUSE – SITE AND UTILITY PLAN
405 LANDSCAPE	
405 L100	MOUSE HOUSE & ICE HOUSE – SITE DEMO PLAN
405 L200	MOUSE HOUSE & ICE HOUSE – SITE PLAN
405 ARCHITECTURAL	
405 A101	MOUSE HOUSE – DEMO PLANS
405 A102	MOUSE HOUSE – DEMO ELEVATIONS
405 A201	MOUSE HOUSE – FLOOR PLANS
405 A301	MOUSE HOUSE – EXTERIOR ELEVATIONS
405 A401	MOUSE HOUSE – BUILDING SECTIONS
405 A601	MOUSE HOUSE – REFLECTED CEILING PLAN
405 A701	MOUSE HOUSE – INTERIOR ELEVATIONS
405 A905	MOUSE HOUSE – SCHEDULES
405 A920	MOUSE HOUSE – (E) CONDITION PHOTOS
405 STRUCTURAL	
405 S201	MOUSE HOUSE – FDN & FLOOR FRAMING PLAN
405 S202	MOUSE HOUSE – ROOF FRAMING PLAN
405 ELECTRICAL	
405 E100	MOUSE HOUSE – ELECTRICAL DEMO PLAN

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
406 ICE HOUSE	
406 GENERAL	
406 G000	ICE HOUSE – COVER
406 ARCHITECTURAL	
406 A101	ICE HOUSE – DEMO PLANS
406 A102	ICE HOUSE – DEMO ELEVATIONS
406 A201	ICE HOUSE – FLOOR PLANS
406 A301	ICE HOUSE – EXTERIOR ELEVATIONS
406 A401	ICE HOUSE – BUILDING SECTIONS
406 A601	ICE HOUSE – REFLECTED CEILING PLAN
406 A701	ICE HOUSE – INTERIOR ELEVATIONS
406 A905	ICE HOUSE – SCHEDULES
406 A920	ICE HOUSE – (E) CONDITION PHOTOS
406 STRUCTURAL	
406 S201	ICE HOUSE – FDN & FLOOR FRAMING PLAN
406 S202	ICE HOUSE – ROOF FRAMING PLAN
406 ELECTRICAL	
406 E101	ICE HOUSE – ELECTRICAL PLAN
407–409 CABINS	
407–409 GENERAL	
407 G000	407–409 CABINS – COVER
407–409 CIVIL	
407 C100	END CABIN – SITE AND UTILITY PLAN
408 C100	MIDDLE CABIN – SITE AND UTILITY PLAN
409 C100	MRS OLIVER'S CABIN – SITE AND UTILITY PLAN
407–409 LANDSCAPE	
407 L100	END CABIN – SITE DEMO PLAN
407 L200	END CABIN – SITE PLAN
408 L100	MIDDLE CABIN & WELL HOUSE – SITE DEMO PLAN
408 L200	MIDDLE CABIN & WELL HOUSE – SITE PLAN
409 L100	MRS OLIVER'S CABIN – SITE DEMO PLAN
409 L200	MRS OLIVER'S CABIN – SITE PLAN
407–409 ARCHITECTURAL	
407 A101	END CABIN – DEMO PLANS
407 A102	END CABIN – DEMO ELEVATIONS
407 A201	END CABIN – FLOOR PLANS
407 A301	END CABIN – EXTERIOR ELEVATIONS
407 A401	END CABIN – BUILDING SECTIONS
407 A501	END CABIN – ENLARGED BATHROOMS
407 A601	END CABIN – REFLECTED CEILING PLAN
407 A701	END CABIN – INTERIOR ELEVATIONS
407 A702	END CABIN – INTERIOR ELEVATIONS
407 A801	END CABIN – EXTERIOR DETAILS
407 A905	END CABIN – SCHEDULES
407 A906	END CABIN – INTERIOR DETAILS
407 A920	END CABIN – (E) CONDITION PHOTOS
408 A920	MIDDLE CABIN – (E) CONDITION PHOTOS
409 A920	MRS OLIVER'S CABIN – (E) CONDITION PHOTOS
407–409 STRUCTURAL	
407 S201	END CABIN – FDN & FLOOR FRAMING PLAN
407 S202	END CABIN – ROOF FRAMING PLAN
407–409 MECHANICAL	
407 M001	END CABIN – MECHANICAL SCHEDULES
407 M101	END CABIN – MECHANICAL PLAN
407–409 ELECTRICAL	
407 E001	END CABIN – ELECTRICAL SCHEDULES
407 E101	END CABIN – POWER AND SIGNAL PLAN
407 E201	END CABIN – LIGHTING PLAN

INSTRUCTIONS FOR READING THIS DRAWING SET:

THE FOLLOWING DRAWING SET IS COMPRISED OF THIRTEEN (13) HISTORICALLY SIGNIFICANT BUILDINGS, EACH WITH THEIR OWN SCOPE OF WORK. THE DRAWING SET IS ORGANIZED IN (14) DIFFERENT SUBSETS:

- 000: OVERALL (APPLICABLE TO ALL STRUCTURES)
- 399: MAIN LODGE
- 400: RIVER CABIN
- 401–402: NURSE'S CABIN (CAPTURES SOW FOR 401 & 402)
- 403: 3–BAY GARAGE
- 404: GEORGE'S CABIN
- 405: MOUSE HOUSE
- 406: ICE HOUSE
- 407–409: END CABIN (CAPTURES SOW FOR 407, 408, & 409)
- 410: HARRY'S CABIN
- 416: WELL HOUSE

EACH SUBSET FOLLOWS THE FOLLOWING SHEET ORDER:

- G – GENERAL (APPLICABLE TO THE FULL SUBSET)
- C – CIVIL
- L – LANDSCAPE
- A – ARCHITECTURAL
- S – STRUCTURAL
- M – MECHANICAL
- E – ELECTRICAL
- P – PLUMBING
- F – FIRE SUPPRESSION

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
407–409 PLUMBING	
407 P001	END CABIN – PLUMBING SCHEDULES
407 P101	END CABIN – PLUMBING DEMO PLAN
407 P201	END CABIN – PLUMBING PLAN
407 FIRE SUPPRESSION	
407 F101	END CABIN – MAIN LEVEL PLAN

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT – WILLIAM E. IVEY – C-3530 – Date 7/21/26 – STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G002

TITLE OF SHEET
OVERALL – DRAWING INDEX

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 237343
SHEET 3 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
410 HARRY'S CABIN	
410 GENERAL	
410 G000	HARRY'S CABIN – COVER
410 CIVIL	
410 C100	HARRY'S CABIN – SITE AND UTILITY PLAN
410 LANDSCAPE	
410 L100	HARRY'S CABIN – SITE DEMO PLAN
410 L200	HARRY'S CABIN – SITE PLAN
410 ARCHITECTURAL	
410 A101	HARRY'S CABIN – DEMO PLANS
410 A102	HARRY'S CABIN – DEMO ELEVATIONS
410 A201	HARRY'S CABIN – FLOOR PLANS
410 A301	HARRY'S CABIN – EXTERIOR ELEVATIONS
410 A401	HARRY'S CABIN – BUILDING SECTIONS
410 A501	HARRY'S CABIN – ENLARGED BATHROOMS
410 A601	HARRY'S CABIN – REFLECTED CEILING PLAN
410 A701	HARRY'S CABIN – INTERIOR ELEVATIONS
410 A801	HARRY'S CABIN – EXTERIOR DETAILS
410 A905	HARRY'S CABIN – SCHEDULES
410 A906	HARRY'S CABIN – INTERIOR DETAILS
410 A920	HARRY'S CABIN – (E) CONDITION PHOTOS
410 STRUCTURAL	
410 S201	HARRY'S CABIN – FDN & FLOOR FRAMING PLAN
410 S202	HARRY'S CABIN – ROOF FRAMING PLAN
410 MECHANICAL	
410 M001	HARRY'S CABIN – MECHANICAL SCHEDULES
410 M201	HARRY'S CABIN – MECHANICAL PLAN
410 ELECTRICAL	
410 E001	HARRY'S CABIN – ELECTRICAL SCHEDULES
410 E100	HARRY'S CABIN – ELECTRICAL DEMO PLAN
410 E101	HARRY'S CABIN – ELECTRICAL RENOVATION PLAN
410 PLUMBING	
410 P001	HARRY'S CABIN – PLUMBING SCHEDULE
410 P101	HARRY'S CABIN – PLUMBING DEMO PLAN
410 P201	HARRY'S CABIN – PLUMBING PLAN
410 FIRE SUPPRESSION	
410 F101	HARRY'S CABIN – MAIN LEVEL PLAN
411 NEW CABIN	
411 GENERAL	
411 G000	NEW CABIN – COVER
411 CIVIL	
411 C100	NEW CABIN – SITE AND UTILITY PLAN
411 LANDSCAPE	
411 L100	NEW CABIN – SITE DEMO PLAN
411 L200	NEW CABIN – SITE PLAN
411 ARCHITECTURAL	
411 A101	NEW CABIN – DEMO PLANS
411 A102	NEW CABIN – DEMO ELEVATIONS
411 A201	NEW CABIN – FLOOR PLANS
411 A301	NEW CABIN – EXTERIOR ELEVATIONS
411 A401	NEW CABIN – BUILDING SECTIONS
411 A501	NEW CABIN – ENLARGED BATHROOMS
411 A601	NEW CABIN – REFLECTED CEILING PLAN
411 A701	NEW CABIN – INTERIOR ELEVATIONS
411 A801	NEW CABIN – EXTERIOR DETAILS
411 A905	NEW CABIN – SCHEDULES
411 A920	NEW CABIN – (E) CONDITION PHOTOS
411 STRUCTURAL	
411 S201	NEW CABIN – FDN & FLOOR FRAMING PLAN
411 S202	NEW CABIN – ROOF FRAMING PLAN

DRAWING INDEX

BLDG/SHEET NO.	SHEET NAME
411 MECHANICAL	
411 M001	NEW CABIN – MECHANICAL SCHEDULES
411 M101	NEW CABIN – MECHANICAL PLAN
411 ELECTRICAL	
411 E001	NEW CABIN – ELECTRICAL SCHEDULES
411 E101	NEW CABIN – POWER AND SIGNAL PLAN
411 E201	NEW CABIN – LIGHTING PLAN
411 PLUMBING	
411 P001	NEW CABIN – PLUMBING SCHEDULES
411 P101	NEW CABIN – DEMO PLAN
411 P201	NEW CABIN – PLUMBING PLAN
411 FIRE SUPPRESSION	
411 F201	NEW CABIN – MAIN LEVEL PLAN
416 WELL HOUSE	
416 GENERAL	
416 G000	WELL HOUSE – COVER
416 ARCHITECTURAL	
416 A201	WELL HOUSE – DEMO PLAN & PLANS
416 A301	WELL HOUSE – EXTERIOR ELEVATIONS & SECTION
416 A920	WELL HOUSE – (E) CONDITION PHOTOS
416 STRUCTURAL	
416 S201	WELL HOUSE – FRAMING PLANS

INSTRUCTIONS FOR READING THIS DRAWING SET:

THE FOLLOWING DRAWING SET IS COMPRISED OF THIRTEEN (13) HISTORICALLY SIGNIFICANT BUILDINGS, EACH WITH THEIR OWN SCOPE OF WORK. THE DRAWING SET IS ORGANIZED IN (14) DIFFERENT SUBSETS:

- 000: OVERALL (APPLICABLE TO ALL STRUCTURES)
- 399: MAIN LODGE
- 400: RIVER CABIN
- 401–402: NURSE'S CABIN (CAPTURES SOW FOR 401 & 402)
- 403: 3–BAY GARAGE
- 404: GEORGE'S CABIN
- 405: MOUSE HOUSE
- 406: ICE HOUSE
- 407–409: END CABIN (CAPTURES SOW FOR 407, 408, & 409)
- 410: HARRY'S CABIN
- 416: WELL HOUSE

EACH SUBSET FOLLOWS THE FOLLOWING SHEET ORDER:

- G – GENERAL (APPLICABLE TO THE FULL SUBSET)
- C – CIVIL
- L – LANDSCAPE
- A – ARCHITECTURAL
- S – STRUCTURAL
- M – MECHANICAL
- E – ELECTRICAL
- P – PLUMBING
- F – FIRE SUPPRESSION

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G003

TITLE OF SHEET
OVERALL – DRAWING INDEX

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 4 OF 371

TAG & SYMBOL LEGEND

NOT ALL TAGS MAY BE USED



BUILDING EXTERIOR ELEVATION



BUILDING SECTION



WALL SECTION

DETAIL CALLOUT



DETAIL REFERENCE



WINDOW TYPE

ELEVATION/SECTION DATUM HEIGHT



DATUM HEIGHT

WORK POINT

NORTH ARROW

BUILDING GRID DESIGNATION



REVISION NUMBER

DOOR TAG

ROOM TAG

BREAKLINE

KEYNOTE

CENTERLINE

GRAPHIC SCALES

1"= 30'-0"

1/4"= 1'-0"

3/8" = 1'-0"

1/2" = 1'-0"

1 1/2" = 1'-0"

3" = 1'-0"

GRAPHIC LEGEND

NOT ALL HATCHES MAY BE USED

MATERIAL HATCHES

BRICK & TILE (CUT)

CMU (CUT)

CONCRETE (CUT)

EARTH : COMPACTED FILL

EARTH : UNDISTURBED

GRAVEL : CRUSHED

GLASS (CUT)

GYPSUM BOARD (CUT)

INSULATION, BATT


INSULATION, RIGID (CUT)

ROOFING : ASPHALT SHINGLES

STONE (CUT)

WOOD: FRAMING, BLOCKING

WOOD FINISH (CUT)

WOOD PLYWOOD (CUT)

HISTORIC PRESERVATION TREATMENT DEFINITIONS

(E): EXISTING ITEM

REMOVE: TO SEPARATE ITEM FROM (E) CONSTRUCTION WITHOUT DAMAGING (E) COMPONENTS TO REMAIN AND LEGALLY DISPOSE OF THEM.

SALVAGE: TO SEPARATE ITEM FROM (E) CONSTRUCTION WITHOUT DAMAGING (E) COMPONENTS TO REMAIN, CLEAN, AND DELIVER READY FOR REUSE TO CONTRACTING OFFICER.

SALVAGE FOR REINSTALLATION: TO SEPARATE ITEM FROM (E) CONSTRUCTION WITHOUT DAMAGING (E) COMPONENTS TO REMAIN, CLEAN, REPAIR, AND PREPARE FOR REUSE, AND REINSTALL WHERE INDICATED.

STABILIZE: TO STRUCTURALLY REINFORCE WHILE MAINTAINING ESSENTIAL EXISTING FORM.

REPAIR: TO STABILIZE, CONSOLIDATE, AND/OR CONSERVE. INCLUDES CLEANING OF SURFACES, PATCHING OF HOLES, CRACK REPAIRS, AND LIMITED IN-KIND MATERIAL REPLACEMENT OF DETERIORATED MATERIAL THAT CAN'T BE REPAIRED THROUGH OTHER MEANS.

RESTORE: TO TREAT ITEM OR MATERIAL TO ACCURATELY RETURN TO ITS ORIGINAL FORM, CHARACTER, AND APPEARANCE BY MEANS OF REPAIR AND LIMITED IN-KIND REPLACEMENT OF MISSING OR DETERIORATED COMPONENTS.

FURNISH: TO SUPPLY, DELIVER, UNLOAD, AND INSPECT FOR DAMAGE.

INSTALL: TO UNPACK, ASSEMBLE, ERECT, APPLY, PLACE, FINISH, CURE, PROTECT, CLEAN, START UP, AND MAKE READY FOR USE.

REINSTALL: TO INSTALL SALVAGED FOR REINSTALLATION COMPONENT.

PROVIDE: TO FURNISH, INSTALL, AND/OR CONSTRUCT.

REPLACE: TO DUPLICATE ITEM OR MATERIAL IN-KIND.

IN-KIND: TO MATCH (E) ITEM AND/OR MATERIAL IN QUALITY AND IN SALIENT CHARACTERISTICS SUCH AS SPECIES, CUT, COLOR, GRAIN, DIMENSIONS, PROFILE, THICKNESS, & FINISH.

ABBREVIATIONS

NOT ALL ABBREVIATIONS MAY BE USED

@	AT
ABA/ABAAS	ARCHITECTURAL BARRIERS ACT ACCESSIBILITY STANDARDS
ACC	ACCESSORY
ACT	ACOUSTICAL CEILING TILE
AFF	ABOVE FINISH FLOOR
B.O.	BOTTOM OF
CJ	CONTROL JOINT
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
CO	CONTRACTING OFFICER
CONC	CONCRETE
CONT	CONTINUOUS
DEMO	DEMOLISH/DEMOLITION
DIA	DIAMETER
DIM	DIMENSION
DN	DOWN
DP	DIMENSION POINT
DS	DOWNSPOUT
DSC	DENVER SERVICE CENTER
(E)	EXISTING
EA	EACH
EJ	EXPANSION JOINT
ELEC	ELECTRICAL
ELEV	ELEVATION
EQ	EQUAL
EQUIP	EQUIPMENT
EW	EACH WAY
FD	FLOOR DRAIN
FF	FINISH FLOOR
FO	FACE OF
GA	GAUGE
GALV	GALVANIZED
GWB	GYPSUM BOARD
GRTE	GRAND TETON NATIONAL PARK
HR	HOUR
HSS	HOLLOW STRUCTURAL SECTION
HVAC	HEATING, VENTILATING, AIR CONDITIONING
ISA	INTERNATIONAL SYMBOL OF ACCESSIBILITY
JSA	JOB SAFETY ANALYSIS
MAX	MAXIMUM
MECH	MECHANICAL
MFR	MANUFACTURER
MIN	MINIMUM
NPS	NATIONAL PARK SERVICE
N/A	NOT APPLICABLE
NIC	NOT IN CONTRACT
NO.	NUMBER
NTS	NOT TO SCALE
OC	ON CENTER
OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
OFOI	OWNER FURNISHED, OWNER INSTALLED
OPH	OPPOSITE HAND
OSHA	OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION
P.LAM	PLASTIC LAMINATE
PFSM	PRE FINISHED SHEET METAL
PL	PLATE
PR	PAIR
PT	PRESSURE/PRESERVATIVE TREATED
RO	ROUGH OPENING
(S)	SALVAGED
SF	SQUARE FEET
SIM	SIMILAR
SOW	SCOPE OF WORK
SSD	SEE STRUCTURAL DRAWINGS
T&G	TONGUE AND GROOVE
TG	TEMPERED GLASS
T.O.	TOP OF
TYP	TYPICAL
UON	UNLESS OTHERWISE NOTED
VIF	VERIFY IN FIELD
W/	WITH
W/O	WITHOUT
WD	WOOD

GENERAL NOTES

1. FOR APPLICABLE CODES AND STANDARDS REFER TO SHEET G-007.
2. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2024 INTERNATIONAL EXISTING BUILDING CODE; FEDERAL, CITY AND COUNTY ORDINANCES; AND APPLICABLE, HEALTH, PLUMBING, MECHANICAL, FIRE AND ELECTRICAL CODES.
3. CONFIRM ALL NEW AND EXISTING CONDITIONS WITH THE CONTRACT DOCUMENTS. NOTE ALL DISCREPANCIES OR CONFLICTS AND DO NOT PROCEED WITH WORK IN THE AREA UNTIL DISCREPANCY OR CONFLICT IS RESOLVED.
4. THE CONTRACTOR SHALL ESTABLISH CLEAR UNDERSTANDING OF THE PROJECT REQUIREMENTS, SYSTEMS AND THEIR COMPONENTS PRIOR TO ORDERING MATERIALS.
5. THE CONTRACTOR SHALL PROVIDE SHORING, BRACING, SUPPORT AND PROTECTION AS REQUIRED.
6. THE CONTRACTOR IS RESPONSIBLE FOR ALL MEANS AND METHODS OF CONSTRUCTION AND SHALL COORDINATE ALL CONSTRUCTION EFFORTS WITH THE CONTRACTING OFFICER.
7. THE CONTRACTOR SHALL PROVIDE FOR DUST CONTROL THROUGHOUT AND SHALL PROVIDE TEMPORARY MEASURES TO VENTILATE AREAS DURING ALL PHASES OF DEMOLITION AND CONSTRUCTION, AND SHALL ERADICATE THE BUILD-UP OF FUMES FROM FINISH MATERIALS AND CONSTRUCTION ACTIVITIES. THE CONTRACTOR SHALL MAINTAIN SIX (6) AIR EXCHANGES PER HOUR UNLESS MORE STRINGENT OSHA, STATE OR LOCAL STANDARDS ARE TO BE ADHERED TO.
8. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE CONTRACTING OFFICER AND GOVERNMENT-PROVIDED CONTRACTORS, IF ANY, AS REQUIRED TO IMPLEMENT THE SCOPE OF WORK.
9. INFORMATION RELATING TO THE EXISTING BUILDING IS BASED ON GOVERNMENT PROVIDED DOCUMENTS AND LIMITED FIELD MEASUREMENTS. ACTUAL CONDITIONS MAY VARY AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION AND PROCUREMENT OF MATERIALS OR ITEMS.
10. SYSTEMS AND CONDITIONS HIDDEN FROM VIEW ARE BASED ON GOVERNMENT PROVIDED DOCUMENTS, HAVE NOT BEEN VERIFIED BY THE ARCHITECT, AND ARE PROVIDED FOR REFERENCE PURPOSES ONLY. ALL SYSTEMS AND CONDITIONS SHALL BE VERIFIED BY THE CONTRACTOR.
11. THE CONTRACTOR SHALL PATCH AND REPAIR ELEMENTS TO MATCH EXISTING ADJACENT CONDITIONS WHERE ITEMS WERE REMOVED AND IN AREAS DAMAGED DURING DEMOLITION, IN AREAS TO REMAIN OCCUPIED ONLY.
12. THE CONTRACTOR SHALL CLEAN, PLUG, PATCH AND REPAIR ALL MATERIALS & SURFACES AS REQ'D TO PREPARE THEM FOR NEW WORK.
13. THE PROJECT AREA IS FREQUENTED BY PARK VISITORS AND WILDLIFE. THE CONTRACTOR SHALL ENSURE THAT SAFETY HAZARDS ARE IDENTIFIED AND APPROPRIATE BARRIERS TO ACCESS ARE USED TO PREVENT INJURY TO ALL HUMANS AND WILDLIFE.
14. HAZARDOUS MATERIALS ARE PRESENT IN THE WORK AREA. A REPORT ON THE PRESENCE OF HAZARDOUS MATERIALS IS ON FILE FOR REVIEW AND USE. EXAMINE REPORT TO BECOME AWARE OF LOCATIONS WHERE HAZARDOUS MATERIALS ARE PRESENT. HAZARDOUS MATERIAL REMEDIATION IS SPECIFIED IN THE PROJECT MANUAL.
15. ALL WORK ON OR NEAR HISTORIC PROPERTIES MUST COMPLY WITH THE SECRETARY OF THE INTERIOR'S STANDARDS FOR THE TREATMENT OF HISTORIC PROPERTIES TO ENSURE THE PROTECTION OF HISTORIC MATERIALS AND INTEGRITY. THESE STANDARDS, CODIFIED IN 36 CFR PART 68, PROVIDE REGULATORY GUIDANCE FOR REHABILITATION, RESTORATION, PRESERVATION, AND RECONSTRUCTION PROJECTS.
16. ILLEGALLY COLLECTING ARTIFACTS OR DAMAGING ARCHAEOLOGICAL SITES ON FEDERAL LAND SHALL BE PENALIZED PER THE ARCHAEOLOGICAL RESOURCES PROTECTION ACT (ARPA).
17. IF PREVIOUSLY UNKNOWN ARCHEOLOGICAL RESOURCES AND/OR HUMAN REMAINS ARE DISCOVERED DURING PROJECT WORK, ALL WORK IN THE IMMEDIATE VICINITY (600 FEET) OF THE DISCOVERY SHALL BE HALTED UNTIL THE RESOURCES ARE IDENTIFIED AND DOCUMENTED AND AN APPROPRIATE CULTURAL RESOURCE MANAGEMENT PLAN, TREATMENT PLAN, OR MITIGATION STRATEGY IS DEVELOPED AND IMPLEMENTED IN CONSULTATION WITH THE STATE HISTORIC PRESERVATION OFFICE (SHPO), AFFECTED TRIBES, AND/OR RELEVANT FEDERAL AGENCIES.
18. ALL VEGETATION MODIFICATION, INCLUDING TREE REMOVAL, SHALL BE REVIEWED AND APPROVED BY A SECTION 106 SPECIALIST AS WELL AS BY A WILDLIFE AND VEGETATION SPECIALISTS.
19. ALL LUMBER DIMENSIONS ARE NOMINAL, UNO.

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TREIB
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
000
G004

TITLE OF SHEET
OVERALL – GENERAL NOTES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	5 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\Collaboration Cache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

CLEAR FLOOR SPACE POSITIONS FOR EXISTING BUILDINGS

NOTE: THE SPACE REQUIREMENTS SHOWN ARE BASED ON THE ARCHITECTURAL BARRIERS ACT (ABA), WHICH APPLIES TO FACILITIES DESIGNED, BUILT, ALTERED, OR LEASED WITH FEDERAL FUNDS.

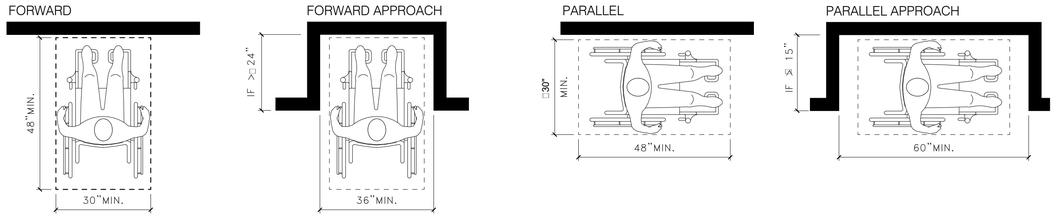

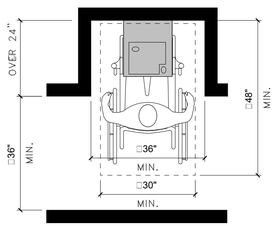

KNEE AND TOE CLEARANCE

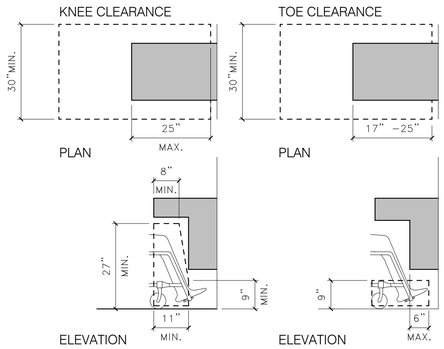

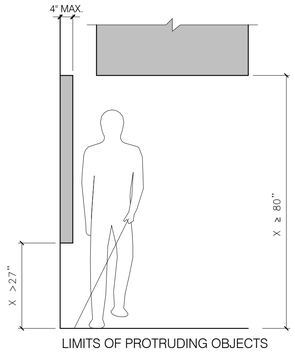

LIMITS OF PROTRUDING OBJECTS

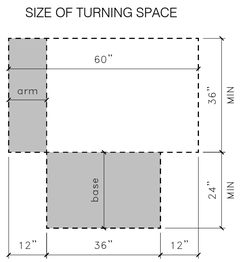

T-SHAPED - EXISTING BUILDINGS

KNEE AND TOE CLEARANCE OVERLAP



CIRCULAR - EXISTING BUILDINGS

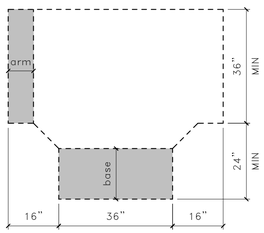

T-SHAPED - NEW BUILDINGS

KNEE AND TOE CLEARANCE OVERLAP

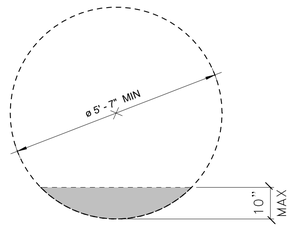

CIRCULAR - NEW BUILDINGS

REACH RANGES

NOTE: THE REACH RANGES INDICATED IS UNDERSTOOD TO BE ACHIEVABLE BY THE PERSON USING A WHEELCHAIR. FROM A SITTING POSITION, ONE CAN REACH UP OR DOWN, TO EITHER THE FRONT OR THE SIDE ONLY TO A LIMITED POINT. THESE DIMENSIONS DETERMINE THE VERTICAL DIMENSIONS WITHIN WHICH AN ELEMENT MUST BE LOCATED TO BE ACCESSIBLE. ANYTHING LOCATED OUTSIDE THESE RANGES MAY NOT BE REACHABLE, AND THERFORE, NOT ACCESSIBLE.

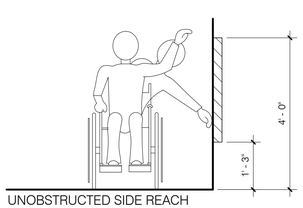

UNOBSTRUCTED SIDE REACH

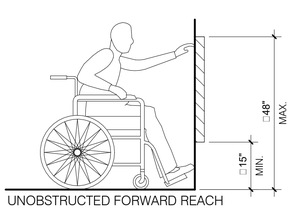

UNOBSTRUCTED FORWARD REACH

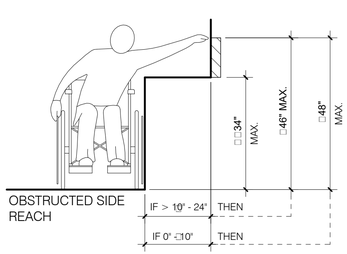

OBSTRUCTED SIDE REACH

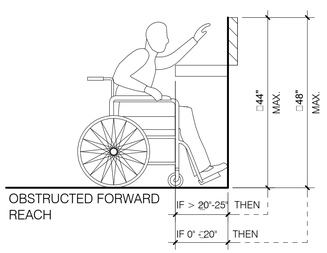

OBSTRUCTED FORWARD REACH

MANEUVERING CLEARANCES AT SWING DOORS

NOTE: THE ABILITY OF AN INDIVIDUAL NOT ONLY TO APPROACH A DOOR BUT ALSO TO GET THE NECESSARY LEVERAGE TO OPEN THE DOOR IS THE BASIS OF THE CLEARANCES ESTABLISHED.

FRONT APPROACH, PULL SIDE

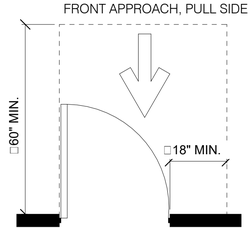

FRONT APPROACH, PUSH SIDE

* IF BOTH CLOSER AND LATCH ARE PROVIDED

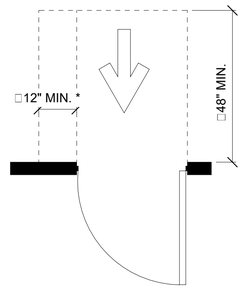

CLEAR WIDTH + PROJECTIONS

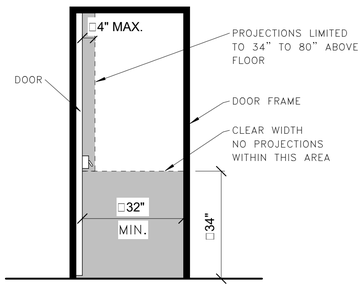

HINGE APPROACH, PULL SIDE

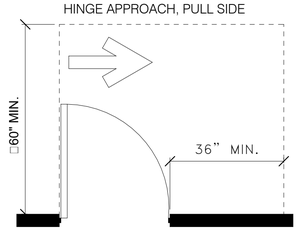

HINGE APPROACH, PULL SIDE

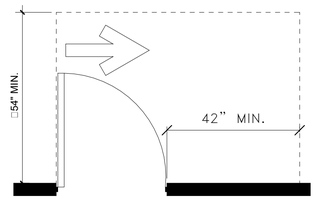

HINGE APPROACH, PUSH SIDE

* IF BOTH CLOSER AND LATCH ARE PROVIDED
** 48" MIN. IF BOTH CLOSER AND LATCH PROVIDED

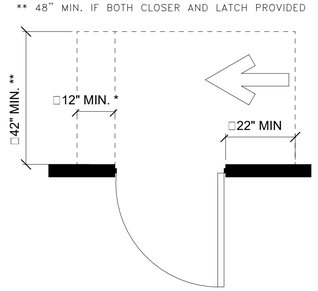

LATCH APPROACH, PULL SIDE

* 54" MIN. IF CLOSER IS PROVIDED

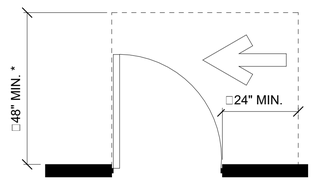

LATCH APPROACH, PUSH SIDE

* IF BOTH CLOSER AND LATCH ARE PROVIDED

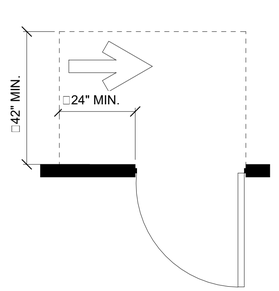

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TYLER
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G005

TITLE OF SHEET
OVERALL – ACCESSIBILITY DIAGRAMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 6 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

TYPICAL MOUNTING HEIGHTS

NOTE: REACH RANGES AND MOUNTING HEIGHTS MAY VARY WITHIN THE BUILDING DEPENDING ON LOCATION OF INDIVIDUAL ACCESSORIES AND THE DIRECTION OF REACH REQUIRED FOR THEIR USE. DIMENSIONS NOTED ARE BASED ON LIMITED REACH RANGE (UNOBSTRUCTED) TO ACCESSORIES "OPERABLE PARTS" (DISPENSING MECHANISMS, START BUTTONS, COIN SLOTS, OR DISPENSER OPENINGS). WHEN ACCESSORIES ARE MOUNTED OVER OBSTRUCTIONS SUCH AS COUNTERS, DEPENDING ON THE NATURE AND DEPTH OF THE OBSTRUCTION IT IS REQUIRED THAT THEY BE LOCATED BETWEEN REACH RANGE REQUIREMENTS FOR OBSTRUCTED HIGH REACH RANGE.

NOTE: THE REQUIREMENTS SHOWN ARE BASED ON THE ARCHITECTURAL BARRIERS ACT (ABA), WHICH APPLIES TO FACILITIES DESIGNED, BUILT, ALTERED, OR LEASED WITH FEDERAL FUNDS.

ACCESSORIES SHOWN ARE FOR REFERENCE ONLY AND ARE NOT INTENDED TO INDICATE ACCESSORIES FOR THE PROJECT. SEE SPECIFICATIONS FOR TYPE AND MODEL.

ACCESSORIES ABBREVIATIONS:
NOT ALL ABBREVATIONS MAY BE USED

DCS	DIAPER CHANGING STATION
HD	HAND DRYER
MR	MIRROR
SND	SANITARY NAPKIN DISPENSER
SD	SOAP DISPENSER
PTD	PAPER TOWEL DISPENSER
PTDWR	PAPER TOWEL DISPENSER + WASTE RECEPTACLE

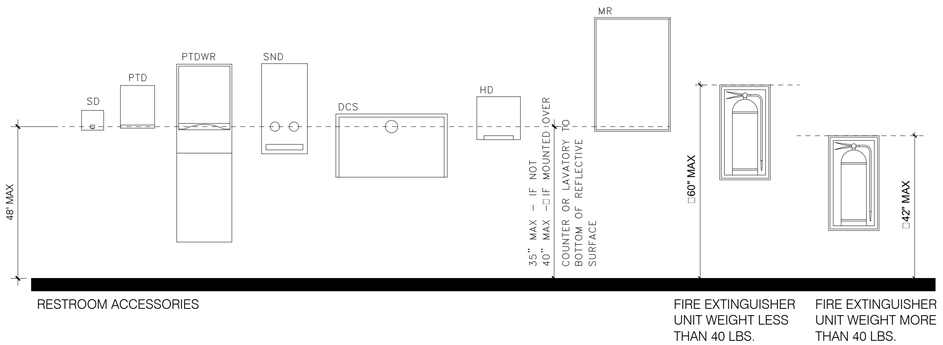

RESTROOM ACCESSORIES

FIRE EXTINGUISHER UNIT WEIGHT LESS THAN 40 LBS.

FIRE EXTINGUISHER UNIT WEIGHT MORE THAN 40 LBS.

TOILET ROOM STANDARDS

NOTE: FIXTURES AND ACCESSORIES SHOWN ARE FOR REFERENCE ONLY AND ARE NOT INTENDED TO INDICATE FIXTURES OR ACCESSORIES FOR THE PROJECT. SEE SPECIFICATIONS FOR TYPE AND MODEL.

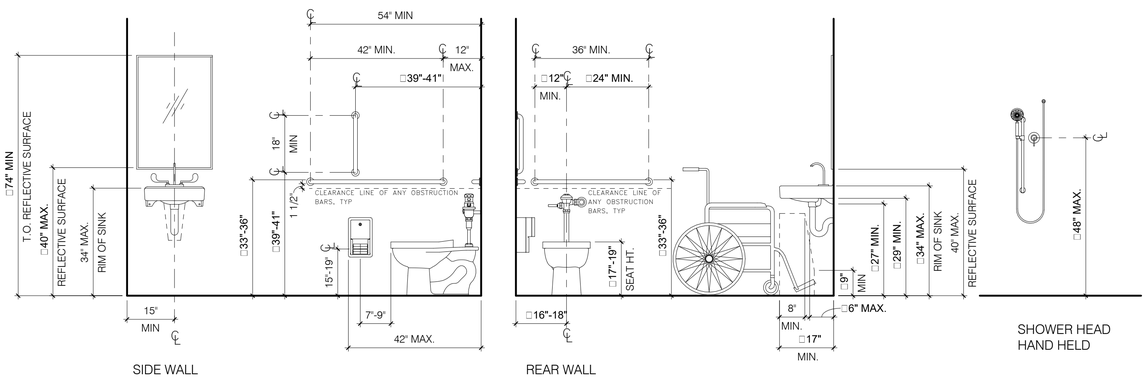

SIDE WALL

REAR WALL

SHOWER HEAD HAND HELD

WATER CLOSETS + TOILET COMPARTMENTS

WATER CLOSET LOCATION



ACCESSIBLE WATER CLOSETS

ACCESSIBLE SIGNAGE

NOTE: SEE 000 904 FOR PROJECT SIGNAGE TYPES.

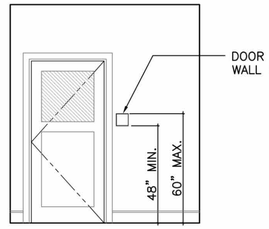

ROOM SIGN LOCATION



PICTOGRAM SIGN

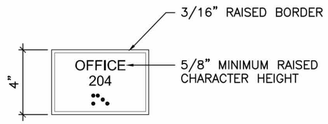

STANDARD ROOM SIGN

OUTDOOR DIRECTIONAL SIGNAGE

NOTE: SEE 000 904 FOR PROJECT SIGNAGE TYPES.
NOTE: OUTDOOR DIRECTIONAL SIGNAGE TO BE OFOI.

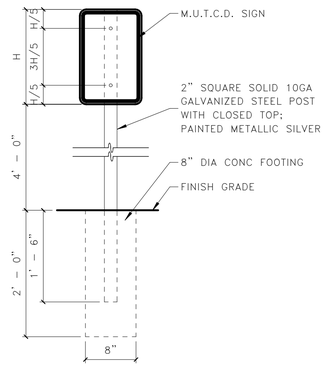

M.U.T.C.D. SIGN (NTS)

DIMENSIONS: 12" X 18" TYP
COLOR: WHITE ON DARK BROWN

NOTES:
1. DRAWINGS ARE FOR DESIGN INTENT ONLY.
2. ALL SIGNS TO BE REVIEWED, COORDINATED, AND APPROVED BY CONTRACTING OFFICER BEFORE FABRICATION.
3. DIRECTIONAL SIGNS SHOULD CONTAIN THE ISA WITH A DIRECTIONAL ARROW OR OTHER DETAILS AS SHOWN. ISA SHOULD COMPLY WITH SECTION ABAAS 703.7.2.1.

ACCESSIBLE PARKING SIGNAGE

NOTE: SEE CIVIL DRAWINGS ON 000 SERIES FOR ACCESSIBLE PARKING SIGNAGE.
NOTE: ACCESSIBLE PARKING SIGNAGE TO BE OFOI.

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYRES C-3530 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G006

TITLE OF SHEET
OVERALL – ACCESSIBILITY DIAGRAMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 7 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

GENERAL PROJECT INFORMATION

BUILDING OWNER:	NATIONAL PARK SERVICE
PROJECT ADDRESS:	4 LAZY F ROAD GRAND TETON NATIONAL PARK, WY
LEGAL DESCRIPTION:	N/A
LAND USE:	PUBLIC LAND MANAGED BY THE NATIONAL PARK SERVICE
PROPERTY AREA/LOT SIZE:	NO CHANGE PROPOSED

PROJECT DESCRIPTION

THE GRTE 237343 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING PROJECT (THE PROJECT) WILL REHABILITATE A TOTAL OF (13) STRUCTURES AT THE 4 LAZY F RANCH, A HISTORIC GUEST RANCH WHICH HAS BEEN UNOCCUPIED SINCE 2006. THE STRUCTURES WILL BE REHABILITATED FOR SEASONAL PARK EMPLOYEE HOUSING. THESE INCLUDE:

- 399 MAIN LODGE (TENANT AMENITIES AND SLEEPING CABIN)
- 400 RIVER CABIN (SLEEPING CABIN)
- 401–402 NURSES CABIN (SLEEPING CABIN)
- 403 3–BAY GARAGE (GARAGE)
- 404 GEORGE'S CABIN (SLEEPING CABIN)
- 405 MOUSE HOUSE (STORAGE)
- 406 ICE HOUSE (STORAGE)
- 407 END CABIN (SLEEPING CABIN)
- 408 MIDDLE CABIN (SLEEPING CABIN)
- 409 MRS. OLIVER'S CABIN (SLEEPING CABIN)
- 410 HARRY'S CABIN (SLEEPING CABIN)
- 411 NEW CABIN (SLEEPING CABIN)
- 416 WELL HOUSE (SLEEPING CABIN)

THE STRUCTURE REHABILITATION WORK INCLUDES INCLUDES ROOF REPLACEMENT, FOUNDATION REPAIR/REPLACEMENT, OTHER STRUCTURAL UPGRADES, EXTERIOR LOG REPAIRS AND REFINISHING, PEST EXCLUSION, HISTORIC WINDOW AND DOOR REPAIRS, UPDATING ELECTRICAL, TELECOMMUNICATIONS, AND PLUMBING SYSTEMS TO MODERN CODES, INSTALLATION OF NEW FIRE SUPPRESSION, AND OTHER PRESERVATION WORK. THE SLEEPING CABINS WILL RETAIN THEIR HISTORIC FUNCTION AS BEDROOMS WITH ATTACHED BATHROOMS AND THE MAIN LODGE WILL HAVE TWO BEDROOMS AND BATHROOMS WHICH WILL BE UPDATED TO COMPLY WITH ACCESSIBILITY REQUIREMENTS. THE MAIN LODGE WILL ALSO HAVE A KITCHEN, DINING ROOM, SHARED LAUNDRY ROOM, AND LIVING SPACE TO BE SHARED BY ALL TENANTS OF THE RANCH.

THE PROJECT WILL ALSO PROVIDE UTILITY UPGRADES INCLUDING A NEW WATER DISTRIBUTION SYSTEM, NEW SEWER COLLECTION SYSTEM, FORCE MAIN AND GRAVITY MAIN, ALONG WITH NEW BURIED TELECOMMUNICATIONS AND UNDERGROUND POWER. UTILITY WORK WILL INCLUDE CONNECTIONS TO PROXIMATE ELECTRICAL, WATER, SANITARY SEWER, AND TELECOMMUNICATION SERVICES AT EACH LODGING BUILDING.

ASSOCIATED SITE WORK WILL INCLUDE PROVIDING A TENANT PARKING AREA, ACCESSIBLE PARKING, MAINTAINED IN–KIND ACCESS ROAD, PATHWAYS CONNECTING BUILDINGS, AND LANDSCAPE RESTORATION.

HISTORIC REHABILITATION REQUIREMENTS

THIS PROJECT IS A REHABILITATION IN ACCORDANCE WITH THE SECRETARY OF THE INTERIOR'S STANDARDS FOR THE TREATMENT OF HISTORIC PROPERTIES. ALL PROJECT BUILDINGS ARE DESIGNATED HISTORIC BUILDINGS LISTED ON THE NATIONAL REGISTER FOR HISTORIC PLACES.

EXISTING CONSTRUCTION, MATERIALS, AND FINISHES ARE CONSIDERED HISTORIC FABRIC IN ALL LOCATIONS. AS A REHABILITATION PROJECT, THE GOAL IS TO DISTURB AS LITTLE HISTORIC FABRIC AS POSSIBLE. CARE MUST BE TAKEN WHEN REMOVING MATERIALS FOR REINSTALLATION OR SALVAGE TO PREVENT DAMAGE TO THE MATERIAL REMOVED OR THE SURROUNDING HISTORIC BUILDING FABRIC. DEMOLITION MUST BE SELECTIVE. DISTURBANCE TO HISTORIC FABRIC NOT IDENTIFIED IN THESE DRAWINGS AND SPECIFICATIONS MUST BE APPROVED BY THE CONTRACTING OFFICER PRIOR TO REMOVAL. SEE SPECIFICATIONS SECTIONS 013591 HISTORIC PRESERVATION TREATMENT PROCEDURES AND 024119 SELECTIVE DEMOLITION FOR DETAILED INFORMATION AND PROCESSES.

THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY DAMAGE CAUSED BY THE EXECUTION OF THIS CONTRACT, TO THE SATISFACTION OF THE CONTRACTING OFFICER AND THE GOVERNMENT. EACH EMPLOYEE OF THE CONTRACTOR AND HIS SUBCONTRACTORS SHALL BE INFORMED OF THE HISTORIC SIGNIFICANCE OF THE BUILDINGS AND MADE RESPONSIBLE FOR THE PROTECTION OF BUILDING ARTIFACTS, FOUND OBJECTS, AND OTHER "COLLECTIBLE" ITEMS UNCOVERED DURING THE WORK. THESE ITEMS ARE THE PROPERTY OF THE GOVERNMENT AND NO SUCH PROPERTY SHALL BE REMOVED FROM THE SITE BY THE CONTRACTOR, CONTRACTOR'S EMPLOYEES OR SUBCONTRACTORS. IF ANY CULTURAL MATERIALS ARE DISCOVERED DURING CONSTRUCTION, WORK IN THE AREA SHALL HALT IMMEDIATELY. THE NPS MUST BE CONTACTED AND THE MATERIALS EVALUATED BY AN ARCHAEOLOGIST OR HISTORIAN MEETING THE SECRETARY OF THE INTERIOR'S PROFESSIONAL QUALIFICATION STANDARDS (48 FR 22716, SEPT. 1983).

SITE TREATMENT REQUIREMENTS

EQUIPMENT WILL BE REQUIRED TO BE CLEANED BY HIGH PRESSURE AIR OR WATER SPRAY BEFORE ENTERING THE PROJECT SITE AND WHEN WORK IS COMPLETED.

ACCESSIBILITY & UNIVERSAL DESIGN

ABA ACCESSIBILITY STANDARDS

U.S. ACCESS BOARD – ARCHITECTURAL BARRIERS ACT ACCESSIBILITY STANDARDS.

NPS MANAGEMENT POLICIES 2006 REQUIRES FACILITIES BE UNIVERSALLY DESIGNED AND ACCESSIBLE TO EVERY SEGMENT OF THE POPULATION. THE FOUR LAZY F RANCH IS LISTED ON THE NATIONAL REGISTER OF HISTORIC PLACES AND THEREFORE WORK MUST BE CAREFULLY PLANNED AND UNDERTAKEN IN A MANNER THAT RESULTS IN MINIMAL OR NO LOSS OF HISTORIC CHARACTER–DEFINING FEATURES. THE GOAL SHOULD BE TO PROVIDE THE HIGHEST LEVEL OF ACCESS WITH THE LEAST IMPACT TO THE HISTORIC SITE AND BUILDINGS. PARTICULAR CARE MUST BE TAKEN NOT TO OBSCURE, DAMAGE, OR DESTROY CHARACTER–DEFINING MATERIALS OR FEATURES IN THE PROCESS OF UNDERTAKING WORK TO MEET CODE REQUIREMENTS.

SEE THE ACCESSIBILITY DIAGRAMS FOR OVERALL REQUIREMENTS.

SEE THE ACCESSIBILITY PLANS FOR BUILDING–SPECIFIC ACCESSIBILITY AND UNIVERSAL DESIGN IMPLEMENTATION.

APPLICABLE CODES

2024 INTERNATIONAL EXISTING BUILDING CODE (IEBC) WITH APPENDICES
2024 INTERNATIONAL ENERGY CONSERVATION CODE
2024 INTERNATIONAL PLUMBING CODE (IPC)
2024 INTERNATIONAL MECHANICAL CODE (IMC)
2024 INTERNATIONAL FIRE CODE (IFC)
2023 NATIONAL ELECTRICAL CODE (NEC)
2024 INTERNATIONAL WILDLAND URBAN INTERFACE CODE
ARCHITECTURAL BARRIERS ACT (ABA) ACCESSIBILITY STANDARDS

APPLICABLE STANDARDS

- AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR CONDITIONING ENGINEERS
- SECRETARY OF THE INTERIOR'S STANDARDS FOR THE TREATMENT OF HISTORIC PROPERTIES WITH GUIDELINES FOR PRESERVING, REHABILITATING, RESTORING, AND RECONSTRUCTING HISTORIC BUILDINGS
- NPS TECHNICAL PRESERVATION SERVICES – PRESERVATION PUBLICATIONS

USE AND OCCUPANCY

CHAPTER 3

APPLICABLE OCCUPANCY CLASSIFICATION GROUP(S):

"R–3": RESIDENTIAL PER 310.4
"U": UTILITY AND MISCELLANEOUS

NO CHANGES IN OCCUPANCY CLASSIFICATION ARE PROPOSED.

IEBC CLASSIFICATION/ HEIGHT/ AREA/ CONSTRUCTION TYPE

THE FOLLOWING TABLE DESCRIBES THE IEBC CLASSIFICATION OF WORK ANTICIPATED AT EACH STRUCTURE AND IMPACTS TO HEIGHTS/ AREAS/ CONSTRUCTION TYPE.

			CHAPTER 3	CHAPTER 5	CHAPTER 5	CHAPTER 6	CHAPTER 15
STRUCTURE NAME	BLDG. NO.	IEBC CLASSIFICATION	BLDG. HEIGHT	BLDG. AREA	CONSTRUCTION TYPE	MIN. ROOF COVERING CLASSIFICATION
MAIN LODGE	399	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
RIVER CABIN	400	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
NURSES CABIN	401–402	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
3 BAY GARAGE	403	ALTERNATION LEVEL 1	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
GEORGE'S CABIN	404	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
MOUSE HOUSE	405	ALTERNATION LEVEL 1	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
ICE HOUSE	406	ALTERNATION LEVEL 1	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
END CABIN	407	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
MIDDLE CABIN	408	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
MRS OLIVER'S CABIN	409	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
HARRY'S CABIN	410	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
NEW CABIN	411	ALTERNATION LEVEL 2	NO CHANGE	NO CHANGE	VB / NO CHANGE	C
WELL HOUSE	416	REPAIRS	NO CHANGE	NO CHANGE	VB / NO CHANGE	C

HAZARDOUS MATERIALS

ASBESTOS CONTAINING MATERIALS, LEAD BASED PAINT, AND ANIMAL DROPPINGS HAVE BEEN IDENTIFIED IN CONCENTRATIONS THAT EXCEED LIMITS ESTABLISHED BY STATE AND FEDERAL REGULATIONS. REMOVAL OF CONTAMINATED MATERIALS BY A LICENSED ABATEMENT CONTRACTOR IS REQUIRED PRIOR TO PERFORMING ANY RENOVATION, REPAIR, OR PAINTING. REFER TO THE HAZARDOUS MATERIALS SURVEY REPORTS PREPARED BY NORTHERN INDUSTRIAL HYGIENE, DATED JULY 2025.

SEE SPECIFICATION SECTIONS:

02 82 00 ASBESTOS ABATEMENT
02 83 00 LEAD–BASED PAINT STABILIZATION, COMPONENT REMOVAL, AND SOIL REMOVAL
02 85 00 ANIMAL DROPPINGS REMEDIATION

SOILS

THE PROJECT SITE IS LOCATED IN AN AREA IDENTIFIED AS HAVING THE POTENTIAL FOR RADON IN CONCENTRATIONS THAT EXCEED LIMITS ESTABLISHED BY STATE AND FEDERAL REGULATIONS. A RADON MITIGATION SYSTEM IS INCLUDED IN THE PROJECT.

SEE CONSTRUCTION DRAWINGS AND SPECIFICATION SECTION 31 21 13 – RADON MITIGATION SYSTEM.

FIRE PROTECTION

CHAPTER 7&9

EXTERIOR WALLS: NO CHANGE
EXTERIOR OPENINGS: NO CHANGE

FIRE PROTECTION ELEMENTS:

ELEMENT	SECTION	PROVIDED	TYPE/CLASS
AUTOMATIC SPRINKLER SYSTEM	PER 903.2	YES	NFPA 13D
STANDPIPE SYSTEM	PER 905.3	NO	NOT REQ'D
FIRE ALARM SYSTEM	PER 907.2.9	YES	NFPA 72
SMOKE DETECTION SYSTEM	PER 907.2.9	YES	NFPA 72

INTERIOR FINISHES

CHAPTER 8

INTERIOR WALL AND CEILING FINISH REQUIREMENTS BY OCCUPANCY:

	SPRINKLERED		
GROUP	INTERIOR EXIT STAIRS, RAMPS AND PASSAGEWAYS	CORRIDORS	ROOMS & ENCLOSED SPACES
R–3	C	C	C

CLASS C: FLAME SPREAD INDEX 76–200; SMOKE DEVELOPED INDEX 0–450

WILDLIFE RISK MITIGATION

PER THE LATEST NPS WILDFIRE RISK ASSESSMENT DEVELOPED IN 2023, THE PROJECT STRUCTURES RATED AS FOLLOWING:

399: MAIN LODGE	MODERATE
400: RIVER CABIN	HIGH
401–402: NURSE'S CABIN	HIGH
403: 3–BAY GARAGE	HIGH
404: GEORGE'S CABIN	MODERATE
405: MOUSE HOUSE	MODERATE
406: ICE HOUSE	HIGH
407: END CABIN	MODERATE
408: MIDDLE CABIN	MODERATE
409: MRS. OLIVER'S CABIN	HIGH
410: HARRY'S CABIN	MODERATE
416: WELL HOUSE	HIGH

THE PROJECT IS THEREFOR IMPLEMENTING THE FOLLOWING MITIGATION MEASURES TO IMPROVE SITE ACCESS, SURROUNDING ENVIRONMENT CONDITIONS, BUILDING CONSTRUCTION, AND AVAILABLE RESOURCES IN ORDER TO REDUCE THE RISK FOR WILDLIFE FIRES:

SURROUNDING ENVIRONMENT IMPROVEMENTS

- OVERALL SITE DEBRIS REMOVAL
- OVERALL SITE REMOVAL OF FLAMMABLE GROUND COVER, SHRUBS, AND TIMBER
- SELECTIVE TREES AND STUMPS REMOVAL (26 TREES AND 9 STUMPS TOTAL)
- IMPROVEMENTS TO ACCESS CONDITIONS

STRUCTURE MATERIALS AND DESIGN

- ROOFING REPLACEMENT WITH FIRE RESISTANT MATERIALS
- NEW CONCRETE FOUNDATIONS
- VEGETATION REMOVAL ABOVE AND BELOW DECKS
- VERIFICATION OF ACCURATE HYDRANT PRESSURE
- RESTORATION OF BUILDING ENVELOP AT EVERY STRUCTURE
- NEW SPRINKLER SYSTEM AT EVERY STRUCTURE
- REMOVAL OF PROPANE TANKS ADJACENT TO STRUCTURES AND ACROSS THE SITE
- NEW UNDERGROUND UTILITY LINES (NO OVERHEAD LINES)
- REMOVAL OF HAZARDOUS MATERIALS AT EACH STRUCTURE, WHERE PRESENT

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT – WILLIAM E. REED – C-3530 – STATE OF WYOMING – Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G007

TITLE OF SHEET
OVERALL – GENERAL INFO AND CODE SUMMARY

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 237343
SHEET 8 OF 371

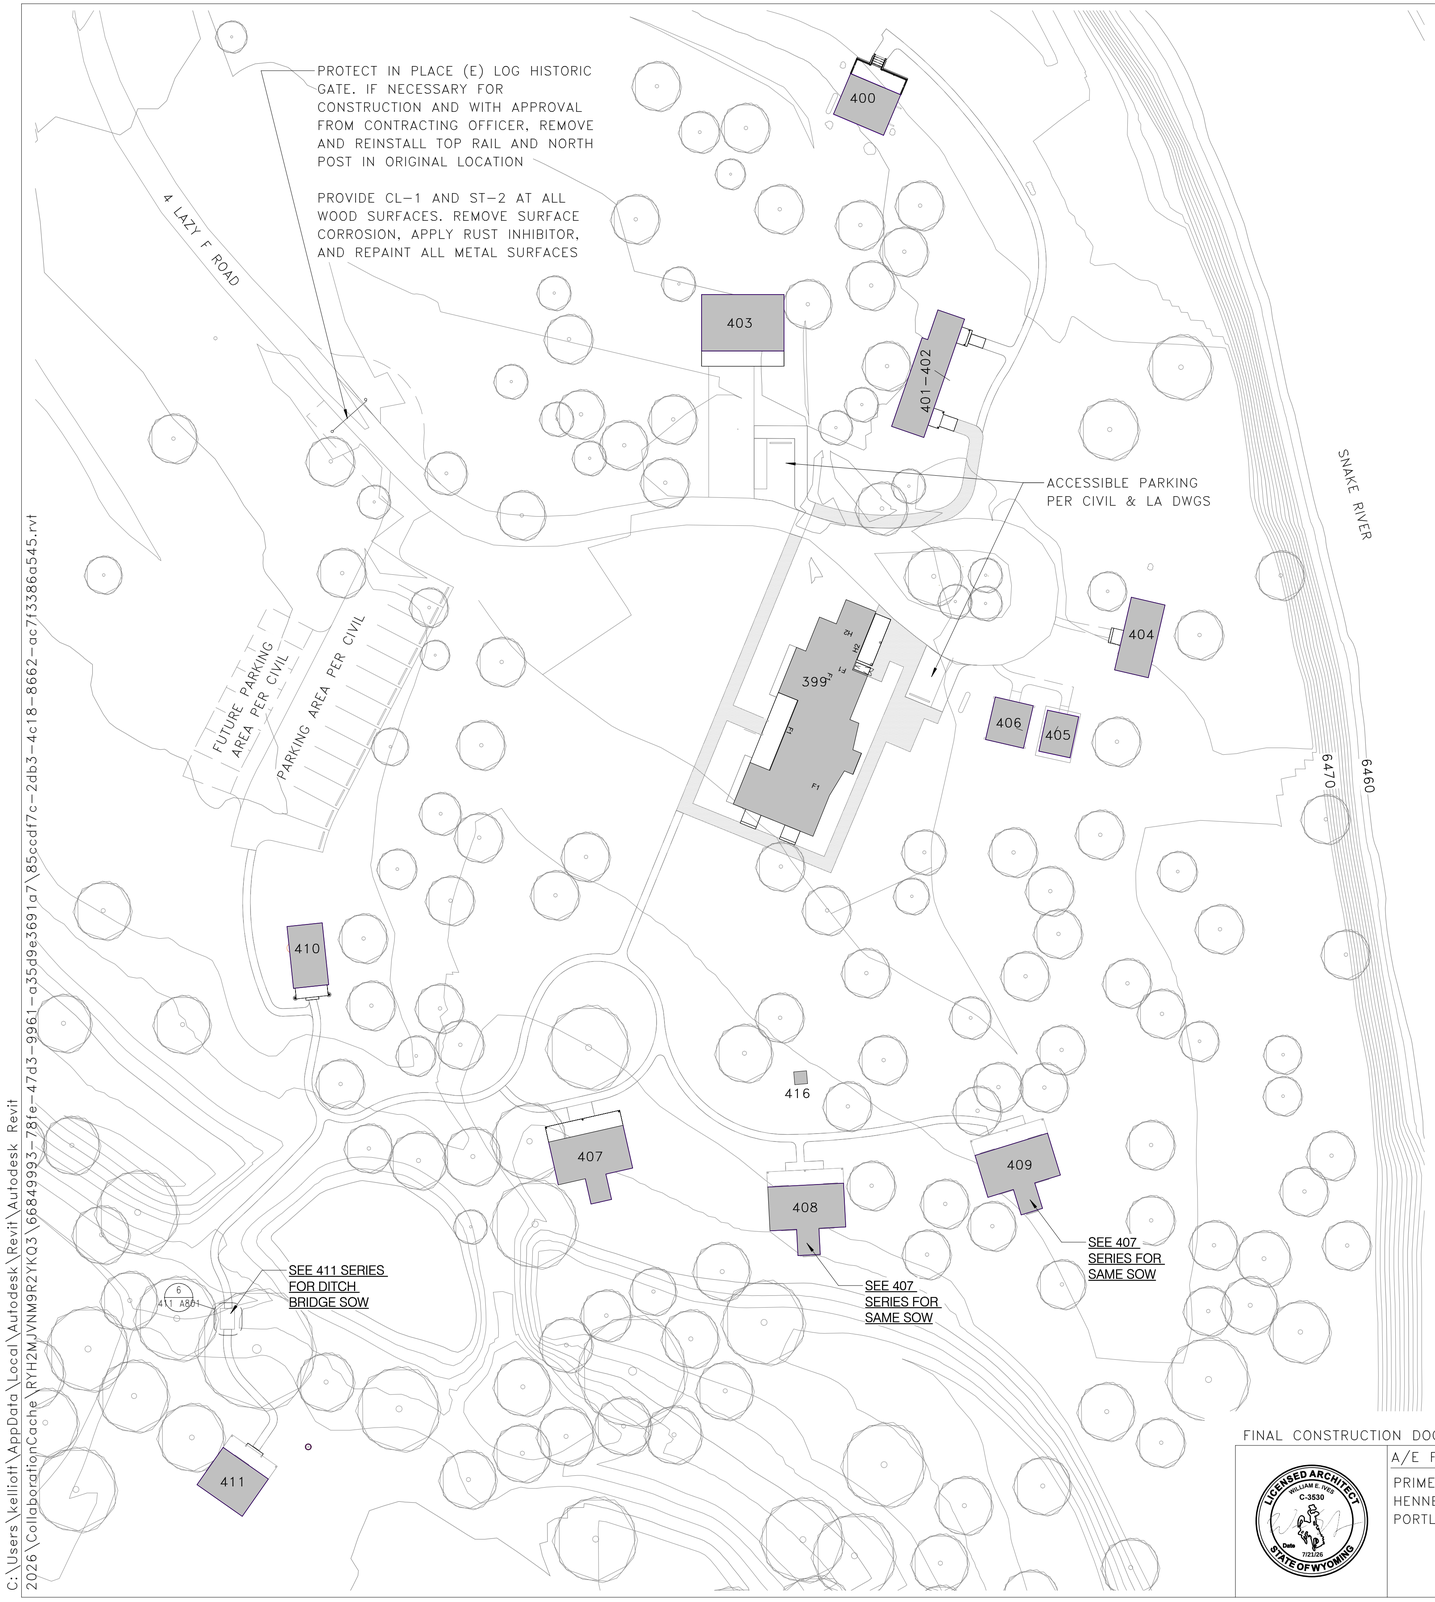

BUILDING SCHEDULE					
BLDG. NO.	NAME	AREA	(E) FLOOR ELEVATION	PROPOSED FLOOR ELEVATION	FOUNDATION WORK
399	MAIN LODGE	2409 SF	6474.29	6474.96	A
400	RIVER CABIN	376 SF	6474.43	6474.43	C
401–402	NURSE'S CABIN	639 SF	6474.89	6475.56	A
403	3–BAY GARAGE	728 SF	6474.50	6475.00	B
404	GEORGES CABIN	403 SF	6474.00	6474.67	A
405	MOUSE HOUSE	210 SF	6473.88	6473.88	–
406	ICE HOUSE	266 SF	6474.00	6474.00	–
407	END CABIN	608 SF	6471.49	6472.16	A
408	MIDDLE CABIN	611 SF	6472.03	6472.70	A
409	MRS OLIVER'S CABIN	613 SF	6473.28	6473.95	A
410	HARRY'S CABIN	344 SF	6474.34	6475.10	A
411	NEW CABIN	393 SF	6474.52	6474.52	C

FOUNDATION WORK REQUIREMENTS

A. REPAIR (E) LOGS AND STABILIZE ENTIRE STRUCTURE, INCLUDING (E) MASONRY CHIMNEYS WHERE APPLICABLE, PRIOR TO LIFTING/MOVING STRUCTURE FOR FOUNDATION WORK PER STRUCTURAL DRAWINGS. PREP AND PLACE BACK AT ORIGINAL LOCATION ONCE CRAWLSPACE AND FOUNDATION WORK IS COMPLETED.

B. PHOTOGRAPH, TAG, CATALOGUE, AND DECONSTRUCT (E) REMAINING LOG STRUCTURE AND PREP FOR REINSTALLATION OF EACH COMPONENT AT EXACT SAME LOCATION. PROVIDE FOUNDATION WORK, STRUCTURAL UPGRADES, AND RECONSTRUCT STRUCTURE PER STRUCTURAL DRAWINGS.

C. PROVIDE STRUCTURAL UPGRADES AT (E) FOUNDATION TO REMAIN PER STRUCTURAL DRAWINGS.

PROJECT OVERVIEW SITE PLAN NOTES

1. SEE LANDSCAPE DRAWINGS FOR LIMITS OF DISTURBANCE.

1 PROJECT OVERVIEW SITE PLAN

1" = 30'–0"

SCALE OF FEET 30 0 30 60

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TYREE C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
G008

TITLE OF SHEET
OVERALL – PROJECT OVERVIEW SITE PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 9 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

GENERAL NOTES:

1. STANDARD SYMBOLS AND LINE TYPES ARE SHOWN IN THE LEGEND. SOME SYMBOLS OR LINE TYPES SHOWN MAY NOT BE SHOWN ON THE PLANS.
2. IN GENERAL, EXISTING STRUCTURES AND FACILITIES ARE NOTED AS "EXISTING" AND ARE SHOWN IN LIGHT LINE WEIGHTS OR AS SCREENED BACKGROUND. NEW STRUCTURES OR FACILITIES ARE SHOWN IN HEAVY LINE WEIGHTS.
3. UTILITY INFRASTRUCTURE AND BUILDING SITE WORK ARE TO BE DESIGNED AND CONSTRUCTED AS ONE PACKAGE.
4. NOTIFY THE CONTRACTING OFFICER OF ANY DISCREPANCIES IN THE PLANS.
5. THE CIVIL SITE WORK IS PART OF A LARGER PROJECT INVOLVING OTHER TRADES WITHIN OR ADJACENT TO THE SITE. THE CIVIL SITE CONTRACTOR SHALL COORDINATE WITH OTHER TRADES TO ALLOW SUFFICIENT ACCESS TO THEIR WORK.
6. CONTRACTOR SHALL CONDUCT WORK IN ACCORDANCE WITH THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) AND ANY OTHER APPLICABLE EROSION CONTOL REQUIREMENTS NOTED IN THE SPECIFICATIONS.
7. CONTRACTOR SHALL TAKE PRECAUTIONS TO PREVENT DAMAGE TO EXISTING CONCRETE WHICH IS TO REMAIN IN PLACE. ANY DAMAGE TO EXISTING CONCRETE OUTSIDE OF PROJECT LIMITS SHALL BE REPAIRED AT THE CONTRACTORS EXPENSE.
8. CONTRACTOR TO PERFORM MISCELLANEOUS GRADING TO PROVIDE GRADUAL TRANSITIONS BETWEEN NEW AND EXISTING GRADES.
9. NON-SURFACED AREAS DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ORIGINAL GRADE.

CONSTRUCTION NOTES:

1. ALL IMPROVEMENTS ON THIS PROJECT SHALL BE COMPLETED IN ACCORDANCE WITH APPLICABLE CODES AS NOTED ON SHEET G006.
2. DRAWINGS FOR THIS WORK ARE DIAGRAMMATIC, INTENDED TO CONVEY THE EXTENT, GENERAL ARRANGEMENT AND LOCATIONS OF THE WORK. BECAUSE OF THE SCALE OF THE DRAWINGS, CERTAIN BASIC ITEMS MAY NOT BE SHOWN. INCLUDE ALL ITEMS WHERE REQUIRED BY CODE, OTHER SECTIONS, AND FOR PROPER INSTALLATION OF THE WORK.
3. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE DIVISION OF INDUSTRIAL REGULATIONS (OSHA) SAFETY STANDARDS. IF REQUESTED BY THE INSPECTOR, THE CONTRACTOR SHALL PROVIDE PROOF OF A PERMIT FROM SAID DIVISION.
4. ALL WORK SHALL CONFORM TO ALL APPLICABLE NATIONAL, STATE AND LOCAL BUILDING CODES AND SHALL BE IN COMPLIANCE WITH APPLICABLE STANDARDS.
5. ALL WORK SHALL BE IN ACCORDANCE AND FULL COMPLIANCE WITH ALL OF THE NPS STANDARDS.
6. THE CONTRACTOR'S OPERATIONS SHALL BE CONFINED WITHIN THE PROJECT LIMITS. MATERIALS AND EQUIPMENT SHALL BE STORED ON THE PROJECT SITE WHERE DESCRIBED IN THE SPECIFICATIONS, DRAWINGS OR AS APPROVED BY THE OWNER. IT SHALL BE UNDERSTOOD THAT THE RESPONSIBILITY FOR PROTECTION AND SAFEKEEPING OF EQUIPMENT AND MATERIALS ON OR NEAR THE SITE WILL BE ENTIRELY THAT OF THE CONTRACTOR AND THAT NO CLAIM SHALL BE MADE AGAINST THE OWNER BY REASON OF ANY ACT OF AN EMPLOYEE OR TRESPASSER.
7. CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO CONSTRUCTION. ANY DISCREPANCIES FOUND ARE TO BE BROUGHT TO THE CONTRACTING OFFICER'S ATTENTION PRIOR TO COMMENCEMENT OR CONTINUATION OF CONSTRUCTION ACTIVITIES.
8. REFERENCE ALL SURVEY MONUMENTS, SECTION CORNERS, 1/4 CORNERS, AND PROPERTY CORNERS PRIOR TO BEING DISTURBED BY CONSTRUCTION. ANY MONUMENTS AND CORNERS DISTURBED DURING CONSTRUCTION SHALL BE REPLACED BY A PROFESSIONAL LAND SURVEYOR (PLS) REGISTERED IN THE STATE OF WYOMING.
9. THE CONTRACTOR SHALL PERFORM ALL CONSTRUCTION ACTIVITIES IN A MANNER TO MINIMIZE INCONVENIENCE TO THE ADJACENT ACTIVITIES AND OPERATIONS.
10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL PUBLIC AND PRIVATE PROPERTY INSOFAR AS IT MAY BE AFFECTED BY THESE OPERATIONS. ALL COSTS FOR PROTECTING, REMOVING, AND RESTORING EXISTING IMPROVEMENTS SHALL BE BORNE SOLELY BY THE CONTRACTOR.
11. THE CONTRACTOR SHALL AT ALL TIMES TAKE WHATEVER MEASURES ARE NECESSARY TO ASSURE THE PROPER CONTAINMENT AND DISPOSAL OF POLLUTANTS ON THE SITE IN ACCORDANCE WITH ANY AND ALL APPLICABLE LOCAL, STATE, AND FEDERAL REGULATIONS. CONTRACTOR REQUIRED TO OBTAIN SWPPP.
12. THE CONTRACTOR SHALL IMMEDIATELY CLEAN UP ANY CONSTRUCTION MATERIALS INADVERTENTLY DEPOSITED ON EXISTING STREETS, SIDEWALKS, OR OTHER PUBLIC RIGHTS-OF-WAY AND MAKE SURE STREETS AND WALKWAYS ARE CLEANED AT THE END OF EACH WORKING DAY.
13. CONSTRUCTION WORK ZONE TRAFFIC SIGNS SHALL BE FURNISHED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH APPLICABLE REQUIREMENTS OF NPS AND ALL COMMUNITY EMERGENCY SERVICES (FIRE, MEDICAL, ETC.). "CONSTRUCTION AHEAD" WARNING SIGNS ARE TO TO BE INSTALLED ALONG ADJACENT ROADS OR DRIVEWAYS. FLASHERS WITH CAUTION TAPE ARE TO BE INSTALLED WHERE ANY CONSTRUCTION ACTIVITY CROSSES A SIDEWALK OR PEDESTRIAN PATH IN ACCORDANCE WITH THE SPECIFICATIONS.
14. AREAS ON THE SITE TO BE GRADED SHALL BE CLEARED AND GRUBBED OF ALL VEGETATION AND DEBRIS. THESE MATERIALS SHALL BE REMOVED FROM THE SITE BY THE CONTRACTOR.
15. THE GROUND SURFACE EXPOSED BY STRIPPING SHALL BE SCARIFIED TO A MINIMUM DEPTH OF EIGHT INCHES (8"), MOISTURE CONDITIONED TO THE PROPER MOISTURE CONTENT FOR COMPACTION, AND COMPACTED AS REQUIRED FOR COMPACTED FILL. RECOMPACTION SHALL BE APPROVED BY THE CONTRACTING OFFICER PRIOR TO PLACING FILL.
16. CONTRACTOR SHALL REPLACE TOPSOIL AND OTHER EXCAVATED SOILS AND ROCK IN THE PROPER ORDER, COBBLE LOWEST, THEN SUBSOIL, THEN TOPSOIL. USE A TRENCH BOX IF ONE IS NEEDED TO REDUCE DISTURBANCE. SPREAD TOPSOIL AS NEAR TO THE ORIGINAL LOCATION AS POSSIBLE.
17. NO STOPPING, PARKING, OR STORING OF CONSTRUCTION MATERIALS IN THE PUBLIC STREETS /ROADS, RIGHTS-OF-WAY, NON-DESIGNATED PARKING LOT OR ANY DRIVEWAY IS ALLOWED.
18. THE CONTRACTOR SHALL RESTORE ALL ROADWAY SURFACES TO EQUAL OR BETTER CONDITION THAN EXISTED PRIOR TO EXCAVATION AS DETERMINED BY THE CONTRACTING OFFICER.
19. ASPHALT AND CONCRETE SHALL BE SAW CUT OR NEAT CUT AS APPROVED BY THE CONTRACTING OFFICER.
20. THE CONTRACTOR SHALL UTILIZE COMPACTION EQUIPMENT SUITABLE FOR THE SOIL TYPES AND SURFACE MATERIALS ENCOUNTERED ON THE PROJECT.
21. SUBGRADE, SUB-BASE, BASE, AND SURFACE COURSE COMPACTION SHALL CONFORM TO ALL APPLICABLE SPECIFICATIONS.
22. CONCRETE SHALL BE 4,000 PSI UNLESS OTHERWISE SPECIFIED.
23. CONTRACTION JOINTS SHALL BE CONSTRUCTED BY SAWING OR SCORING. WHEN SCORING, A TOOL SHALL BE USED THAT WILL LEAVE CORNERS ROUNDED AND TO DESTROY AGGREGATE INTERLOCK FOR SPECIFIED MINIMUM DEPTH. ALL ROUNDED CORNERS SHALL MATCH EXAMPLE PROVIDED BY CONTRACTING OFFICER.
24. CONTRACTOR IS RESPONSIBLE FOR APPLYING FOR A STORMWATER POLLUTION PREVENTION PLAN THROUGH THE WYOMING DEPARTMENT OF ENVIRONMENTAL QUALITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING THE NECESSARY APPROVALS FOR STORMWATER RUNOFF.
25. CONTRACTOR IS RESPONSIBLE FOR PROJECT DUST CONTROL.
26. COORDINATE WITH NPS AND DEVELOP PLANS FOR ACCESS AND HAUL ROUTES, LIMITS OF WORK, STAGING AND LAYDOWN AREAS, AND ALL CONSTRUCTION PREPARATION. ALL PLANS MUST BE APPROVED PRIOR TO CONSTRUCTION

GENERAL UTILITY NOTES:

1. THE LOCATION, DEPTH, AND SIZE OF EXISTING UTILITIES SHOWN ON THESE PLANS IS APPROXIMATE. THE CONTRACTOR SHALL FIELD VERIFY THE EXISTENCE, LOCATION, DEPTH, SIZE, LINE, AND GRADE OF EXISTING UTILITY CONNECTIONS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ANY DAMAGE TO THE EXISTING FACILITIES DUE TO FAILURE TO LOCATE OR PROVIDE PROPER PROTECTION WHEN LOCATION IS KNOWN. WATER AND SEWER UTILITIES ARE PLANNED TO BE BROUGHT TO EACH BUILDING AS A PART OF PHASE 1 – THE CURRENT PLANS REFLECT THE DESIGN LOCATION OF THESE UTILITIES. THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL BURIED UTILITIES PRIOR TO BEGINNING CONSTRUCTION.
2. LOCATION OF SITE UTILITIES SHALL BE VERIFIED BY GENERAL CONTRACTOR AND THE UTILITY COMPANY PROVIDING SERVICE. ANY PROPOSED ADJUSTMENTS TO DRY UTILITY LOCATION SHALL BE COORDINATED WITH UTILITY COMPANIES AND CONTRACTING OFFICER.
3. INFORM NPS OF WATER, SEWER, BURIED POWER, AND FIBER UTILITIES ROUTING CHANGES. NPS SHALL BE RESPONSIBLE FOR COORDINATING WITH ARCHEOLOGY, HISTORICAL COMPLIANCE AND NATURAL RESOURCES FOR ANY VARIATIONS IN PROPOSED ROUTING, TERMINATION LOCATIONS, AND BUILDING PENETRATIONS NPS SHALL OBTAIN ALL NECESSARY SHPO APPROVALS WITH INPUT FROM THE CONTRACTOR.
4. PRIOR TO SUBMITTING PIPING DRAWINGS FOR ANY NEW PIPE THAT IS TO CONNECT TO AN EXISTING PIPE OR STRUCTURE, THE CONTRACTOR SHALL EXPOSE THE EXISTING PIPE OR STRUCTURE TO VERIFY ITS EXACT LOCATION, SIZE, MATERIALS, INVERT ELEVATIONS, AND GRADE.
5. GENERAL CONTRACTOR SHALL HAVE APPROVAL OF ALL GOVERNING AGENCIES HAVING JURISDICTION OVER ANY UTILITY SYSTEM PRIOR TO INSTALLATION.
6. DIMENSIONS SHOWN ARE TO CENTERLINE OF PIPE OR FITTING.
7. LAY PIPE TO UNIFORM GRADE BETWEEN INDICATED ELEVATION POINTS.
8. SIZE OF FITTINGS SHOWN ON DRAWINGS SHALL CORRESPOND TO ADJACENT STRAIGHT RUN OF PIPE, UNLESS OTHERWISE INDICATED. TYPE OF JOINT AND FITTING MATERIAL SHALL BE THE SAME AS SHOWN FOR ADJACENT STRAIGHT RUN OF PIPE.
9. THE CONTRACTOR SALL BE RESPONSIBLE FOR CROSSING ALL UTILITIES WITHOUT INTERRUPTION. ANY INTERRUPTION IN SERVICES SHALL BE IMMEDIATELY RESTORED AT THE CONTRACTOR'S EXPENSE, UNLESS PREVIOUSLY ABANDONED.
10. EROSION CONSIDERATIONS MUST BE TAKEN IN TO ACCOUNT DURING ALL TRENCHING TO ENSURE SAFE WORK ENVIRONMENT AND TO ENSURE PROTECTION OF AREAS ADJACENT TO CONSTRUCTION. ALL EROSION CONTROL MUST BE ACCORDING TO THE CONTRACTOR'S APPROVED SWPPP.
11. AT THE END OF EACH WORK DAY, NO TRENCH OF LONGER THAN 50 FEET SHALL BE LEFT OPEN. ALL OPEN TRENCHES SHALL BE FENCED.
12. THE CONTRACTOR SHALL HAVE ONE CALL OF WYOMING, 811 OR (1-800-849-2476), LOCATE EXISTING ELECTRIC AND TELEPHONE UTILITY LINES. NPS WILL MARK OUT EXISTING WATER AND SEWER LINES.

GENERAL GRADING NOTES:

1. SIDEWALK CROSS SLOPE SHALL BE 1.5% (TYP, 1% MIN, 2% MAX). MATCH SIDEWALK GRADES AT BUILDING ENTRANCES.
2. ACCESSIBLE ROUTES (PUBLIC WALKING TOUR ROUTE AND SIDEWALKS WIDER THAN 4'-0") TO COMPLY WITH ABA REQUIREMENTS.
3. ENSURE THE WALKS ALONG THE ACCESSIBLE ROUTE HAVE A RUNNING SLOPE OF 1:20 OR 5% MAXIMUM (EXCEPT AT THE CURB RAMPS, WHICH CAN BE UP TO 1:12 OR 8.33%) AND A CROSS SLOPE OF 1:48 OR 2% MAXIMUM. THIS INCLUDES AT THE CROSSING OF DRIVE LANES.
4. WHERE THE ACCESSIBLE ROUTES INTERSECT, A 48"X48" LEVEL "LANDING" THAT HAS A SLOPE OF 2% MAXIMUM IN ANY DIRECTION IS REQUIRED.
5. SIDE SLOPES FROM DRIVE AND PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
6. PER THE PUBLIC RIGHTS-OF-WAY GUIDELINES PUBLISHED BY THE US ACCESS BOARD, A WALK WITHIN THE PUBLIC RIGHTS-OF-WAY MAY HAVE A RUNNING SLOPE WHICH APPROXIMATES THE SLOPE OF THE ADJACENT STREET. THE SLOPE CAN BE INCREASED AS NEEDED TO ACCOMMODATE LEVEL AREAS REQUIRED FOR INTERSECTING ACCESSIBLE ROUTES AND SITE ELEMENTS SUCH AS BENCHES, TRASH CANS, AND BIKE RACKS.
7. WHERE THE PUBLIC SIDEWALK ADJOINS THE ROUTE TO A BUILDING ENTRANCE (TRANSITION AREAS – ALLOWING A USER TO STOP AND CHANGE DIRECTIONS), THE RUNNING AND CROSS SLOPE IN THAT AREA MUST BE 1:48 OR 2% MAXIMUM.
8. ENSURE THE MANEUVERING CLEARANCES AT THE EXTERIOR SIDE OF ALL ENTRY DOORS AND AT BOTH SIDES OF GATES HAVE A SLOPE OF 1:48 OR 2% MAXIMUM IN ANY DIRECTION, AND A 1/2" MAXIMUM OVERALL CHANGE IN LEVEL AT THE THRESHOLDS.
9. ENSURE A 30" X 48" CLEAR FLOOR SPACE (CFS) IS PROVIDED ADJACENT TO THE EXTERIOR SITE ELEMENTS SUCH AS BENCHES, TRASH CANS, AND BIKE RACKS, AND HAVE A SLOPE OF 1:48 OR 2% MAXIMUM IN ANY DIRECTION.
10. SLOPE LANDSCAPED AREAS AWAY FROM BUILDING AT 2% MIN, 12.5% (8:1) MAX GRADE, OR AS NOTED ON THE PLANS.
11. PROTECT VEGETATION TO THE EXTENT POSSIBLE. COORDINATE ALL TRIMMING OR REMOVAL OF TREES AND SHRUBS WITH NPS PRIOR TO TRIMMING OR REMOVAL.

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss ss ss — SEWER SERVICE
- 8"w 8"w — WATER LINE (SIZE INDICATED)
- ws ws — WATER SERVICE
- bp bp — BURIED POWER
- op op — OVERHEAD POWER
- bt bt bt — BURIED TELEPHONE
- X X X — FENCE
- FB FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- ss ss ss — SEWER SERVICE
- WS WS — WATER SERVICE
- COM COM — BURIED COMMUNICATIONS
- FB FB — BURIED FIBER OPTIC SERVICE
- BP BP — BURIED POWER
- FM FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL
- CRUSHER FINES
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

811 Know what's below. Call before you dig.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer - Civil - CELINE GAUCHER - 12845 - Date: 07/21/2026 - WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C001	TITLE OF SHEET OVERALL – GENERAL NOTES REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 10 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\Sheets\000 C001 General Notes.dwg

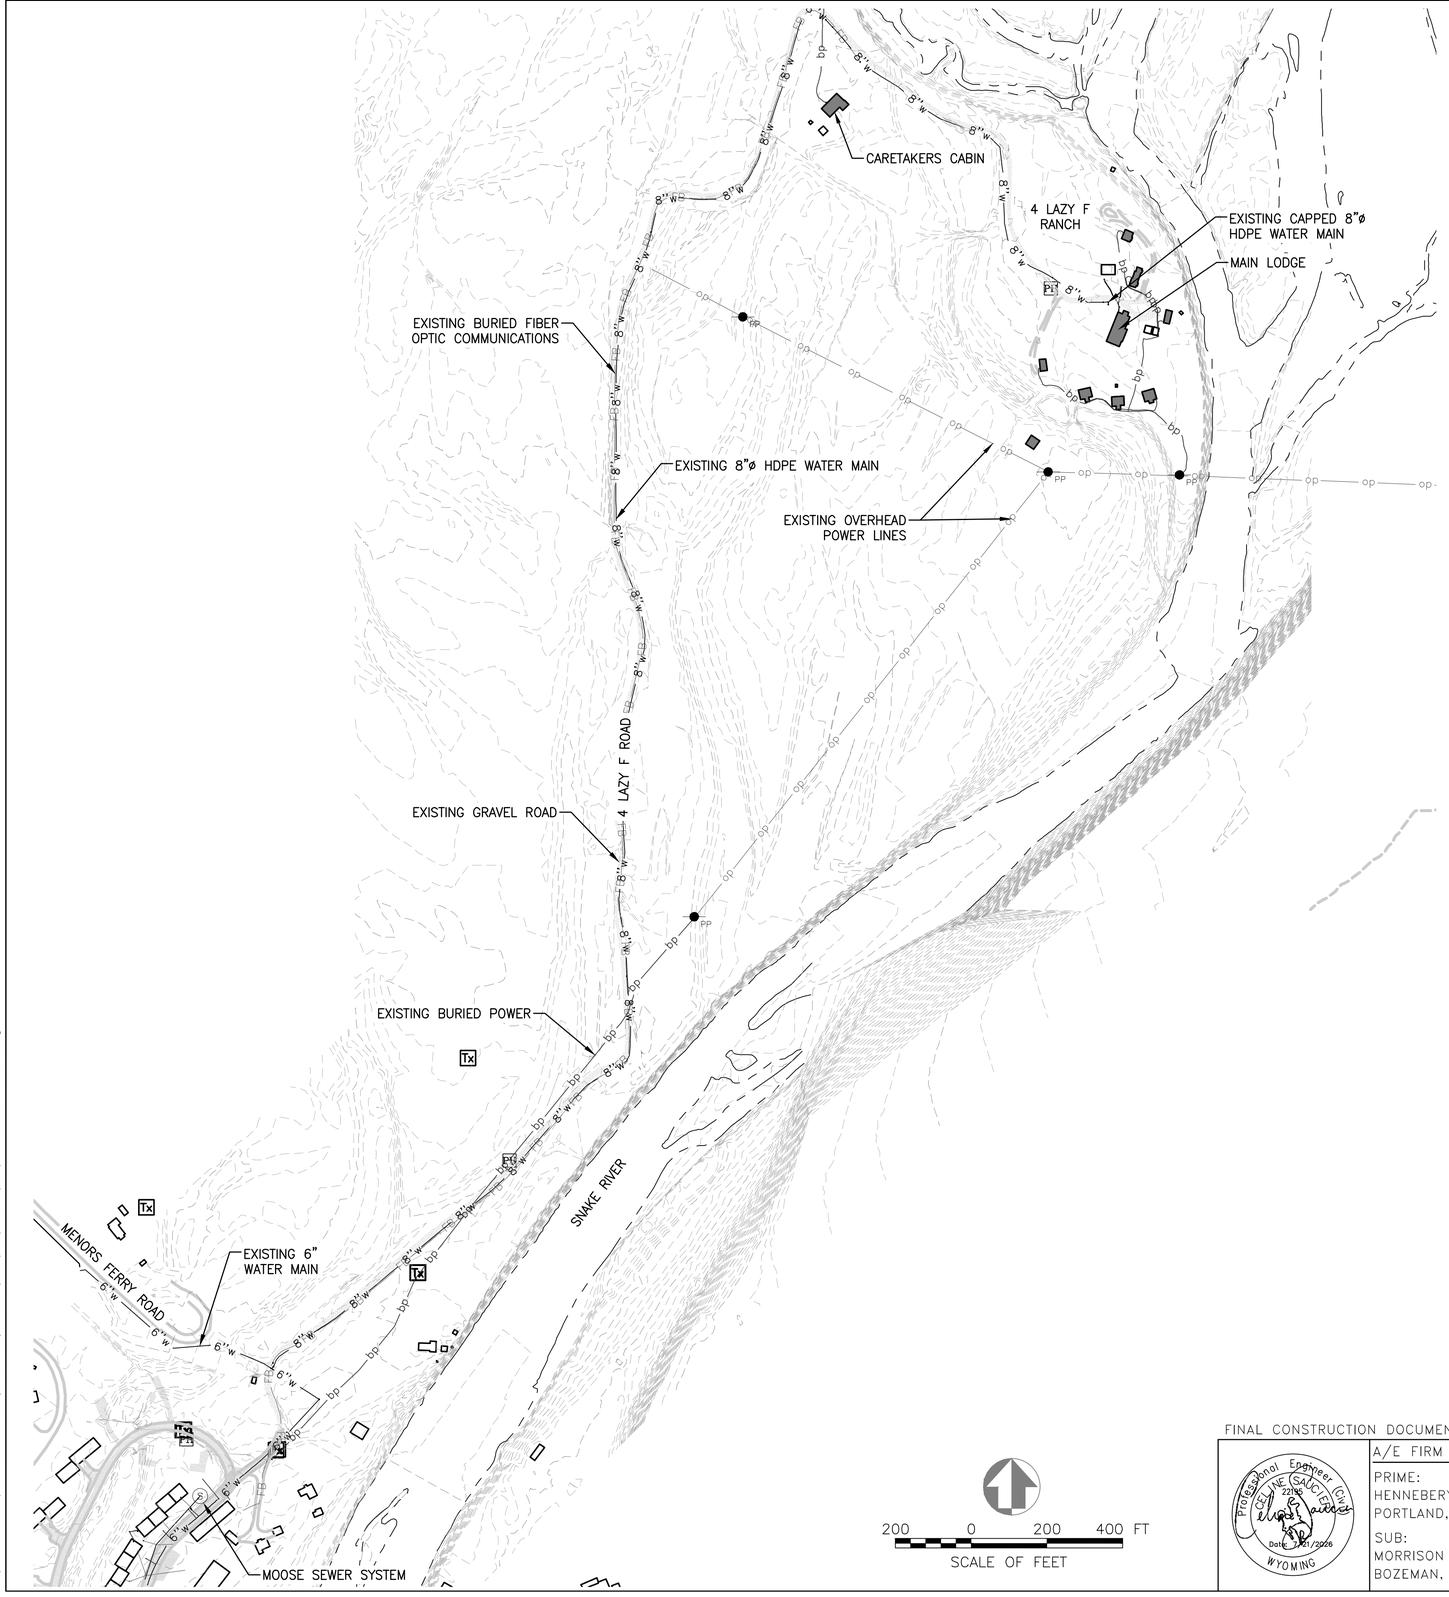

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWING GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
   - 1.4. CONTRACTOR IS RESPONSIBLE FOR OBTAINING CONTROL SURVEY INFORMATION FROM THE PARTY THAT PERFORMED THE ORIGINAL LIDAR SURVEY.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEE, NOR IS THERE ANY GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY OF UTILITIES HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS-BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CCJ INC (SAJC) (ECI) 22155 WYOMING Date: 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C002

TITLE OF SHEET
OVERALL – EXISTING SITE OVERVIEW

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 11 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DSGN - PHASE 1.dwg

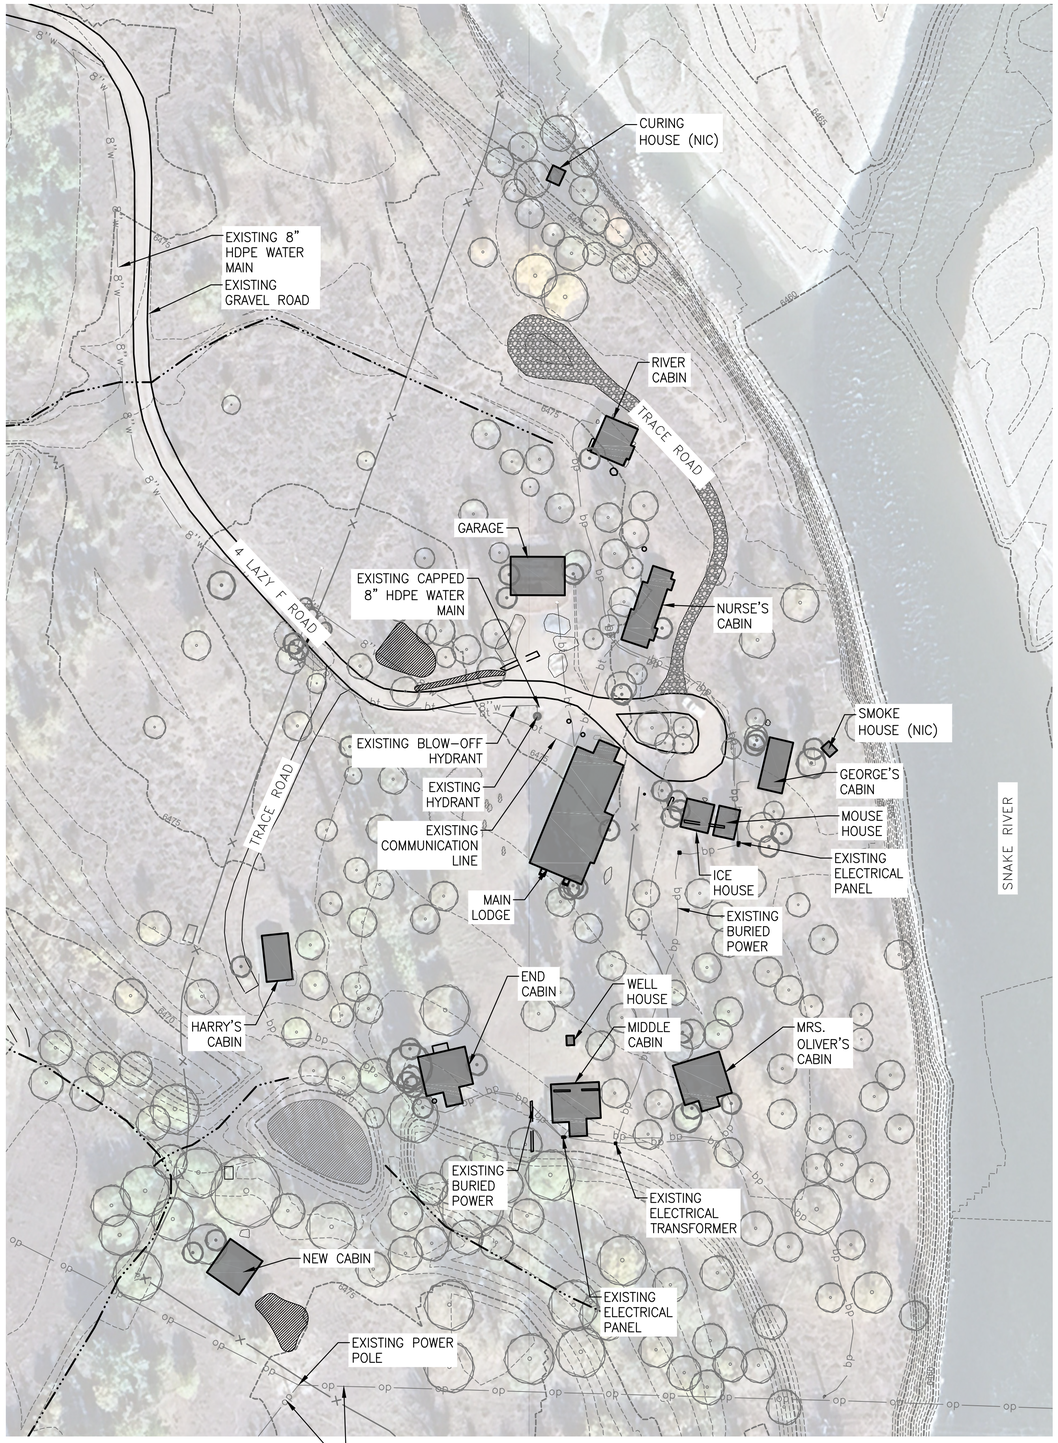

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWING GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
   - 1.4. CONTRACTOR IS RESPONSIBLE FOR OBTAINING CONTROL SURVEY INFORMATION FROM THE PARTY THAT PERFORMED THE ORIGINAL LIDAR SURVEY.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEE, NOR IS THERE ANY GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY OF UTILITIES HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS-BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CHRISTOPHER M. SAUCIER 22255 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C003	TITLE OF SHEET OVERALL – EXISTING SITE – LAZY 4 F RANCH REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 12 OF 371

P:\6204-HEA_Arch\010 - NPS IDIO MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C002 Existing Conditions.dwg

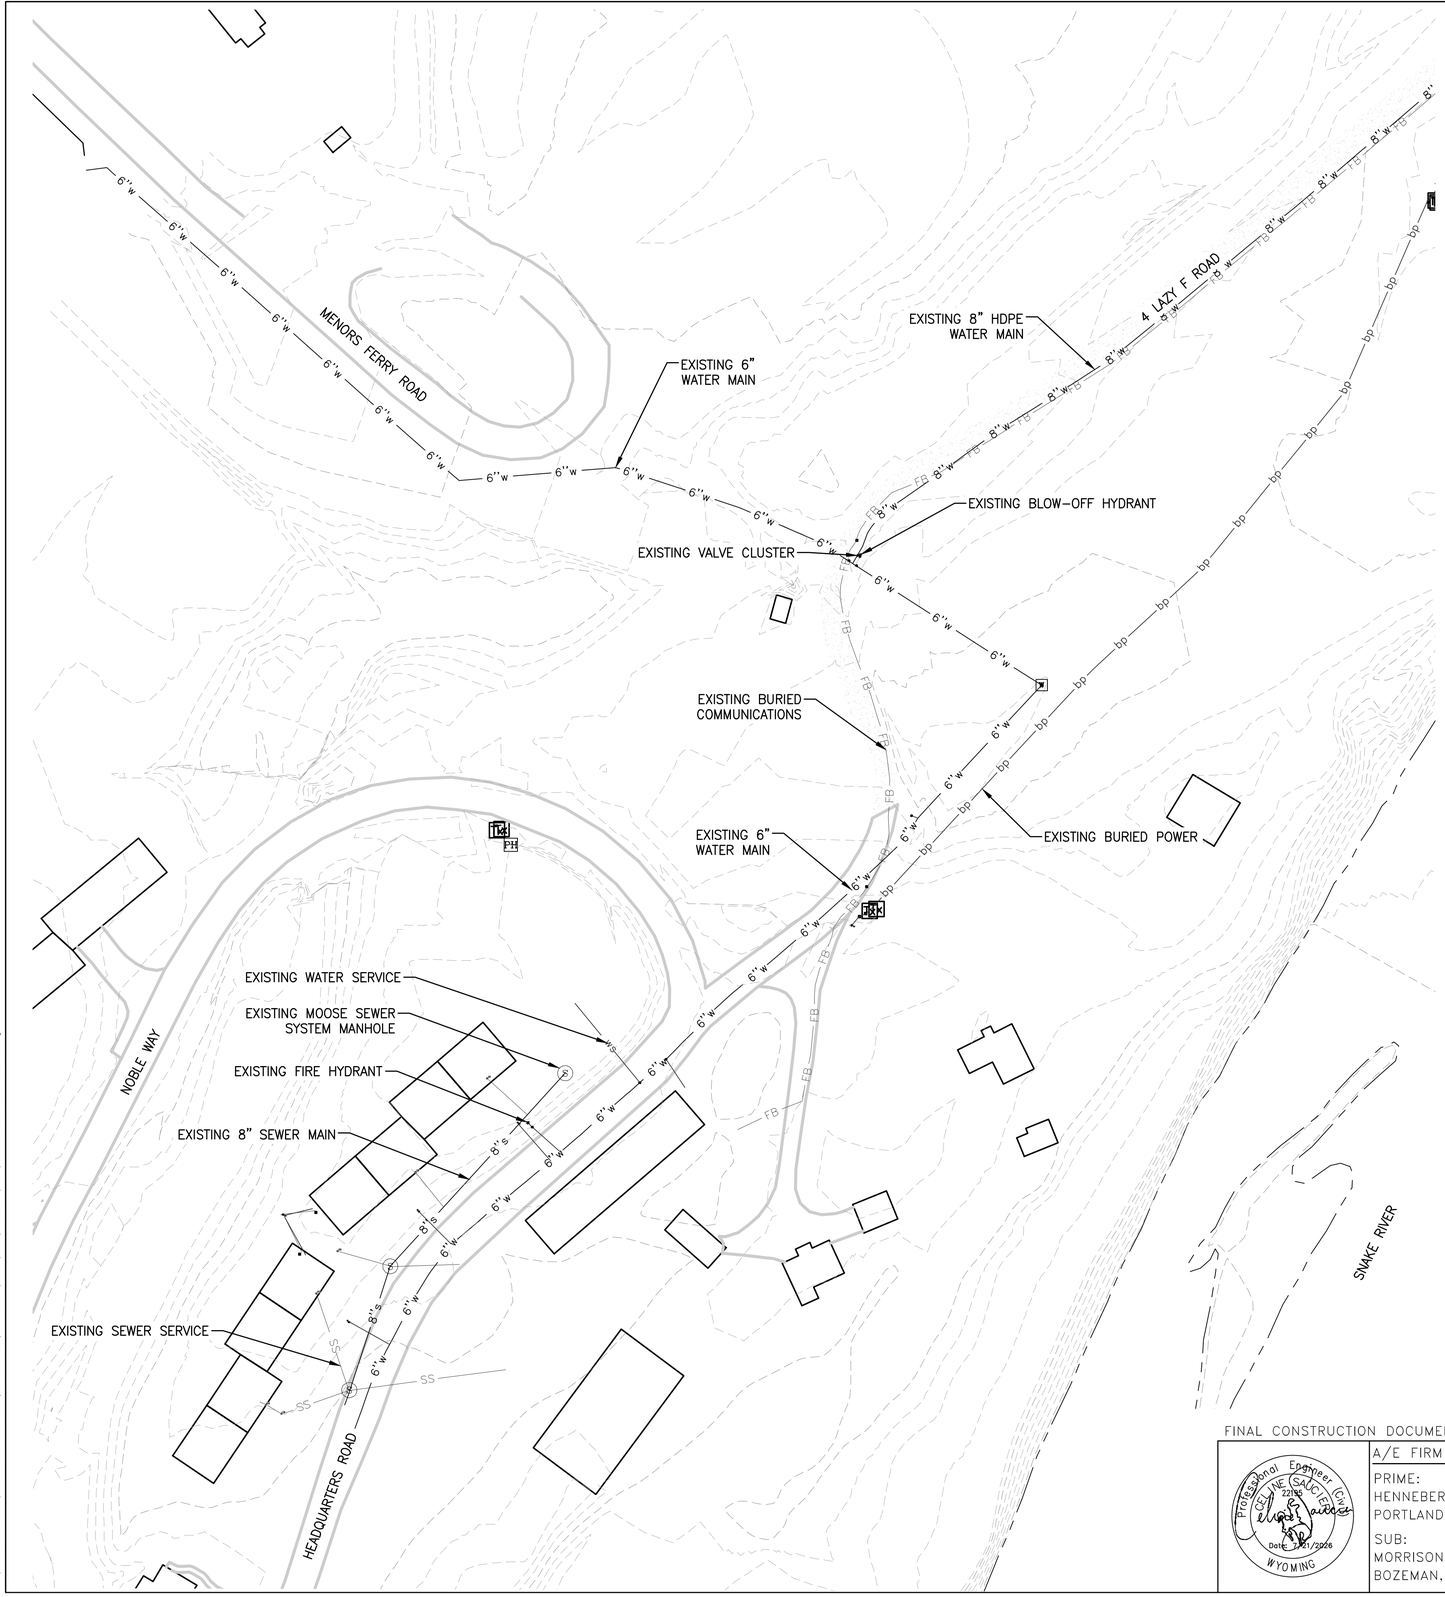

50 0 50 100 FT
SCALE OF FEET

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWING GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
   - 1.4. CONTRACTOR IS RESPONSIBLE FOR OBTAINING CONTROL SURVEY INFORMATION FROM THE PARTY THAT PERFORMED THE ORIGINAL LIDAR SURVEY.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEE, NOR IS THERE ANY GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY OF UTILITIES HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS-BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE M. SAUCIER 22152 WYOMING Date: 7/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED:	MMI
DRAWN:	CMS
TECH REVIEW:	CMS
DATE:	07/21/2026

SUB SHEET NO.
000
C004

TITLE OF SHEET
OVERALL – EXISTING SITE – MOOSE SEWER SYSTEM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	13 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DSGN - PHASE 1.dwg

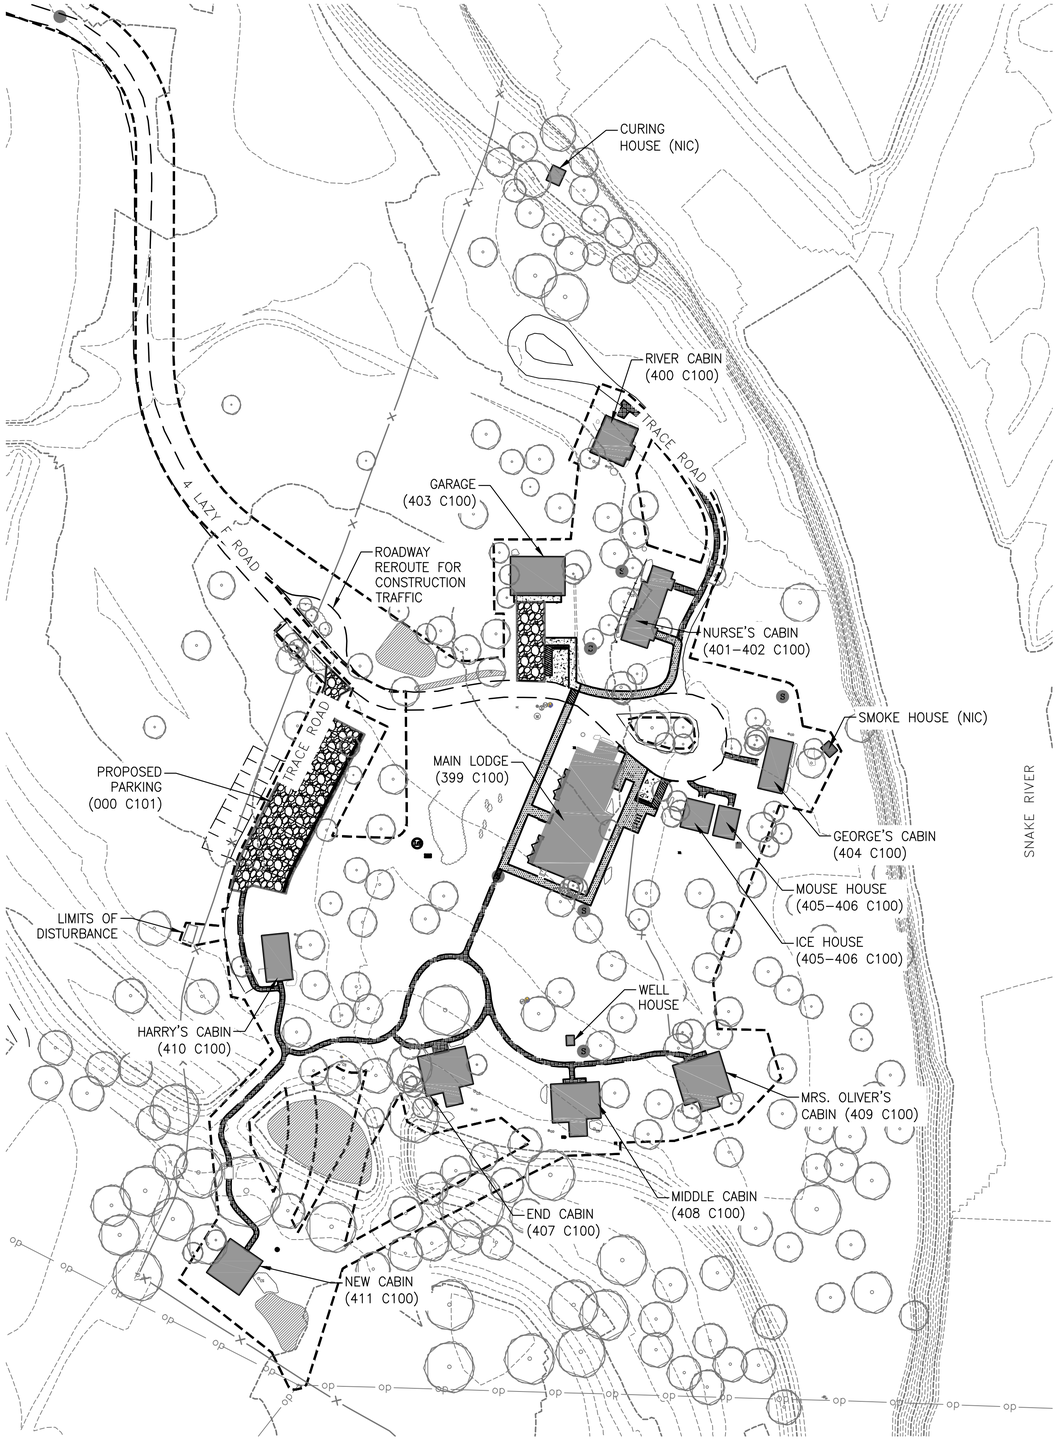

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWING GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
   - 1.4. CONTRACTOR IS RESPONSIBLE FOR OBTAINING CONTROL SURVEY INFORMATION FROM THE PARTY THAT PERFORMED THE ORIGINAL LIDAR SURVEY.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEE, NOR IS THERE ANY GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY OF UTILITIES HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS-BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22842 Date: 07/21/2026 WYOMING

A/E FIRM	DESIGNED: MMI
PRIME: HENNEBERY EDDY PORTLAND, OR	DRAWN: CMS
SUB: MORRISON MAIERLE BOZEMAN, MT	TECH REVIEW: CMS
	DATE: 07/21/2026

SUB SHEET NO. 000 C100

TITLE OF SHEET
OVERALL – PROPOSED SITE PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	14 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

MATCH EXISTING CONNECTION ≈ 74.21

R20.00'

R29.92'

TEMPORARY CONSTRUCTION ENTRANCE TO ACCOMMODATE LARGE CONSTRUCTION EQUIPMENT

PROTECT IN PLACE (E) LOG HISTORIC GATE. IF NECESSARY FOR CONSTRUCTION AND WITH APPROVAL FROM CONTRACTING OFFICER, REMOVE AND REINSTALL TOP RAIL AND NORTH POST IN ORIGINAL LOCATION.

MATCH EXISTING CONNECTION ≈ 73.80

MATCH EXISTING CONNECTION ≈ 73.70

MAINTAIN CONDITION OF EXISTING GRAVE ROAD THROUGHOUT CONSTRUCTION

MATCH EXISTING CONNECTION ≈ 73.83

12.39'

10.31'

7.53'

11.26'

R5.00'

21.00'

(13) 10'X20' PARKING STALLS, 5' APRON IN FRONT OF STALL

PROPOSED BURIED POWER CONDUIT, SEE E100.

6474

6475

102.14'

FUTURE PARKING

TIMBER PARKING BLOCK (TYP 13) SEE 4/C102

GRAVEL PARKING GRADED TO DRAIN FOLLOWING EXISTING CONTOURS SEE 1/C102

95.50'

LIFT STATION SEE 000 C305

LS

CONTINUE PARKING

MATCH EXISTING CONNECTION ≈ 74.78

MATCH EXISTING CONNECTION ≈ 74.84

R106.00'

R70.00'

3' CRUSHER FINES RE: LANDSCAPE

10.00'

R5.00'

20.86'

MATCH LINE 410 C100

10 0 10 20

SCALE OF FEET

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW–OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE GACIENGA 22025 Date: 07/21/2026 WYOMING

A/E FIRM	DESIGNED: MMI
PRIME: HENNEBERY EDDY PORTLAND, OR	DRAWN: CMS
SUB: MORRISON MAIERLE BOZEMAN, MT	TECH REVIEW: CMS
	DATE: 07/21/2026

SUB SHEET NO.

000 C101

TITLE OF SHEET

OVERALL – ENLARGED PARKING

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	15 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

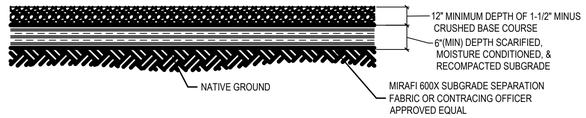

1. EXCAVATE AND REMOVE TOPSOIL/ UNCONTROLLED FILL AND DEBRIS
2. PRIOR TO PLACEMENT OF THE BASE COURSE, THE EXPOSED SUBGRADE SHALL BE SCARIFIED TO MINIMUM DEPTH OF SIX INCHES (6") BELOW EXISTING GRADE, MOISTURE CONDITIONED, AND RECOMPACTED TO 95% (MINIMUM) OF MAXIMUM DENSITY AS DETERMINED BY ASTM D 698.
3. PLACE SUBGRADE SEPARATION FABRIC ACROSS COMPACTED SUBGRADE PER 31 05 00 GEOTEXTILES SPECIFICATIONS
4. PROVIDE MINIMUM 12" COMPACTED BASE COURSE
   - 4.1. AGGREGATE BASE COURSE SHALL CONFORM TO SPECIFICATIONS AND INCORPORATE A MAXIMUM PARTICLE SIZE OF ONE AND ONE-HALF INCHES (1-1/2")
   - 4.2. PLACE BASE COURSE IN 8-INCH (MAX) LOOSE LIFT THICKNESS AND COMPACT EACH LIFT TO A MINIMUM STANDARD RELATIVE COMPACTION OF 95%
   - 4.3. USE ADDITIONAL BASE COURSE, IF NEEDED, TO MEET DESIGN GRADE BASED ON SUBGRADE PREPARATION (REMOVAL OF TOPSOIL/FILL/DEBRIS)

1 GRAVEL PARKING AREA
NOT TO SCALE

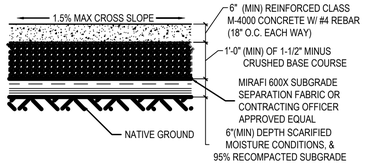

NOTES:

1. PRIOR TO PLACEMENT OF THE BASE COURSE, THE EXPOSED SUBGRADE SHALL BE SCARIFIED TO A MINIMUM DEPTH OF SIX INCHES (6") BELOW EXISTING GRADE, MOISTURE CONDITIONED, AND RECOMPACTED TO 95% (MINIMUM) OF MAXIMUM DENSITY AS DETERMINED BY ASTM D 698.
2. AGGREGATE BASE COURSE SHALL CONFORM TO SPECIFICATIONS AND INCORPORATE A MAXIMUM PARTICLE SIZE OF ONE AND ONE-HALF INCHES (1-1/2").
3. AGGREGATE BASE COURSE SHALL BE COMPACTED TO A MINIMUM OF 95% OF THE MAXIMUM DRY DENSITY AS DETERMINED BY ASTM D 698.
4. SPACE CONTRACTION JOINTS TO MATCH THE WIDTH OF SIDEWALK.
5. INSTALL EXPANSION JOINT MATERIAL AT EVERY FIFTH JOINT FOR THE FULL DEPTH OF CONCRETE.
6. EXPOSED CONCRETE FINISH ON CONCRETE PAVEMENT ADJACENT TO RAP TRAILS

2 CONCRETE PARKING AREA
NOT TO SCALE

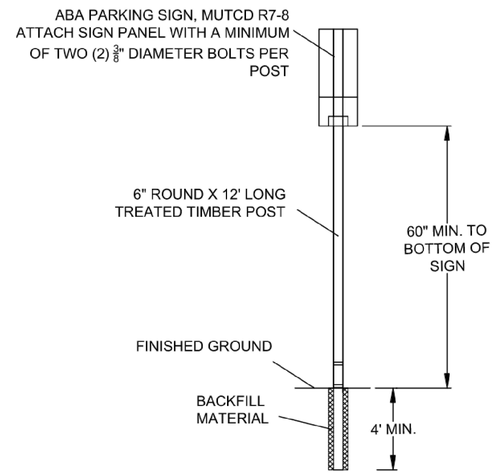

1. SIGN PANEL SHALL BE NPS BROWN VERSION
2. NOT IN CONTRACT, TO BE PROVIDED BY OTHERS
3. PARK WILL FURNISH AND INSTALL ALL CODE REQUIRED EXTERIOR SIGNAGE AND ASSOCIATE POSTS

3 SINGLE SIGN POST INSTALLATION
NOT TO SCALE

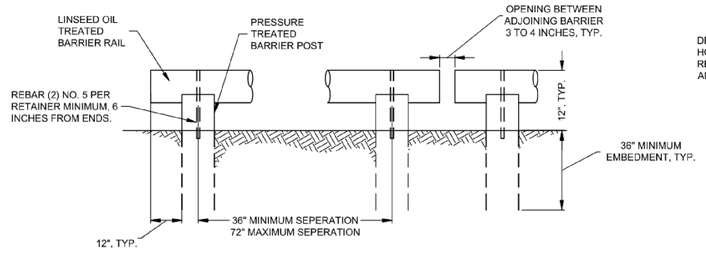

ELEVATION VIEW



EMBEDDED REBAR DETAIL

1. PRE-DRILL HOLES FOR FASTENERS TO PREVENT SPLITTING OF LOGS OR SAWN TIMBERS.
2. REBAR LENGTH SHALL BE 2.5X THE DEPTH OF THE RAIL WITH A MINIMUM OF 18 INCHES LONG.
3. COMPACT AND BACKFILL POST HOLES IN 6 INCH LIFTS UNTIL NO VISUAL DISPLACEMENT.
4. FIELD TREAT ALL FIELD CUTS AND PRE-DRILLED HOLES.

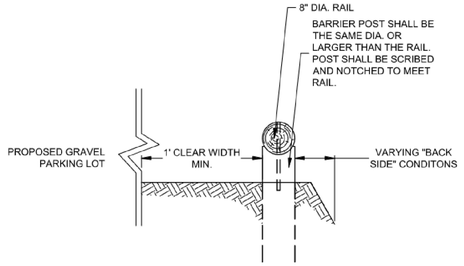

TYPICAL LOG BARRIER SECTION

4 TYPICAL TIMBER BARRIER DETAIL
NOT TO SCALE

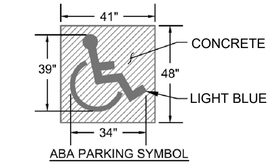

ABA PARKING SYMBOL

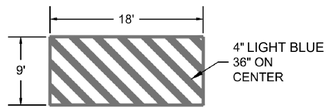

ABA PARKING STRIPING

5 PAVEMENT MARKINGS
NOT TO SCALE

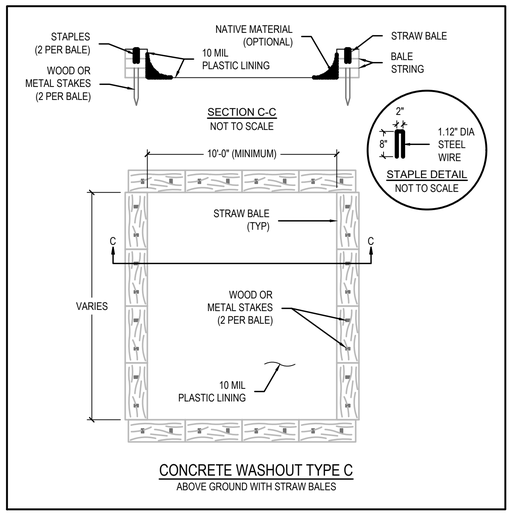

CONCRETE WASHOUT TYPE C
ABOVE GROUND WITH STRAW BALES

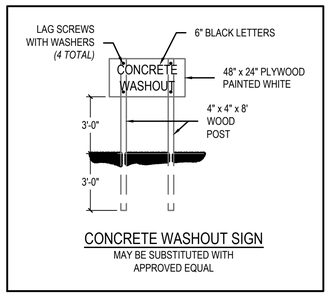

CONCRETE WASHOUT SIGN
MAY BE SUBSTITUTED WITH APPROVED EQUAL

NOTES:

1. THE ACTUAL LAYOUT OF THE CONCRETE WASHOUT FACILITY SHALL BE DETERMINED IN THE FIELD.
2. A CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN THIRTY FEET (30') OF THE TEMPORARY CONCRETE WASHOUT FACILITY.
3. MATERIALS USED TO CONSTRUCT TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE REMOVED FROM THE PROJECT SITE AND DISPOSED OF OR RECYCLED.
4. HOLES, DEPRESSIONS, OR OTHER GROUND DISTURBANCE CAUSED BY THE REMOVAL OF THE TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE BACKFILLED, REPAIRED, AND STABILIZED TO PREVENT EROSION.

6 CONCRETE WASHOUT FACILITY DETAIL
NOT TO SCALE

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22048 Date: 07/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C102	TITLE OF SHEET OVERALL – SITE DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 16 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\C1-0_GRTE-C4_SITE-DETAILS.dwg

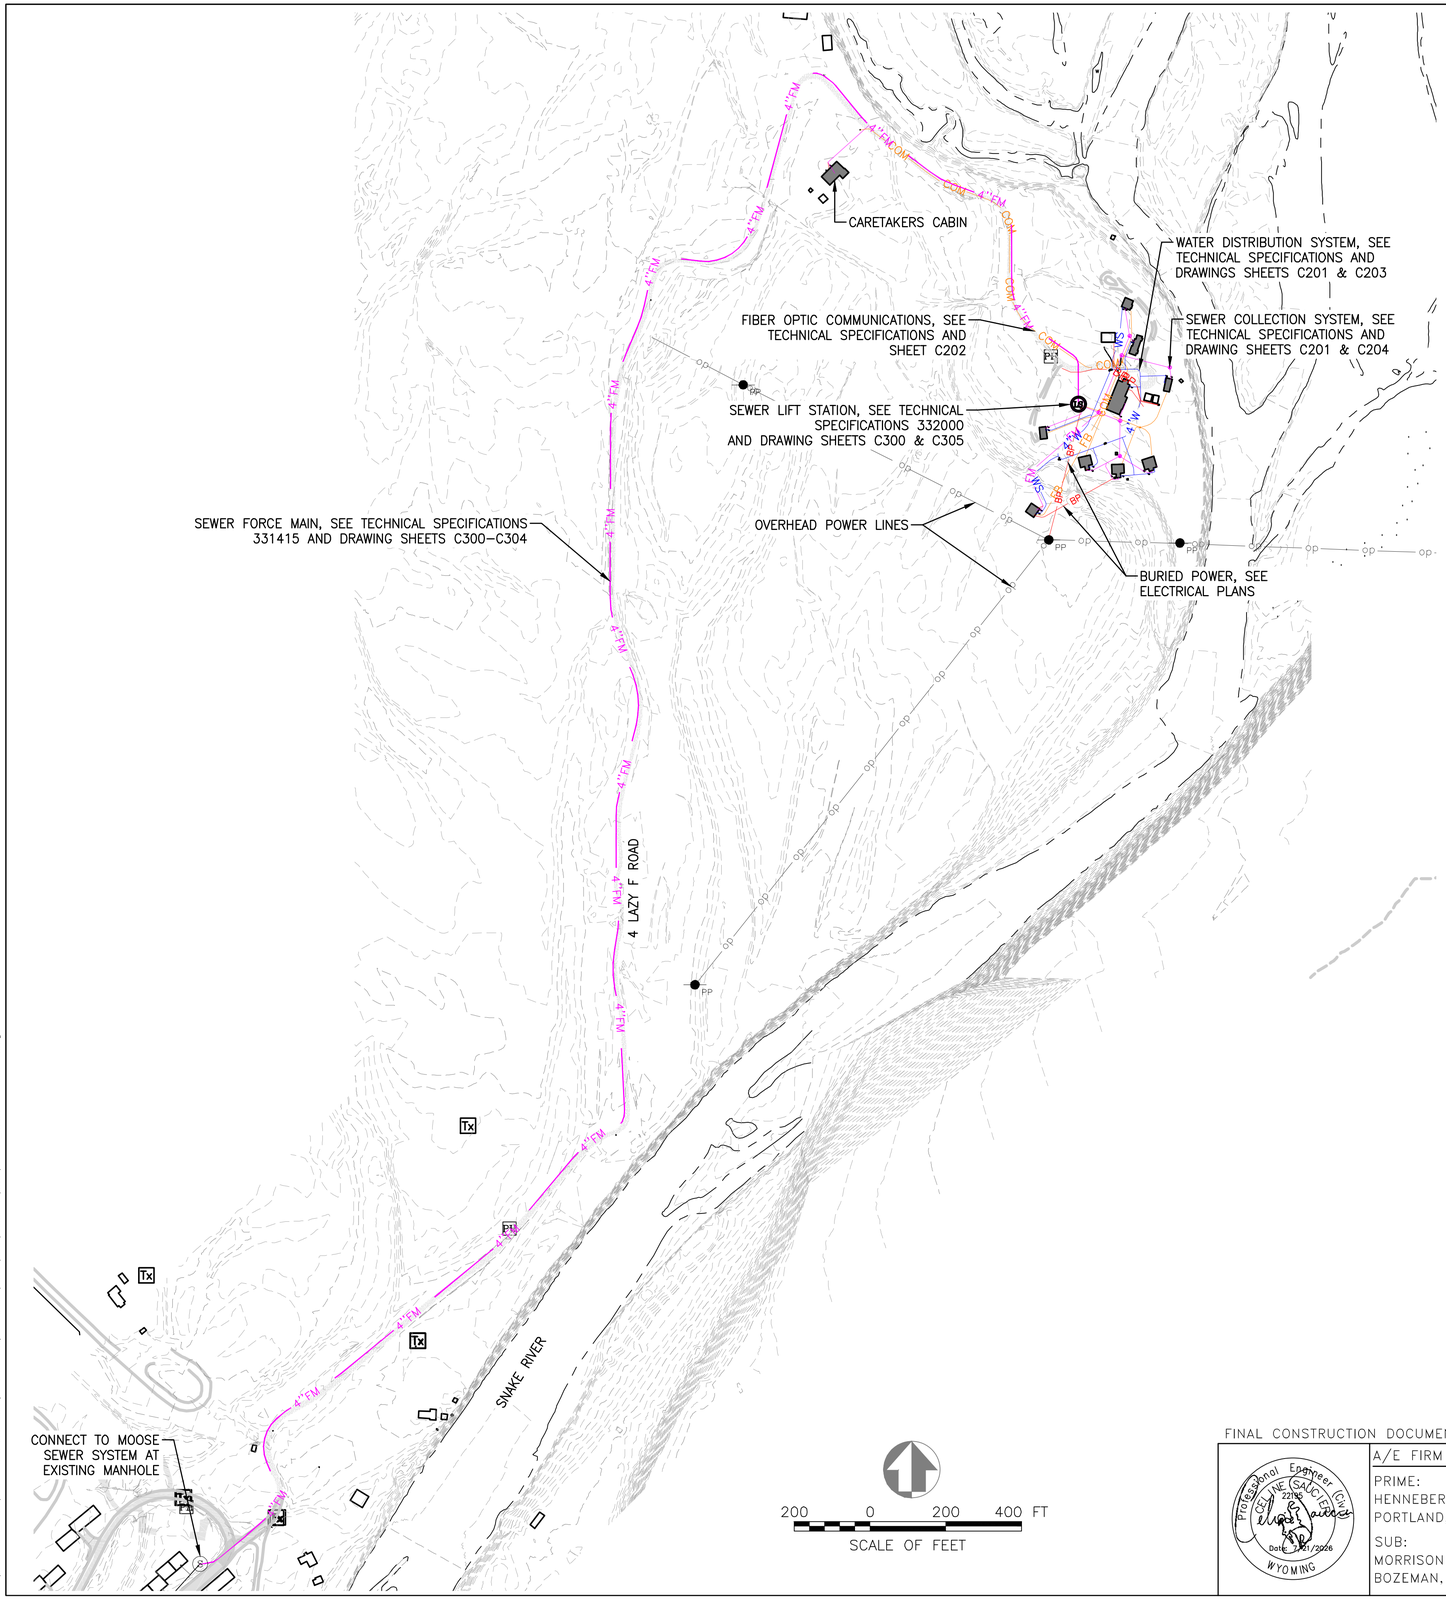

CONTRACTOR NOTE:
CAUTION: UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS–BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

NOTE: ALL WATER SYSTEM AND SEWER SYSTEM WORK MUST BE DESIGNED TO WYDEQ WATER QUALITY REGULATIONS AND CONSTRUCTED PER WYOMING PUBLIC WORKS STANDARD SPECIFICATIONS 2023 EDITION AS WELL AS 2024 ICC CODES AND STANDARDS.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CHRISTINE M. SAUCIER 22586 WYOMING Date: 7/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C200

TITLE OF SHEET
OVERALL – PROPOSED UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 17 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DSGN – PHASE 1.dwg

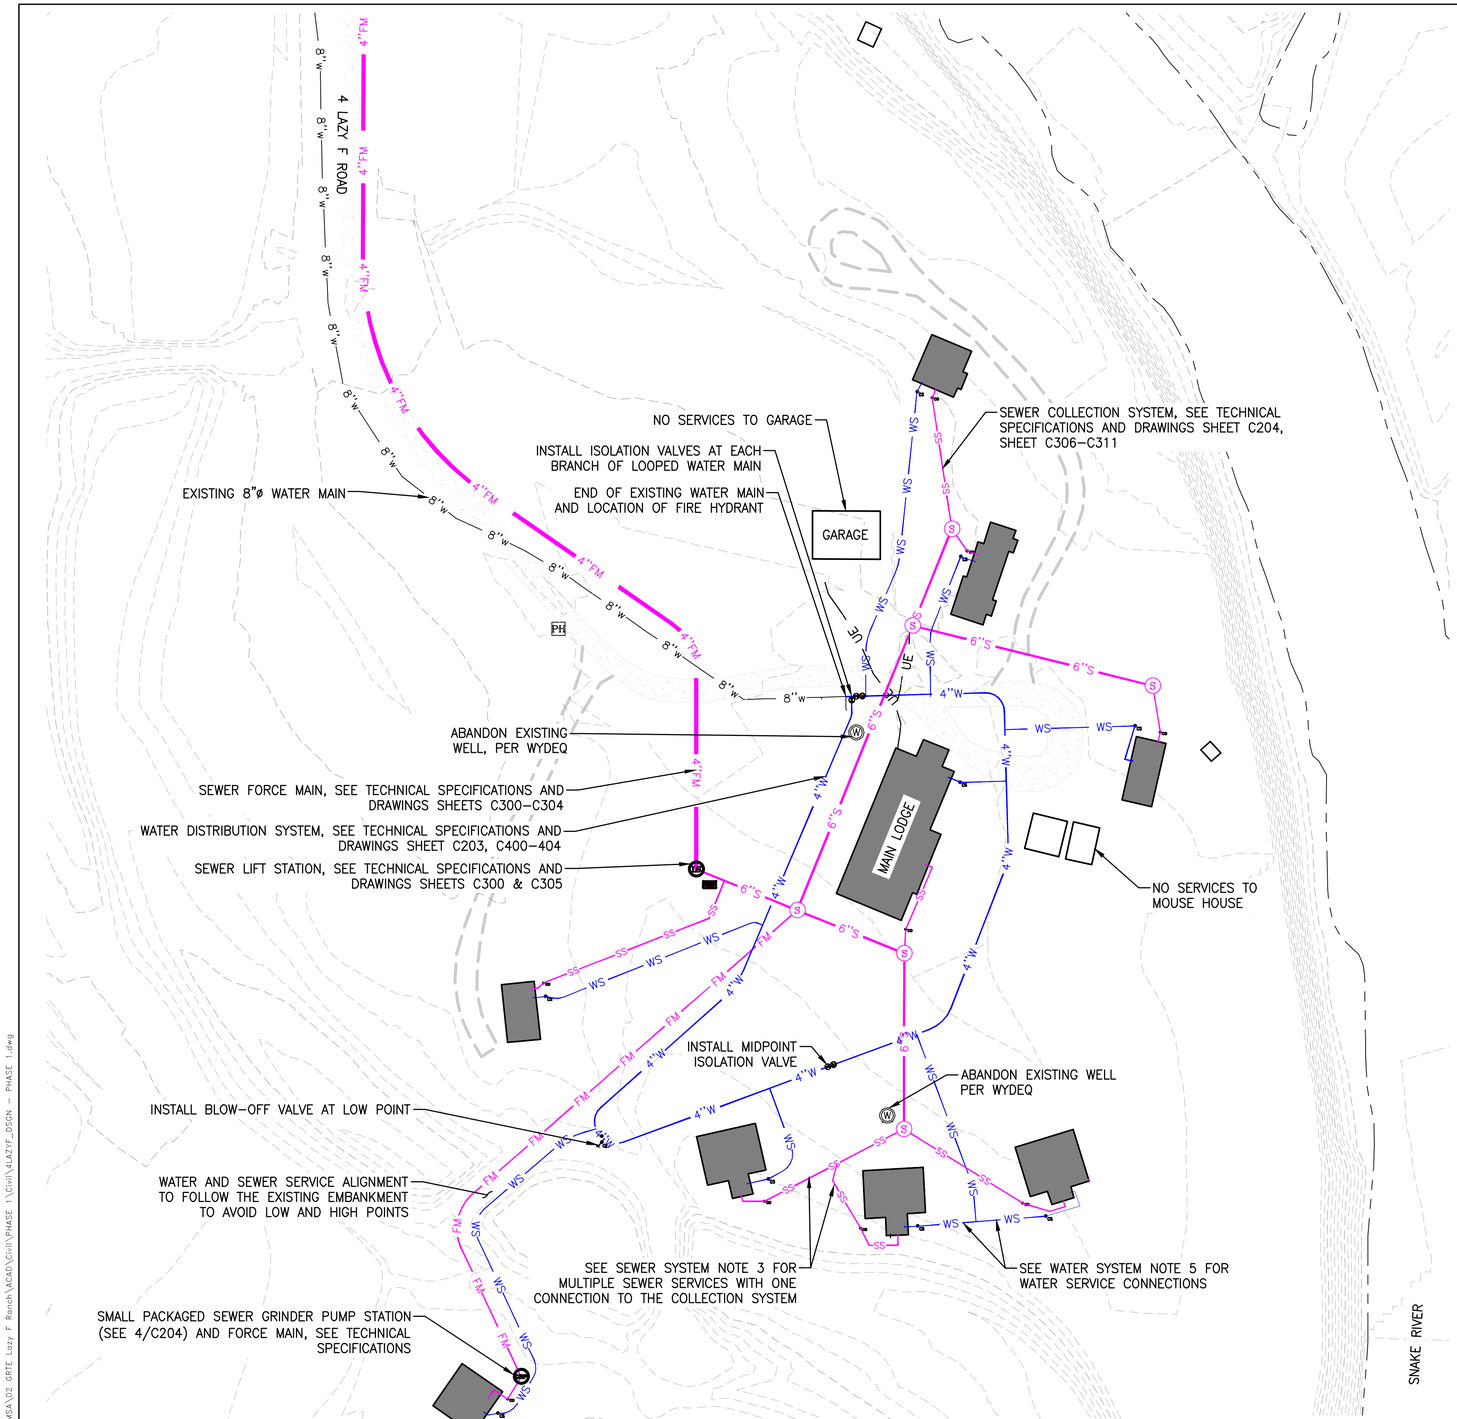

CONTRACTOR NOTE:

CAUTION: UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS–BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

GENERAL NOTES:

1. ALL WATER SYSTEM AND SEWER SYSTEM WORK MUST BE DESIGNED TO WYDEQ WATER QUALITY REGULATIONS AND CONSTRUCTED PER WYOMING PUBLIC WORKS STANDARD SPECIFICATIONS 2023 EDITION.
2. WATER DISTRIBUTION SYSTEM AND SEWER COLLECTION SYSTEM SHALL BE DESIGNED AND CONSTRUCTED WITHIN THE LIMITS OF DISTURBANCE NOTED ON THESE DRAWINGS AND IN THE TECHNICAL SPECIFICATIONS.
3. WATER AND SEWER WILL BE SERVED TO ALL STRUCTURES SHADED ON THIS SHEET. NOTE THE GARAGE AND MOUSE HOUSE WILL NOT BE SERVED WATER OR SEWER.
4. BASIC WATER AND SEWER SYSTEM DETAILS ARE SHOWN ON SHEETS C203 AND C204.
5. TRACER WIRE SHALL BE INSTALLED ON ALL WATER MAINS, WATER SERVICES, AND SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

SEWER SYSTEM NOTES:

1. SEWER SERVICES SHALL BE CONNECTED TO MANHOLES WHERE IT IS REASONABLE. SERVICES CONNECTED TO MANHOLES WILL BE INSTALLED WITH A ONE–WAY SEWER CLEANOUT AT THE SERVICE 5' FROM THE STRUCTURE. IN LOCATIONS WHERE THE SERVICE LINE CONNECTS DIRECTLY TO A SEWER MAIN, A TWO–WAY CLEANOUT WILL BE REQUIRED AT THE TERMINATION LOCATION 5' FROM THE STRUCTURE.
2. ALL SEWER SERVICES CONNECTED TO A GRAVITY SEWER MAIN SHALL UTILIZE A WYE FITTING, SEWER SADDLES WILL NOT BE ALLOWED.
3. UP TO TWO SEWER SERVICES MAY BE CONNECTED TO ONE 4" SEWER MAIN CONNECTION. IF DESIRED, THE CONNECTION SHALL BE COMPLETED WITH A WYE FITTING AND A CLEANOUT AT THE INTERSECTION.
4. END OF SEWER MAINS SHALL INCLUDE A SEWER MANHOLE. CLEANOUTS AT THE ENDS OF THE MAINS WILL NOT BE ALLOWED.

WATER SYSTEM NOTES:

1. ALL WATER SYSTEM MAINS AND SERVICES SHALL BE SIZED TO MEET NFPA FIRE FLOW REQUIREMENTS.
2. INDIVIDUAL WATER SERVICE CURB STOPS WILL BE REQUIRED AT ALL STRUCTURES. CURB STOPS SHALL BE LOCATED WITHIN 5' OF THE STRUCTURES.
3. ALL WATER SERVICES TO EACH STRUCTURE MUST BE CONSTRUCTED PER DETAIL 1/C203 WITH A PUMP OUT FOR NPS SEASON CLOSURE AND OPERATION.
4. WATER BLOW–OFF HYDRANTS WILL BE REQUIRED AT ANY LOW POINT IN THE WATER MAIN. AIR RELIEF VALVES WILL BE REQUIRED AT ANY HIGH POINT IN THE WATER MAIN.
5. UP TO TWO WATER SERVICES MAY BE CONNECTED TO A SINGE SERVICE FEED FROM THE WATER MAIN. EACH SERVICE MUST HAVE AN INDIVIDUAL CURB VALVE.
6. WATER MAIN SHALL BE LOOPED WITH NO DEAD–ENDS. WATER MAIN SHALL BE LOCATED TO KEEP INDIVIDUAL WATER SERVICE LENGTHS LESS THAN 200 FEET LONG.
7. WATER MAIN ISOLATION VALVES SHALL BE PROVIDED ON EACH BRANCH OF THE LOOPED SYSTEM AND ONE MIDPOINT OF THE SYSTEM.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) NE (SAJCJE) 22155 Date: 7/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C201

TITLE OF SHEET
OVERALL – WATER & SEWER SYSTEM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 18 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DSGN – PHASE 1.dwg

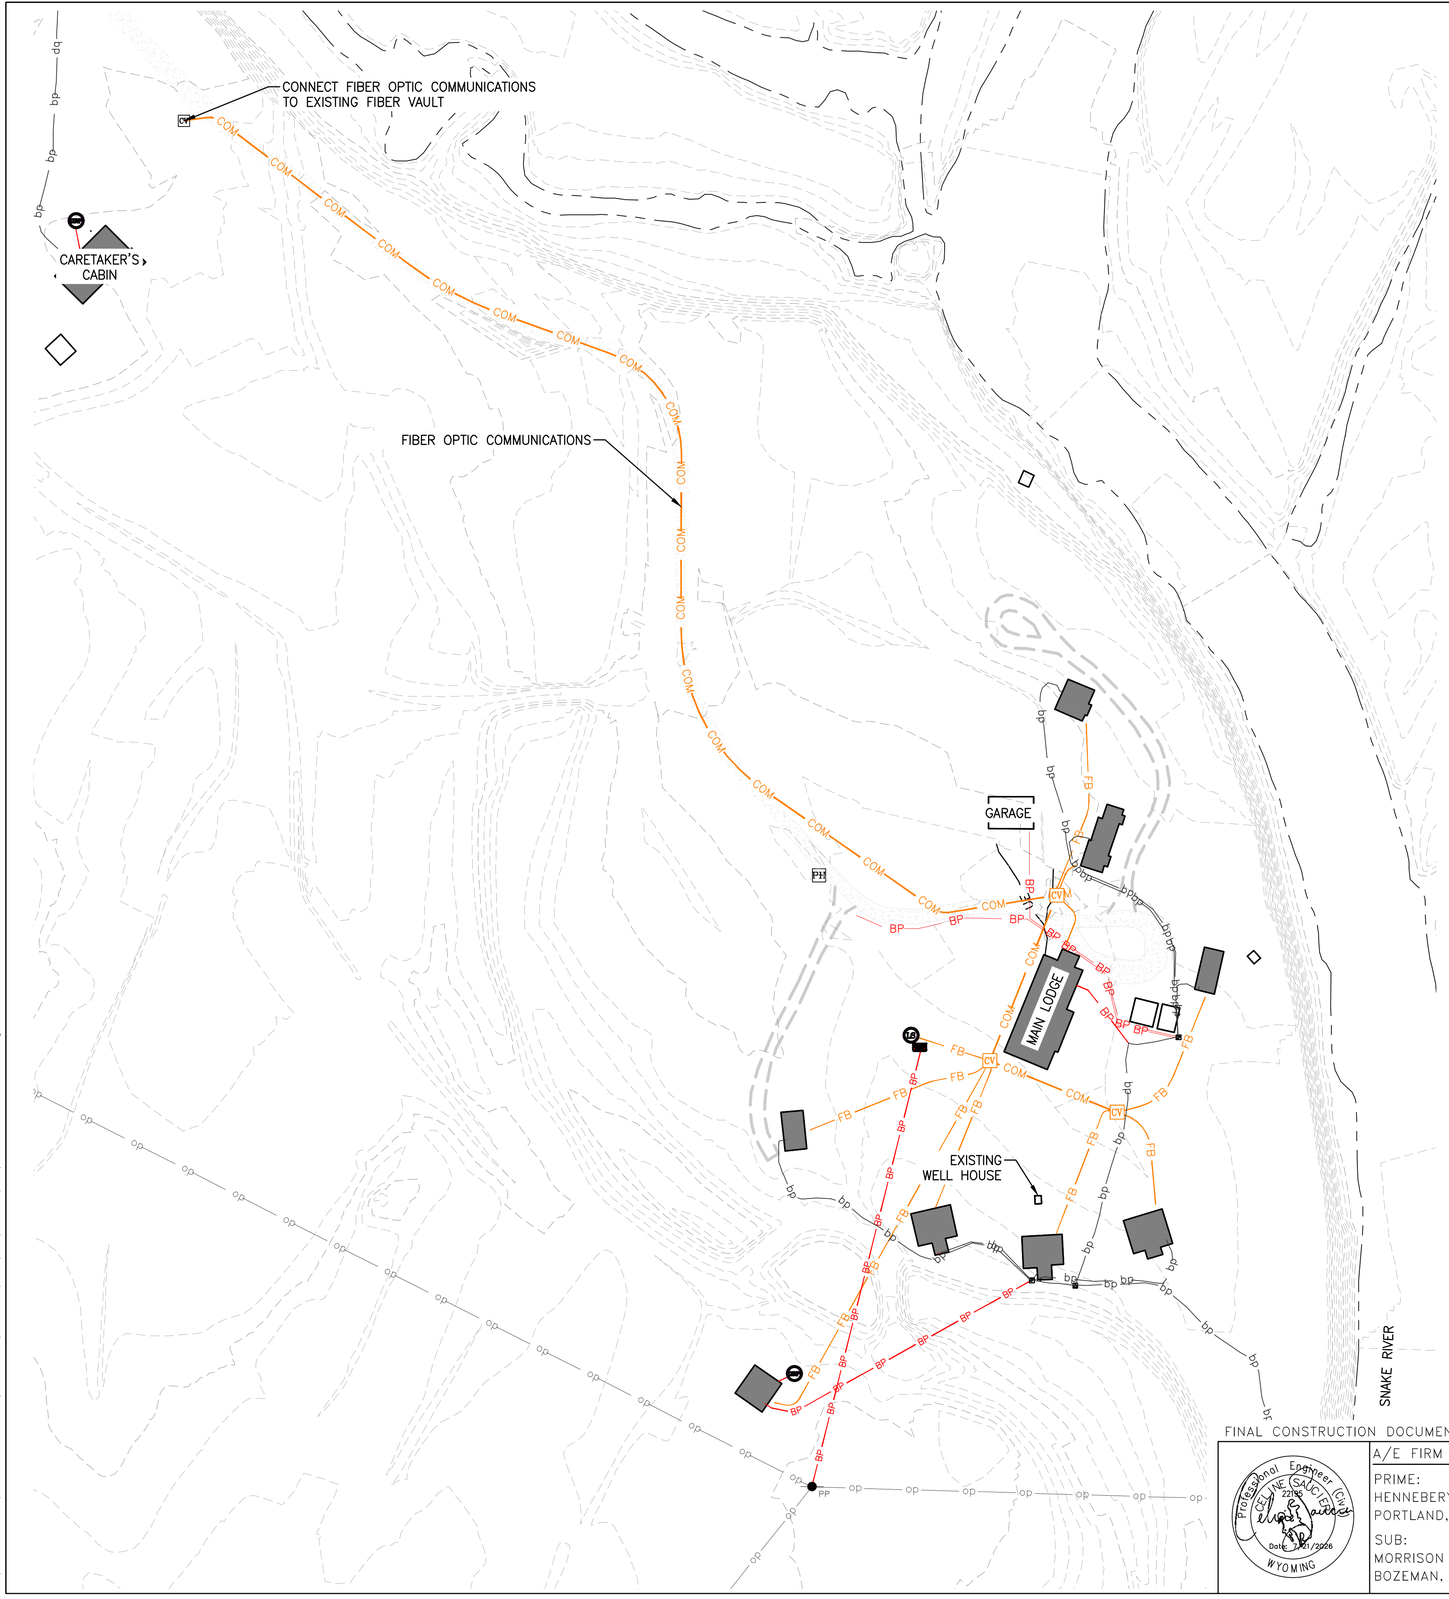

CONTRACTOR NOTE:

CAUTION: UNDERGROUND UTILITY LOCATIONS ARE NOT GUARANTEED, NOR IS THERE ANY GUARANTEE THAT ALL EXISTING UTILITIES (WHETHER FUNCTIONAL OR ABANDONED) WITHIN THE PROJECT AREA ARE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES BEFORE STARTING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE RESULTING FROM CONTRACTORS WORK. NO SITE SURVEY HAS BEEN PERFORMED. PRE DESIGN EXHIBITS HAVE BEEN CREATED FROM AS-BUILT DRAWINGS AND FROM DATA COLLECTED IN THE FIELD IN SEPTEMBER OF 2024 BY GRPS INC. A CONTRACT UTILITY LOCATING COMPANY. ALL LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE.

GENERAL NOTES:

1. ALL BURIED FIBER OPTIC COMMUNICATIONS SHALL BE COMPLETED PER THE UTILITY SUPPLIERS REQUIREMENTS.
2. FIBER OPTIC COMMUNICATION IS PROVIDED BY DIAMOND COMMUNICATIONS, COORDINATE ALL FIBER INSTALLATION WITH DIAMOND COMMUNICATIONS.
3. ALL INSTALLATION OF FIBER SHALL BE COMPLETED WITHIN THE LIMITS OF DISTURBANCE INDICATED ON THESE DRAWINGS.
4. FIBER OPTIC INFRASTRUCTURE WILL BE SUPPLIED TO THE LIFT STATIONS.
5. FIBER WILL BE SUPPLIED TO ALL SHADED STRUCTURES.
6. FIBER SHALL BE INSTALLED FROM THE CARETAKER'S CABIN TO THE CONTROL PANEL OF THE LIFT STATION TO PROVIDE SCADA SERVICE.
7. DIAMOND COMMUNICATIONS TO FURNISH FIBER CONDUIT (GFM – GOVERNMENT FURNISHED MATERIAL), AND CONTRACTOR SHALL INSTALL THE CONDUIT. GFM WILL BE 1" HDPE CONDUIT. CONTRACTOR IS RESPONSIBLE FOR ALL EXCAVATION, TRENCHING, AND BACKFILL FOR CONDUIT INSTALLATION.
8. DIAMOND COMMUNICATIONS TO FURNISH FIBER PULL BOXES (GFM – GOVERNMENT FURNISHED MATERIAL), AND CONTRACTOR SHALL INSTALL THE PULL BOXES. CONTRACTOR IS RESPONSIBLE FOR ALL EXCAVATION, TRENCHING, AND BACKFILL FOR PULL BOX INSTALLATION.
9. STUB CONDUIT INTO THE CRAWL SPACE OF EACH SHADED STRUCTURE. SEAL ALL FOUNDATION WALL PENETRATIONS.
10. DIAMOND COMMUNICATIONS WILL FURNISH AND INSTALL ALL ACTUAL FIBER OPTIC CABLING.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE M. SAUCEDA 22166 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C202

TITLE OF SHEET
OVERALL – FIBER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 19 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\41AZYF_DSGN – PHASE 1.dwg

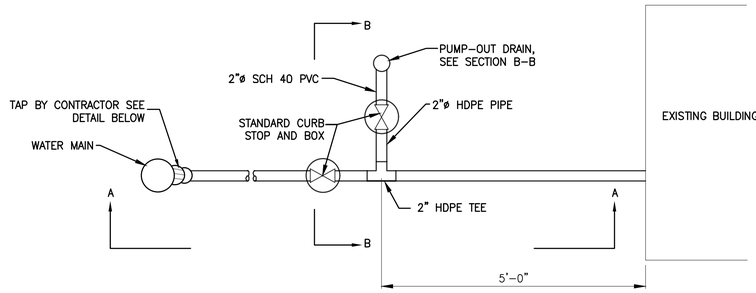

PLAN

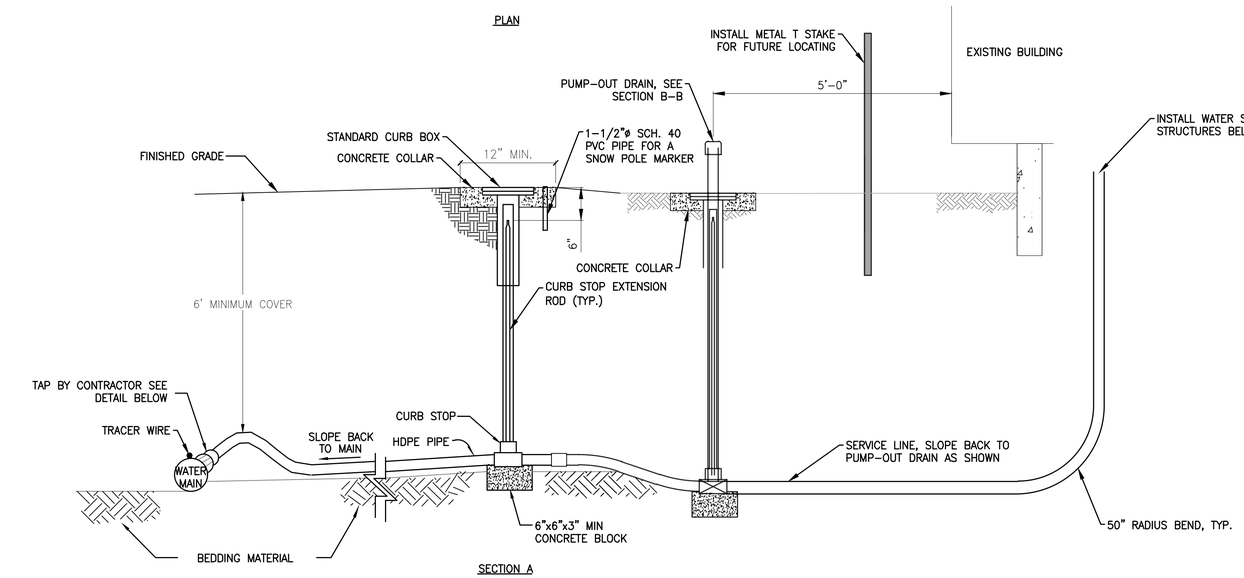

SECTION A

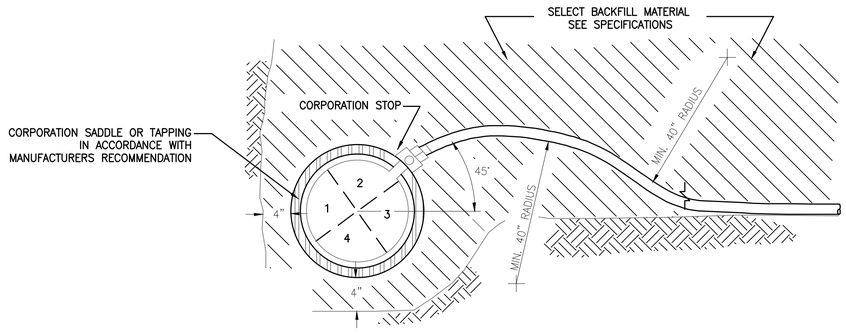

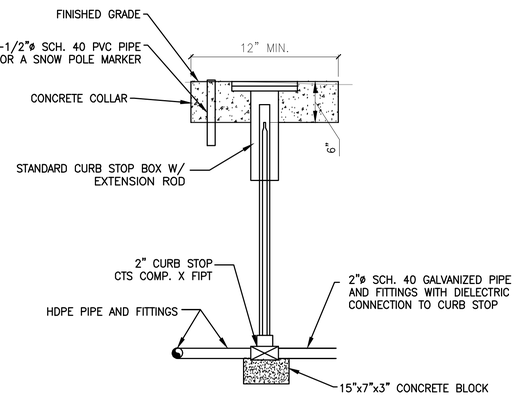

SECTION B

1 / C203 TYPICAL WATER SERVICE DETAIL

SCALE: N.T.S.

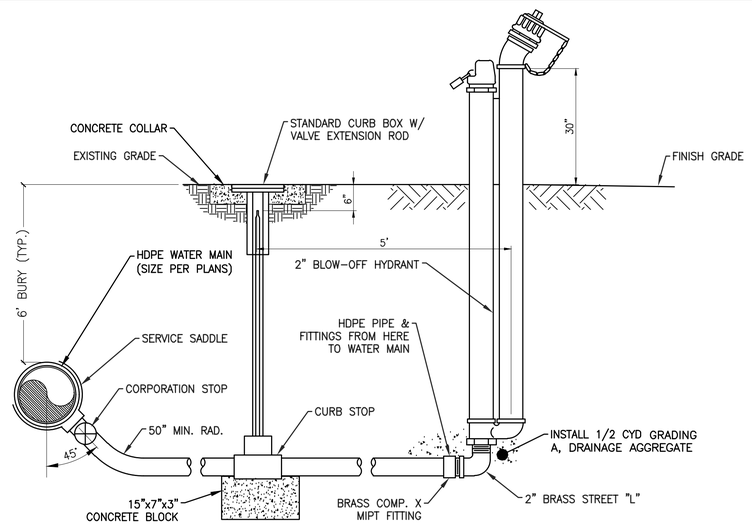

2 / C203 BLOW-OFF HYDRANT ASSEMBLY DETAIL

SCALE: N.T.S.

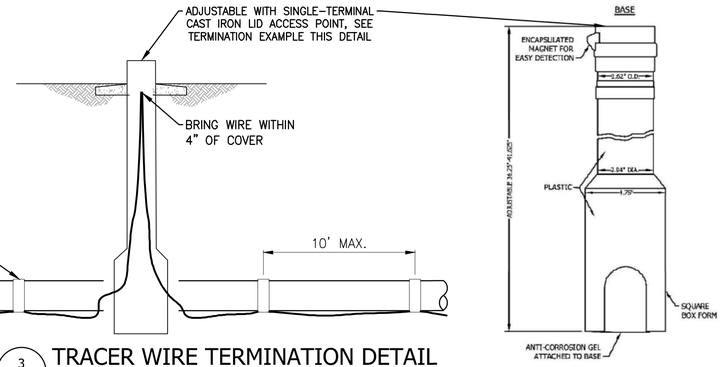

3 / C203 TRACER WIRE TERMINATION DETAIL

SCALE: N.T.S.

TERMINATION EXAMPLE

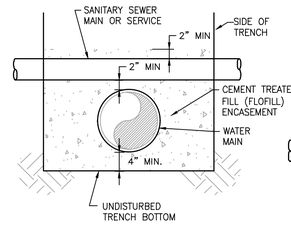

NOTE: EXTEND ENCASEMENT IN WATER TRENCH 10' EACH DIRECTION FROM CROSSING

SEWER ABOVE WATER MAIN

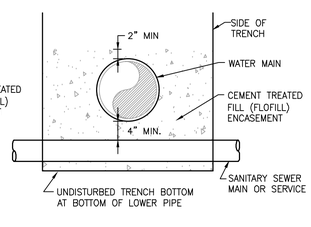

NOTE: EXTEND ENCASEMENT IN WATER TRENCH 10' EACH DIRECTION FROM CROSSING

WATER MAIN ABOVE SEWER

4 / C203 WATER MAIN FLO-FILL ENCASEMENT DETAIL

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE (GAUCI) EDDY 22795 Date: 7/21/2026 WYOMING

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO. 000 C203

TITLE OF SHEET
OVERALL – WATER SYSTEM DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 20 OF 371

P:\6204-NEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DETL – PHASE 1.dwg

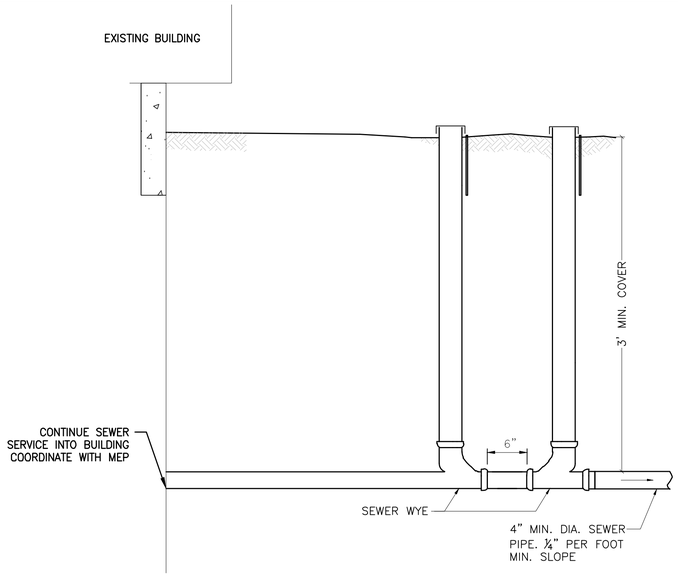

NOTE: REQUIRED FOR SEWER SERVICES NOT CONNECTING TO A MANHOLE.

1/C204 TYPICAL DUAL CLEANOUT DETAIL

SCALE: N.T.S.

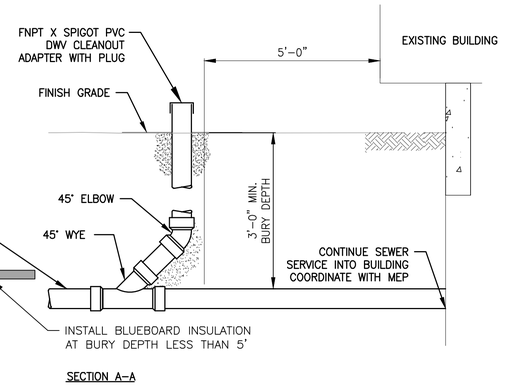

NOTES:
1. LOCATE CLEANOUTS 5' (MIN.) FROM BUILDING FOUNDATIONS.
2. CLEANOUT INVERTS SHALL BE A MINIMUM OF 48" BELOW FINISHED GRADE.

2/C204 TYPICAL CLEANOUT & CONNECTION DETAIL

SCALE: N.T.S.

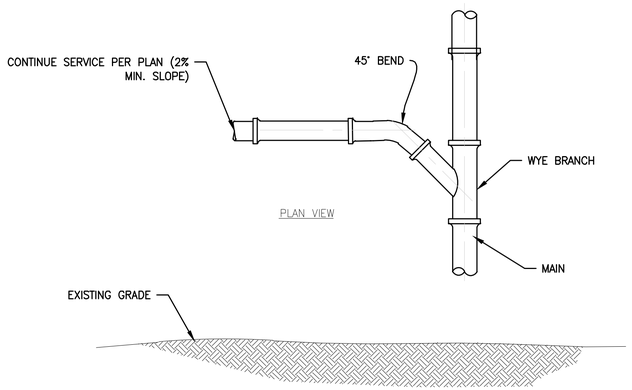

NOTE: NO SERVICE SADDLES WILL BE ACCEPTED

3/C204 SEWER SERVICE CONNECTION DETAIL

SCALE: N.T.S.

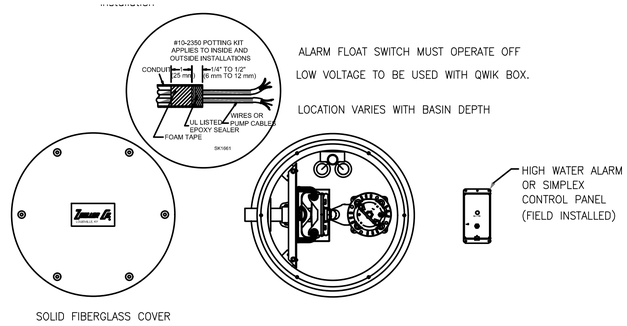

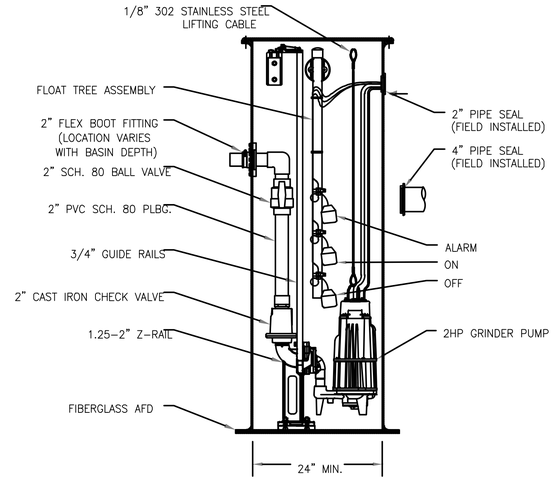

NOTE: ALL INSTALLATIONS MUST COMPLY WITH ALL APPLICABLE ELECTRICAL AND PLUMBING CODES, INCLUDING BUT NOT LIMITED TO THE NATIONAL ELECTRICAL CODE, LOCAL, REGIONAL AND/OR STATE PLUMBING CODES, ETC.

4/C204 TYPICAL OUTDOOR GRINDER PUMP SYSTEM INSTALLATION

SCALE: N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CHRISTOPHER M. SAUCIER 22155 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C204	TITLE OF SHEET OVERALL – SEWER SYSTEM DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 21 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DETL - PHASE 1.dwg

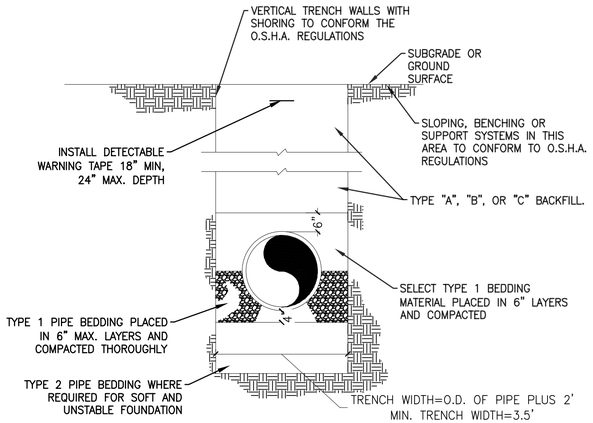

NOTES:

1. WHERE TRENCH PASSES THROUGH EXISTING PAVEMENT THE PAVEMENT SHALL BE CUT ALONG A NEAT VERTICAL LINE A MINIIMUM OF 12" FROM THE EDGE OF THE TRENCH OPENING. WHERE NEAT LINE IS LESS THAN 3' FROM EDGE OF EXISTING PAVEMENT OR CURB AND GUTTER SECTION, REMOVE AND REPLACE ENTIRE PAVEMENT SECTION BETWEEN TRENCH AND EDGE OF PAVEMENT.
2. WHERE INTER-DUCT IS INSTALLED IN SEPARATE TRENCH USE STANDARD TRENCH DETAIL WITH 42' DEPTH OF BURY.
3. EXCAVATIONS SHALL CONFORM TO O.S.H.A. CONSTRUCTION STANDARDS.

1 C205 TYPICAL TRENCH DETAIL

SCALE: N.T.S.

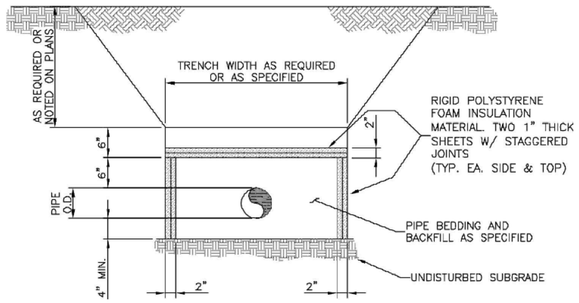

NOTES:

1. INSULATION TO BE USED WHEN:
   1.1. COVER OVER WATER LINE IS LESS THAN 72 INCHES DEEP
   1.2. COVER OVER SEWER LINE IS LESS THAN 60 INCHES DEEP

2 C205 BURIED PIPE INSULATION DETAIL

SCALE: N.T.S.

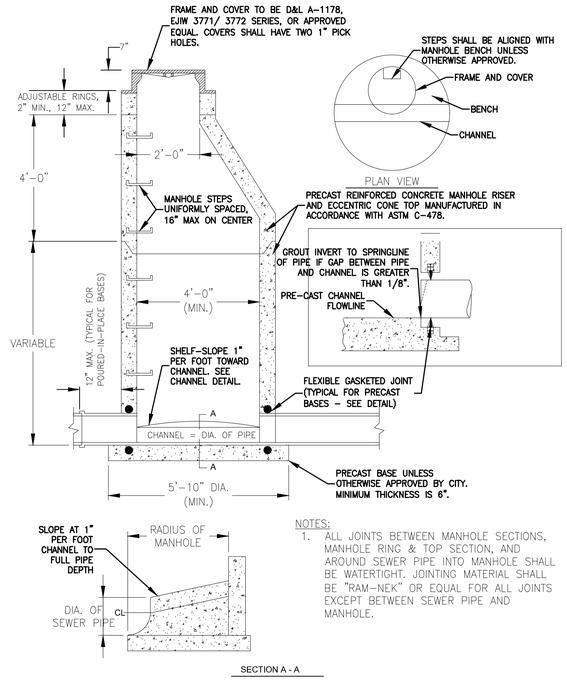

NOTES:

1. ALL JOINTS BETWEEN MANHOLE SECTIONS, MANHOLE RING & TOP SECTION, AND AROUND SEWER PIPE INTO MANHOLE SHALL BE WATERTIGHT. JOINTING MATERIAL SHALL BE "RAM-NEK" OR EQUAL FOR ALL JOINTS EXCEPT BETWEEN SEWER PIPE AND MANHOLE.

3 C205 GRAVITY MANHOLE DETAIL

SCALE: N.T.S.

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\41AZYF_DETL - PHASE 1.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE OF AUTHORIZATION 2026 WYOMING Date: 7/21/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	MORRISON MAIERLE BOZEMAN, MT
DESIGNED:	MMI
DRAWN:	CMS
TECH REVIEW:	CMS
DATE:	07/21/2026
SUB SHEET NO.	000 C205
TITLE OF SHEET	OVERALL – UTILITY DETAILS
	REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK
DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	22 OF 371

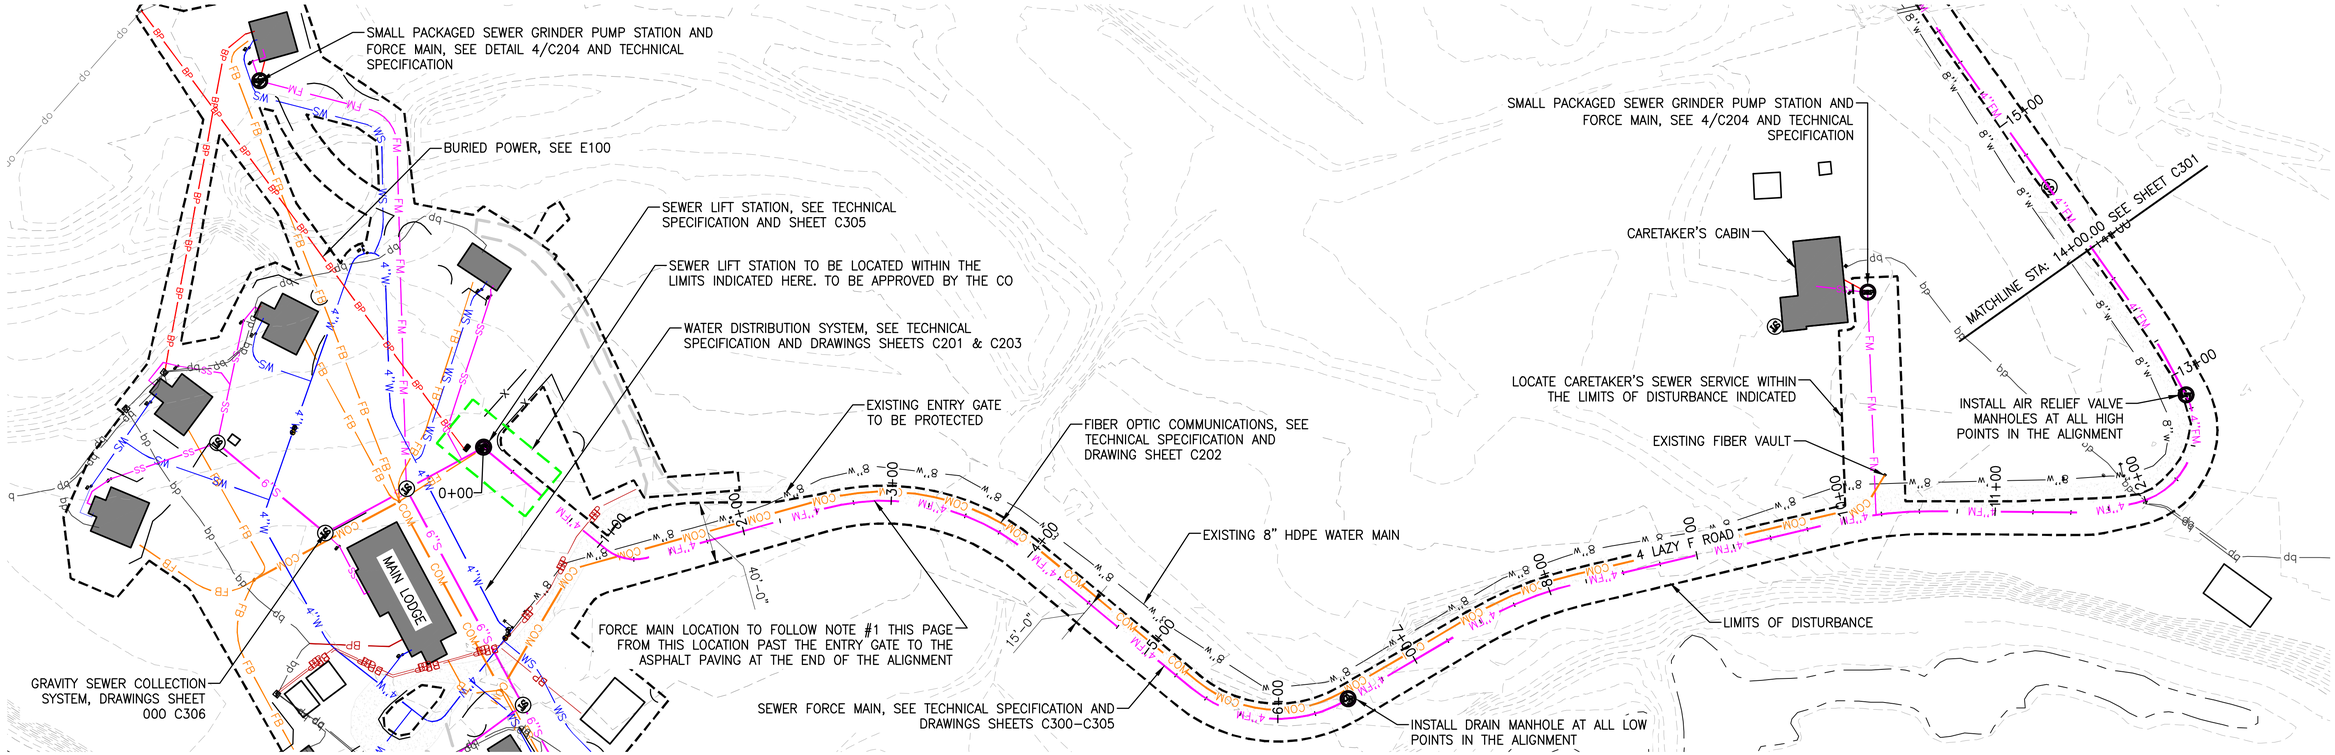

50 0 50 100 FT
SCALE OF FEET

SCALES: (22x34)
1"=100' HOR.
1"=10' VER.

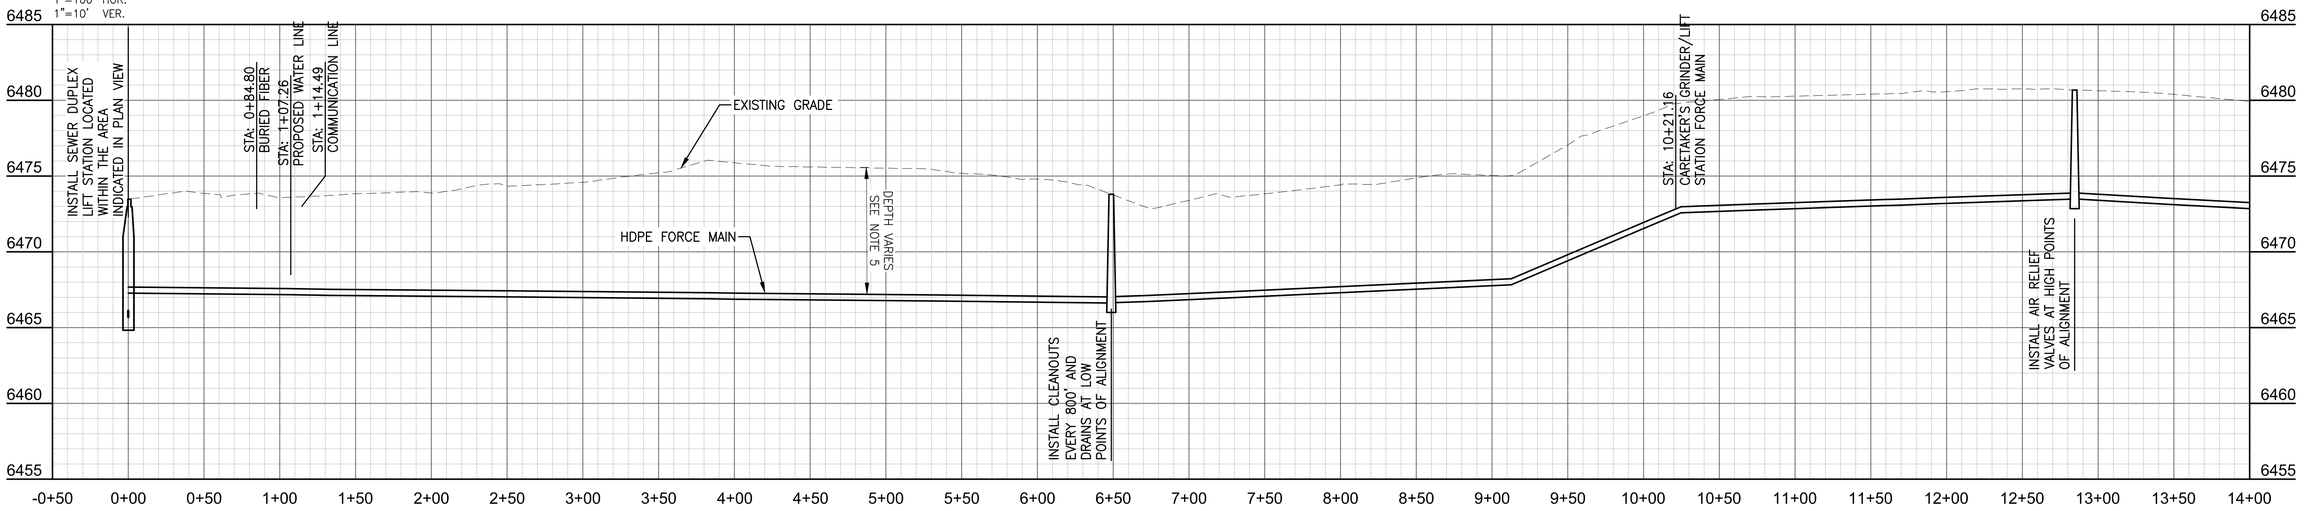

NOTES:

1. SEWER FORCE MAIN SHALL BE LOCATED ALONG THE EDGE OF THE EXISTING GRAVEL ROAD TO MINIMIZE DISTURBANCE OUTSIDE OF THE GRAVEL ROAD BUT STILL ALLOW ONE LANE OF VEHICLE ACCESS DURING CONSTRUCTION. LIMITS OF DISTURBANCE ALONG THE ROADWAY INDICATE A 15' WIDE SECTION FROM THE ROAD, SEE DETAIL 3/C305
2. MAINTAIN A MINIMUM OF 10' HORIZONTAL DISTANCE FROM SEWER FORCE MAIN AND EXISTING WATER MAIN.
3. SEWER FORCE MAIN CLEANOUTS SHALL BE REQUIRED AT A MINIMUM OF EVERY 800' WITH DRAINS AT ALL LOW POINTS IN THE FORCE MAIN AND AIR RELIEF VALVES AT ALL HIGH POINTS. DRAIN VAULTS AND AIR RELIEF VALVE VAULTS MAY ALSO INCORPORATE FORCE MAIN CLEANOUT. SEE FORCE MAIN DETAILS SHEET C305.
4. SEWER FORCE MAIN CONSTRUCTION SHALL INCLUDE LOCATING WIRE AND TERMINAL POSTS AS REQUIRED IN THE POR TECHNICAL SPECIFICATIONS.
5. FORCE MAIN DEPTH WITH LESS THAN 6' OF COVER REQUIRES BLUE BOARD INSULATION. DEPTH MAY VARY TO ELIMINATE THE NEED FOR DRAINS AND AIR RELIEF VALVES.
6. FORCE MAIN TO BE INSTALLED UTILIZING PLOWING METHODS TO LIMIT THE AREA OF DISTURBANCE.
7. TRACER WIRE SHALL BE INSTALLED ON THE SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE NO. 23788 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C300

TITLE OF SHEET
OVERALL – FORCE MAIN
P&P 0+00.00–14+00.00

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 23 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\VACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

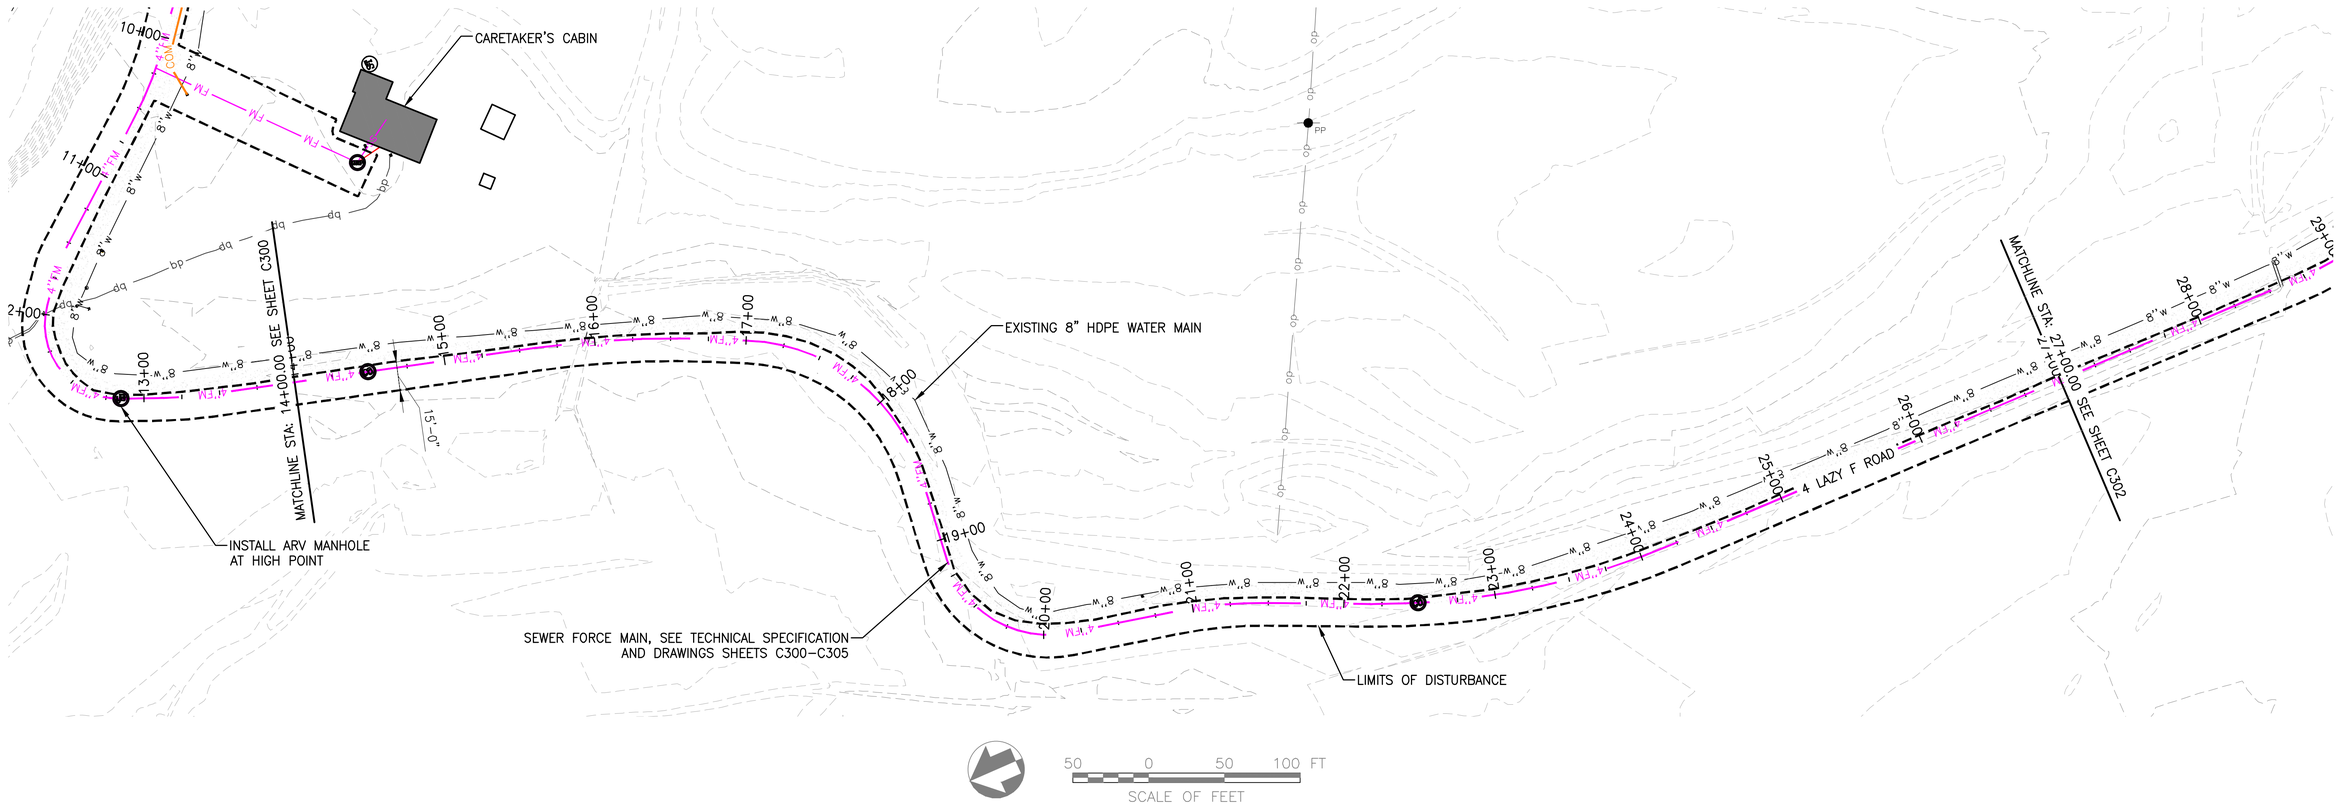

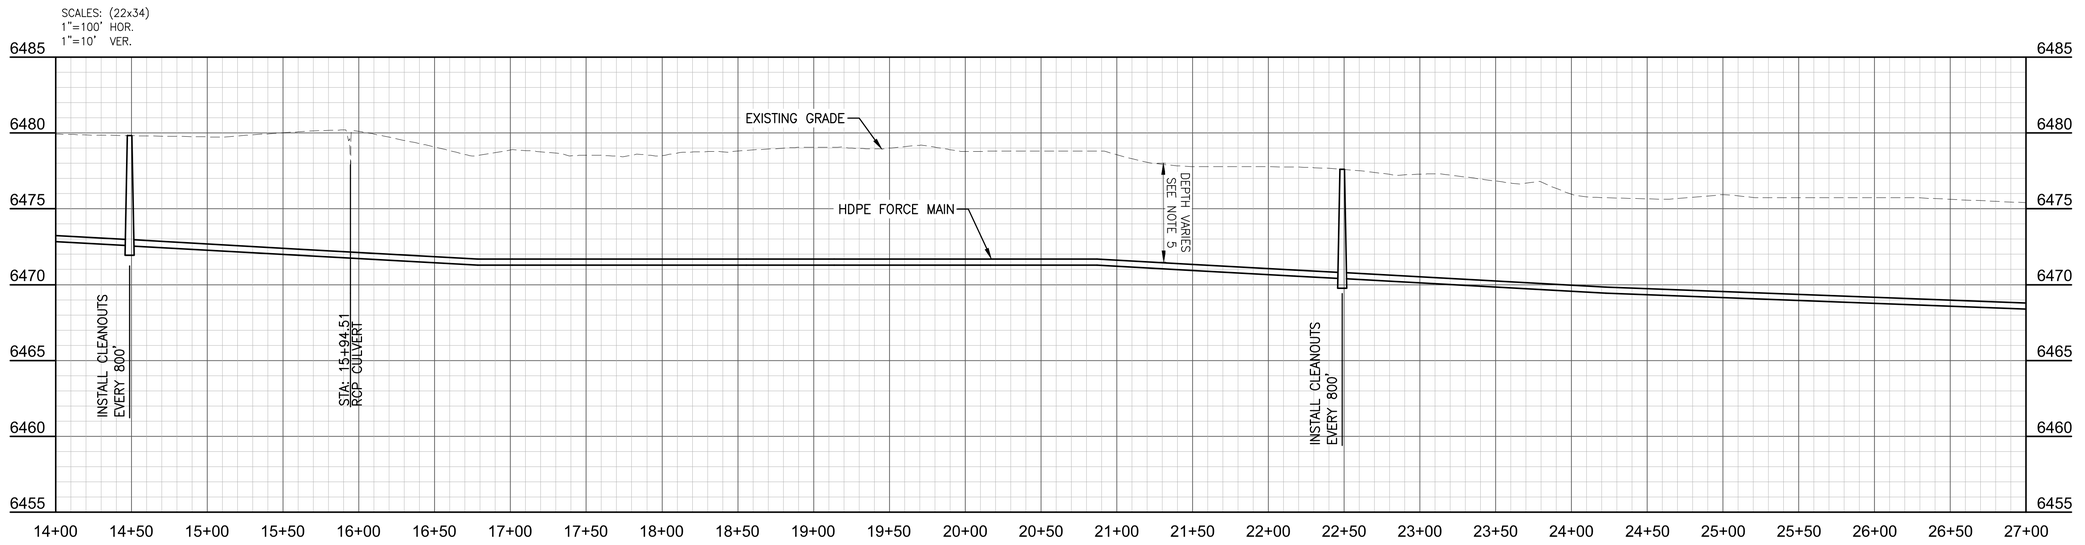

NOTES:

1. SEWER FORCE MAIN SHALL BE LOCATED ALONG THE EDGE OF THE EXISTING GRAVEL ROAD TO MINIMIZE DISTURBANCE OUTSIDE OF THE GRAVEL ROAD BUT STILL ALLOW ONE LANE OF VEHICLE ACCESS DURING CONSTRUCTION. LIMITS OF DISTURBANCE ALONG THE ROADWAY INDICATE A 15' WIDE SECTION FROM THE ROAD, SEE DETAIL 3/C305
2. MAINTAIN A MINIMUM OF 10' HORIZONTAL DISTANCE FROM SEWER FORCE MAIN AND EXISTING WATER MAIN.
3. SEWER FORCE MAIN CLEANOUTS SHALL BE REQUIRED AT A MINIMUM OF EVERY 800' WITH DRAINS AT ALL LOW POINTS IN THE FORCE MAIN AND AIR RELIEF VALVES AT ALL HIGH POINTS. DRAIN VAULTS AND AIR RELIEF VALVE VAULTS MAY ALSO INCORPORATE FORCE MAIN CLEANOUT. SEE FORCE MAIN DETAILS SHEET C305.
4. SEWER FORCE MAIN CONSTRUCTION SHALL INCLUDE LOCATING WIRE AND TERMINAL POSTS AS REQUIRED IN THE POR TECHNICAL SPECIFICATIONS.
5. FORCE MAIN DEPTH WITH LESS THAN 6' OF COVER REQUIRES BLUE BOARD INSULATION. DEPTH MAY VARY TO ELIMINATE THE NEED FOR DRAINS AND AIR RELIEF VALVES.
6. FORCE MAIN TO BE INSTALLED UTILIZING PLOWING METHODS TO LIMIT THE AREA OF DISTURBANCE.
7. TRACER WIRE SHALL BE INSTALLED ON THE SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer Civil CELINE SAUCEDA 22156 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C301	TITLE OF SHEET OVERALL – FORCE MAIN P&P 14+00.00 – 27+00.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 24 OF 371

P:\6204-HEA_Arch\010 – NPS BIO MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

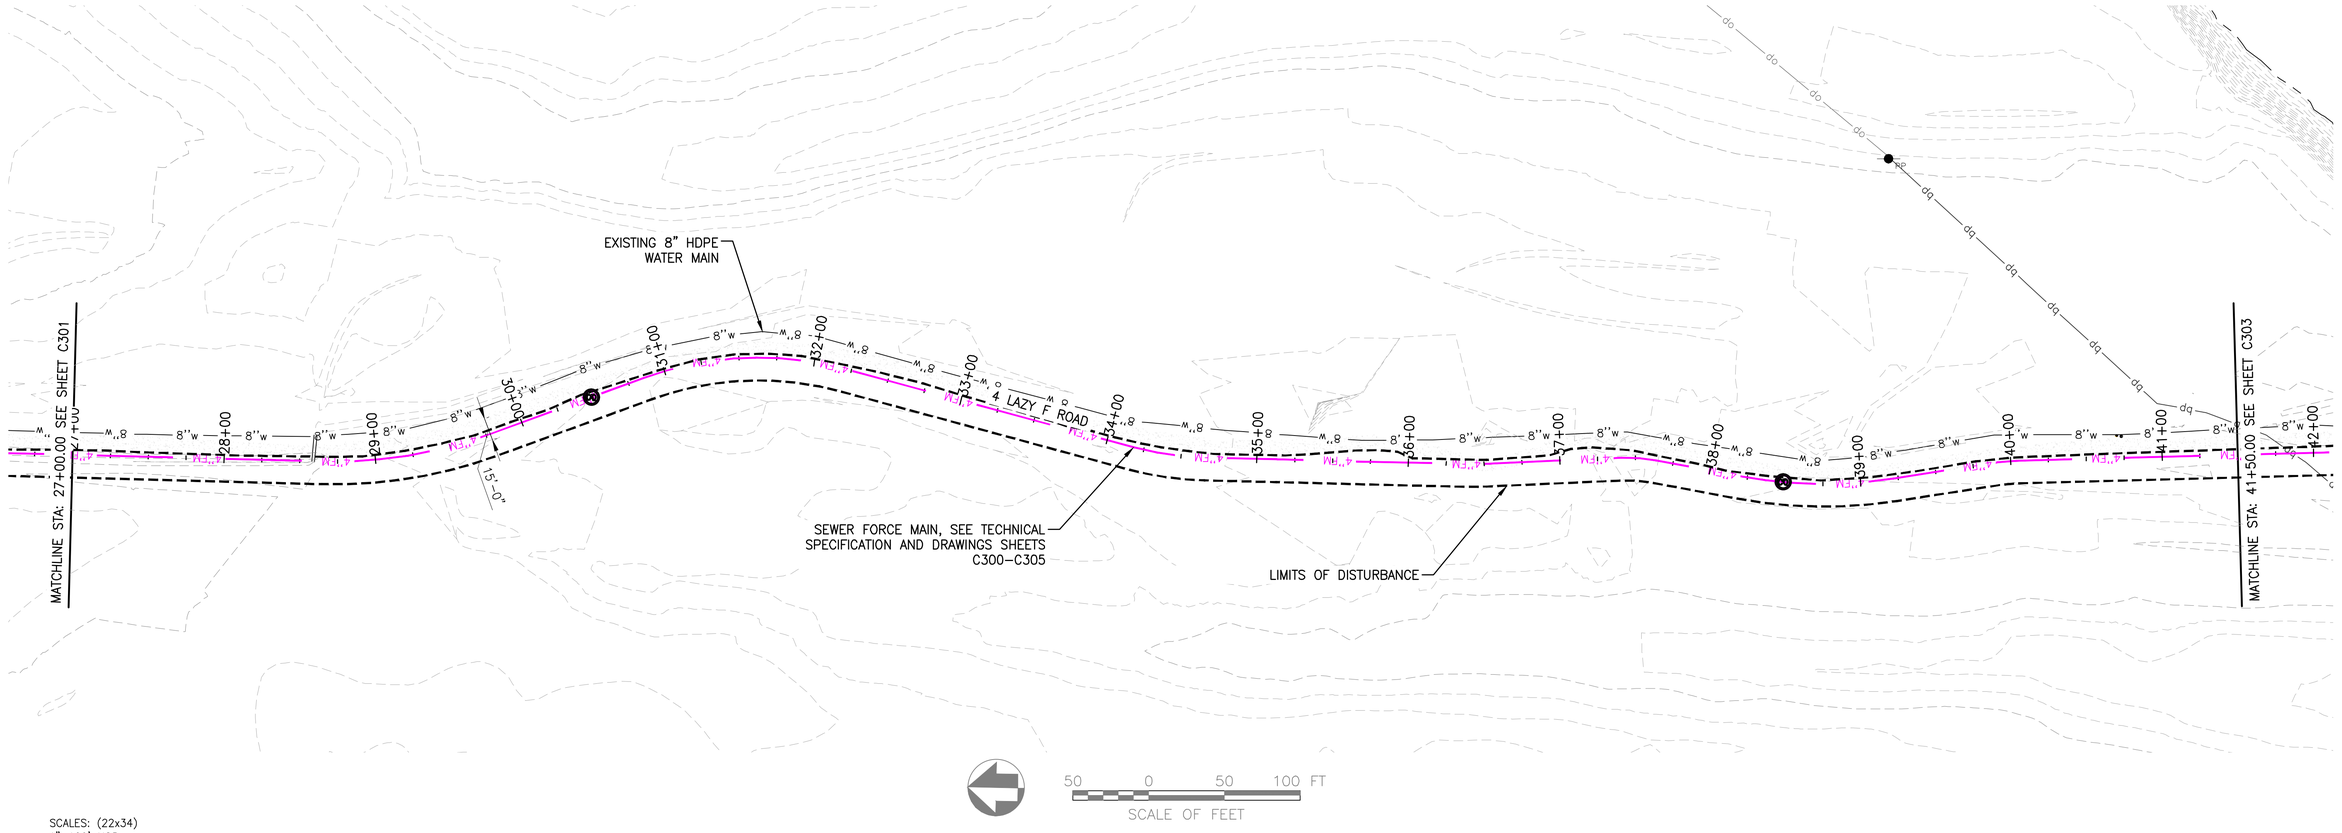

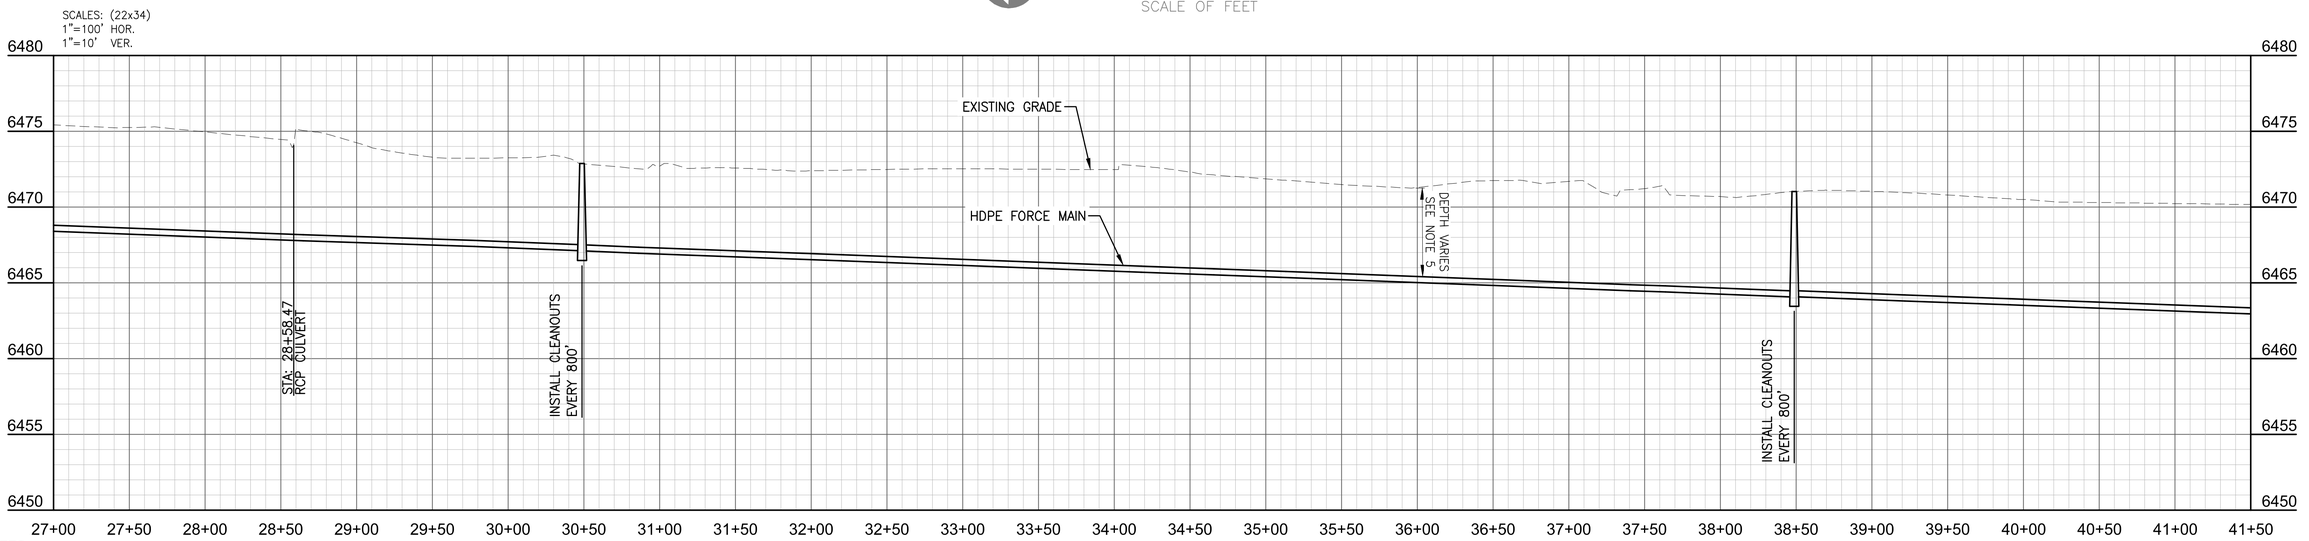

NOTES:

1. SEWER FORCE MAIN SHALL BE LOCATED ALONG THE EDGE OF THE EXISTING GRAVEL ROAD TO MINIMIZE DISTURBANCE OUTSIDE OF THE GRAVEL ROAD BUT STILL ALLOW ONE LANE OF VEHICLE ACCESS DURING CONSTRUCTION. LIMITS OF DISTURBANCE ALONG THE ROADWAY INDICATE A 15' WIDE SECTION FROM THE ROAD, SEE DETAIL 3/C305
2. MAINTAIN A MINIMUM OF 10' HORIZONTAL DISTANCE FROM SEWER FORCE MAIN AND EXISTING WATER MAIN.
3. SEWER FORCE MAIN CLEANOUTS SHALL BE REQUIRED AT A MINIMUM OF EVERY 800' WITH DRAINS AT ALL LOW POINTS IN THE FORCE MAIN AND AIR RELIEF VALVES AT ALL HIGH POINTS. DRAIN VAULTS AND AIR RELIEF VALVE VAULTS MAY ALSO INCORPORATE FORCE MAIN CLEANOUT. SEE FORCE MAIN DETAILS SHEET C305.
4. SEWER FORCE MAIN CONSTRUCTION SHALL INCLUDE LOCATING WIRE AND TERMINAL POSTS AS REQUIRED IN THE POR TECHNICAL SPECIFICATIONS.
5. FORCE MAIN DEPTH WITH LESS THAN 6' OF COVER REQUIRES BLUE BOARD INSULATION. DEPTH MAY VARY TO ELIMINATE THE NEED FOR DRAINS AND AIR RELIEF VALVES.
6. FORCE MAIN TO BE INSTALLED UTILIZING PLOWING METHODS TO LIMIT THE AREA OF DISTURBANCE.
7. TRACER WIRE SHALL BE INSTALLED ON THE SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) NE 22156 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C302	TITLE OF SHEET OVERALL – FORCE MAIN P&P 27+00.00–41+50.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 25 OF 371

P:\6204-HEA_Arch\010 – NPS 1010 MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

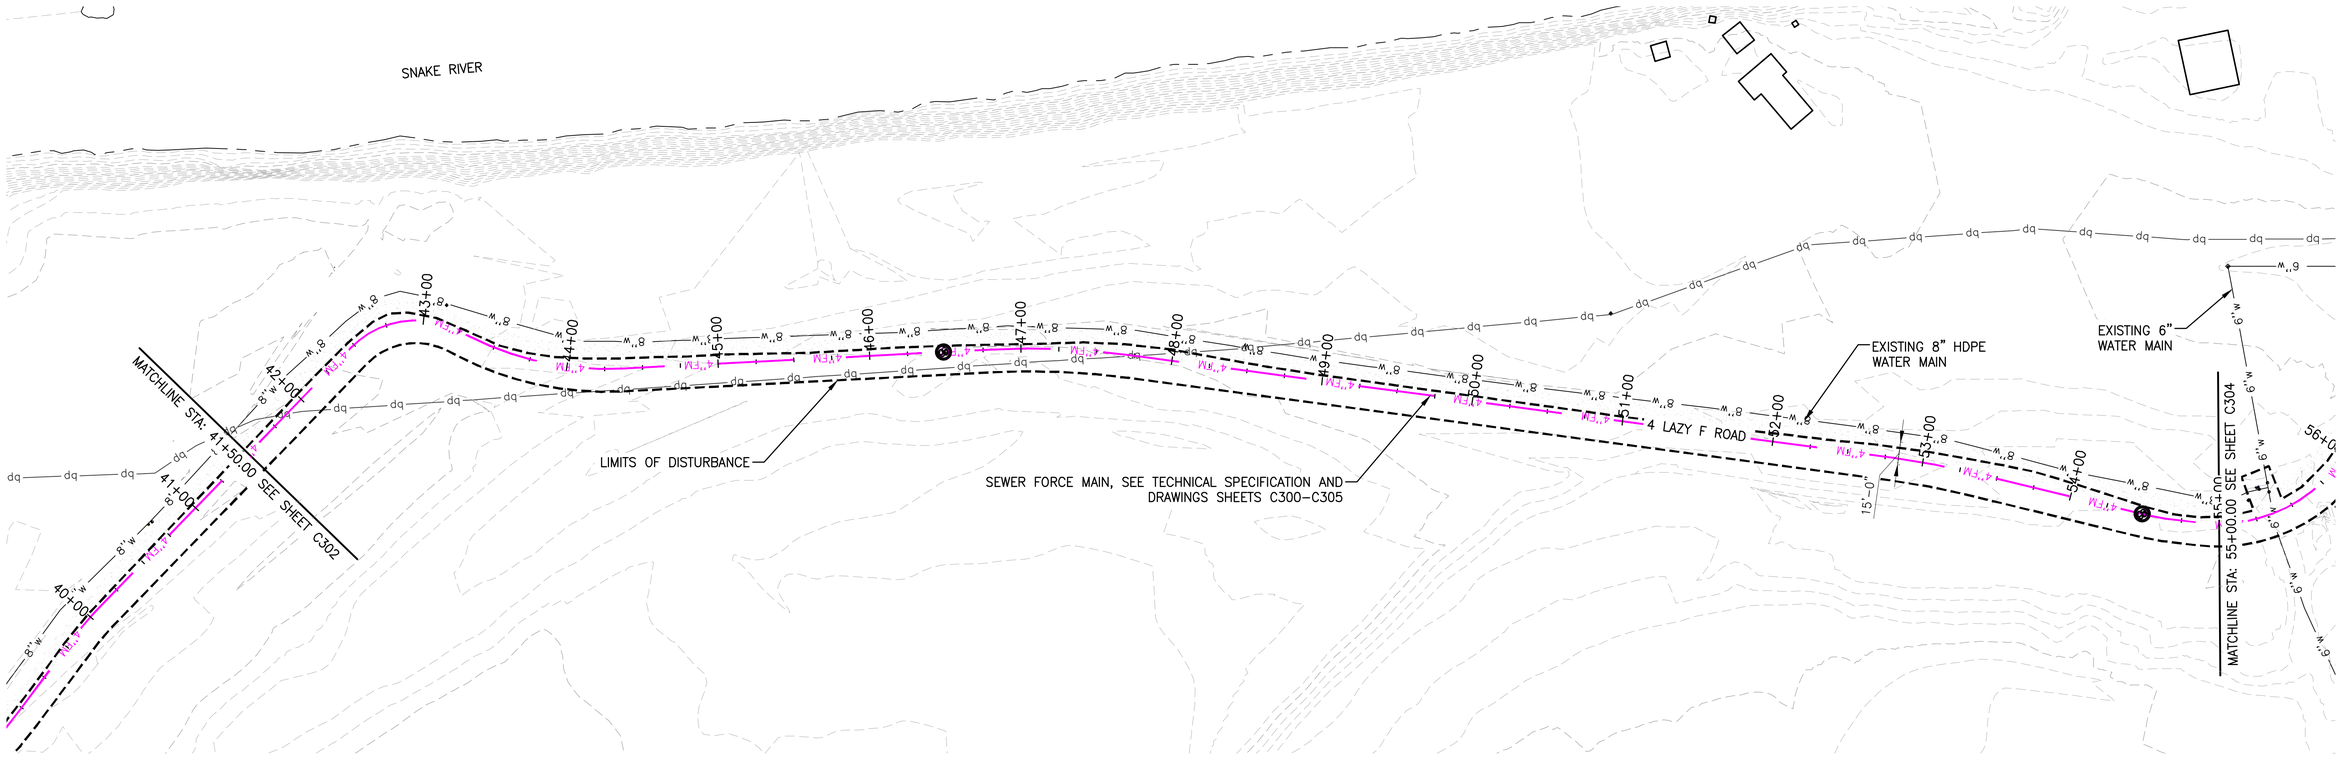

50 0 50 100 FT
SCALE OF FEET

SCALES: (22x34)
1"=100' HOR.
1"=10' VER.

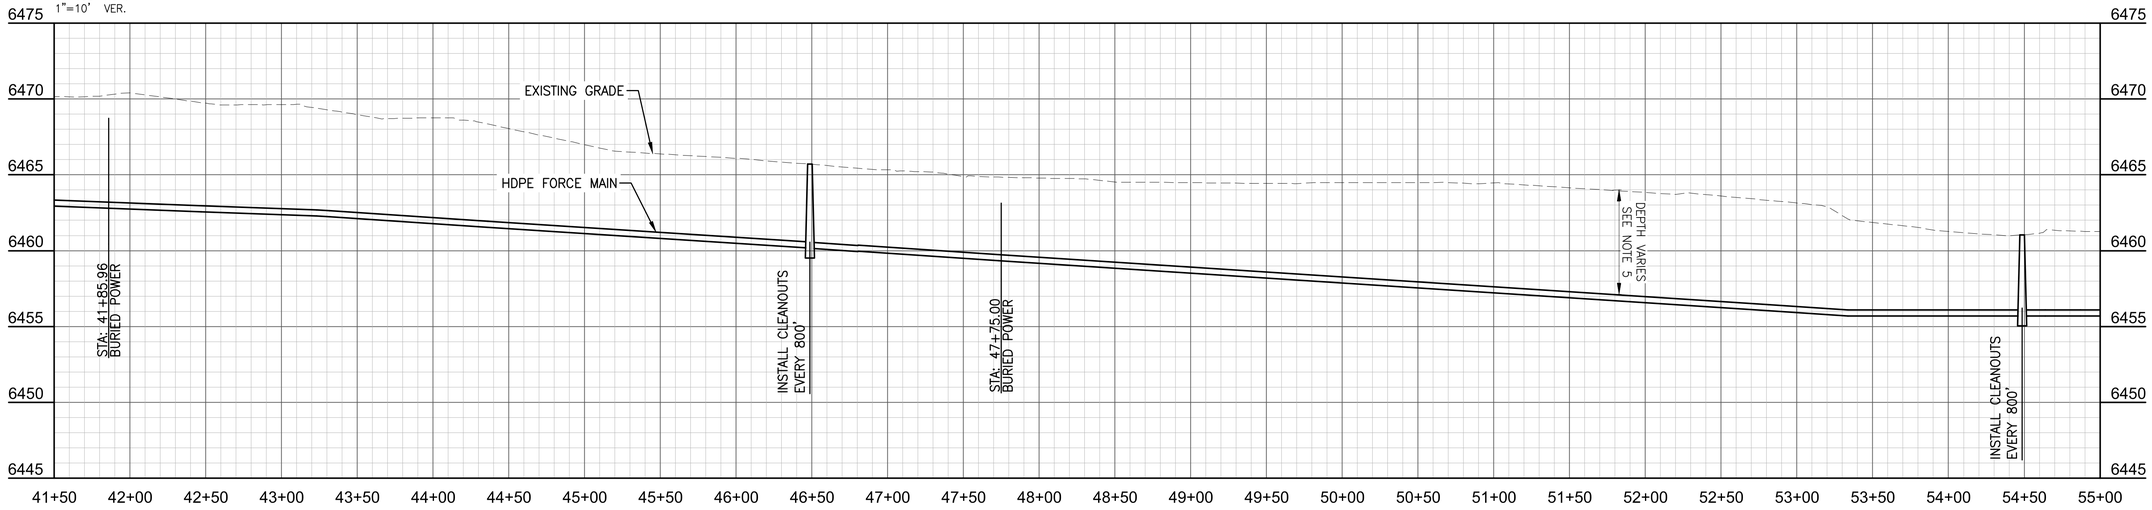

NOTES:

1. SEWER FORCE MAIN SHALL BE LOCATED ALONG THE EDGE OF THE EXISTING GRAVEL ROAD TO MINIMIZE DISTURBANCE OUTSIDE OF THE GRAVEL ROAD BUT STILL ALLOW ONE LANE OF VEHICLE ACCESS DURING CONSTRUCTION. LIMITS OF DISTURBANCE ALONG THE ROADWAY INDICATE A 15' WIDE SECTION FROM THE ROAD, SEE DETAIL 3/C305
2. MAINTAIN A MINIMUM OF 10' HORIZONTAL DISTANCE FROM SEWER FORCE MAIN AND EXISTING WATER MAIN.
3. SEWER FORCE MAIN CLEANOUTS SHALL BE REQUIRED AT A MINIMUM OF EVERY 800' WITH DRAINS AT ALL LOW POINTS IN THE FORCE MAIN AND AIR RELIEF VALVES AT ALL HIGH POINTS. DRAIN VAULTS AND AIR RELIEF VALVE VAULTS MAY ALSO INCORPORATE FORCE MAIN CLEANOUT. SEE FORCE MAIN DETAILS SHEET C305.
4. SEWER FORCE MAIN CONSTRUCTION SHALL INCLUDE LOCATING WIRE AND TERMINAL POSTS AS REQUIRED IN THE POR TECHNICAL SPECIFICATIONS.
5. FORCE MAIN DEPTH WITH LESS THAN 6' OF COVER REQUIRES BLUE BOARD INSULATION. DEPTH MAY VARY TO ELIMINATE THE NEED FOR DRAINS AND AIR RELIEF VALVES.
6. FORCE MAIN TO BE INSTALLED UTILIZING PLOWING METHODS TO LIMIT THE AREA OF DISTURBANCE.
7. TRACER WIRE SHALL BE INSTALLED ON THE SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE OF AUTHORIZATION 2356 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C303

TITLE OF SHEET
OVERALL – FORCE MAIN
P&P 41+50.00–55+00.00

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 26 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

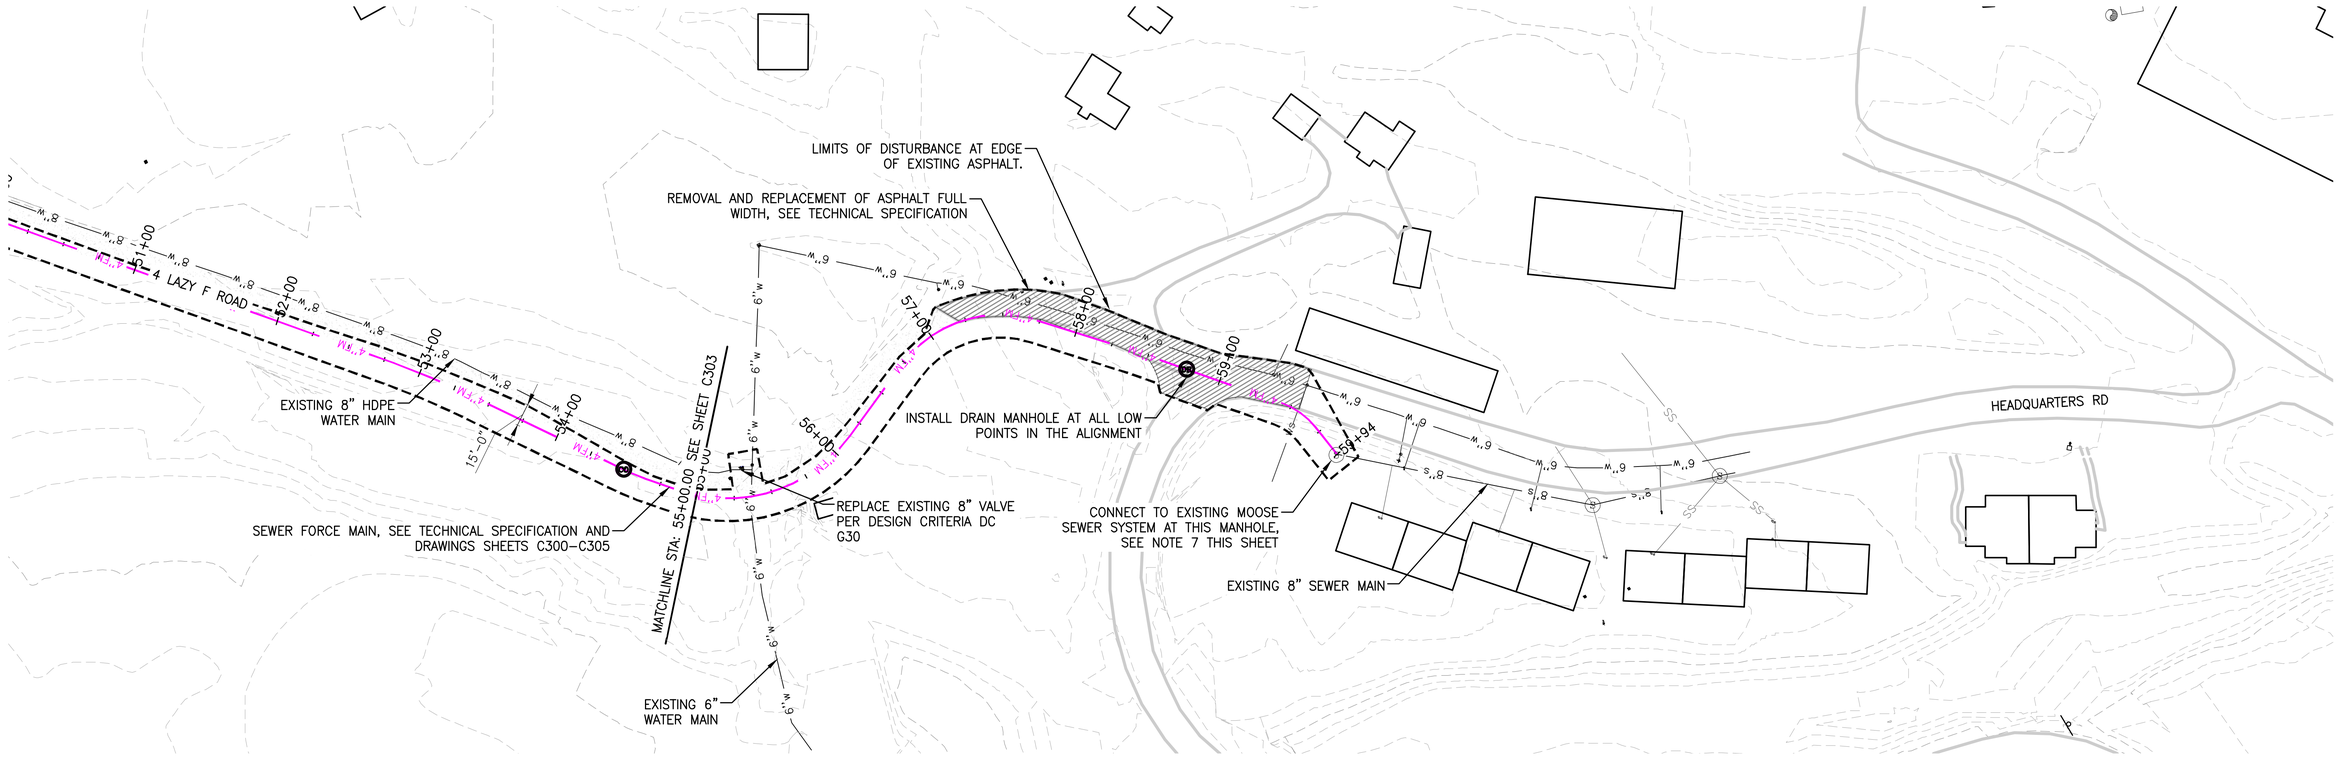

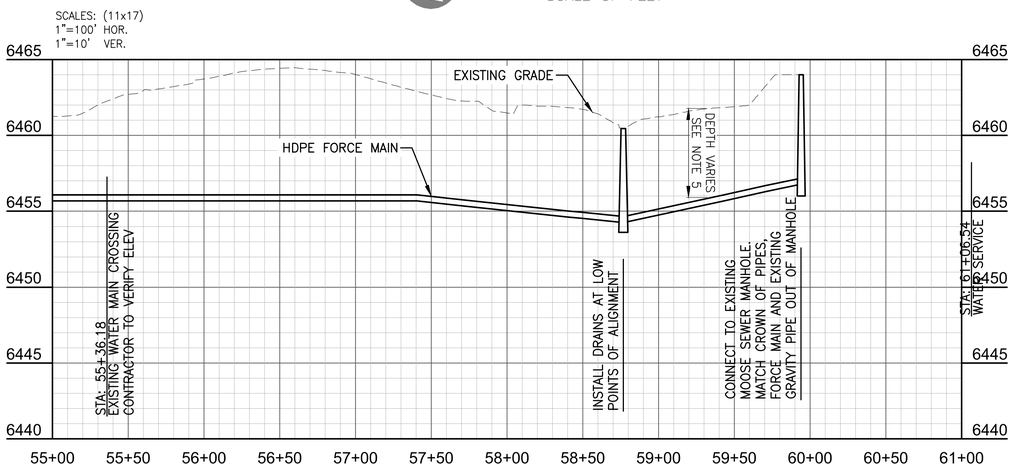

NOTES:

1. SEWER FORCE MAIN SHALL BE LOCATED ALONG THE EDGE OF THE EXISTING GRAVEL ROAD TO MINIMIZE DISTURBANCE OUTSIDE OF THE GRAVEL ROAD BUT STILL ALLOW ONE LANE OF VEHICLE ACCESS DURING CONSTRUCTION. LIMITS OF DISTURBANCE ALONG THE ROADWAY INDICATE A 15' WIDE SECTION FROM THE ROAD, SEE DETAIL 3/C305
2. MAINTAIN A MINIMUM OF 10' HORIZONTAL DISTANCE FROM SEWER FORCE MAIN AND EXISTING WATER MAIN.
3. SEWER FORCE MAIN CLEANOUTS SHALL BE REQUIRED AT A MINIMUM OF EVERY 800' WITH DRAINS AT ALL LOW POINTS IN THE FORCE MAIN AND AIR RELIEF VALVES AT ALL HIGH POINTS. DRAIN VAULTS AND AIR RELIEF VALVE VAULTS MAY ALSO INCORPORATE FORCE MAIN CLEANOUT. SEE FORCE MAIN DETAILS SHEET C305.
4. SEWER FORCE MAIN CONSTRUCTION SHALL INCLUDE LOCATING WIRE AND TERMINAL POSTS AS REQUIRED IN THE POR TECHNICAL SPECIFICATIONS.
5. FORCE MAIN DEPTH WITH LESS THAN 6' OF COVER REQUIRES BLUE BOARD INSULATION. DEPTH MAY VARY TO ELIMINATE THE NEED FOR DRAINS AND AIR RELIEF VALVES.
6. FORCE MAIN TO BE INSTALLED UTILIZING PLOWING METHODS TO LIMIT THE AREA OF DISTURBANCE.
7. TRACER WIRE SHALL BE INSTALLED ON THE SEWER FORCE MAIN. SEE DETAIL SHEET C203 FOR TRACER WIRE TERMINATION DETAIL.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE NO. 18014 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO. 000 C304

TITLE OF SHEET
OVERALL – FORCE MAIN
P&P 55+00.00–61+00.00

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 27 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

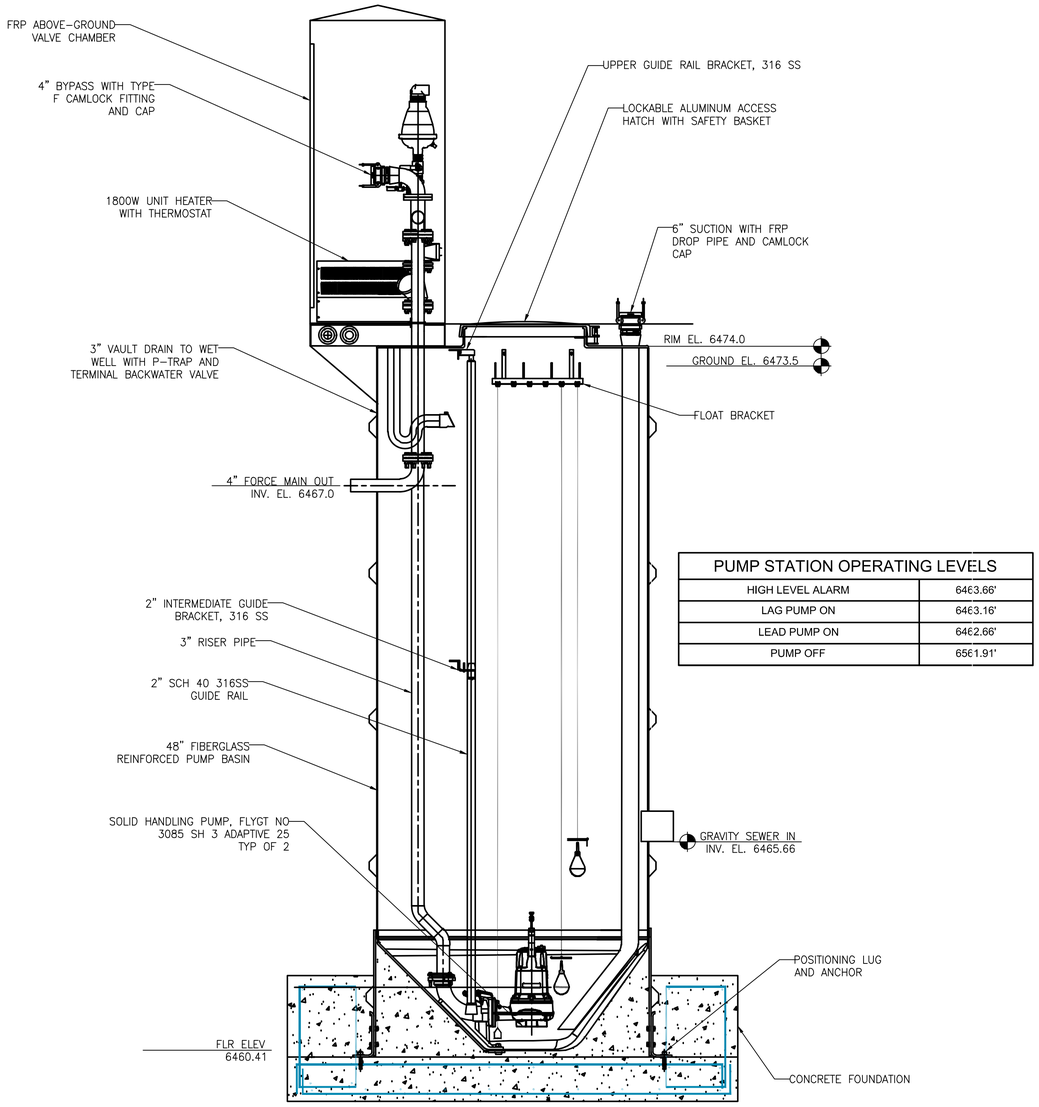

PUMP STATION OPERATING LEVELS	
HIGH LEVEL ALARM	64∈3.66'
LAG PUMP ON	64∈3.16'
LEAD PUMP ON	64∈2.66'
PUMP OFF	65∈1.91'

NOTE: SEE POR TECHNICAL SPECIFICATIONS FOR DUPLEX LIFT STATION REQUIREMENTS.

1 / C305 LIFT STATION DETAIL

SCALE: N.T.S.

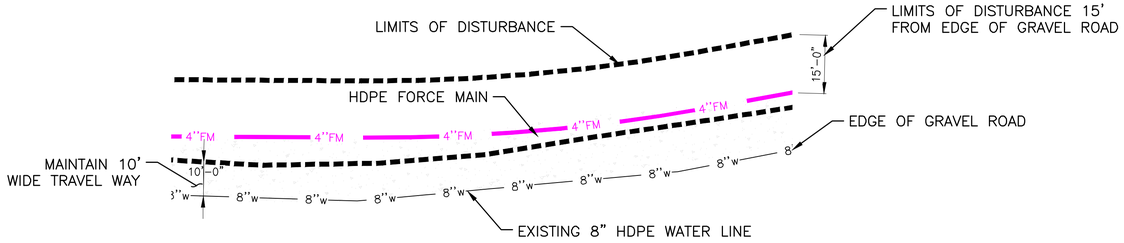

3 / C305 TYPICAL FORCE MAIN LOCATION AND LIMITS OF DISTURBANCE

SCALE: N.T.S.

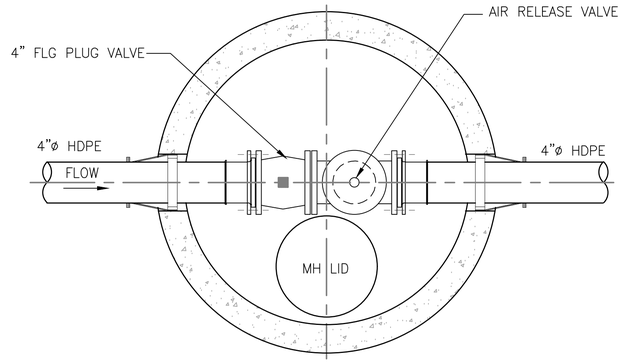

1. REINFORCEMENT FOR PRECAST SECTIONS SHALL BE AS PER ASTM C-478
2. CONCRETE MANHOLE SECTIONS TO BE WET CAST WITH ONE COAT (2 LBS. / SQ. YD MIN.) OF "THOROSEAL" OR DRY CAST WITH TWO COATS (2 LBS / SQ. YD MIN. BASE COAT AND 1 LB / SQ YD MIN FINISH COAT) OF "THOROSEAL" APPLIED PER MANUFACTURERS RECOMMENDATIONS.
3. DETAIL IS PROVIDED FOR REFERENCE, FORCE MAIN CLEANOUTS, AIR RELIEF VALVE VAULTS AND DRAIN MANHOLES REQUIRED AS NOTED ON THE PLANS AND PER THE POR TECHNICAL SPECIFICATIONS.

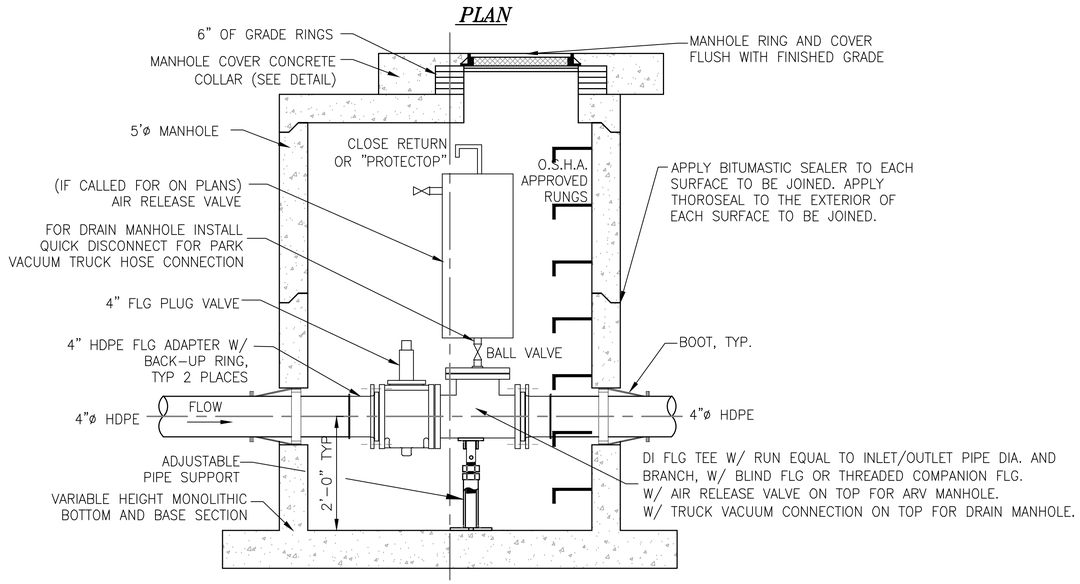

2 / C305 ARV DETAIL

SCALE: N.T.S.

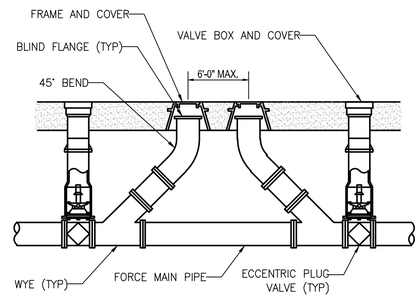

4 / C305 FORCE MAIN CLEANOUT DETAIL

SCALE: N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (CivIL) CERTIFICATE GAUCHER 22765 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C305	TITLE OF SHEET OVERALL – FORCE MAIN DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 28 OF 371

P:\6204-REA_Arch\010 – NPS 100 MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\4LAZYF_DETL – PHASE 1.dwg

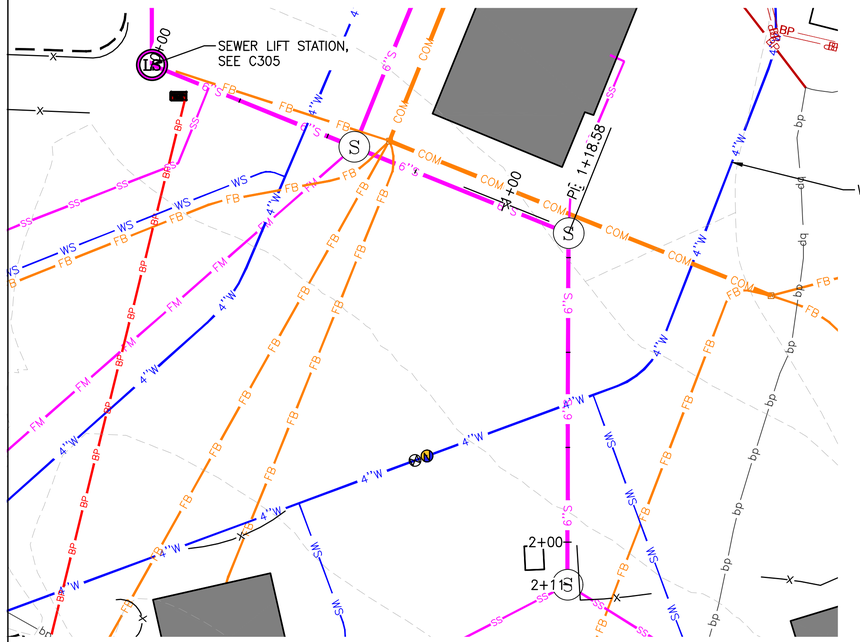

20 0 10 20 FT

SCALE OF FEET

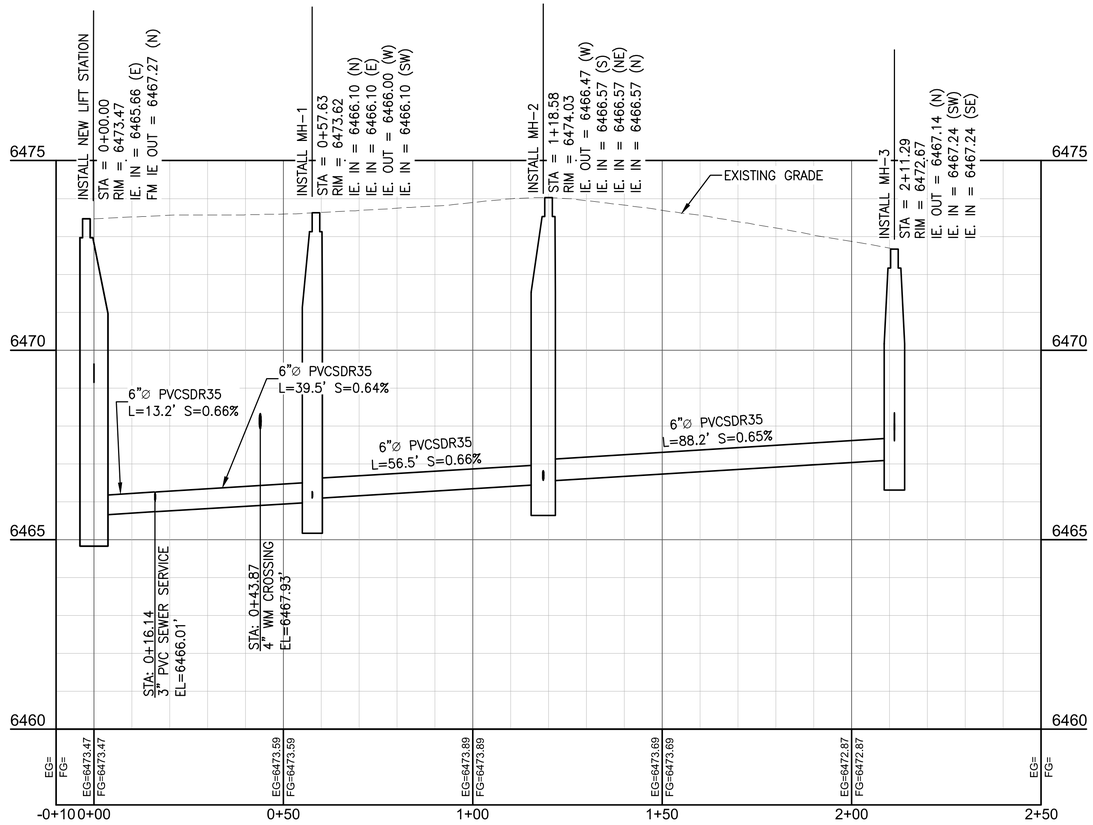

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE M. SAUCEDA 22168 Date: 7/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C306	TITLE OF SHEET OVERALL – GRAVITY SEWER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 29 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

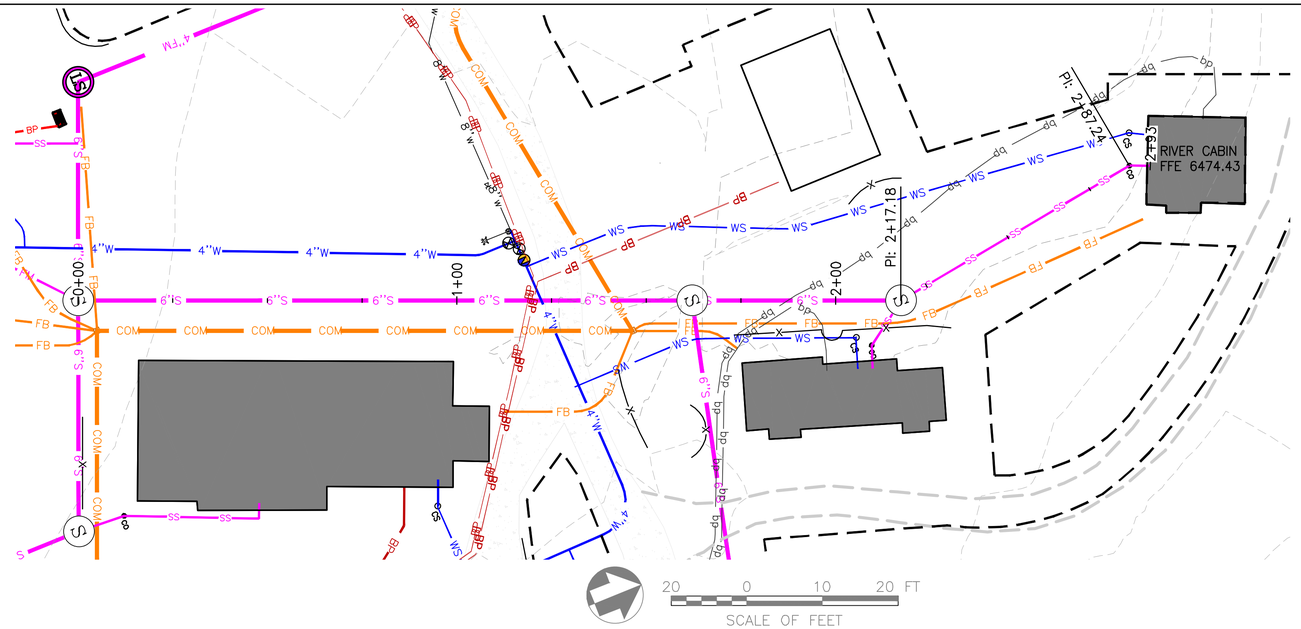

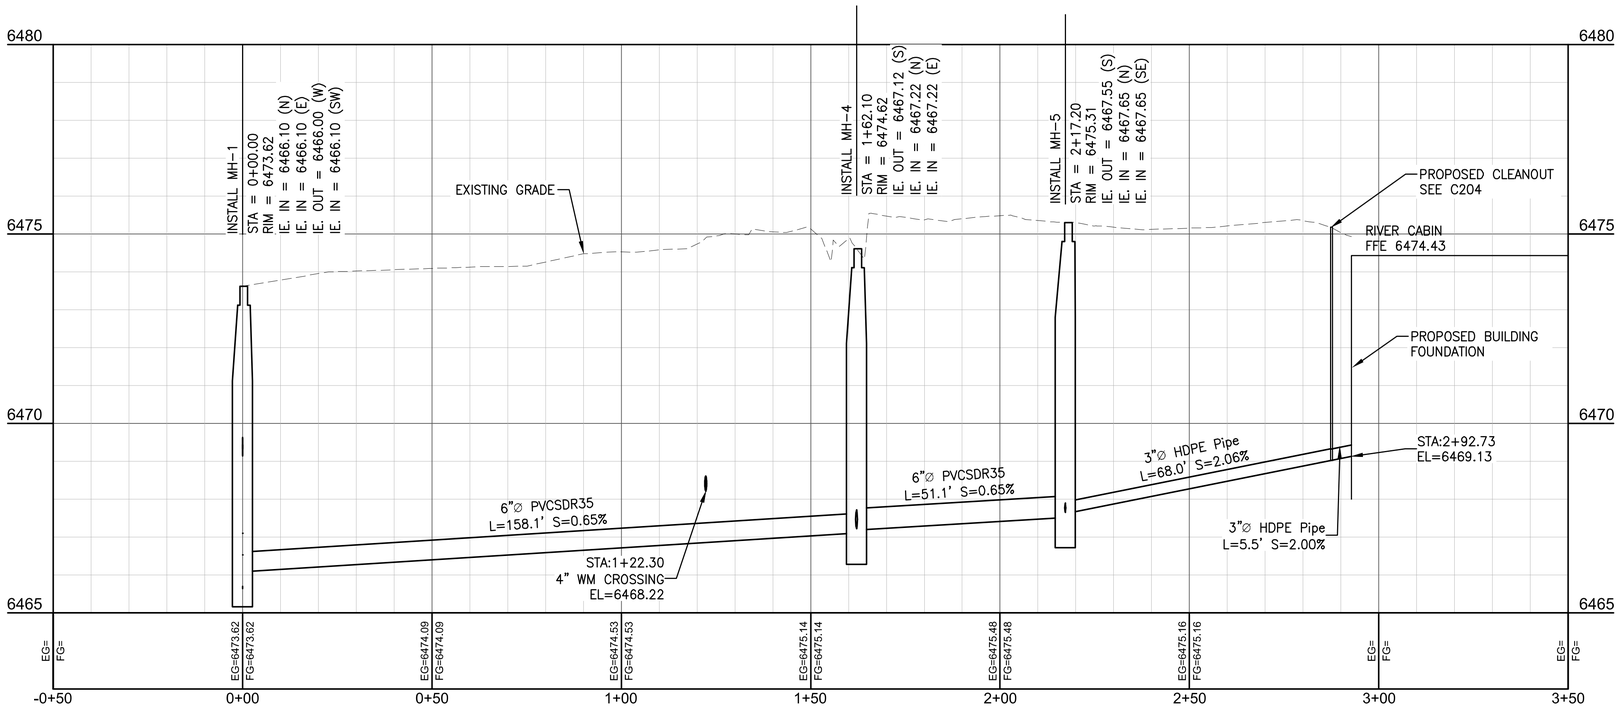

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22146 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C307

TITLE OF SHEET
OVERALL – RIVER CABIN
PLAN & PROFILE

REHABILITATE "4 LAZY F RANCH" CABINS FOR
HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 30 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

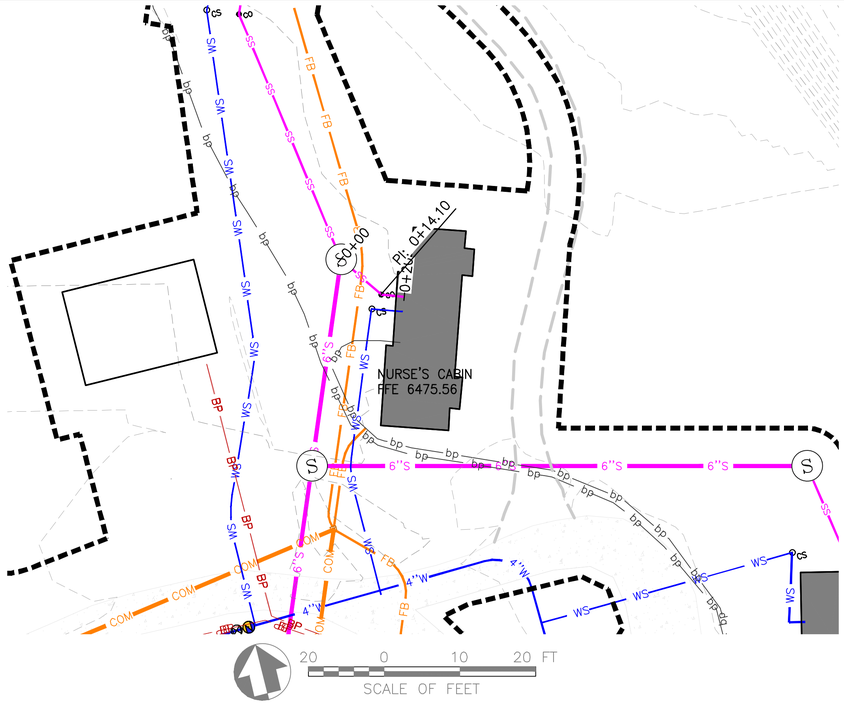

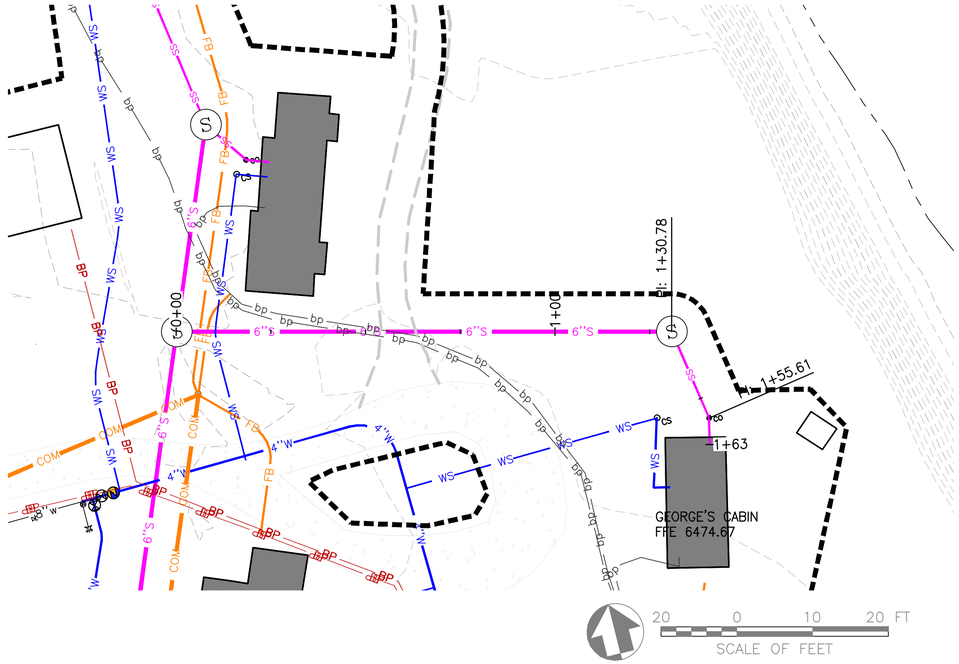

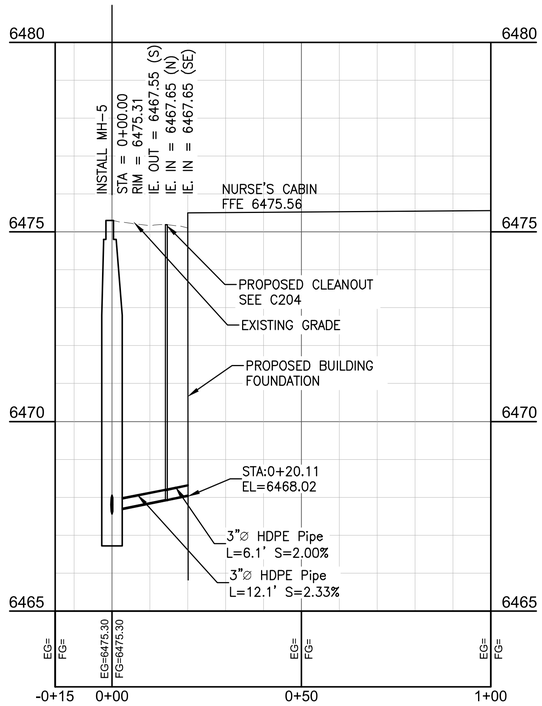

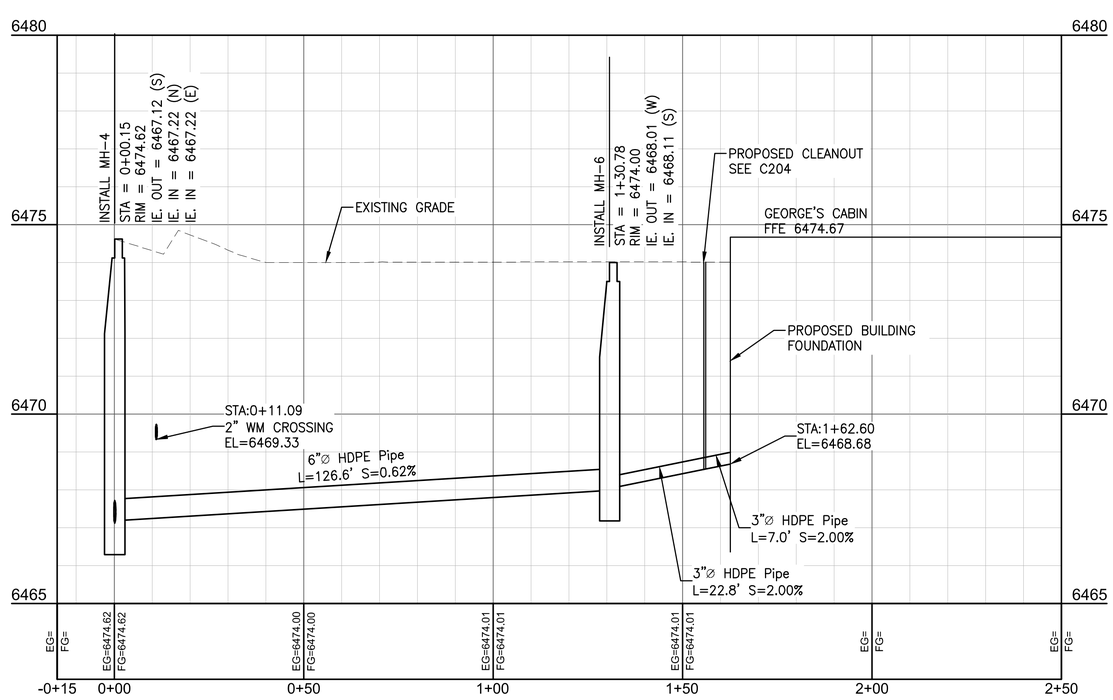

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE 23788 Date: 07/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C308	TITLE OF SHEET OVERALL – NURSE'S AND GEORGE'S CABIN SEWER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 31 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

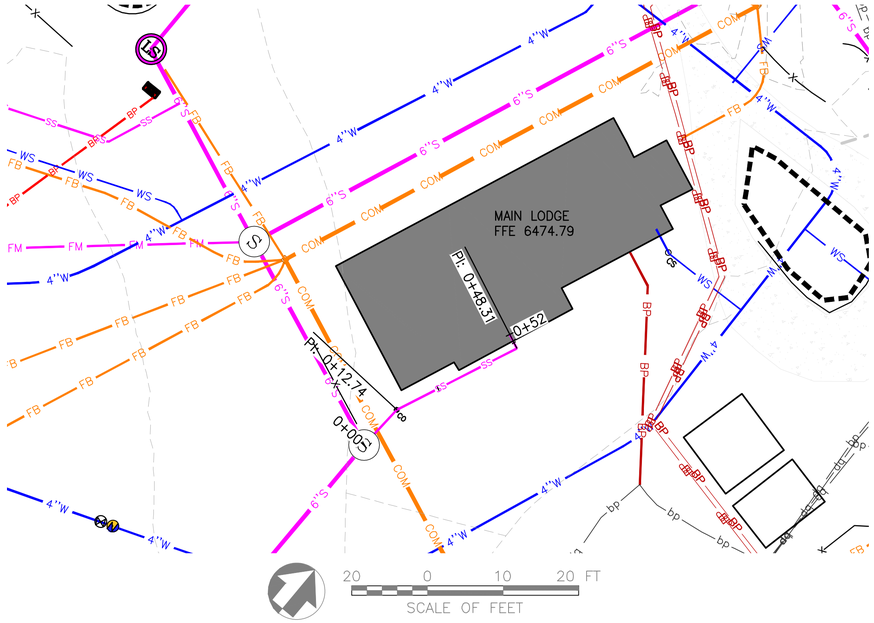

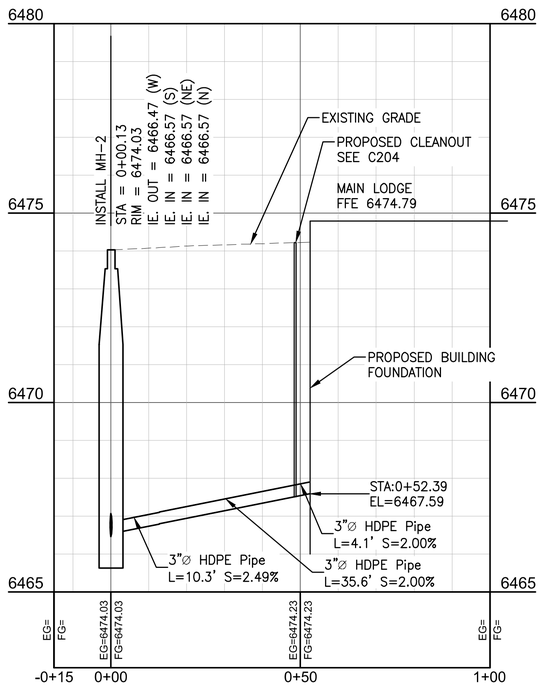

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CHRISTOPHER M. SAUCIER 23788 WYOMING Date: 7/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C309	TITLE OF SHEET OVERALL – MAIN LODGE SEWER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 32 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

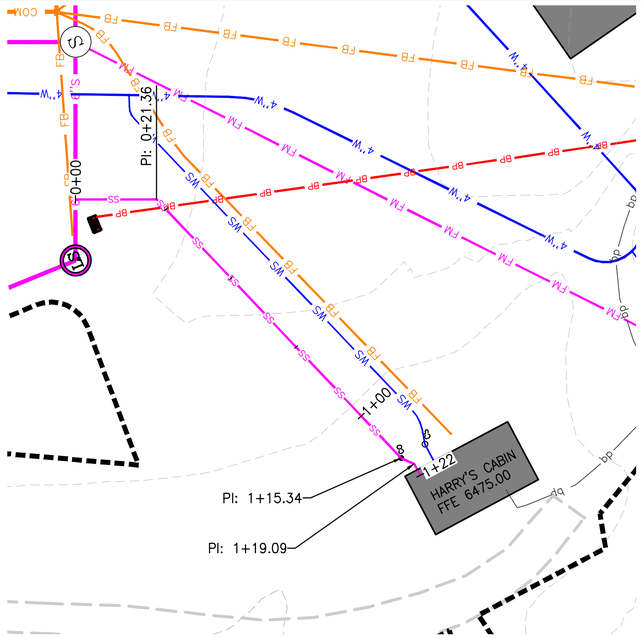

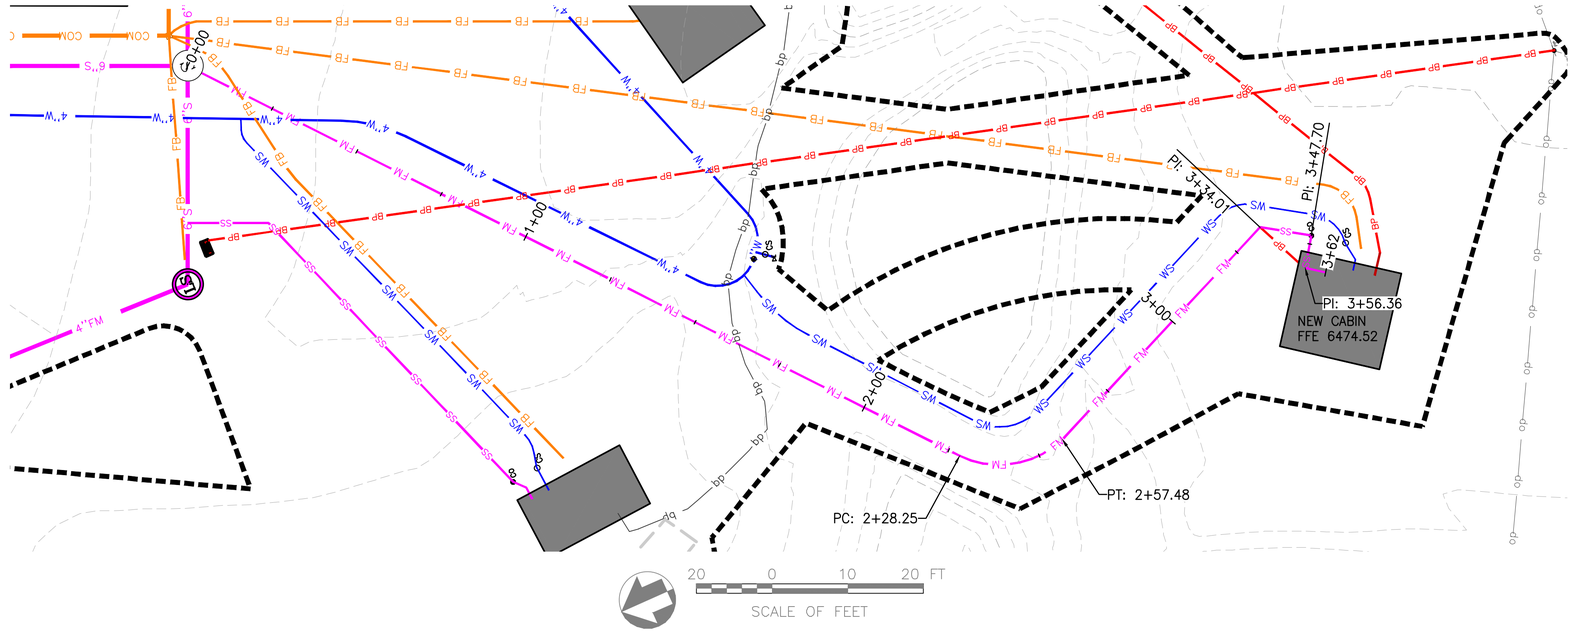

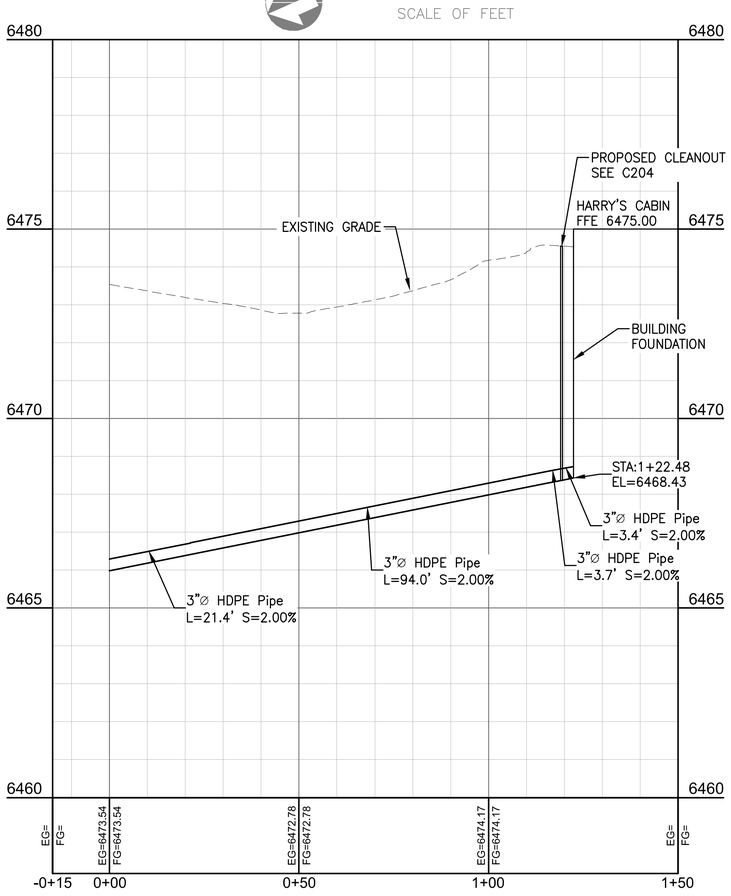

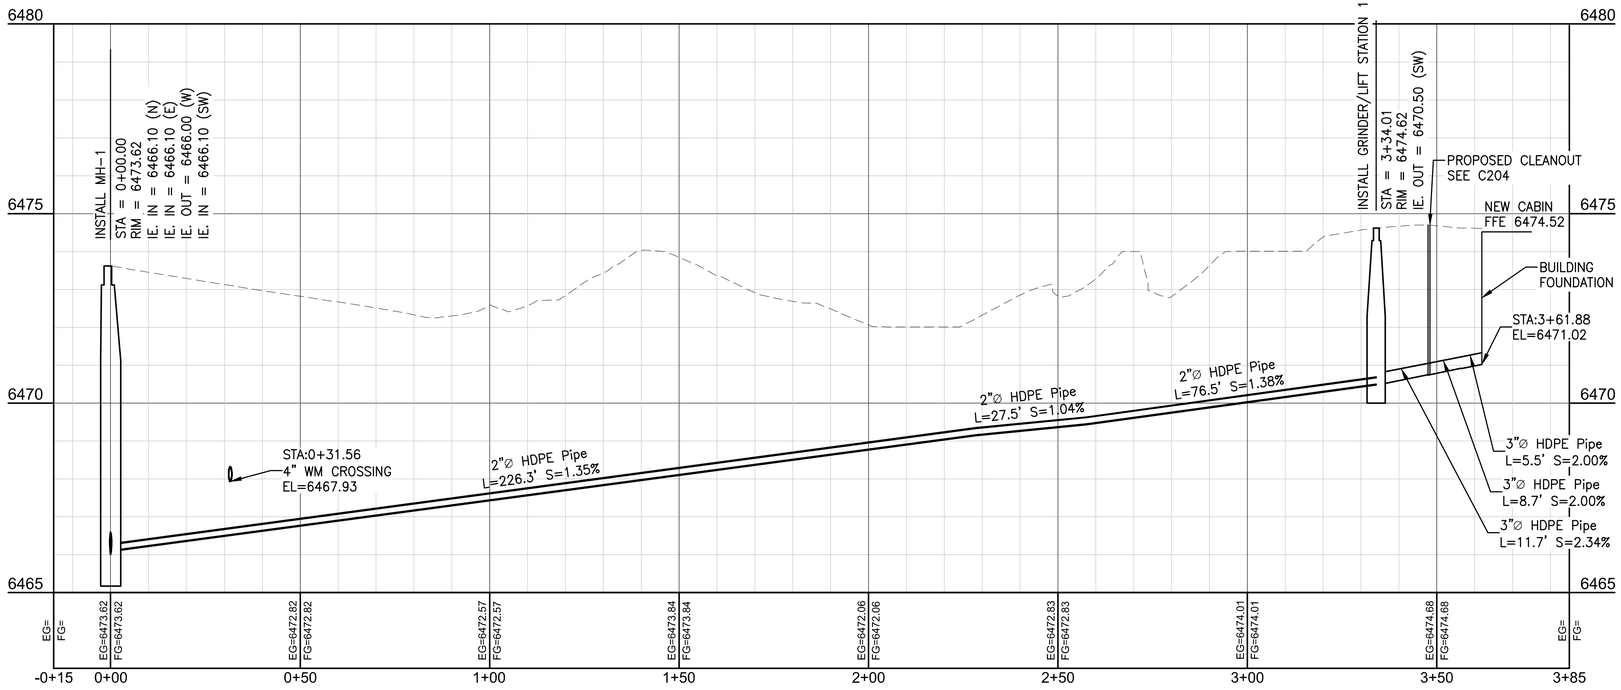

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CHRISTINE (GAUCI) EDDY 22135 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C310	TITLE OF SHEET OVERALL – HARRY'S AND NEW CABIN SEWER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 33 OF 371

P:\6204-NEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

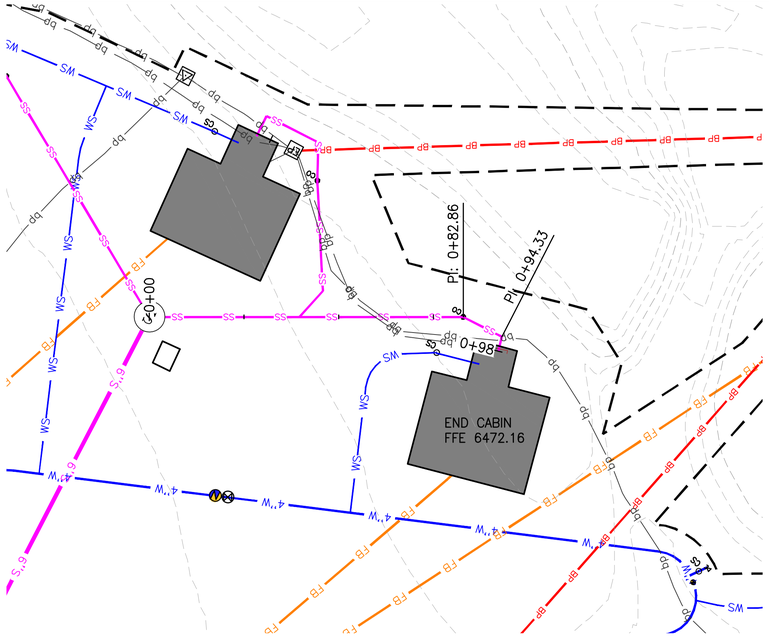

20 0 10 20 FT
SCALE OF FEET

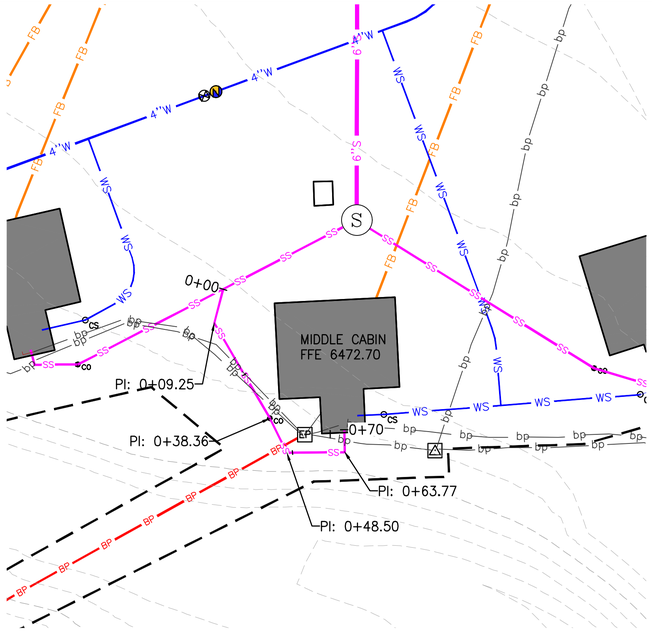

20 0 10 20 FT
SCALE OF FEET

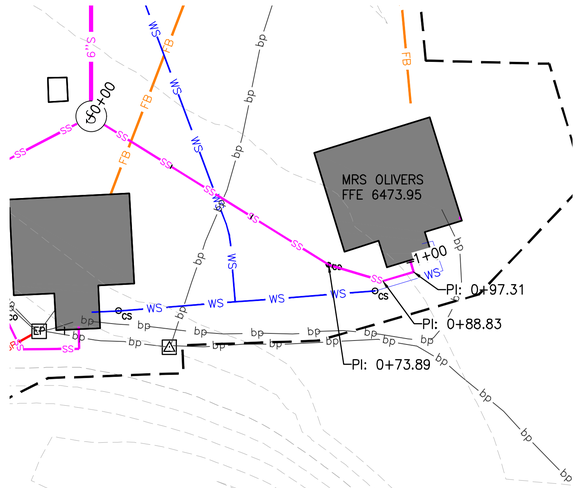

20 0 10 20 FT
SCALE OF FEET

SCALES: (11x17)
1"=40' HOR.
1"=4' VER.

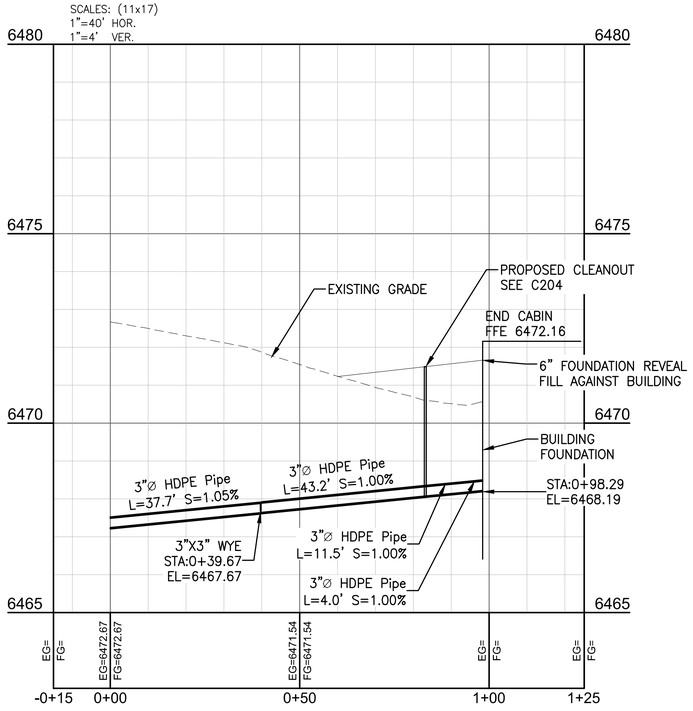

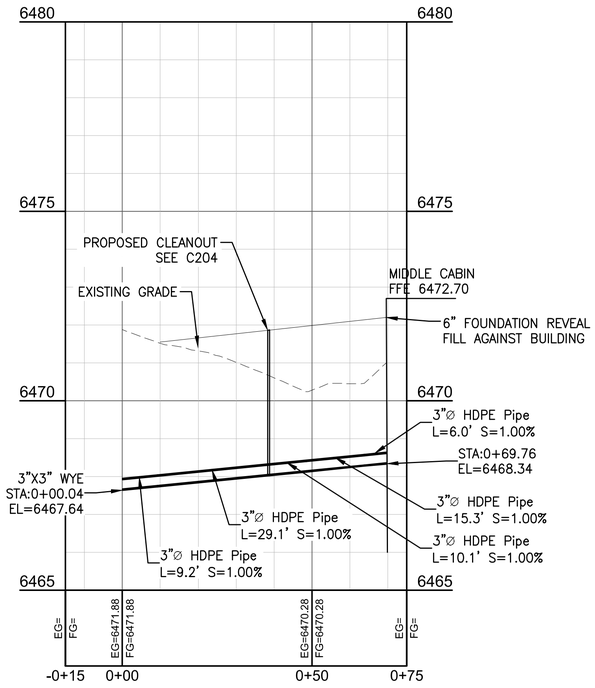

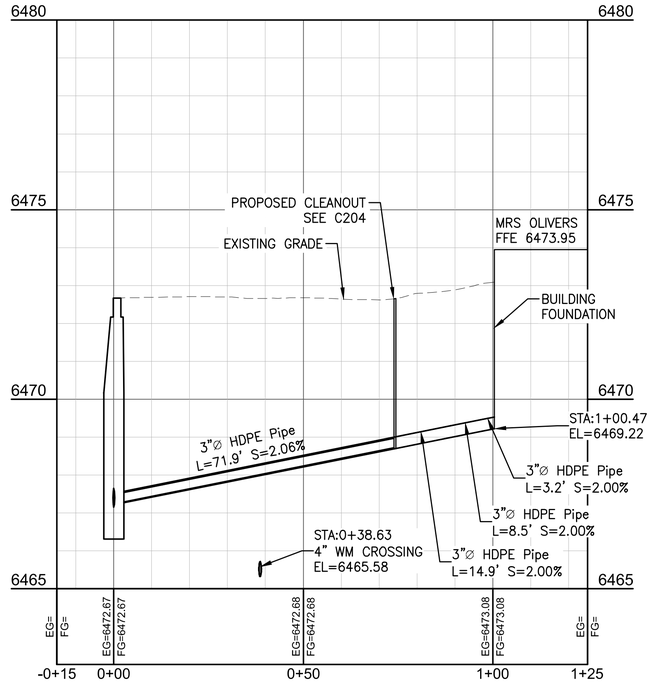

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil)
CELINE (SALCIE) EDDY
22148
Date: 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C311

TITLE OF SHEET
OVERALL – END, MIDDLE, MRS. OLIVERS CABIN SEWER PLAN & PROFILE
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 34 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF-FORCE MAIN PHASE 1.dwg

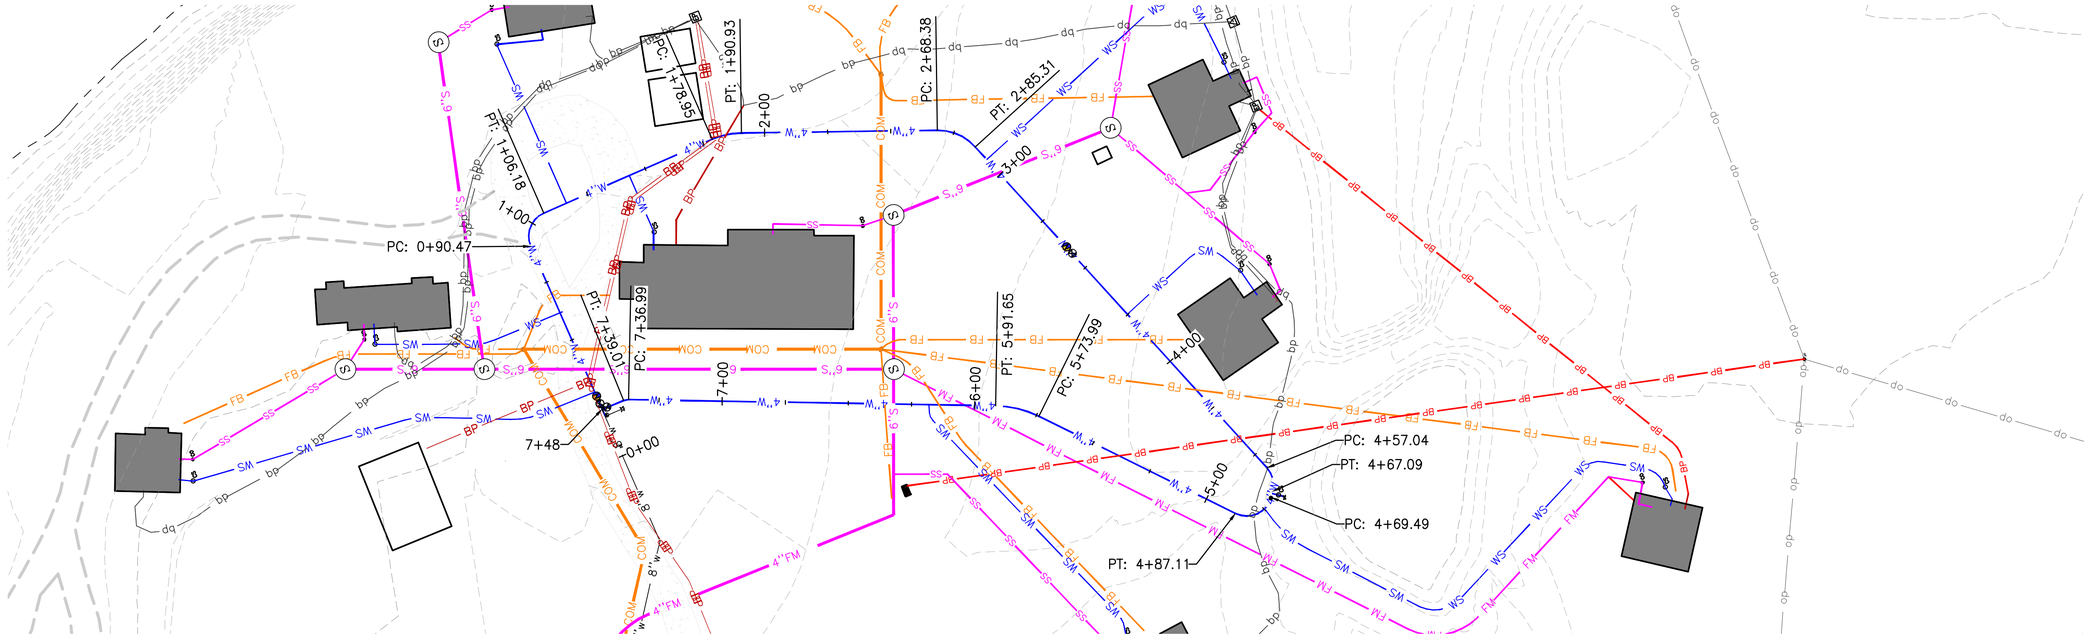

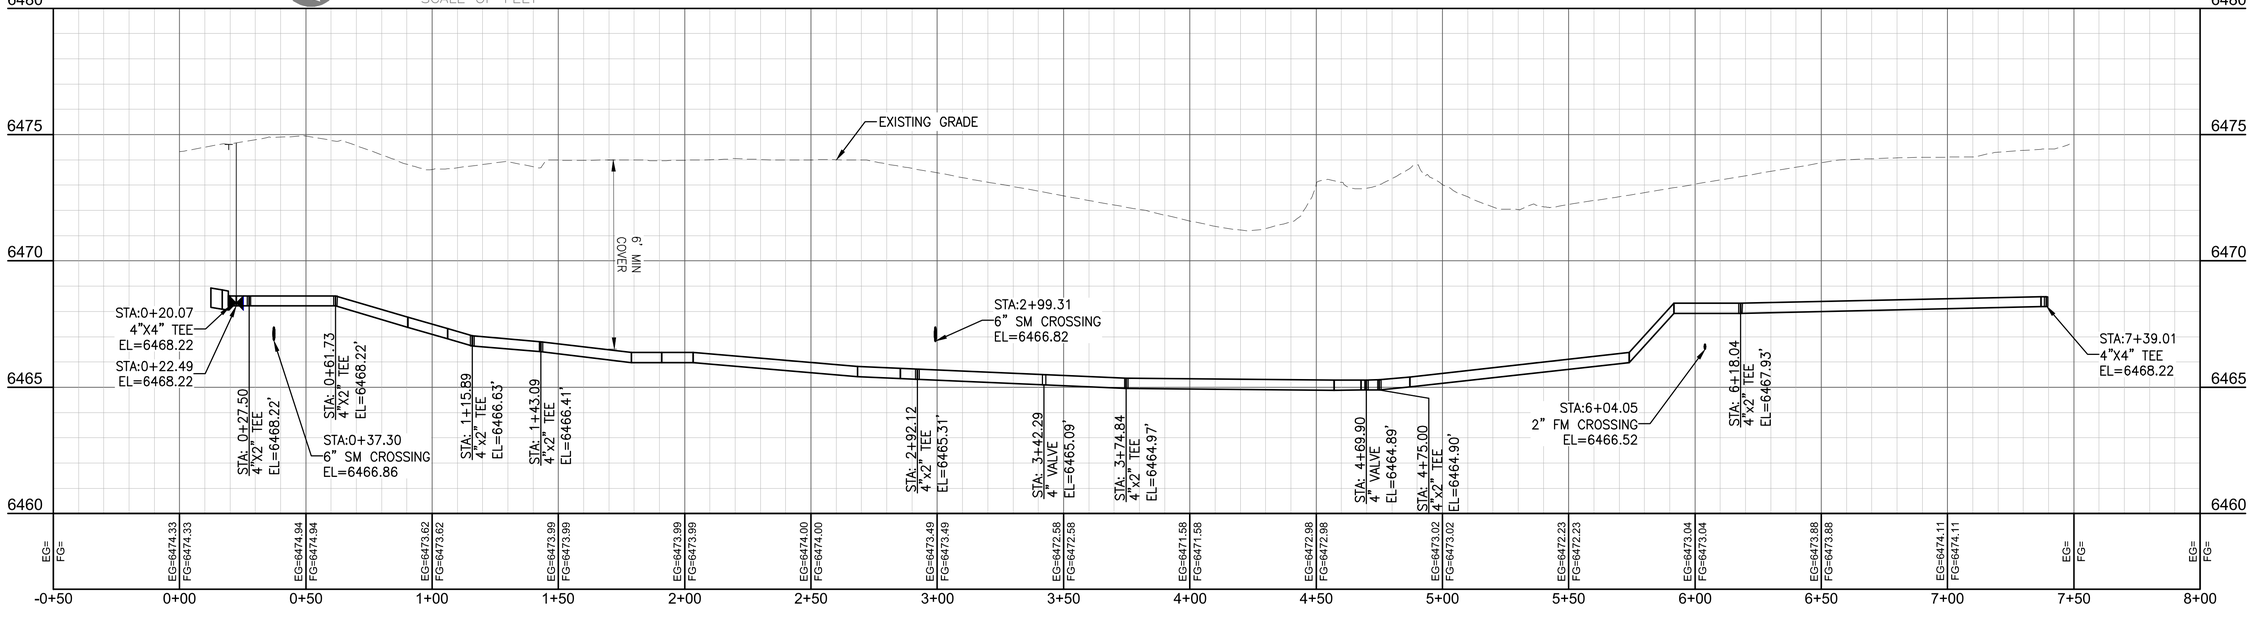

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCEDA 23765 STATE OF WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C400	TITLE OF SHEET OVERALL WATER MAIN PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 35 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF- WATER MAIN 1.dwg

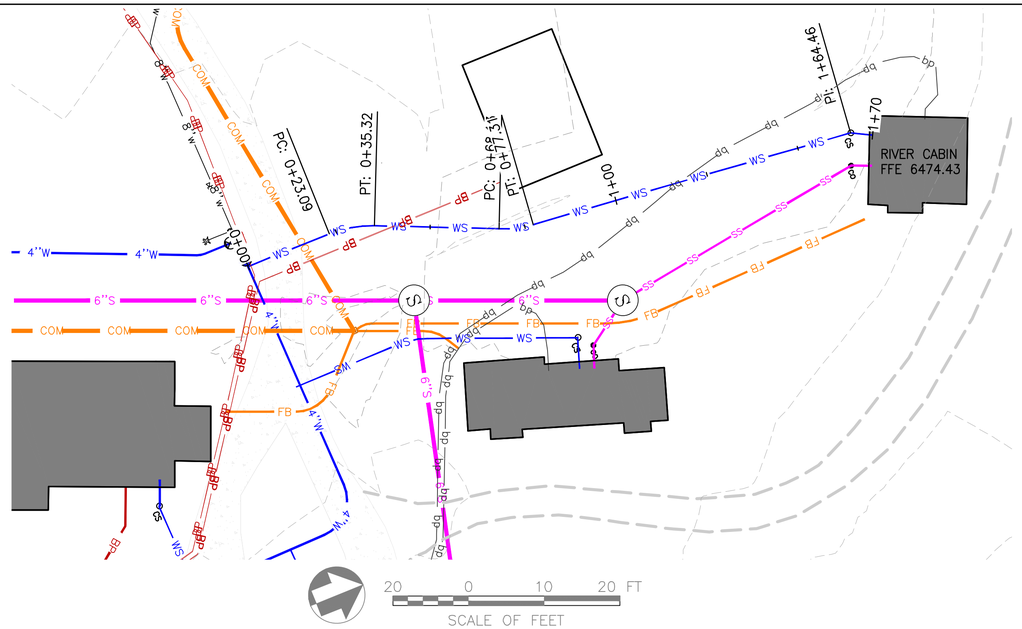

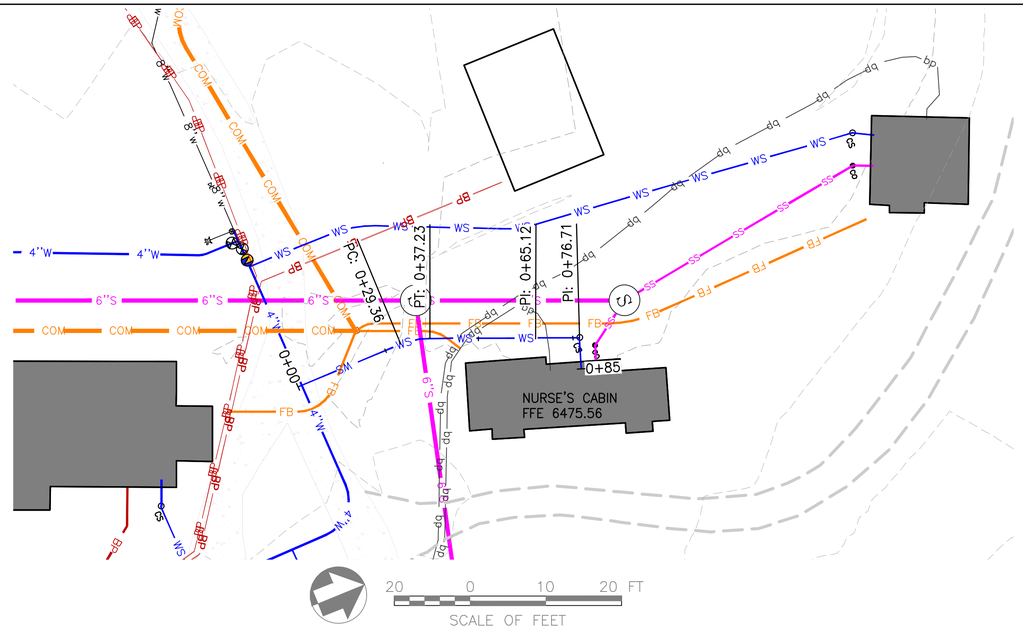

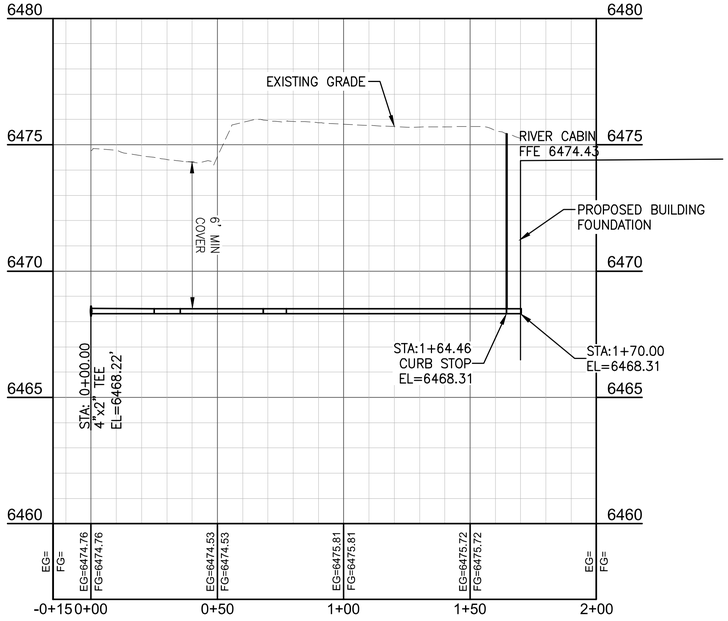

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22148 Date: 7/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C401	TITLE OF SHEET OVERALL –RIVER AND NURSE'S CABIN WATER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 36 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF- WATER MAIN 1.dwg

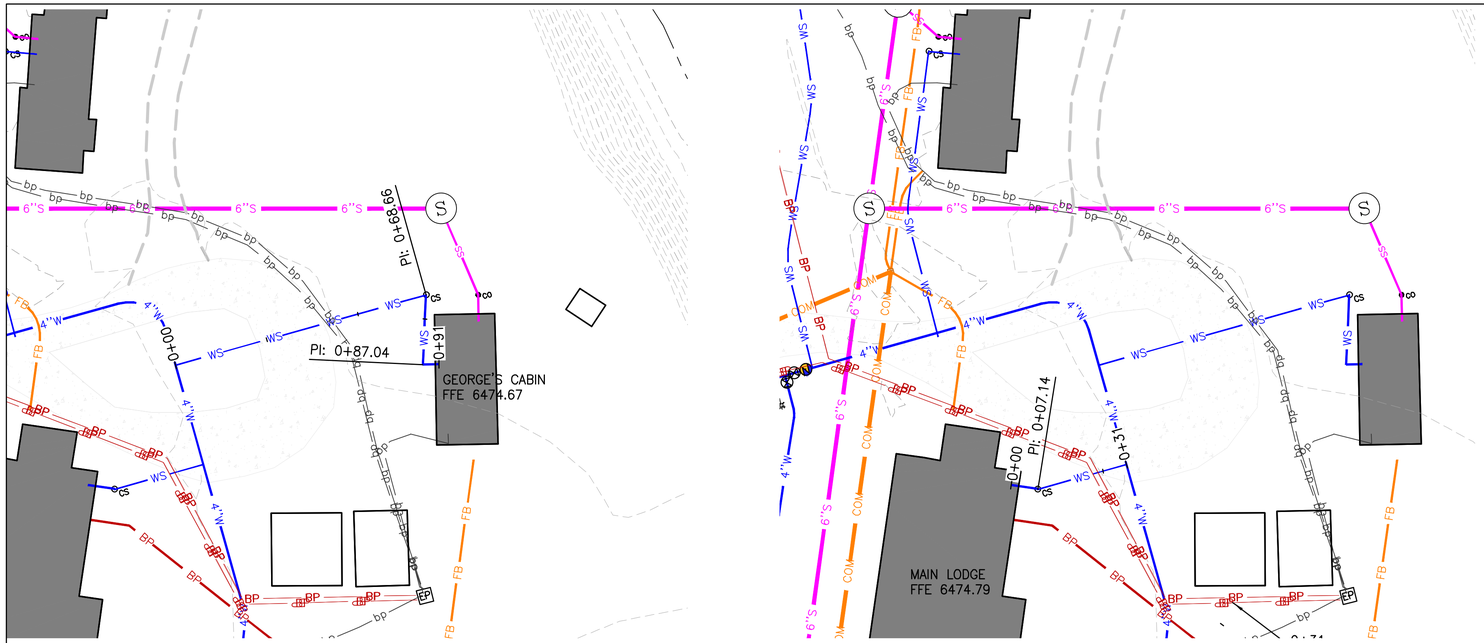

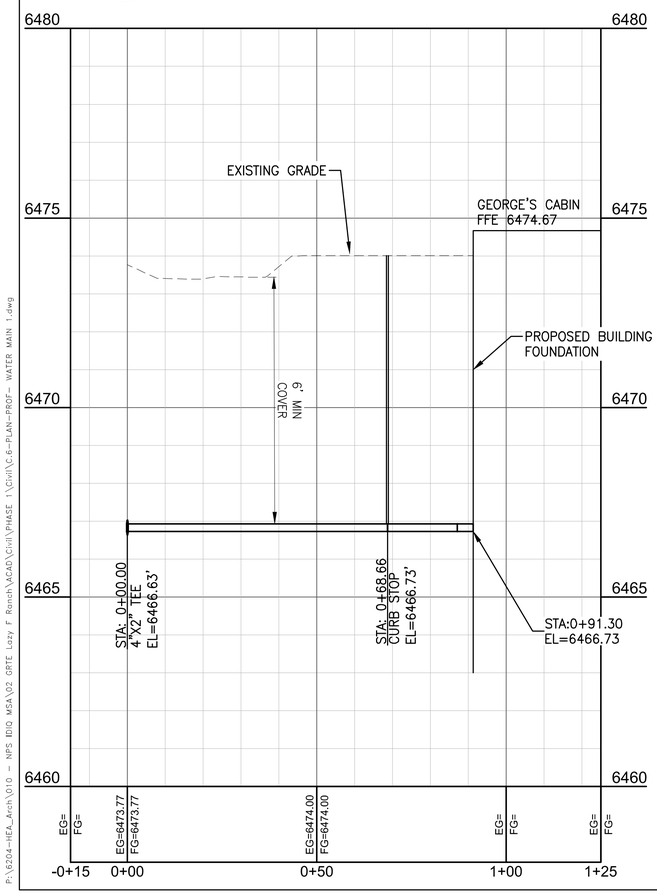

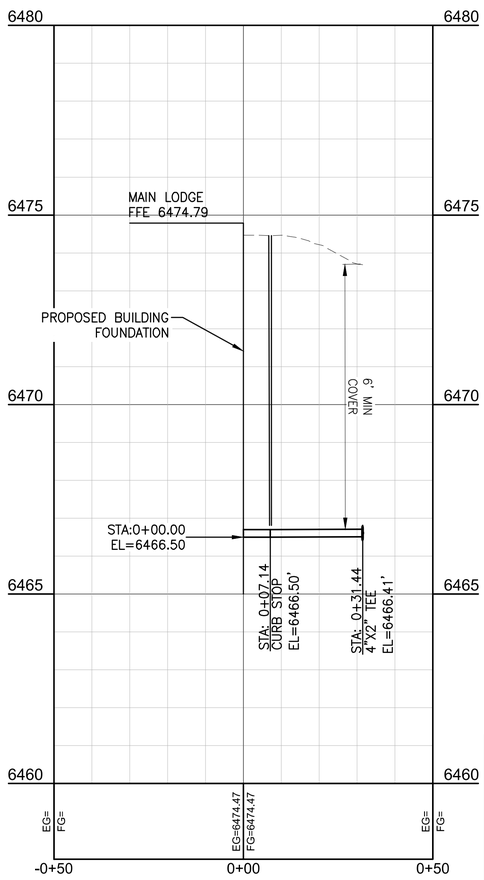

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C.6-PLAN-PROF- WATER MAIN 1.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE GAUCI FEE 22105 WYOMING Date: 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
000
C402

TITLE OF SHEET
OVERALL – GEORGE'S AND MAIN LODGE WATER PLAN & PROFILE
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 37 OF 371

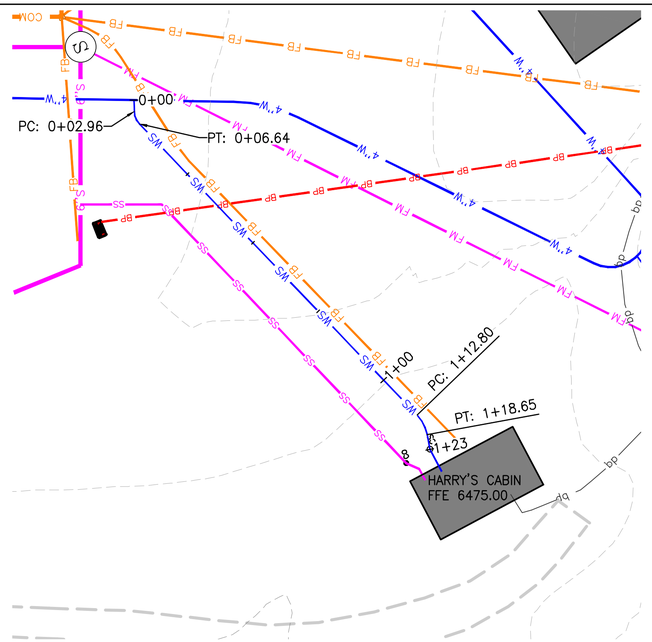

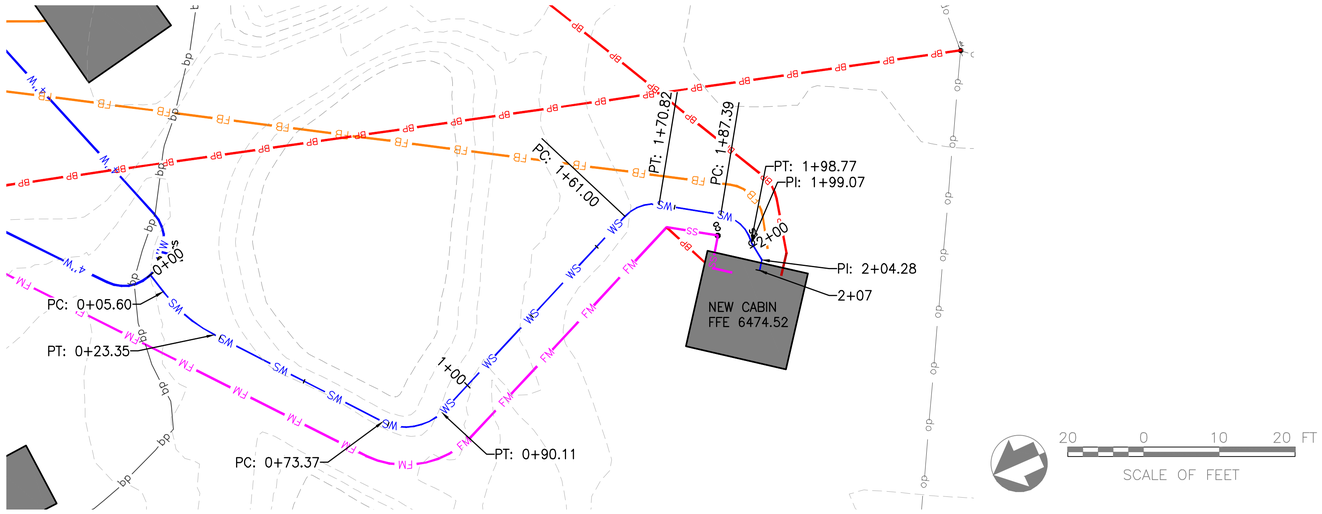

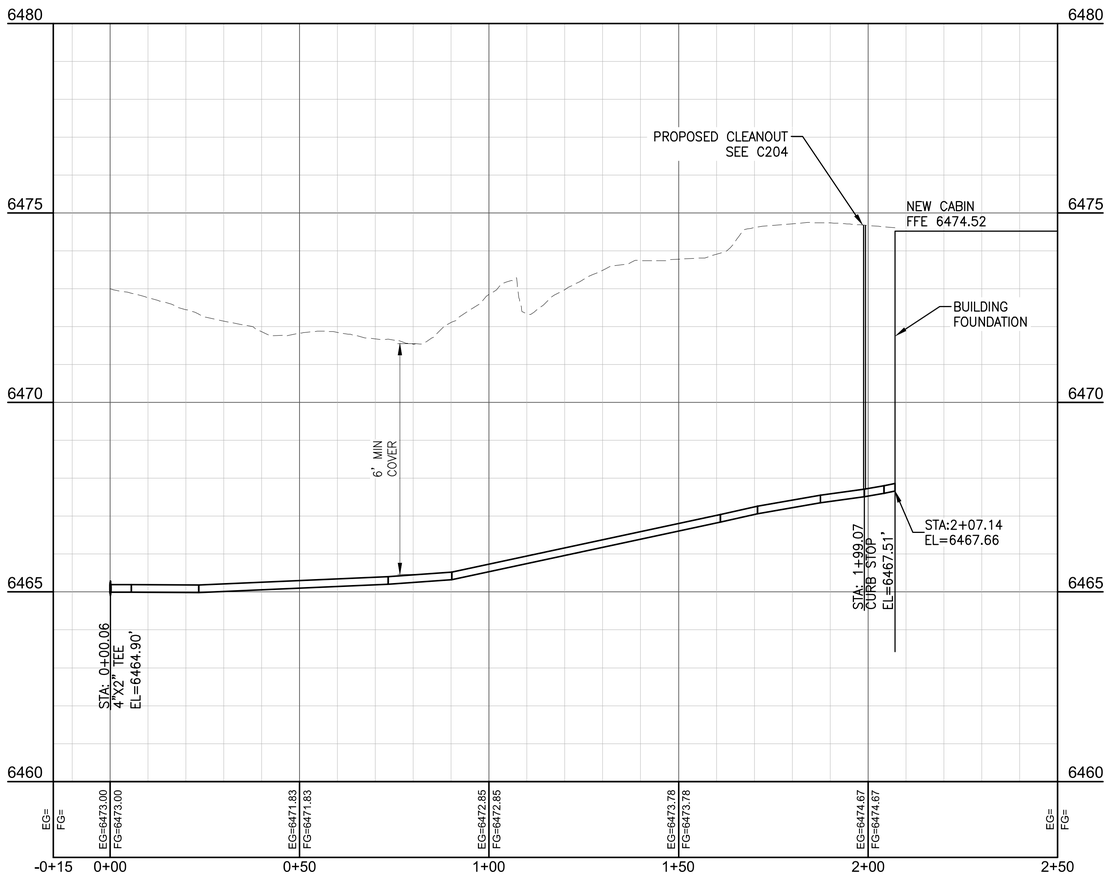

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE M. SAUCEDA 22196 Date: 7/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 000 C403	TITLE OF SHEET OVERALL – HARRY'S AND NEW CABIN WATER PLAN & PROFILE REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 38 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF- WATER MAIN 1.dwg

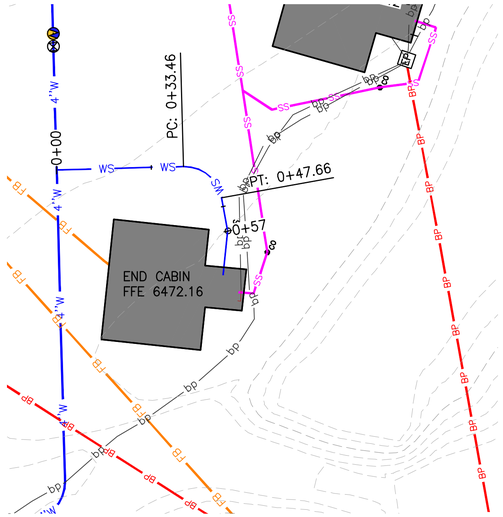

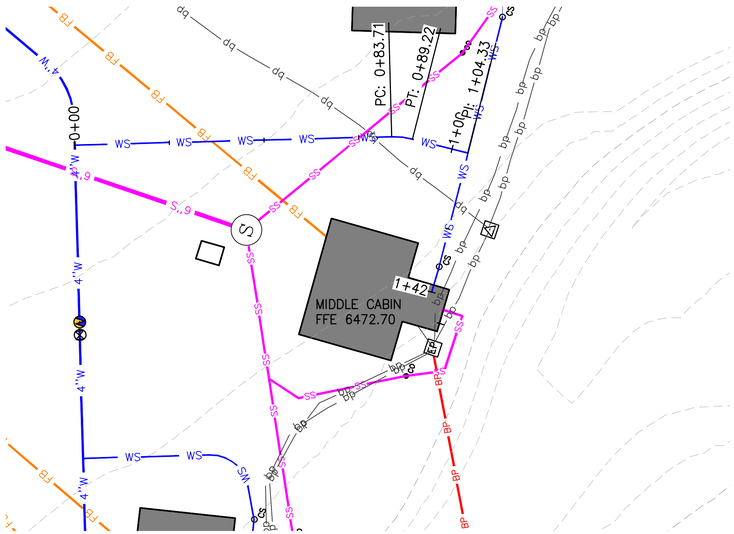



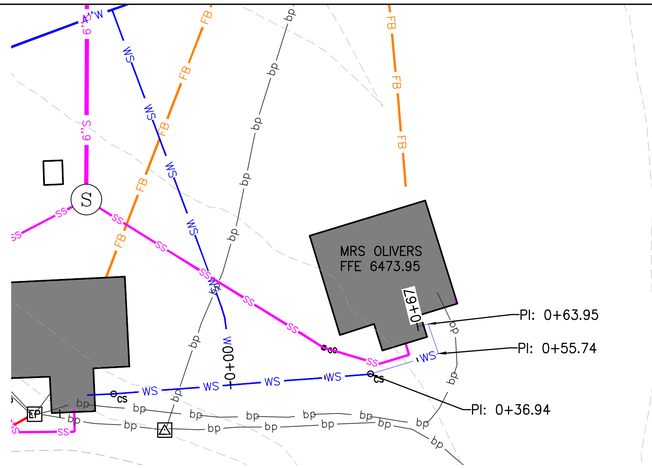

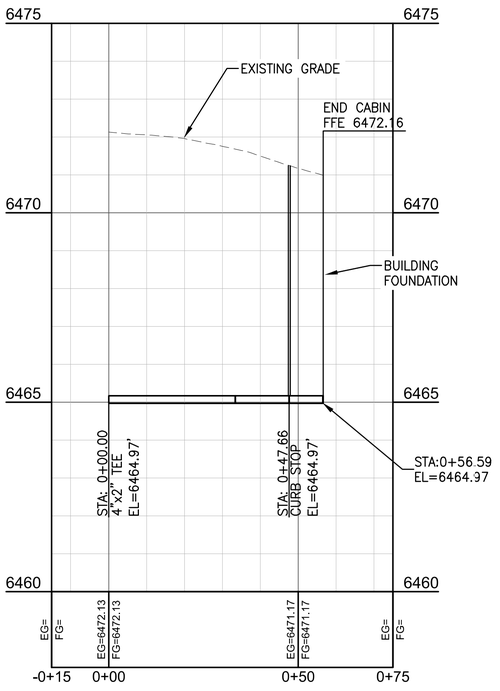

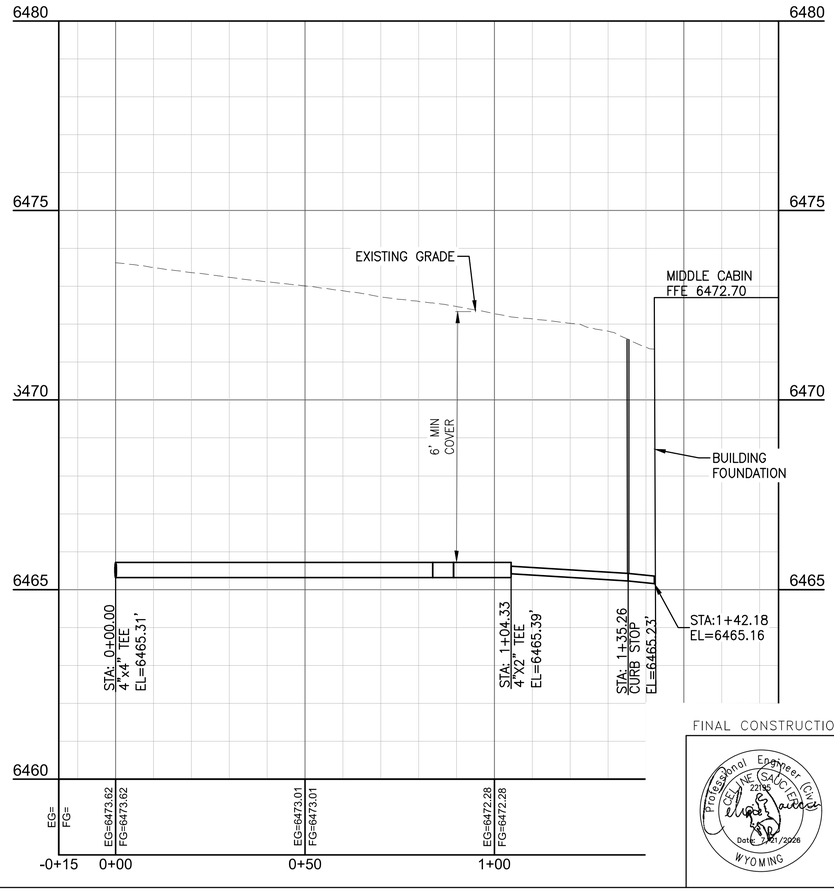

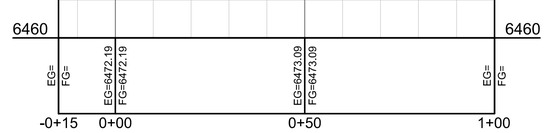

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE NO. 22565 STATE OF WYOMING Date: 7/21/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	MORRISON MAIERLE BOZEMAN, MT
DESIGNED:	MMI
DRAWN:	CMS
TECH REVIEW:	CMS
DATE:	07/21/2026

SUB SHEET NO.
000
C404

TITLE OF SHEET
OVERALL – END, MIDDLE, MRS OLIVER'S CABIN WATER PLAN & PROFILE
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 39 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\PHASE 1\Civil\C-6-PLAN-PROF- WATER MAIN 1.dwg

7/16/26 08:49:SKERSTIENS R:\25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\LAL\2-0_GRTE-L4_STAGING.DWG
XREFS: ..\BASES\26_0308_NPS GRTE 4 Lazy F ARCH -PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock 22x34 - GRTE 4 Lazy F.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_EX COND.dwg
IMAGES: ..\GRAPHICS\CLR_BASE MAP220.JPG; ..\GRAPHICS\CLR_BASE MAP219.JPG; ..\GRAPHICS\CLR_BASE MAP220.JPG; ..\GRAPHICS\CLR_BASE MAP210.PNG;

GENERAL NOTES:

1. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   1.1. DO NOT SCALE DRAWINGS. THE DRAWINGS GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EX UTILITIES.
2. DAMAGE TO NATURAL AREAS, EX GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. PRIOR TO CONSTRUCTION, CONTRACTOR IS TO COMPLETE PRE CONSTRUCTION MEETINGS AND PROVIDE PROTECTION AND ACCESS PLANS AND SCHEDULES FOR THE CONTRACTING OFFICER'S APPROVAL OF ALL EQUIPMENT AND FOOT TRAFFIC CONSTRUCTION ACCESS, ROUTES, METHODS, PLANS AND SCHEDULES, INCLUDING BUT NOT LIMITED TO; TREE PROTECTION PLAN, TRAFFIC CONTROL PLAN AND HISTORIC PRESERVATION FEATURE PRESERVATION PLAN. REFERENCE DIVISION 01 AND TECHNICAL SPECIFICATIONS FOR ADDITIONAL PLANS AND FOR SPECIFIC REQUIREMENTS.
4. THE CULTURAL LANDSCAPE OF GRAND TETON NATIONAL PARK IS LISTED ON THE NATIONAL REGISTER OF HISTORICAL PLACES. THERE ARE CONTRIBUTING BUILT AND NATURAL RESOURCES LOCATED THROUGH THE PROJECT AREA. ALL WORK MUST ADHERE TO THE SECRETARY OF INTERIOR'S STANDARDS AS PER SECTION 01 35 91 HISTORIC PRESERVATION TREATMENT PROCEDURES.
5. REFER TO L002 STAGING AND ACCESS PLAN FOR TRAFFIC MANAGEMENT AND CONTROL MEASURES.
6. CONTRACTOR IS TO TAKE PRE-CONSTRUCTION VIDEOS OF THE GRAND TETON SITE ALONG THE PROJECT BOUNDARY, AND HAUL ROUTE ALONG 4 LAZY F ROAD. VIDEO SHALL PROVIDE DOCUMENTATION OF EXISTING CONDITIONS OF THE PAVEMENT, SHOULDERS, CURBS, ROAD SIGNS, AND OTHER MISCELLANEOUS ELEMENTS AS IDENTIFIED BY THE CONTRACTING OFFICER TO DOCUMENT ACCESS ROUTES AND WORK AREAS FOR POTENTIAL DAMAGES DURING CONSTRUCTION OPERATIONS FOR TRUCK AND EQUIPMENT DELIVERY AND HAULING.
7. CONTRACTOR IS TO REPAIR ANY HARD SURFACES AND GROUND SURFACES BACK TO PRE-CONSTRUCTION CONDITIONS OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
8. REFERENCE 01 3513.05 ENVIRONMENTAL PROTECTION SPECIFICATION FOR ADDITIONAL INFORMATION.

DEMOLITION NOTES:

1. CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING THEMSELVES WITH THE CONTRACT DOCUMENTS, VERIFYING FIELD CONDITIONS AND DIMENSIONS, AND CONFIRMING THAT THE WORK MAY BE ACCOMPLISHED AS SHOWN PRIOR TO PROCEEDING WITH CONSTRUCTION. CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER IN WRITING OF ANY DISCREPANCY WITHIN THE CONTRACT DOCUMENTS AND REQUEST CLARIFICATION PRIOR TO PROCEEDING WITH CONSTRUCTION.
2. CONTRACTOR SHALL COORDINATE THE LIMITS OF CONSTRUCTION IN THE FIELD WITH THE CONTRACTING OFFICER PRIOR TO COMMENCEMENT OF WORK.
3. REFERENCE DIVISION 01 FOR ARCHEOLOGICAL MONITORING REQUIREMENTS.
4. PRIOR TO COMMENCEMENT OF WORK, CONTRACTOR SHALL REVIEW AND IDENTIFY MATERIALS TO BE SALVAGED FOR CONTRACTING OFFICERS APPROVAL.
5. CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UTILITIES PRIOR TO CONSTRUCTION.
6. VERIFY EXISTING TREE LOCATIONS, CONSTRUCTION FENCING, AND TREE PROTECTION WITH THE CONTRACTING OFFICER PRIOR TO CONSTRUCTION.
7. ALL VEGETATION MODIFICATION, INCLUDING TREE REMOVAL, AT NATIONAL REGISTER OF HISTORIC PLACES –LISTED OR –ELIGIBLE PROPERTIES SHALL BE REVIEWED AND APPROVED BY THE SECTION 106 SPECIALISTS (AS WELL AS BY WILDLIFE AND VEGETATION SPECIALISTS).
8. PROJECTS SHOULD AIM TO REMOVE HAZARDOUS TREES IN THE FALL (OCTOBER FOR THIS PROJECT) TO AVOID GREATER IMPACTS TO WILDLIFE.
9. CONTRACTOR SHALL MINIMIZE SITE DISTURBANCE TO THE EXTENT POSSIBLE. SELECTIVE CLEARING HATCH IS THE MAXIMUM DISTURBANCE AREA PERMITTED. SELECTIVE CLEARING AREA IS TO BE MINIMIZED TO THE EXTENT FEASIBLE TO PROTECT EXISTING MATURE TREE CANOPY WITH LARGE CRITICAL ROOT ZONES AND EXISTING ESTABLISHED GROUND VEGETATION. COORDINATE WITH CONTRACTING OFFICER. AT SELECTIVE PLANT REMOVAL AREAS, MINIMIZE DISTURBANCE TO THE EXTENT FEASIBLE AND PER CONTRACTING OFFICER APPROVAL.
10. A FEW RARE PLANTS WERE FOUND DURING A VEGETATION SURVEY IN 2025. COORDINATE WITH THE VEGETATION BRANCH SO THAT THEY CAN COLLECT SEED AND SALVAGE RARE PLANTS PRIOR TO CONSTRUCTION.
11. COORDINATE ALL PROJECT WORK WITH PARK VEGETATION SPECIALISTS REGARDING INVASIVE, NON-NATIVE PLANT (WEED) TREATMENTS, REVEGETATION REQUIREMENTS, COSTS, AND SCHEDULING.
12. TEMPORARY DISTURBANCE AREAS TO BE APPROVED BY THE CONTRACTING OFFICER.
13. MAINTAIN POSITIVE DRAINAGE AT ALL TIMES.
14. REFERENCE CIVIL PLANS AND SPECIFICATIONS FOR EROSION CONTROL AND BMPS.
15. PROVIDE PROTECTION MEASURES FOR ALL HISTORIC FEATURES, INCLUDING BUT NOT LIMITED TO; BUILDINGS, FENCES AND OTHER SMALL-SCALE LANDSCAPE FEATURES, ETC.. ALL PROTECTION MEASURES ARE TO BE INSTALLED AND APPROVED BY THE CONTRACTING OFFICER PRIOR TO COMMENCEMENT OF WORK.
16. EXISTING PROPANE TANKS WILL BE REMOVED FROM THE FLOODPLAIN. NO FUELS OR OTHER HAZARDOUS MATERIALS WOULD BE STORED AT HISTORIC PROPERTIES WITHIN THE FLOODPLAIN.
17. THE CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF ALL DEBRIS AND MISCELLANEOUS MATERIALS LOCATED AROUND THE CABINS, GARAGE, AND LODGE PRIOR TO OR DURING CONSTRUCTION ACTIVITIES. CLEANUP SHALL INCLUDE, BUT IS NOT LIMITED TO, WOOD, SCRAP METAL, DISCARDED BUILDING MATERIALS, TRASH, AND OTHER DEBRIS PRESENT WITHIN THE PROJECT AREA.
18. EXISTING TREE STUMPS THAT CONFLICT WITH OR ARE IMPACTED BY THE PROPOSED BUILDING FOOTINGS SHALL BE REMOVED AS NECESSARY TO FACILITATE CONSTRUCTION. STUMP REMOVAL SHALL INCLUDE ALL ROOTS AND SUBSURFACE MATERIALS THAT INTERFERE WITH THE INSTALLATION OF FOUNDATIONS OR ASSOCIATED SITE IMPROVEMENTS. DISTURBED AREAS SHALL BE BACKFILLED, COMPACTED, AND RESTORED IN ACCORDANCE WITH PROJECT REQUIREMENTS.

LAYOUT & PLANTING NOTES

1. CONTRACTOR SHALL NOT WILLFULLY PROCEED WITH CONSTRUCTION AS DESIGNED WHEN IT IS OBVIOUS THAT UNKNOWN OBSTRUCTIONS, AREA DISCREPANCIES AND/OR GRADE DIFFERENCES EXIST THAT MAY NOT HAVE BEEN KNOWN DURING DESIGN. SUCH CONDITIONS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE CONTRACTING OFFICER. THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR ALL NECESSARY REVISIONS DUE TO FAILURE TO GIVE SUCH NOTIFICATIONS.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING THEMSELVES FAMILIAR WITH ALL UNDERGROUND UTILITIES, PIPES AND STRUCTURES. CONTRACTOR SHALL TAKE SOLE RESPONSIBILITY FOR COSTS INCURRED DUE TO DAMAGE AND THE REPLACEMENT OF SAID UTILITIES. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO ACTUAL CONSTRUCTION.
3. ALL EXISTING IMPROVEMENTS TO REMAIN SHALL BE PROPERLY AND ADEQUATELY PROTECTED FROM DAMAGE DURING CONSTRUCTION OPERATIONS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RESTORE TO THE ORIGINAL CONDITION ANY EXISTING ITEMS THAT ARE DAMAGED OR DISTURBED IN ANY WAY.
4. TO THE MAXIMUM EXTENT POSSIBLE, TOPSOIL THAT IS REMOVED DURING CONSTRUCTION ACTIVITY SHALL BE CONSERVED AND STOCKPILED FOR LATER USE ON AREAS REQUIRING REVEGETATION. TOPSOIL SHALL BE STORED IN WINDROW OR PILE FORMATION WITH A MAXIMUM HEIGHT OF 3 FEET.
5. DO NOT COMINGLE TOPSOIL WITH OTHER MATERIALS. REUSE TOPSOIL WITHIN THE SAME AREA TO THE EXTENT POSSIBLE.
6. ALL SOIL DECOMPACTION, SPREADING OF STOCKPILED TOPSOIL, ESTABLISHING FINISH GRADES FOR SEEDING IS THE RESPONSIBILITY OF THE CONTRACTOR.
7. EXACT SEEDING LOCATIONS TO BE FIELD VERIFIED WITH THE CONTRACTING OFFICER.
8. SEED MIX WILL BE PROVIDED BY THE GOVERNMENT. THE CONTRACTOR WILL BE RESPONSIBLE FOR SEED BED PREPARATION, SEED PLACEMENT AND ESTABLISHMENT.
9. FOR SEEDING, APPLY THE SEED ON FULLY PREPARED SOIL EVENLY BY HAND OR USING A BROADCAST SEEDER AND LIGHTLY RAKE THE SEED INTO THE SOIL MAKING SURE SEED IS RAKED INTO A DEPTH OF ¼". FOLLOWING SEEDING NO VEHICLE OR EQUIPMENT WILL BE ALLOWED ON THE SEEDED AREA AND MINIMIZE ALL OTHER GROUND DISTURBANCE, INCLUDING EXCESSIVE WALKING, IN SEEDED AREAS.
10. TO FACILITATE REVEGETATION AND NON-NATIVE, INVASIVE PLANT MANAGEMENT, PROVIDE THE SRM VEGETATION BRANCH (307 739 3486) VIA PROJECT DOCUMENTS, WITH AN ESTIMATE OF POTENTIAL GROUND DISTURBANCE AT LEAST 4 WEEKS PRIOR TO WORK AND WITH THE DIMENSIONS OF THE DISTURBED AREA AFTER THE WORK IS COMPLETE.
11. PRESERVE EXISTING TREES TO THE EXTENT POSSIBLE, AND DURING TRENCHING OPERATIONS, AVOID DAMAGING THE ROOTS OF NEARBY TREES.
12. STUMPS RESULTING FROM TREE REMOVAL SHALL BE FLUSH CUT LEVEL WITH THE GROUND AND NO HIGHER THAN 2" AS MEASURED FROM THE UPHILL SIDE UNLESS SPECIFIED OTHERWISE.
13. PROCEED WITH SEEDING ONLY BETWEEN OCTOBER 1 AND OCTOBER 31 OR WHEN ALL THE FOLLOWING CONDITIONS ARE MET.
   13.1. AVERAGE SOIL TEMPERATURES ARE BELOW 48 DEGREES, TYPICALLY BETWEEN OCTOBER AND NOVEMBER
   13.2. SOIL IS DECOMPACTED AND ALL PREPARATION WORK IS COMPLETE
   13.3. SOIL SEED BED IS FRIABLE AND IS SOFT ENOUGH TO SHOW A FOOTPRINT AND FIRM ENOUGH TO HOLD SEED IN THE TOP ¼
   13.4. SOIL IS NOT EXCESSIVELY WET OR MUDDY
   13.5. SOIL IS NOT FROZEN
   13.6. SNOW IS LESS THAN ¼" DEEP
14. 20% COVERAGE ON RIPPING AND SEEDING FOR CONTRACTING OFFICER TO DIRECT WORK.

SITE CONSTRUCTION STAGING & ACCESS NOTES:

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING THEMSELVES WITH THE CONTRACT DOCUMENTS, VERIFYING FIELD CONDITIONS AND DIMENSIONS, AND CONFIRMING THAT THE WORK MAY BE ACCOMPLISHED AS SHOWN PRIOR TO PROCEEDING WITH CONSTRUCTION. CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER IN WRITING OF ANY DISCREPANCY WITHIN THE CONTRACT DOCUMENTS AND REQUEST CLARIFICATION PRIOR TO PROCEEDING WITH CONSTRUCTION.
2. CONTRACTOR SHALL MINIMIZE SITE DISTURBANCE TO THE EXTENT POSSIBLE.
3. CONTRACTOR SHALL PROVIDE SHOP DRAWINGS AND MEANS AND METHODS FOR PROTECTION MEASURES OF HISTORIC FEATURES, INCLUDING BUT NOT LIMITED TO; BUILDINGS, FENCES AND OTHER SMALL-SCALE LANDSCAPE FEATURES, ETC. WHICH ARE LOCATED THROUGHOUT THE PROJECT AREA. CONTRACTOR IS TO PROVIDE AND MAINTAIN TEMPORARY PROTECTIVE MEASURES FOR HISTORIC CONTRIBUTING FEATURES THROUGHOUT THE DURATION OF THE CONSTRUCTION AS DIRECTED BY THE CONTRACTING OFFICER. WORK WITH CAUTION AND USE HAND TOOLS WHEN NEEDED TO PREVENT DAMAGE TO THESE IRREPLACEABLE RESOURCES. REFERENCE SECTION 01 35 91 HISTORIC PRESERVATION TREATMENT PROCEDURES AND SECTION 01 56 39 TREE RETENTION AND PROTECTION.
4. TO MINIMIZE THE AMOUNT OF GROUND DISTURBANCE, LOCATE STAGING AND STOCKPILING AREAS IN PREVIOUSLY DISTURBED SITES TO THE EXTENT POSSIBLE. RETURN ALL STAGING AND STOCKPILING AREAS TO PRE-CONSTRUCTION CONDITIONS FOLLOWING CONSTRUCTION.
5. PRIOR TO CONSTRUCTION, CONTRACTOR IS TO COMPLETE PRE CONSTRUCTION MEETINGS AND PROVIDE PROTECTION, ACCESS AND MAINTENANCE PLANS AND SCHEDULES FOR THE CONTRACTING OFFICER'S APPROVAL OF ALL EQUIPMENT AND FOOT TRAFFIC CONSTRUCTION ACCESS, ROUTES, METHODS, PLANS AND SCHEDULES, INCLUDING BUT NOT LIMITED TO; TREE PROTECTION PLAN, TREE AND VEGETATION REMOVAL SAFETY PLAN, TRAFFIC CONTROL PLAN AND HISTORIC FEATURE PRESERVATION FEATURE PRESERVATION PLAN. REFERENCE DIVISION 01 AND TECHNICAL SPECIFICATIONS FOR ADDITIONAL PLANS AND FOR SPECIFIC REQUIREMENTS.
6. AT LEAST FIVE [5] WORKING DAYS PRIOR TO CONSTRUCTION, CONTRACTOR IS TO COMPLETE PRE CONSTRUCTION MEETINGS. AT LEAST FORTY-FIVE [45] DAYS PRIOR TO CONSTRUCTION, CONTRACTOR IS TO PROVIDE PROTECTION, ACCESS AND MAINTENANCE PLANS AND SCHEDULES FOR THE CONTRACTING OFFICER'S INITIAL APPROVAL OF ALL EQUIPMENT AND FOOT TRAFFIC CONSTRUCTION ACCESS, ROUTES, METHODS, PLANS AND SCHEDULES, INCLUDING BUT NOT LIMITED TO; TREE PROTECTION PLAN, VEGETATION REMOVAL, SAFETY PLAN, TRAFFIC CONTROL PLAN AND HISTORIC PRESERVATION FEATURE PRESERVATION PLAN, ARCHEOLOGICAL DAILY WORK, AND WILDLIFE PROTECTION PLAN. REFERENCE DIVISION 01 AND TECHNICAL SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS AND SUBSEQUENT SUBMITTAL REQUIREMENTS.
   6.1. TRAFFIC CONTROL PLAN SHALL BE PREPARED BY A CERTIFIED TRAFFIC CONTROL SUPERVISOR AND SHALL BE IN CONFORMANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES. NO WORK SHALL BEGIN UNTIL ALL TRAFFIC CONTROL DEVICES HAVE BEEN PLACED IN ACCORDANCE WITH THE PLAN. THE CONTRACTOR SHALL CONTINUOUSLY MAINTAIN THE TRAFFIC CONTROL DEVICES FOR THE ENTIRE DURATION OF THE PROJECT.
   6.2. CONTRACTOR SHALL CONFORM TO ALL FEDERAL, STATE AND LOCAL HEALTH AND SAFETY RULES AND REGULATIONS.
   6.3. CONSTRUCTION SEQUENCE TO MINIMIZE IMPACTS TO NPS ADMINISTRATIVE ACCESS.
7. DETOUR PLAN: THE WORK CONSISTS OF THE MAINTENANCE OF TRAFFIC AND THE PROTECTION OF THE TRAVELING PUBLIC APPROACHING THE CONSTRUCTION AREA WITHIN THE LIMITS OF THE CONSTRUCTION.
   7.1. FURNISH, PLACE AND MAINTAIN TRAFFIC CONTROL SIGNS AND DEVICES AND MAINTAIN TRAFFIC DURING HOURS OF CONSTRUCTION AND AT ALL TIMES IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION.
   7.2. COVER OR REMOVE ALL SIGNS NOT IN USE DURING CONSTRUCTION ACTIVITY.
   7.3. REMOVE ALL TEMPORARY TRAFFIC CONTROL DEVICES WHEN WORK IS COMPLETED AND ROADWAY IS SUITABLE FOR TRAFFIC.
   7.4. INSPECT ALL TRAFFIC CONTROL DEVICES AT THE BEGINNING AND END OF EACH WORK DAY TO ENSURE PROPER PLACEMENT OF SIGNS.
   7.5. CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER 24 HOURS PRIOR TO THE BEGINNING OF THE DETOUR OR ROAD CLOSURE.
8. REFERENCE DIVISION 01 AND TECHNICAL SPECIFICATIONS FOR SEASONAL AND INCLEMENT WEATHER SITE ACCESS RESTRICTIONS AND REQUIREMENTS.
9. REFER TO LANDSCAPE ARCHITECTURE DRAWINGS FOR TREE PROTECTION.
10. DO NOT EXCAVATE OR DISTURB BEYOND WHAT IS REQUIRED FOR STAGING UNLESS APPROVED BY THE CONTRACTING OFFICER.
11. REFERENCE DIVISION 01 FOR VEHICLE AND EQUIPMENT ACCESS RESTRICTIONS.
12. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS SECTION, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
13. NOISE CONTROL: PERFORM DECONSTRUCTION AND CONSTRUCTION OPERATIONS TO MINIMIZE NOISE. PERFORM NOISE-PRODUCING WORK IN LESS SENSITIVE HOURS OF THE DAY OR WEEK AS DIRECTED BY THE CONTRACTING OFFICER. REFERENCE SECTION 01 57 19.12 NOISE & ACOUSTICS MANAGEMENT.
14. THE LIMITS OF CONSTRUCTION (LOC) IS REPRESENTATIVE OF THE APPROXIMATE AREA OF DISTURBANCE TO COMPLETE THE REHABILITATION OF 4 LAZY F RANCH CABINS FOR HOUSING. LOC IS EXTENDED AROUND EACH STRUCTURE FOR FOUNDATION REPAIRS AND EQUIPMENT ACCESS. PRELIMINARY LOCATIONS HAVE BEEN IDENTIFIED FOR STRUCTURES TO BE LIFTED AND TEMPORARILY MOVED. THE CONTRACTOR SHALL PROVIDE A CONSTRUCTION STAGING & ACCESS PLAN, IDENTIFYING CONSTRUCTION SEQUENCING AND ACCESS NEEDS MINIMIZING SITE DISTURBANCE TO THE EXTENT POSSIBLE.
15. FOR PRICING PURPOSES ASSUME MINOR REPAIRS TO THE GRAVEL ROAD DUE TO CONSTRUCTION ACCESS.
16. MAINTAIN A SAFE CONSTRUCTION ZONE. INSTALL TEMPORARY FENCING AROUND OPEN HOLES WHEN PERSONNEL ARE NOT PRESENT TO EXCLUDE WILDLIFE AND PEOPLE. TEMPORARY FENCING WILL BE REMOVED AFTER EXCAVATIONS/TRENCHES ARE BACKFILLED. REFERENCE DIVISION 01 SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
17. CALVING PERIOD (MAY 15-JUNE 30).
   17.1. VEHICLE TRIPS ON THE ACCESS ROAD WILL BE MINIMIZED AND CONSOLIDATED DURING THE CALVING SEASON TO REDUCE NOISE, VISUAL DISTURBANCE, AND THE RISK OF VEHICLE-WILDLIFE INTERACTIONS IN AREAS USED BY CALVING ELK.
   17.2. TEMPORARY VISUAL SCREENING WILL BE EMPLOYED WHERE FEASIBLE TO REDUCE NOISE AND VISUAL DISTURBANCE TO ADJACENT CALVING AREAS. LIMITING VISUAL CUES OF HUMAN PRESENCE HELPS COWS AND CALVES REMAIN UNDISTURBED IN NEARBY HABITAT.
   17.3. REFERENCE DIVISION 01 SPECIFICATION FOR ADDITIONAL REQUIREMENTS.
18. ALL PROJECT ACTIVITIES MUST COMPLY WITH 1) CONSERVATION RECOMMENDATIONS (CR) TO PROTECT GRIZZLY BEARS PROVIDED IN THE USFWS 2016 BIOLOGICAL OPINION ON THE HISTORIC PROPERTIES MANAGEMENT PLAN AND, 2) THE GRTE SUPERINTENDENT'S COMPENDIUM REGULATIONS RELATED TO FOOD STORAGE AND PARK RECOMMENDED BEST MANAGEMENT PRACTICES FOR LIVING AND WORKING IN BEAR COUNTRY.
19. THE CONTRACTOR WILL HAVE THE OPTION TO EITHER RELOCATE THE CABINS OR RAISE CABINS IN PLACE, DEPENDING ON THE SELECTED CONSTRUCTION APPROACH. REFER TO ARCHITECTURE SHEETS. ANY AREAS DISTURBED DURING CONSTRUCTION ACTIVITIES SHALL BE RESTORED AND REVEGETATED UPON COMPLETION OF THE WORK. TREE AND SHRUB REMOVAL SHALL BE LIMITED TO THE SPECIFIC REMOVAL LOCATIONS AS SHOWN ON THE DEMOLITION PLANS, IN ADDITION TO ONLY THOSE VEGETATION AREAS NECESSARY TO FACILITATE THE MOVEMENT OR RAISING OF THE CABINS AND ASSOCIATED CONSTRUCTION OPERATIONS. EVERY EFFORT SHOULD BE MADE TO MINIMIZE IMPACTS TO EXISTING VEGETATION OUTSIDE OF THE REQUIRED WORK LIMITS.

ABBREVIATIONS

&	AND
'	FEET
"	INCHES
%	PERCENT
±	PLUS OR MINUS
#	NUMBER
ABAAS	ARCHITECTURAL BARRIERS ACT ACCESSIBILITY STANDARDS
APX	APPROXIMATELY
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
ARCH	ARCHITECTURE
B##	BUILDING ##
BLDG	BUILDING
BR	BRIDGE
CONC.	CONCRETE
C.O.	CONTRACTING OFFICER
DEMO	DEMOLITION
DIA OR ø	DIAMETER
DR	DRIVE
ELEC.	ELECTRIC
(E)	EXISTING
EG.	EXISTING GRADE
ETC	ETCETERA
FFE	FINISHED FLOOR ELEVATION
FG	FINISHED GRADE
FHWA	FEDERAL HIGHWAY ADMINISTRATION
HT	HEIGHT
LOC	LIMITS OF CONSTRUCTION
MIN.	MINIMUM
MAX.	MAXIMUM
MISC.	MISCELLANEOUS
MUTCD	MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES
N	NORTH
N/A	NOT APPLICABLE
NIC	NOT IN CONTRACT
NHL	NATIONAL HISTORIC LANDSCAPE
NTS	NOT TO SCALE
NPS	NATIONAL PARK SERVICE
O.C.	ON CENTER
O.D.	OUTSIDE DIAMETER
PVC	POLY VINYL CHLORIDE
QTY	QUANTITY
R	RADIUS
RAP	RECLAIMED ASPHALT PAVING
RD	ROAD
RE:	REFERENCE
SPECS.	SPECIFICATIONS
SF	SQUARE FEET
SOI	SECRETARY OF INTERIOR
T&E	THREATENED & ENDANGERED
TC	TOP OF CURB
TYP.	TYPICAL
W	WEST
W/	WITH

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT — EILEEN M. KEMP — LA-0212C — DATE: 07/21/26 — STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L001	TITLE OF SHEET OVERALL – GENERAL LANDSCAPE NOTES & ABBREVIATIONS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 40 OF 371

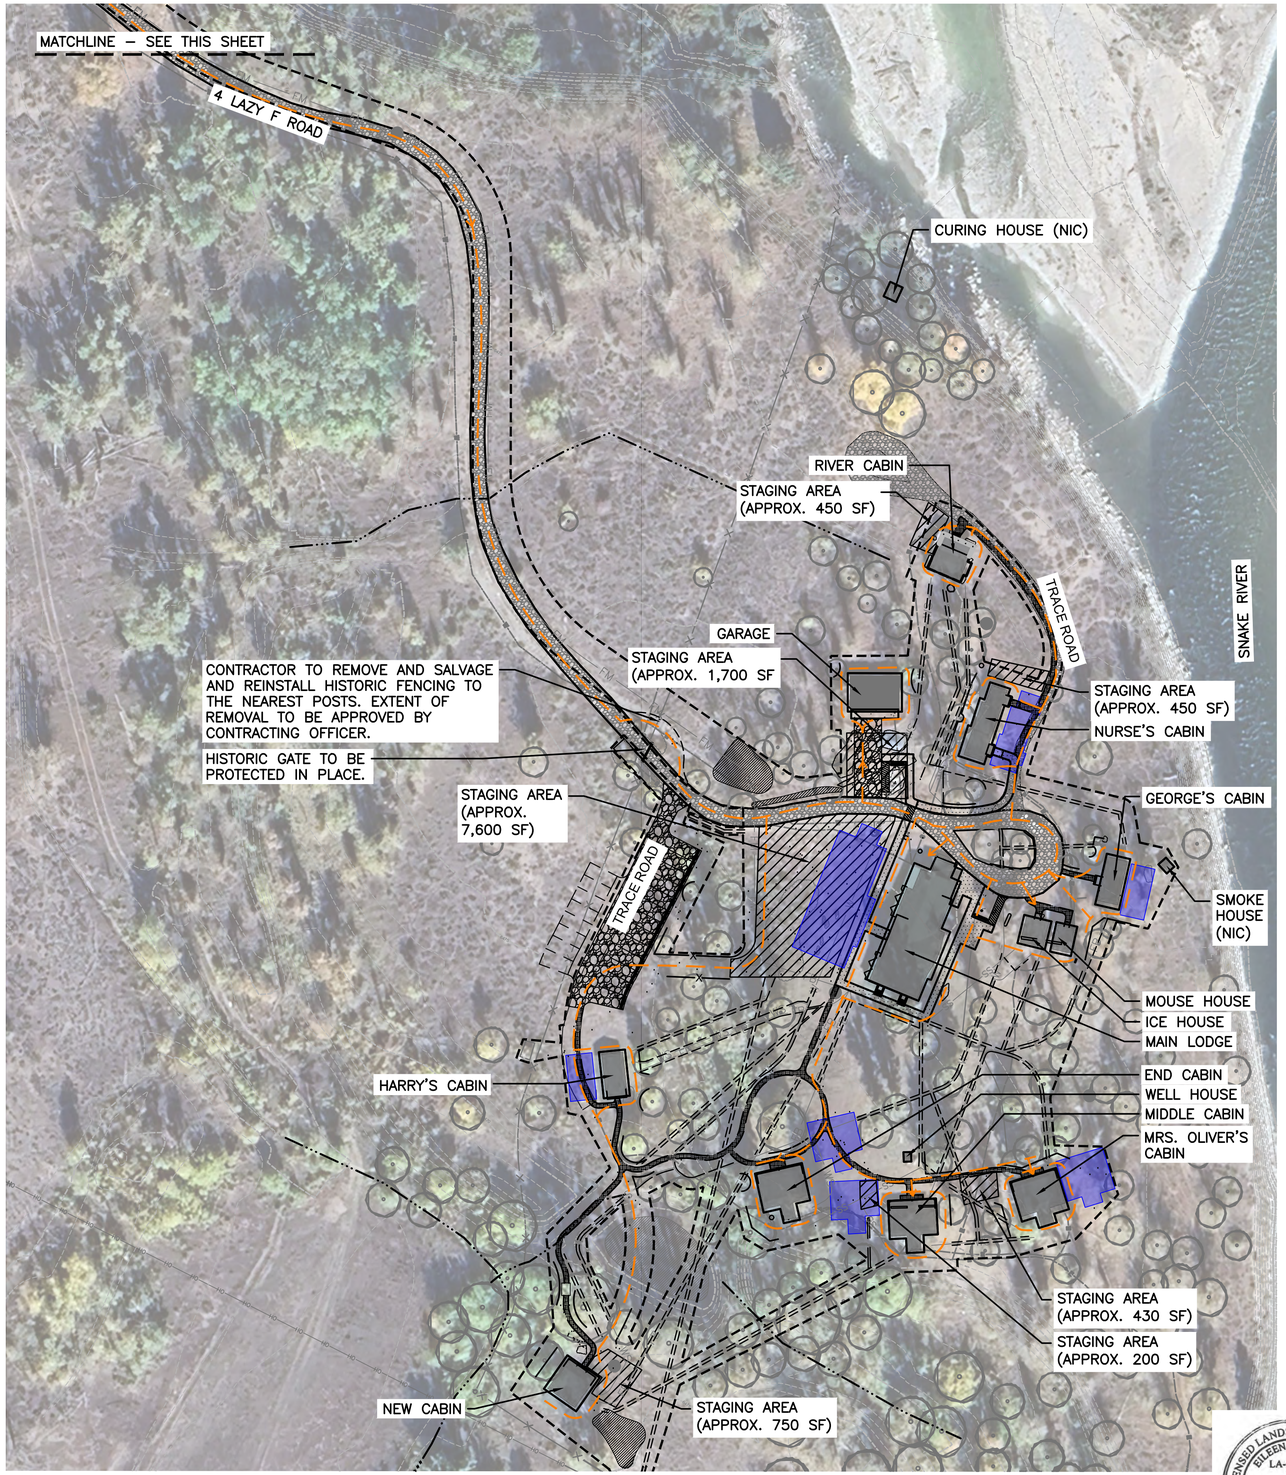

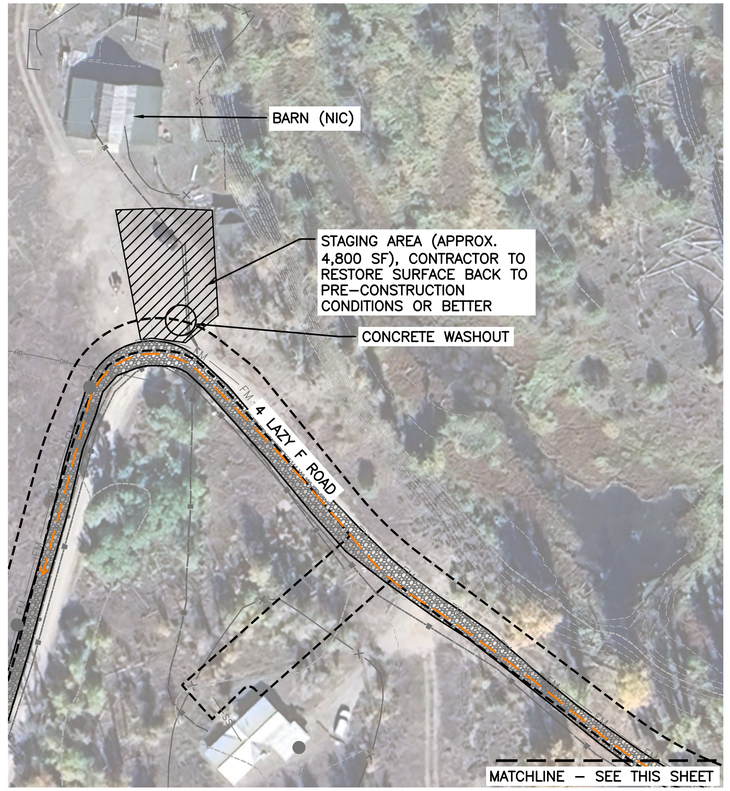

KEY MAP

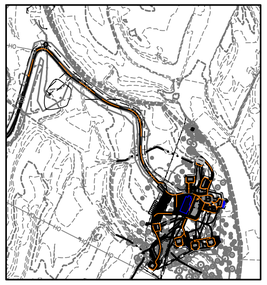

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) FENCE
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) OVERHEAD POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) DITCH
- (E) ROAD
- (E) COMPACTED DIRT
- (E) TREE
- (E) RIVER ROCK
- RAP TRAIL
- CRUSHER FINES
- CONCRETE, RE: CIVIL
- GRAVEL, RE: CIVIL
- CONSTRUCTION ACCESS ROUTE
- STAGING AREA
- LIMIT OF CONSTRUCTION
- POTENTIAL TEMPORARILY BUILDING MOVE LOCATION

SITE CONSTRUCTION STAGING & ACCESS NOTES ON L001 GENERAL NOTES & ABBREVIATIONS.

50 0 50 100
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C STATE OF WYOMING Date: 07/21/26

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L002	TITLE OF SHEET OVERALL – STAGING & ACCESS PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 41 OF 371

7/16/2026 8:04:19 AM
XREFS: ..\BASES\26_0308_NPS GRTE 4 Lazy F ARCH -PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock 22x34 - GRTE 4 Lazy F.dwg|XC-BASE-699421_ EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_EX COND.dwg
IMAGES: ..\GRAPHICS\CLR_BASE MAP219.JPG; ..\GRAPHICS\CLR_BASE MAP220.JPG; ..\GRAPHICS\CLR_BASE MAP210.PNG;

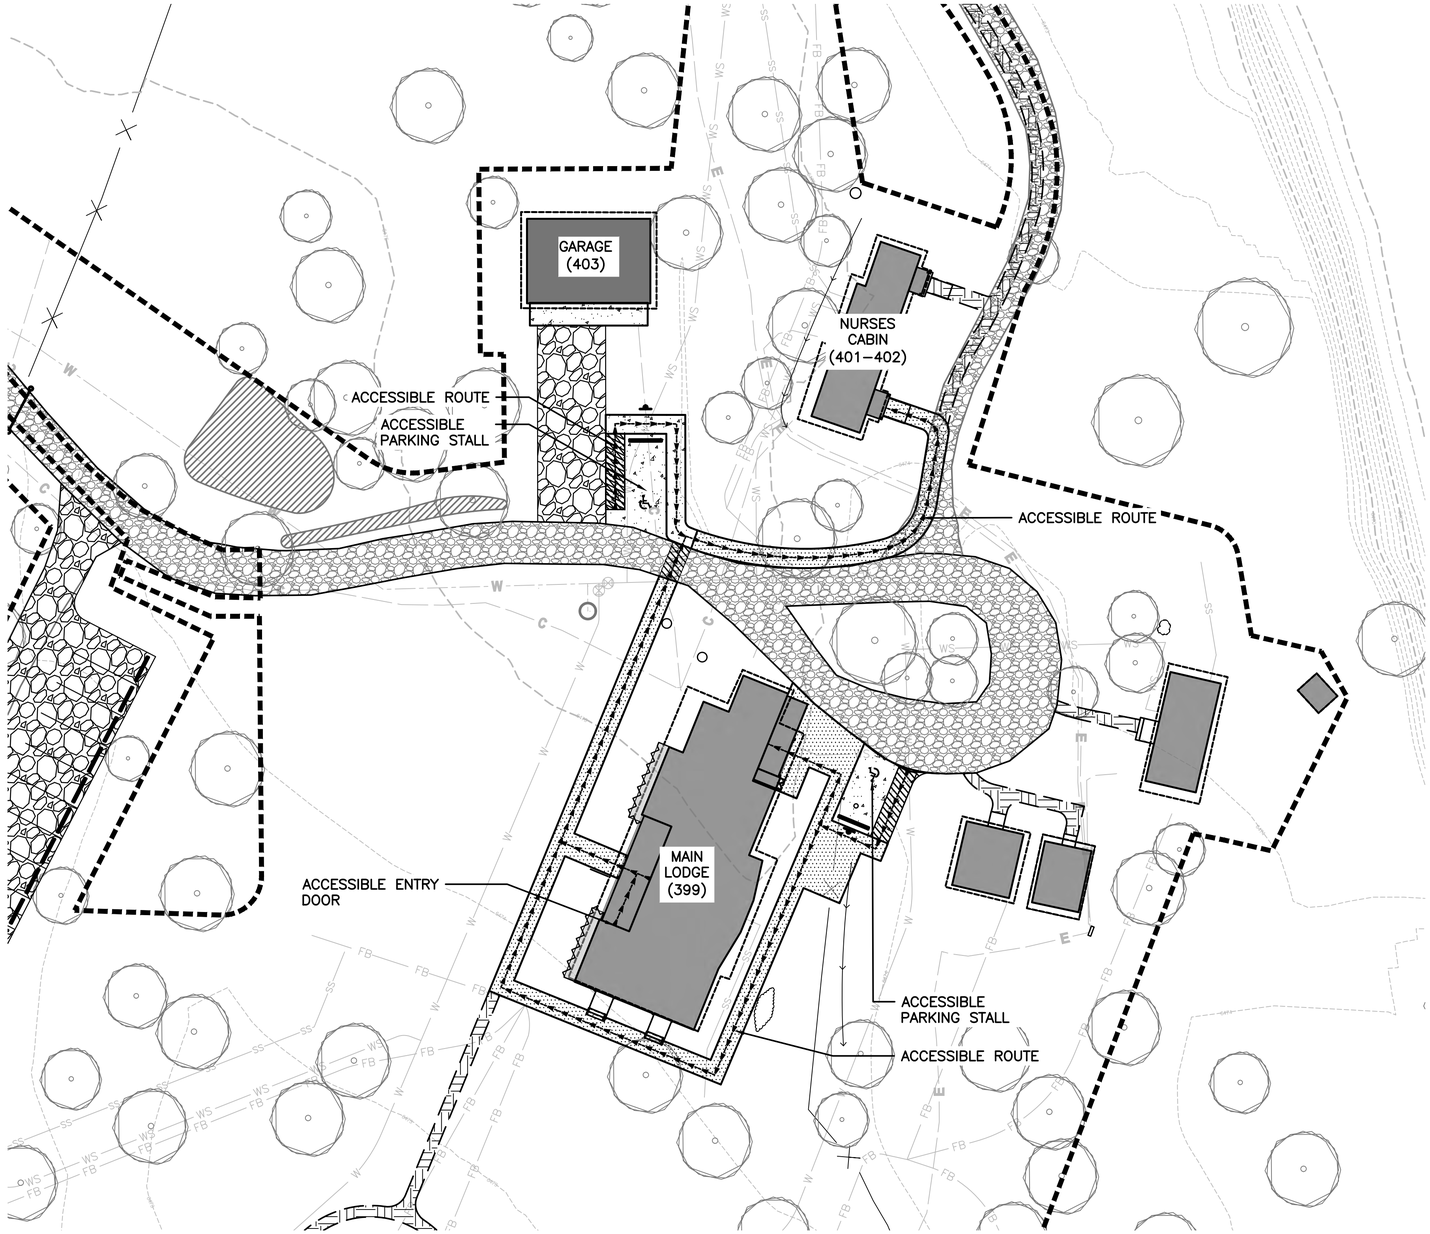

RUNNING SLOPE OF TRAIL SEGMENT (CONSTRUCTION MAXIMUMS) ±0 CONSTRUCTION TOLERANCE		MAXIMUM LENGTH OF SEGMENT
STEEPER THAN	BUT NOT STEEPER THAN	
1:20 (5%)	1:12 (8.33%)	200 FEET
1:12 (8.33%)	1:10 (10%)	30 FEET
1:10 (10%)	1:8 (12%)	10 FEET
TRAIL CROSS SLOPE (WITH CONSTRUCTION TOLERANCE)		
1.5% MAX		N/A
'LEVEL AREAS' e.g. LANDINGS, ABAAS PARKING, ABAAS PARKING ACCESS AISLES, TURNING SPACES, ETC.		
1.5% MAX IN ALL DIRECTIONS		N/A

MAXIMUM RUNNING SLOPE, SEGMENT LENGTH, & CROSS SLOPE OF ACCESSIBLE TRAIL ROUTES

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) FENCE
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) OVERHEAD POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) DITCH
- (E) GRAVEL ROAD
- (E) BUILDING
- (E)TREE
- RAP TRAIL
- CRUSHER FINES
- EXPOSED AGGREGATE CONCRETE RE: CIVIL
- LANDSCAPE BED
- (E) RIVER ROCK
- GRAVEL, RE: CIVIL
- LIMIT OF CONSTRUCTION
- ACCESSIBLE ROUTE

ACCESSIBILITY NOTES:

1. ALL NEWLY CONSTRUCTED OR ALTERATIONS OF ACCESSIBILITY ROUTES (WALKS, RAMPS, ETC.) SHALL COMPLY WITH THE RULES AND REGULATIONS SET FORTH BY NPS FOR CONSTRUCTION TOLERANCES, UNLESS OTHERWISE INDICATED.

KEY MAP

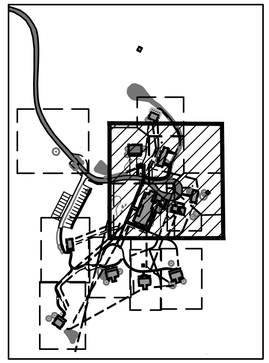

20 0 20 40
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L003	TITLE OF SHEET OVERALL – SITE ACCESSIBILITY PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 / 193826
PMIS/PKG NO. 237343
SHEET 42 OF 371

File Path
77#26_08\SKERSTIENS_R26 P\DEN\ERNPS GRTE 4LAZY F RANCH - 198519_FINAL CD\CAD\ALL\4-0_GRTE-L4_ACCESSIBLE.DWG
XREFS: BASES26_0308_NPS GRTE 4 LAZY F_ARCH 1-PROJECT OVERVIEW SITE PLAN_4WHNPS_TitleBlock22x34 - GRTE SHEET.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_ACCESSIBLE.dwg\XC-4LAZYF_DSGN.dwg
IMAGES: ..\GRAPHICS\CLR_BASE MAP\219.JPG, ..\GRAPHICS\CLR_BASE MAP\220.JPG, ..\GRAPHICS\CLR_BASE MAP\210.PNG,

File Path
T:\RFS_04\ASSESS\26_0308_NPS_GRTE 4 Lazy F_ARCH-PROJECT OVERVIEW\SITE PLAN\4Lazy F_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XREFS_04ASSESS\26_0308_NPS_GRTE 4 Lazy F_ARCH-PROJECT OVERVIEW\SITE PLAN\4Lazy F_DSGN.dwg\NPS_TitleBlock 22x34 - GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XL-GRTE-L4 4 Lazy F.dwg\XC-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_DEMO.DWG
IMAGES...\..\2_Admin\Photos\Garage\Debri-1.jpg\Debri-2.jpg\Debri-3.jpg\Debri-4.jpg\Debri.jpg\..\..\2_Admin\Photos\Gate\Gate-1.jpg\Gate.jpg\..\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub removes-1.jpg\..\..\2_Admin\Photos\IceHouse\Mouse and Ice .jpg\..\..\...

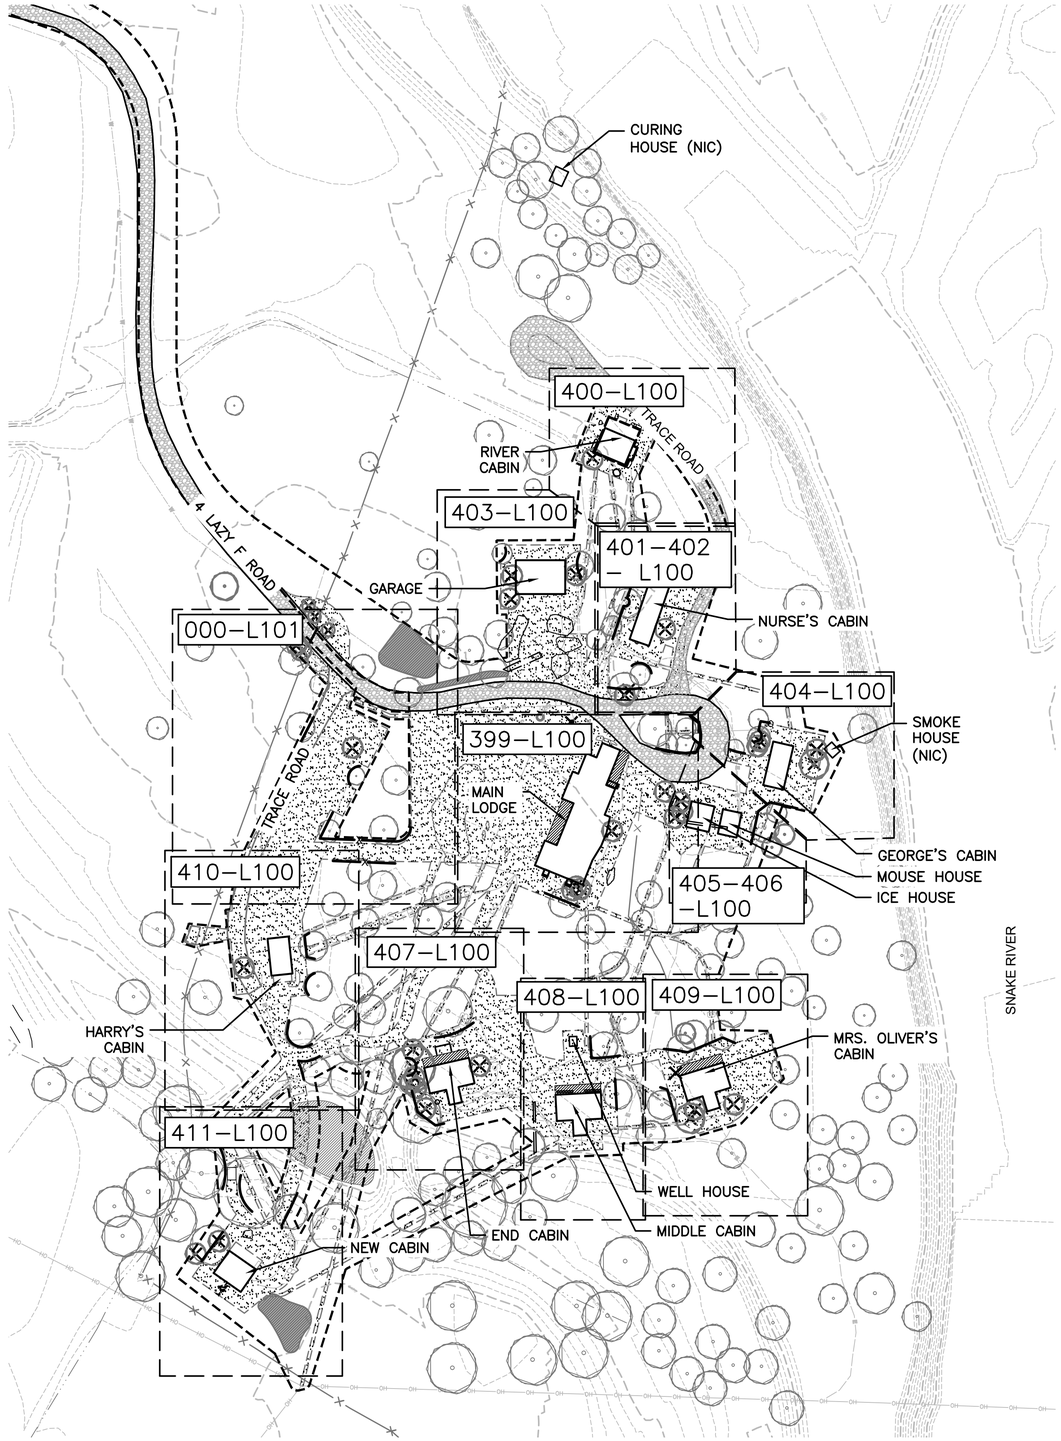

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) FENCE
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) OVERHEAD POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) DITCH
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- RIVER ROCK
- CLEAR & GRUB CLIN 1
- CLEAR & GRUB
- CONCRETE TO BE REMOVED, RE: ARCH.
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE/ STUMP TO BE REMO

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWINGS GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. REFERENCE SPECIFICATION 02 41 13 SELECTIVE SITE DEMOLITION FOR TREE REMOVAL.
4. REFERENCE SPECIFICATION 01 35 13.05 ENVIRONMENTAL PROTECTION FOR BIRD SURVEY REQUIREMENTS.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

50 0 50 100
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L100	TITLE OF SHEET OVERALL – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 43 OF 371

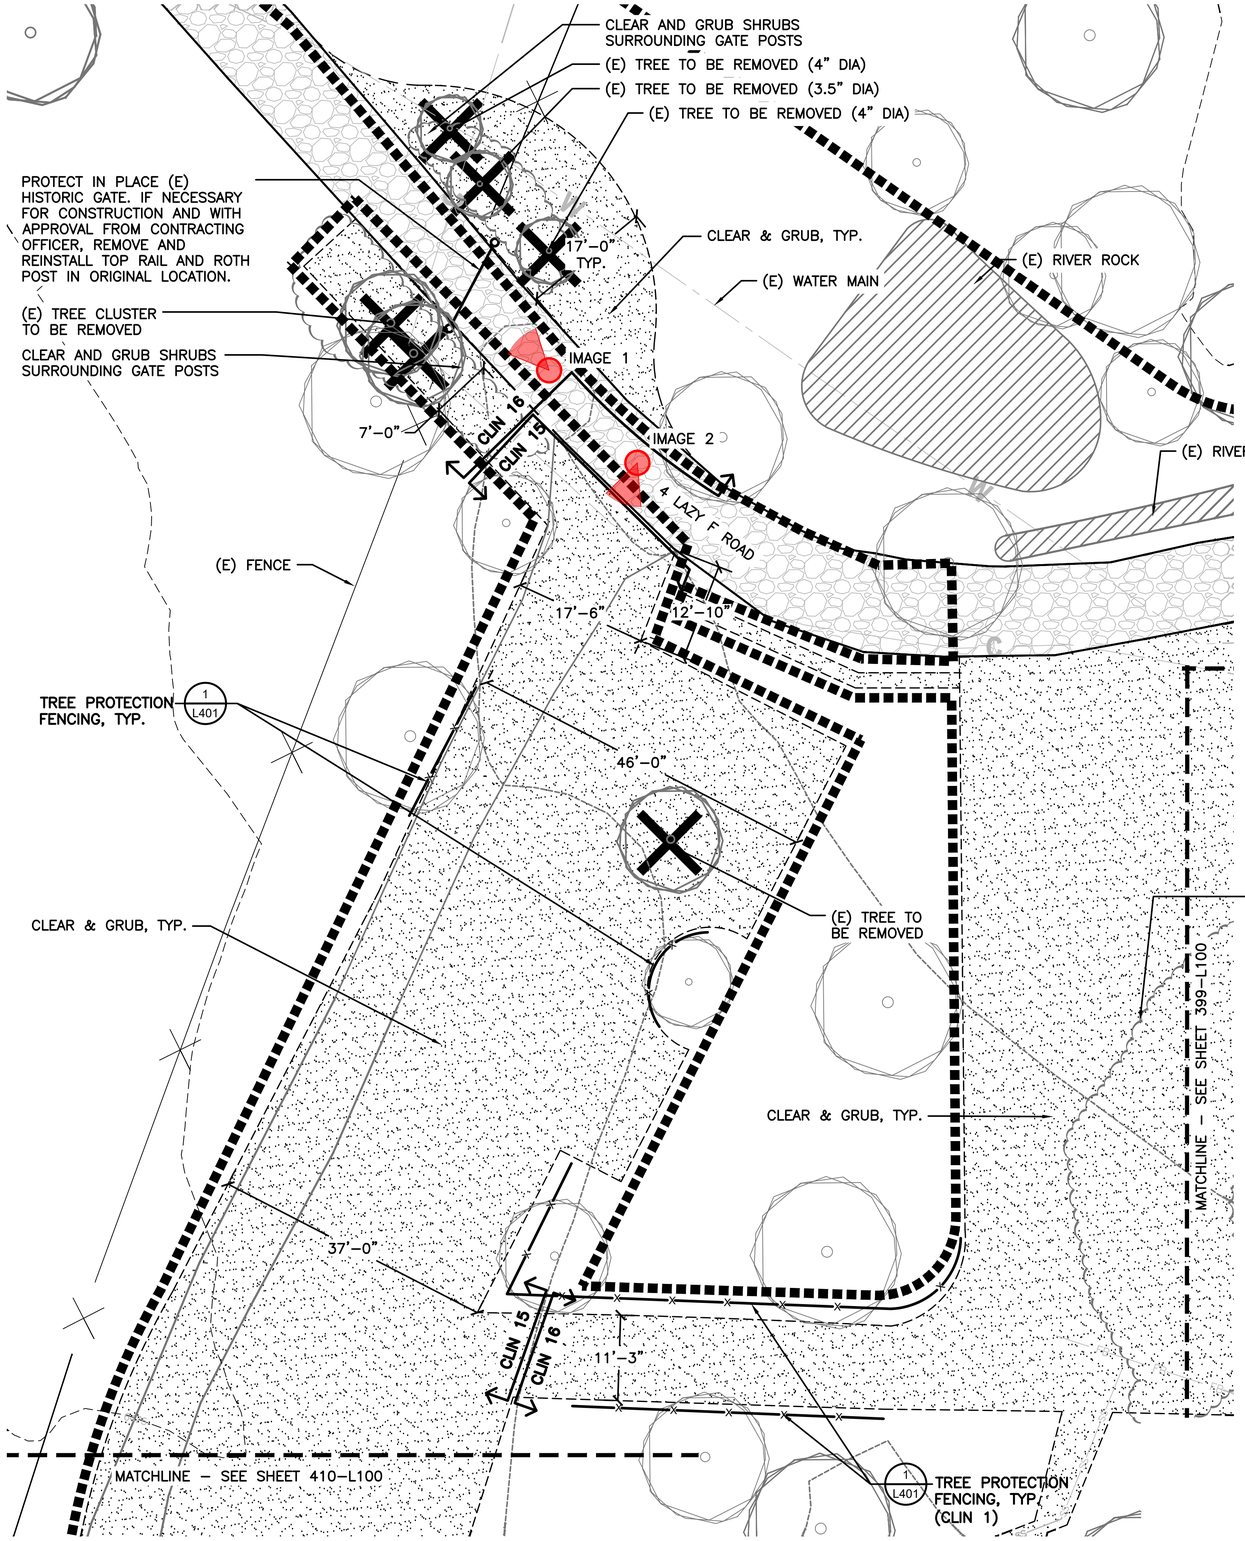

IMAGE 1: (E) HISTORIC GATE. PROTECT IN PLACE. CLEAR AND GRUB AROUND GATE POSTS. REMOVE (E) TREES AND SHRUBS.

IMAGE 2: PROPOSED PARKING LOT LOCATION. CLEAR AND GRUB (E) TREES AND SHRUBS AS NEEDED PER PARKING LOT LAYOUT.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) TREE
- (E) FENCE
- (E) RIVER ROCK
- CLEAR & GRUB (CLIN 1)
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

NOTES:

1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).
2. PROPOSED PARKING LOT SHALL BE CONSTRUCTED AS SHOWN ON THE PLANS. ANY AREAS DISTURBED DURING CONSTRUCTION ACTIVITIES SHALL BE RESTORED AND REVEGETATED UPON COMPLETION OF THE WORK. TREE AND SHRUB REMOVAL SHALL BE LIMITED TO ONLY THOSE VEGETATION AREAS NECESSARY TO ACCOMMODATE THE PROPOSED PARKING. EVERY EFFORT SHALL BE MADE TO MINIMIZE IMPACTS TO EXISTING VEGETATION OUTSIDE OF THE REQUIRED LIMITS OF DISTURBANCE.

KEY MAP

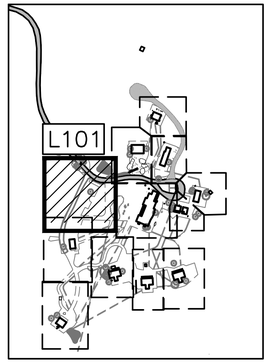

10 0 10 20
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L101	TITLE OF SHEET OVERALL - PARKING LOT SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 44 OF 371

File Path:
77 Files: 0843 SKERSTIENS_R25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\ALI\1-0_GRTE-L4_DEMO.DWG
XREFS: 0843 SKERSTIENS_R25 P:\DENVER\NPS GRTE 4 LAZY F_ARCH PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_DEMO.DWG
IMAGES: ..\..\2_Admin\Photos\Garage\Debri-1.jpg\Debri-2.jpg\Debri-3.jpg\Debri-4.jpg\Debri.jpg\..\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.removes-1.jpg\..\..\2_Admin\Photos\HarrysCabin\Mouse and Ice .jpg\..\..\2_Admin\Photos\GateGate-1.jpg\Gate.jpg\..\..\2_Admin\Photos\GateGate-1.jpg\Gate.jpg\..\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.removes-1

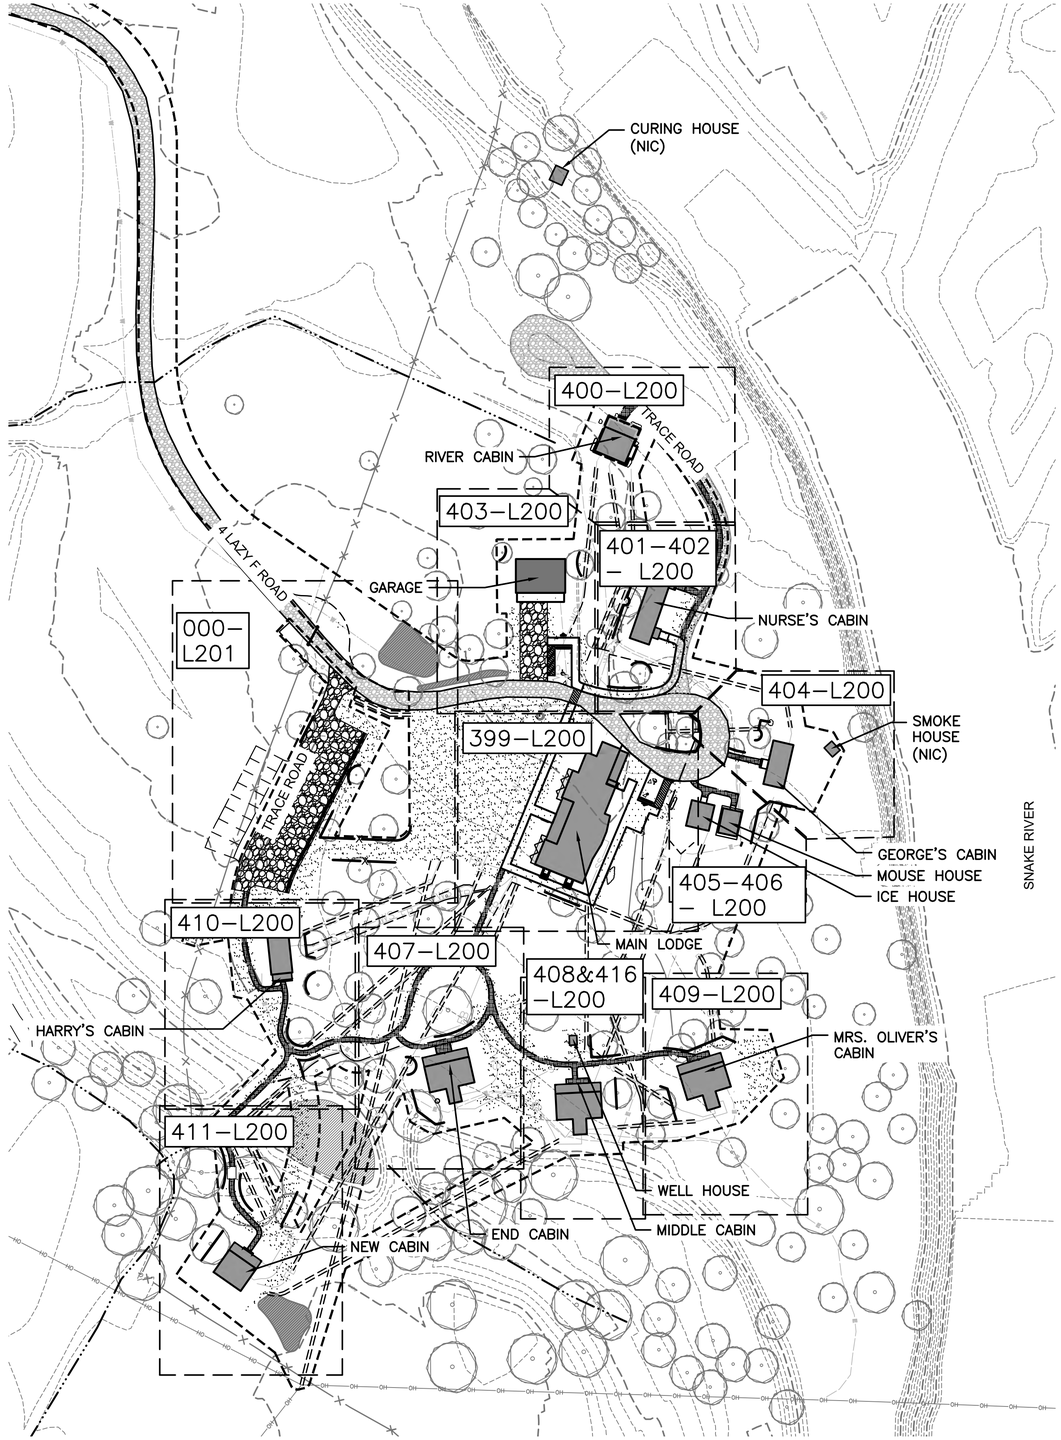

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) FENCE
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) OVERHEAD POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) DITCH
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) RIVER ROCK
- RAP TRAIL
- CRUSHER FINES
- CONCRETE, RE: CIVIL
- LANDSCAPE BED
- GRAVEL, RE: CIVIL
- NATIVE SEED
- LIMIT OF CONSTRUCTION

GENERAL PLANTING NOTES:

1. AREAS DISTURBED BY EQUIPMENT AND OUT OF LIMITS OF CONSTRUCTION SHALL BE RE–GRADED AND RESTORED BACK TO ORIGINAL CONDITION OR BETTER.
2. ALL TOPSOIL STRIPPING AND STOCKPILING, TREE AND VEGETATION REMOVALS, EARTHWORK, AND IMPORTING FILL MATERIAL IS THE RESPONSIBILITY OF THE CONTRACTOR. FILL MATERIAL SHALL REACH FINAL SUBGRADE PER GRADING PLANS.
3. THE TOPSOIL STOCKPILING AREAS SHALL BE DEFINED ON SITE AND APPROVED BY THE CONTRACTING OFFICER DURING CONSTRUCTION.
4. THE CONTRACTOR SHALL FLAG TREE REMOVAL LOCATIONS AND ROUTES FOR CONTRACTING OFFICER APPROVAL PRIOR TO COMMENCEMENT OF WORK.
5. CONTRACTOR TO PROVIDE TREE FALLING SAFETY PLAN FOR APPROVAL PRIOR TO COMMENCEMENT.
6. ALL SOIL, GRAVEL AND FILL MATERIALS SHALL BE CERTIFIED WEED FREE PRIOR TO BEING BROUGHT INTO THE PARK. THE SOURCE LOCATION OF ALL MATERIALS WILL BE IDENTIFIED IN SUBMITTALS. THE CONTRACTOR SHALL MINIMIZE THE USE OF OFF–SITE MATERIALS BY COORDINATING WITH THE PARK ABOUT USE OF ON–SITE MATERIAL.
7. SUBMIT PER SPECIFICATION SECTION 32 9300 A SOURCE FOR PROPOSED SHRUBS AND PERENNIAL MATERIALS. NPS TO PROVIDE AND INSTALL SEED FOLLOWING SITE/ REVEGETATION PREPARATION BY THE CONTRACTOR. ALL PLANT MATERIAL TO BE INSTALLED SHALL BE REVIEWED AND APPROVED BY PARK THROUGH SUBMITTALS.
8. CONTRACTOR SHALL ENSURE THE PARKING OF VEHICLES AND EQUIPMENT SHALL REMAIN WITHIN EXISTING PARKING LOTS AND ROADWAYS. CONSTRUCTION VEHICLES AND EQUIPMENT SHALL NOT BE PARKED OR STORED UNDER TREES OR OFF PAVEMENT.
9. SPECIES OF SPECIAL CONCERN AND ASSOCIATED SEASONAL RESTRICTIONS ARE TO BE COORDINATED WITH NPS PRIOR TO CONSTRUCTION.

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWINGS GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.
3. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

50 0 50 100
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C DATE 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L200	TITLE OF SHEET OVERALL SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 45 OF 371

File Path:
T:\GIS\SKERSTIENS R2S P:\DENVER\NPS GRTE 4LAZY F RANCH - 199539\ FINAL CD\CAD\LAL1-0_GRTE-L4 LAYOUT.DWG
XREFS: 0BASE_699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg
IMAGES: ..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...
..\..\2_Admin\Photos\Parking lot\Parking lot toe-5.jpg|..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...
..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\Parking lot\Parking lot-4.jpg|Parking lot toe-5.jpg|..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...
..\..\2_Admin\Photos\MainLodge\IMG_3706.JPG|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\Parking lot\Parking lot-4.jpg|Parking lot toe-5.jpg|..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...

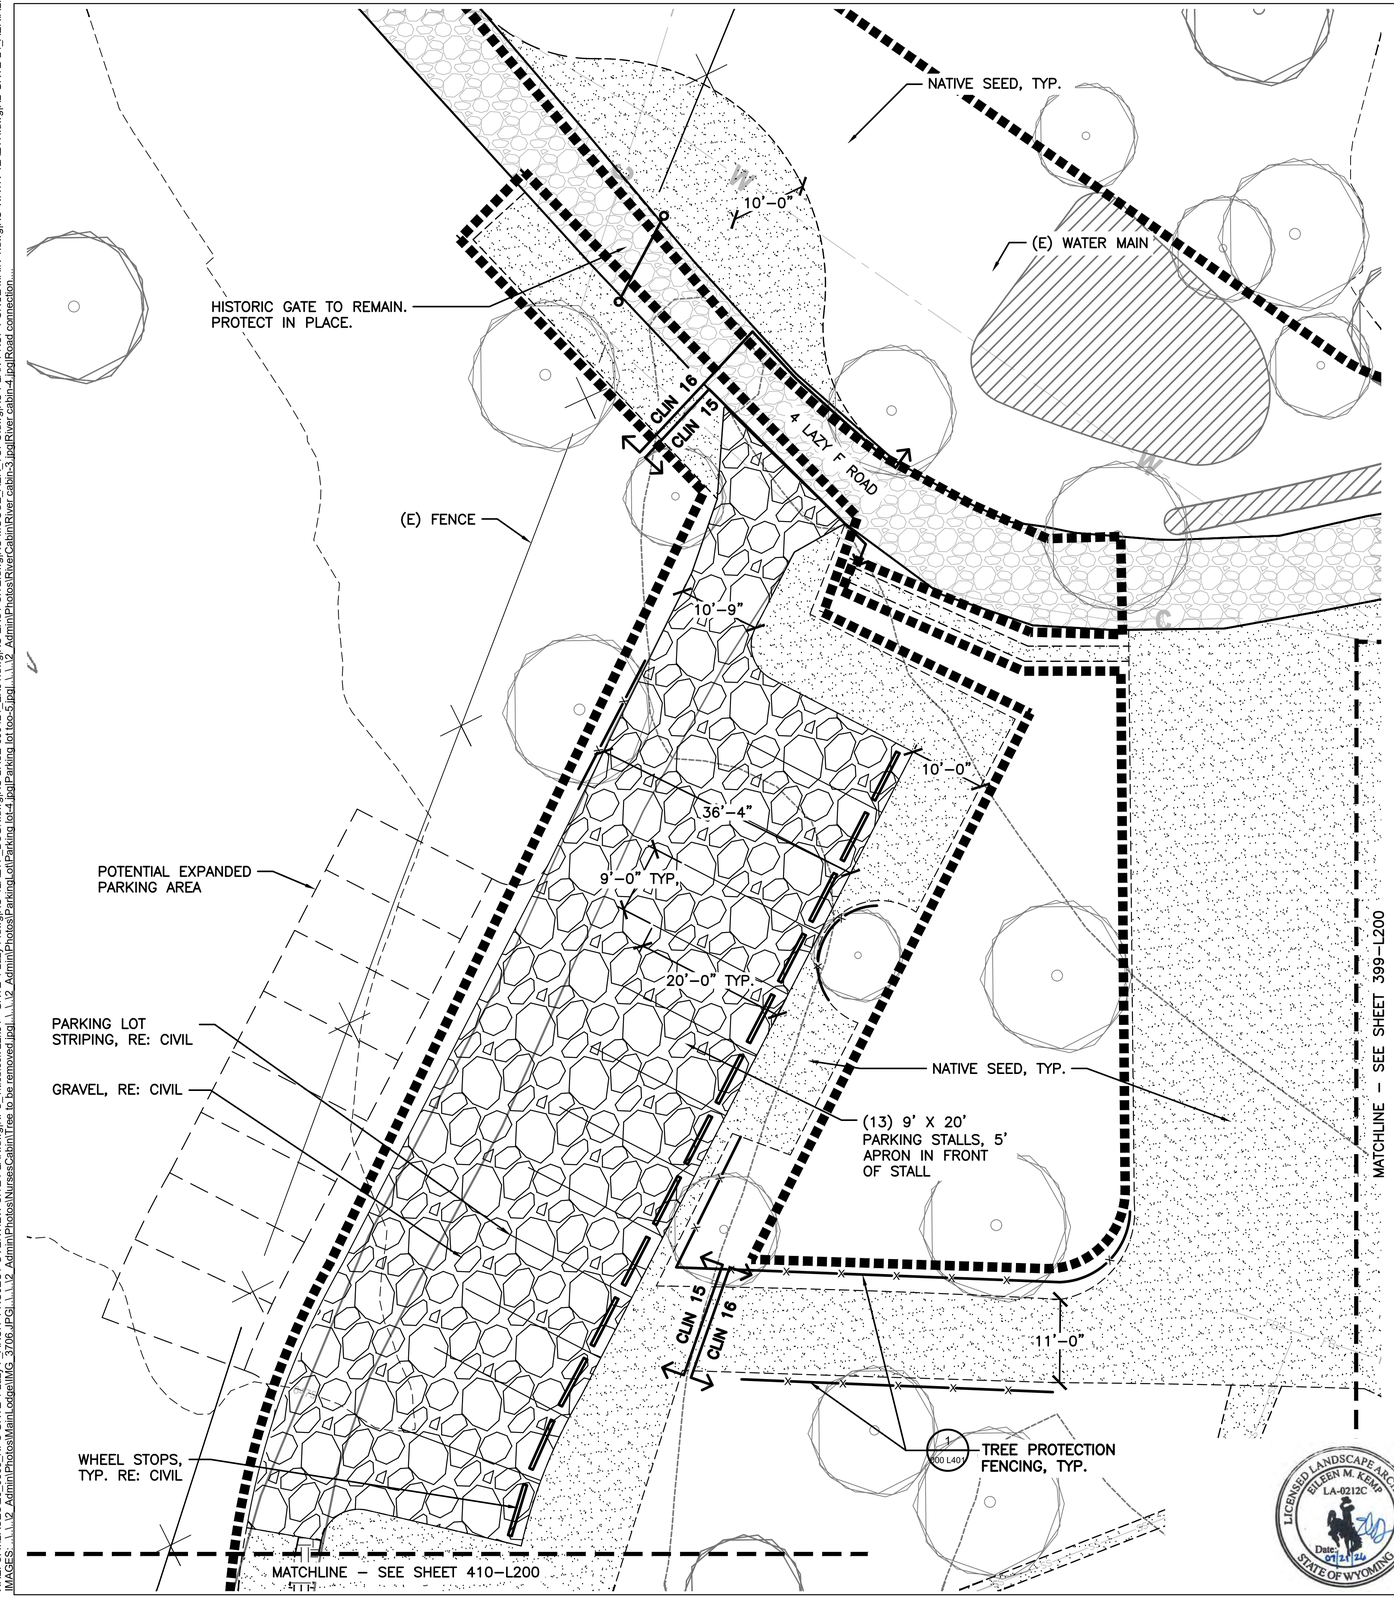

IMAGE 1: PROPOSED GRAVEL PARKING LOT, RE: CIVIL

IMAGE 2: PROPOSED GRAVEL PARKING LOT ENTRANCE, RE: CIVIL

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) TREE
- (E) FENCE
- NATIVE SEED
- GRAVEL, RE: CIVIL
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

NOTES:

1. STANDARD VEHICLE STALLS TO BE GRAVEL.
2. SIDE SLOPES FROM PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
3. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).
4. PROPOSED PARKING LOT SHALL BE CONSTRUCTED AS SHOWN ON THE PLANS. ANY AREAS DISTURBED DURING CONSTRUCTION ACTIVITIES SHALL BE RESTORED AND REVEGETATED UPON COMPLETION OF THE WORK. TREE AND SHRUB REMOVAL SHALL BE LIMITED TO ONLY THOSE VEGETATION AREAS NECESSARY TO ACCOMMODATE THE PROPOSED PARKING. EVERY EFFORT SHALL BE MADE TO MINIMIZE IMPACTS TO EXISTING VEGETATION OUTSIDE OF THE REQUIRED LIMITS OF DISTURBANCE.

KEY MAP

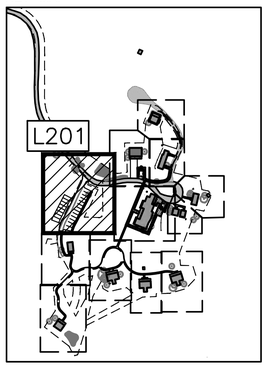

10 0 10 20
SCALE OF FEET

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L201	TITLE OF SHEET OVERALL – PARKING LOT SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 46 OF 371

File Path
T:\Projects\06\BASS\26_0308_NPS_GRTE_4 Lazy F_ARCH_PROJECT OVERVIEW\1 SITE PLAN\dwg\NPS_TitleBlock_22x34 - GRTE 4 Lazy F.dwg\XC-4LAZY F_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.DWG
XREFS: ...\IMAGES\...\2_Admin\Photos\Main Lodge\IMG_3706.JPG,\...\2_Admin\Photos\NurseesCabin\Tree to be removed.jpg\,\...\2_Admin\Photos\ParkingLot\Parking lot-4.jpg\Parking lot too-5.jpg\,\...\2_Admin\Photos\RiverCabin\River cabin-3.jpg\River cabin-4.jpg\Road connection...

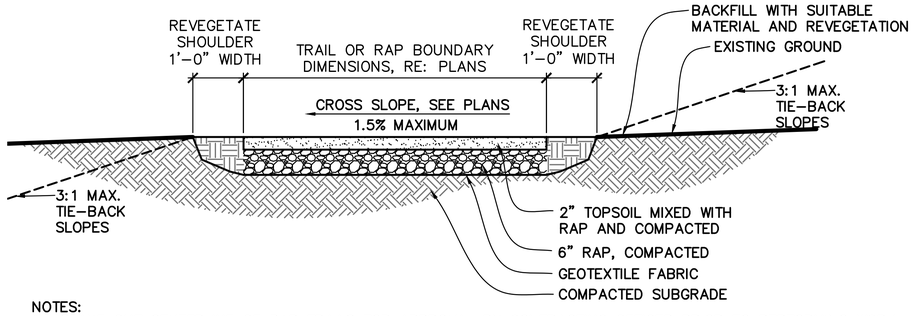

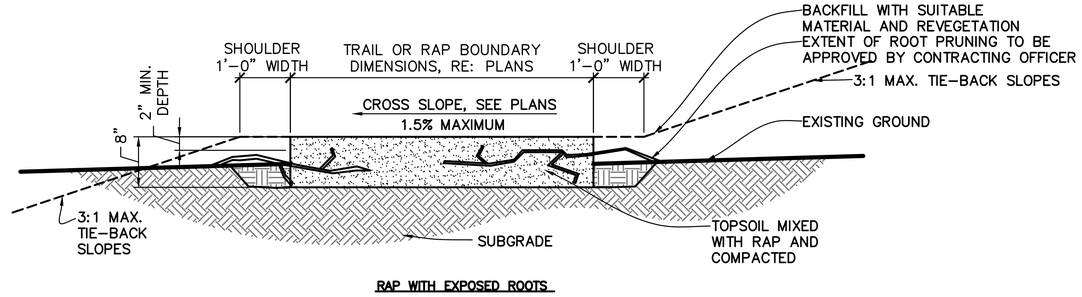

RAP WITH EXPOSED ROOTS

NOTES:
1. STAKE OUT CENTERLINE OF RAP TRAILS FOR APPROVAL BY CONTRACTING OFFICER PRIOR TO PERFORMING WORK.
2. CONTRACTOR TO PROVIDE 20 LINEAL–FOOT MOCK–UP OF RAP TRAIL FOR APPROVAL BY CONTRACTING OFFICER. MOCKUP MAY REMAIN IN PLACE IF APPROVED.
3. AFTER CUTTING TRAIL TO GRADE AS SHOWN ON PLANS, TILL SURFACE OF TRAIL TO AN APPROXIMATE DEPTH OF 8".
4. PLACE GEOTEXTILE FABRIC IN THE DIRECTION OF TRAIL ALIGNMENT.
5. PLACE RAP OVER GEOTEXTILE MAT TO A LOOSE DEPTH OF 6".
6. PLACE A LOOSE LAYER OF SOIL OVER THE PLACED RAP AT A RATE SUFFICIENT TO ACHIEVE A 2–INCH–DEEP BLENDED LAYER OF RAP AND SOIL.
7. SPRAY STABILIZATION EMULSION UNIFORMLY OVER THE LOOSE SOIL PRIOR TO TILLING AND MIXING.
8. COMPACT TRAIL SURFACE TO A MINIMUM OF 90% MODIFIED PROCTOR DENSITY.
9. AFTER FINAL COMPACTION, APPLY A FINISH COAT OF STABILIZATION EMULSION PER MANUFACTURER'S INSTRUCTIONS.

1 000 L400 RAP TRAIL

SCALE: 1"=1'–0"

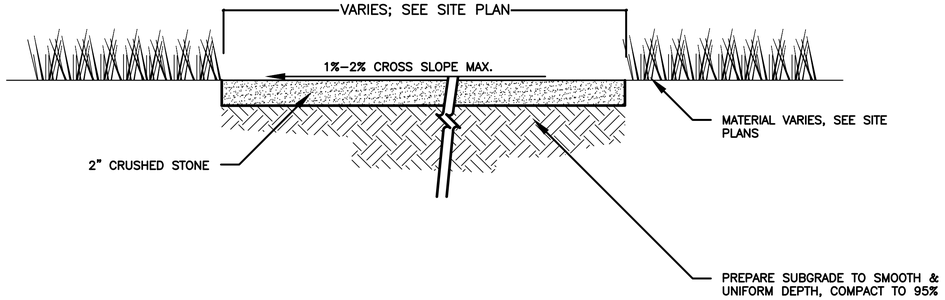

NOTES:
1. WIDTH AND ADJACENT MATERIAL VARIES, SEE SITE PLANS.
2. COLOR: GRAY. COLOR SAMPLE TO BE PROVIDED AND APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
3. CRUSHED STONE TO BE 8–10MM.
4. CRUSHED STONE TO BE COMPACTED.

2 000 L400 CRUSHER FINES

SCALE: 1"=1'–0"

☐ SELECT DESIRED MOUNT OPTION:
☑ EMBEDDED MOUNT (HRE/G)
☐ SURFACE MOUNT (HRP/G)

☐ SELECT DESIRED OPTION:
☐ ANCHOR KIT

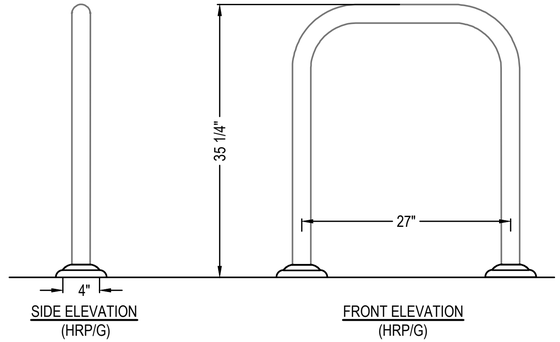

SIDE ELEVATION (HRP/G)

FRONT ELEVATION (HRP/G)



SIDE ELEVATION (HRE/G)

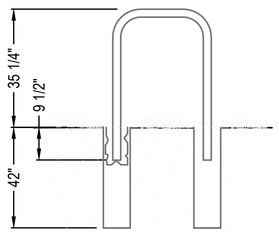

FRONT ELEVATION (HRE/G)

REFERENCE IMAGE

3 000 L400 BIKE RACK

MANUFACTURER: PILOT ROCK OR EQUAL
MODEL: BICYCLE RACKS: HITCHIN' POST (HRE/G)

SCALE: 1"=1'–0"

GENERAL NOTES:
1. SITE FURNISHING DETAILS TO BE COORDINATED WITH APPROVED MANUFACTURER. SHOP DRAWINGS, AS APPLICABLE, ARE TO BE PROVIDED FOR CONTRACTING OFFICER APPROVAL PRIOR TO FABRICATION AND CONSTRUCTION. APPROVED EQUAL MANUFACTURER'S ARE ACCEPTABLE PROVIDED THEY MEET THE SALIENT CHARACTERISTICS PROVIDED IN THE SPECIFICATIONS.
2. COMPLY WITH MANUFACTURER'S WRITTEN INSTALLATION INSTRUCTIONS UNLESS MORE STRINGENT REQUIREMENTS ARE INDICATED.
3. INSTALL SITE FURNISHINGS AFTER LANDSCAPING AND PAVING HAVE BEEN COMPLETED.
4. INSTALL SITE FURNISHINGS LEVEL, PLUMB AND TRUE.

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM	DESIGNED:	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
PRIME: HENNEBERY EDDY PORLTAND, OR	DHM	000 L400	OVERALL – SITE DETAILS	136 / 193826
	DRAWN: DHM			PMIS/PKG NO. 237343
SUBCONTRACTOR: DHM DESIGN DENVER, CO	TECH REVIEW: DHM		REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	SHEET 47 OF 371
	DATE: 07/21/2026			

File Path
7/16/26 08:44 SKERSTIENS R25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\LA\L3-0_GRTE-L4_DETAILS.DWG
XREFS: ..\BASES\NPS_TITLEBLOCK 22X34 - GRTE 4 LAZY F.DWG; ..\BASES\XL-GRTE\L4_LAYOUT.DWG; ..\BASES\XL-GRTE\L4_EX COND.DWG; ..\BASES\G006 - PROJECT OVERVIEW SITE PLAN.DWG; IMAGES; ..\IMAGES\BICYCLE RACKS .JPG; ..\IMAGES\VEHICULAR GATE.JPG; ..\IMAGES\SOUTH ELEVATION AT LODGE.JP

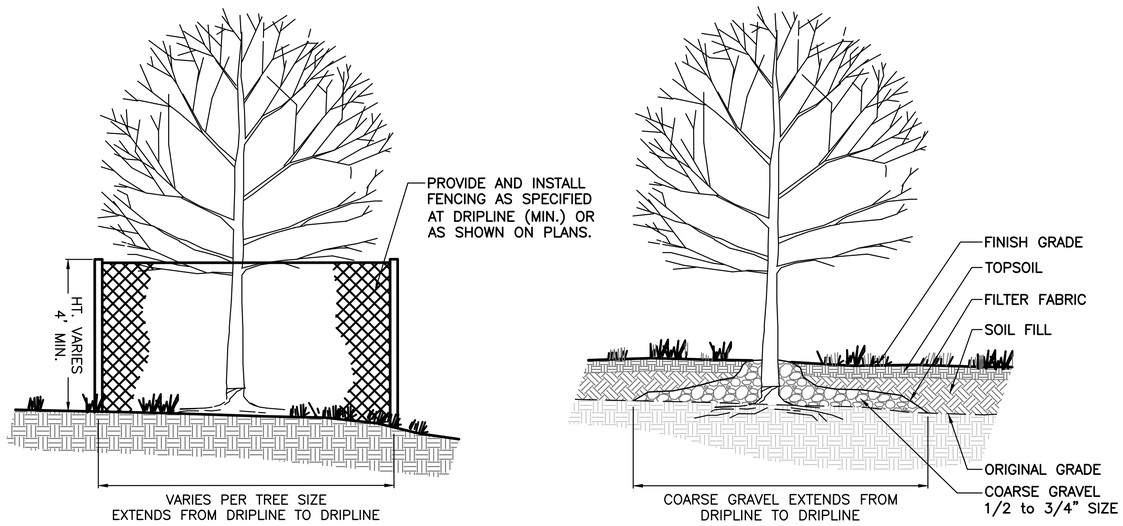

NOTES:
1. EXISTING TREES TO BE PROTECTED DURING DEMOLITION AND CONSTRUCTION.
2. IN AREAS WHERE GRADING EXTENDS INTO EXISTING TREE DRIPLINES CONTRACTOR SHALL HAND GRADE. CONTRACTING OFFICER APPROVAL REQUIRED PRIOR TO HAND GRADING.
3. TREE PROTECTION AREA: THE TREE PROTECTION AREA SHOULD CONSIST OF THE GROUND ENCOMPASSING FROM 1.5 (MINIMUM) TO 2.0 TIMES THE DISTANCE BETWEEN THE TRUNK AND DRIP LINE, OR ONE LINEAR FOOT AWAY FROM THE TRUNK BASE FOR EVERY INCH DIAMETER OF THE TRUNK, WHICHEVER IS GREATER (SEE DEFINITION OF DRIP LINE, BELOW). AREAS OF GROUND COVERED BY PAVEMENT, BUILDINGS, OR OTHER PERMANENT STRUCTURES WHERE THE PRESENCE OF ROOTS IS MINIMAL OR NEGLIGIBLE ARE EXCLUDED. THE AREA UNDER OR WITHIN THE TREE'S DRIP LINE IS ALSO REFERRED TO AS THE "CRITICAL ROOT ZONE" (SEE DEFINITION OF CRITICAL ROOT ZONE, BELOW).
4. DRIP LINE: THE OUTERMOST EDGE OF THE TREE'S CANOPY OR BRANCH SPREAD. THE AREA WITHIN A TREE'S DRIP LINE IS ALL THE GROUND UNDER THE TOTAL BRANCH SPREAD.
5. CRITICAL ROOT ZONE: SHALL BE DEFINED AS THE TREE PROTECTION AREA ENCOMPASSING FROM 1.5 (MINIMUM) TO 2.0 TIMES THE DISTANCE BETWEEN THE TRUNK AND DRIP LINE, OR ONE LINEAR FOOT AWAY FROM THE TRUNK BASE FOR EVERY INCH DIAMETER OF THE TRUNK, WHICHEVER IS GREATER.
6. DIAMETER (CALIPER): THE SIZE (IN INCHES) OF A TREE'S TRUNK IS MEASURED AT:

TRUNK SIZE	WHERE MEASURED
< 4"	6" above grade
4" – 8"	12" above grade
> 8"	54" above grade

NOTE: ALL MEASUREMENTS SHOULD BE ROUNDED UP TO THE NEAREST INCH.

7. MATERIALS AND SUPPLIES SHALL NOT BE STOCKPILED OR STORED WITHIN THE TREE PROTECTION AREA.
8. CONTRACTOR IS REQUIRED TO HIRE AN ARBORIST TO REVIEW TREE RETENTION AND PROTECTION METHODS, LOCATIONS, SCHEDULES AND MAINTENANCE AND OVERSEE THE PROJECT.
9. IF IT APPEARS THAT THE COMPLETION OF THE CONSTRUCTION MAY CAUSE DAMAGE TO THE BRANCHES, TRUNK, OR ROOTS OF ANY TREE, THE CONTRACTOR SHALL CONTACT THE CONTRACTING OFFICER'S OFFICE. THE ARBORIST AND CONTRACTING OFFICER WILL MAKE A DETERMINATION AS TO WHETHER SUCH DAMAGE IS IMMINENT.
10. TREE PROTECTION ZONE (TPZ) SHALL NOT BE RESIZED, MODIFIED, OR ALTERED IN ANY MANNER WITHOUT PRIOR APPROVAL OF THE CONTRACTING OFFICER.
11. ENTRANCE/ACCESS TO THE TPZ IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL FROM THE CONTRACTING OFFICER.
12. TREE TRUNKS ARE TO BE WRAPPED HEAVILY WHILE CONSTRUCTION ACTIVITIES ARE TAKING PLACE WITHIN THE DRIP LINE AREA.
13. SOIL FILL SHALL BE MATERIAL THAT IS EASILY MORE PENETRATED BY AIR AND WATER. MATERIAL MAY INCLUDE GRAVELLY FILL AND UP TO 4" OF SANDY FILL AND MUST BE APPROVED BY THE CONTRACTING OFFICER.
14. SOIL FILL SHALL NEVER BE DIRECTLY PLACED AGAINST THE TRUNK OF THE TREE.
15. AVOID SOIL COMPACTION OF EXISTING SOIL AND FILL MATERIAL OVER THE CRITICAL ROOT ZONE.

NOTES FOR FILL CONDITION

16. CONTRACTOR SHALL CREATE AN AERATION AND DRAINAGE SYSTEM IN COORDINATION WITH THE ARBORIST IF MORE THAN 2" OF FILL COVERS THE TREE ROOTS. THIS SYSTEM INCLUDES:
    - 16.1. REMOVE ALL UNDERBRUSH AND VEGETATION BENEATH THE DRIPLINE OF THE TREE TO PREVENT DECOMPOSITION.
    - 16.2. THE TOP 3–6" OF EXISTING SOIL SURFACE SHALL BE CULTIVATED/BROKEN UP CAREFULLY AS TO DISTURB THE LEAST POSSIBLE AMOUNT OF ROOTS. THIS ALLOWS BETTER CONTACT WITH THE FILL SOIL AND PREVENTS A SHARP LINE OF DEMARCATION BETWEEN EXISTING AND FILL SOIL.
    - 16.3. STARTING AT THE OUTER EXTREMITIES OF THE BRANCHES, APPLY 3–6" OF COARSE GRAVEL TOWARDS THE TREE TRUNK AT AN INCREASING DEPTH UNTIL THERE IS 8–12" OR DEEPER WITHIN TWO FEET OF THE TRUNK. COARSE GRAVEL CAN REACH THE SURFACE OF THE FILL IN THE AREA EXTENDING 2' AROUND THE TRUNK OF THE TREE.
    - 16.4. COVER THE COARSE GRAVEL WITH A THIN LAYER OF FILTER FABRIC, WOVEN PLASTIC, OR OTHER POROUS MATERIAL TO PREVENT SOIL FILTRATION. FABRIC TO BE JUTE CARPET BLANKET, 5.5 OUNCE, MEDIUM–WEAVE BIODEGRADABLE BURLAP OR APPROVED EQUAL BY THE CONTRACTING OFFICER.
    - 16.5. SPREAD WELL DRAINED SOIL FILL OVER THE FILTER FABRIC LAYER TO THE DESIRED DEPTH. REFER TO GRADING PLANS FOR MAXIMUM FILL CONDITIONS AT EACH TREE LOCATION.
    - 16.6. APPLY 4" OF TOPSOIL OVER SOIL FILL. TOPSOIL MATERIAL SHALL BE POROUS, EASILY PENETRATED BY AIR AND WATER AND TO BE APPROVED BY CONTRACTING OFFICER.

1 000 L401 TREE PROTECTION FENCING

SCALE: 1/2"=1'–0"

NOTES:
1. SHRUBS SHALL BE OF QUALITY PER ANSI STANDARDS Z–60.
2. BACKFILL WITH SOIL FROM PLANTING HOLE THAT HAS BEEN PREVIOUSLY MODIFIED TO MEET NPS REQUIREMENTS.

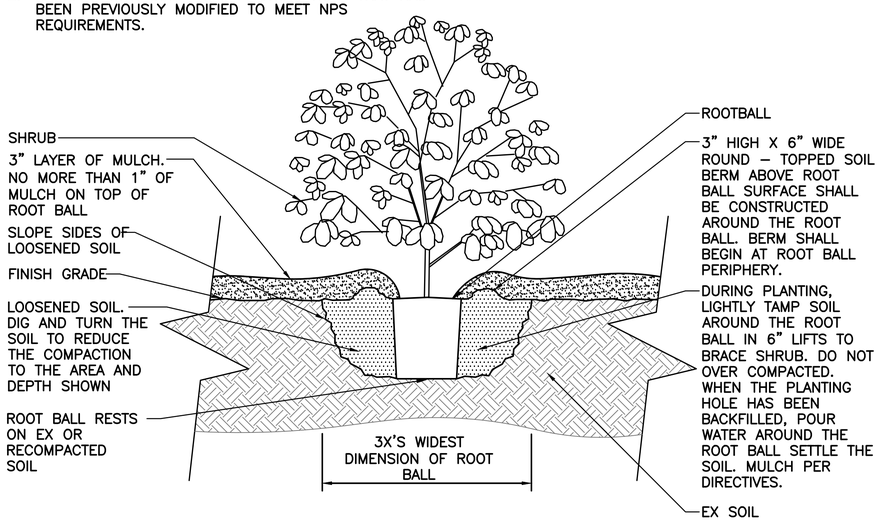

SECTION

2 000 L401 SHRUB PLANTING

SCALE: 1"=1'–0"

NOTES:
1. HOLD GRADE 1" BELOW EDGE OF WALK OR CURB.
2. PERENNIAL PLANTING – REFER TO PLANT BED LAYOUT AND PLANTING PLAN FOR PLACEMENT OF PERENNIALS.
3. GRADE EDGE OF PLANTING ARE TO RETAIN MULCH.
4. ANY BROKEN OR CRUMBLING ROOTBALLS WILL BE REJECTED. REMOVING THE CONTAINERS WILL NOT BE AN EXCUSE FOR DAMAGED ROOTBALLS.

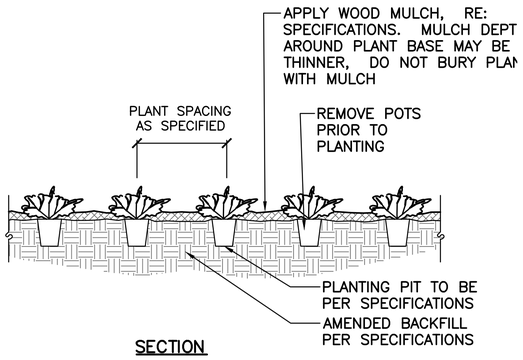

SECTION

3 000 L401 PERENNIAL PLANTING

SCALE: 1"=1'–0"

NOTES:
1. ALIGN FRONT ROW PARALLEL TO BED LINE.
2. IF THERE IS A DISCREPANCY BETWEEN THE PLANT COUNTS ON THE CALL–OUTS ON THE PLANS & THE ACTUAL NUMBER OF PLANT SYMBOLS DEPICTED ON THE PLANS, THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING THE ACTUAL NUMBER OF PLANTS AS SYMBOLICALLY DEPICTED ON THE PLANS.

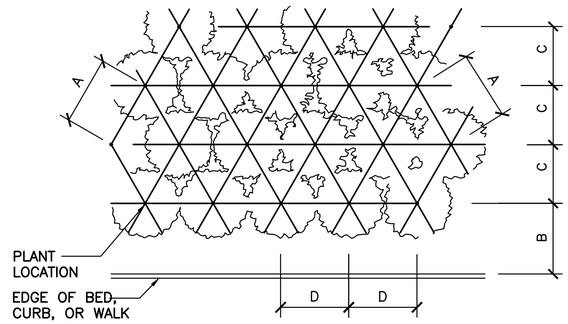

PLAN

	A	B	C	D
6"	6"	6"	5"	6"
8"	8"	6"	7"	8"
12"	12"	8"	10"	12"
18"	18"	9"	15½"	18"
24"	24"	18"	21"	24"
30"	30"	15"	26"	30"
36"	36"	30"	31"	36"
48"	48"	30"	42"	48"
60"	60"	36"	52"	60"

PLANT SPACING

4 000 L401 PERENNIAL SPACING

SCALE: 1"=1'–0"

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L401	TITLE OF SHEET OVERALL – SITE DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 48 OF 371

File Path
7/16/26 08:44 SKERSTIENS R25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\LA\L3-0_GRTE-L4_DETAILS.DWG
XREFS: ..\BASES\NPS_TITLEBLOCK 22X34 - GRTE 4 LAZY F.DWG; ..\BASES\XL-GRTE-L4_LAYOUT.DWG; ..\BASES\XL-GRTE-L4_EX COND.DWG; ..\BASES\G006 - PROJECT OVERVIEW SITE PLAN.DWG; IMAGES; ..\IMAGES\BICYCLE RACKS .JPG; ..\IMAGES\VEHICULAR GATE.JPG; ..\IMAGES\SOUTH ELEVATION AT LODGE.JPG

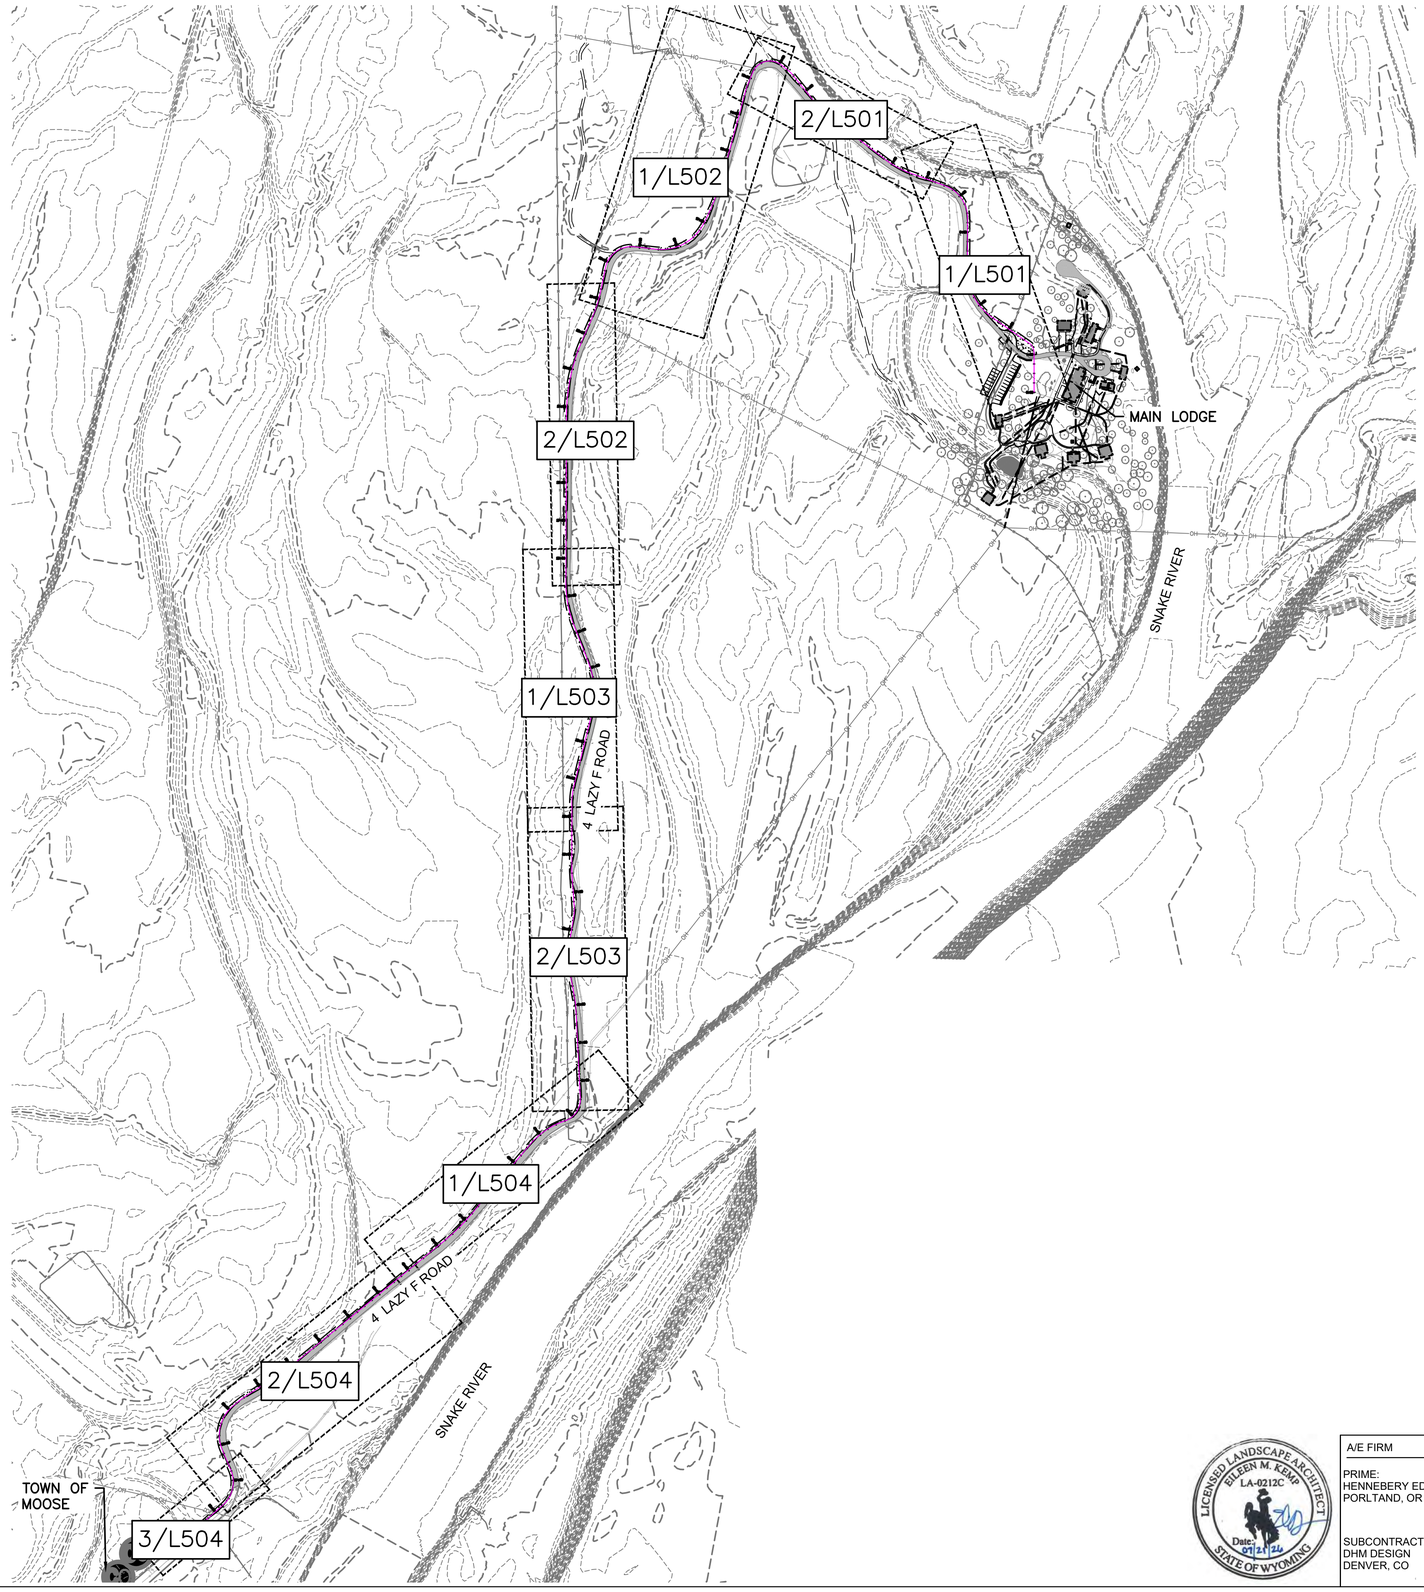

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- (E) DITCH
- CLEAR & GRUB/ NATIVE SEED

GENERAL PLANTING NOTES:

1. EQUIPMENT DISTURBANCE FROM VEGETATION REMOVAL TO BE RE-GRADED AND PREPARED BACK TO ORIGINAL CONDITIONS OR BETTER.
2. ALL TOPSOIL STRIPPING AND STOCKPILING, TREE AND VEGETATION REMOVALS, EARTHWORK, IMPORTING FILL MATERIAL TO REACH FINAL SUBGRADE WITHIN THE AREA OF CONSTRUCTION ACTIVITIES IS THE RESPONSIBILITY OF THE CONTRACTOR.
3. THE TOPSOIL STOCKPILING AREAS SHALL BE DEFINED ON SITE AND APPROVED BY THE CONTRACTING OFFICER DURING CONSTRUCTION.
4. THE CONTRACTOR SHALL FLAG TREE REMOVAL LOCATIONS AND ROUTES FOR CONTRACTING OFFICER APPROVAL PRIOR TO COMMENCEMENT OF WORK.
5. CONTRACTOR TO PROVIDE TREE FALLING SAFETY PLAN FOR APPROVAL PRIOR TO COMMENCEMENT.
6. ALL SOIL, GRAVEL AND FILL MATERIALS SHALL BE CERTIFIED WEED FREE PRIOR TO BEING BROUGHT INTO THE PARK. THE SOURCE LOCATION OF ALL MATERIALS WILL BE IDENTIFIED IN SUBMITTALS. THE CONTRACTOR SHALL MINIMIZE THE USE OF OFF-SITE MATERIALS BY COORDINATING WITH THE PARK ABOUT USE OF ON-SITE MATERIAL.
7. SUBMIT PER SPECIFICATION SECTION 32 9300 ON SOURCE FOR PROPOSED SHRUBS AND PERENNIAL MATERIALS. NPS TO PROVIDE AND INSTALL SEED FOLLOWING SITE/ REVEGETATION PREPARATIONS BY THE CONTRACTOR. ALL PLANT MATERIAL TO BE INSTALLED TO BE REVIEWED AND APPROVED BY PARK THROUGH SUBMITTALS.
8. CONTRACTOR SHALL ENSURE THE PARKING OF VEHICLES AND EQUIPMENT SHALL REMAIN WITHIN EXISTING PARKING LOTS AND ROADWAYS. CONSTRUCTION VEHICLES AND EQUIPMENT SHALL NOT BE PARKED OR STORED UNDER TREES OR OFF PAVEMENT.
9. SPECIES OF SPECIAL CONCERN AND ASSOCIATED SEASONAL RESTRICTIONS ARE TO BE COORDINATED WITH NPS PRIOR TO CONSTRUCTION.

GENERAL NOTES:

1. PARTIAL TOPOGRAPHIC SURVEY WAS COMPLETED AS PART OF THE SCOPE OF THIS PROJECT. THE BASIS OF THESE DRAWINGS ARE PARTIAL TOPOGRAPHIC SURVEY, LIDAR, SITE OBSERVATIONS, ORIGINAL BUILDING DRAWINGS AND GOOGLE EARTH IMAGERY. EVERY ATTEMPT HAS BEEN MADE TO DOCUMENT ACTUAL CONDITIONS, HOWEVER, THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS AND THOROUGHLY BECOME FAMILIAR WITH THE SITE CONDITIONS RELATED TO THE WORK. FAILURE TO DO SO WILL NOT RELIEVE THE CONTRACTOR OF THE OBLIGATIONS OF THE CONTRACT.
   - 1.1. DO NOT SCALE DRAWINGS. THE DRAWINGS GENERALLY REFLECT EXISTING CONDITIONS AND DO NOT REPRESENT A COMPLETE AND COMPREHENSIVE SURVEY OF THE EXISTING CONDITIONS. SCALING THE DRAWINGS MAY RESULT IN DISCREPANCIES.
   - 1.2. THE CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING CONDITIONS IN THE FIELD BEFORE PROCEEDING. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY OF ANY INCONSISTENCY BETWEEN THE CONDITIONS FOUND AND THOSE SHOWN ON THE DRAWINGS.
   - 1.3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTENCE, LOCATIONS, AND STATUS OF ALL EXISTING UTILITIES.
2. DAMAGE TO NATURAL AREAS, EXISTING GRADES, VEGETATION, PAVEMENTS, UNDERGROUND UTILITIES, AND OTHER IMPROVEMENTS AND AREAS OF PROTECTION, CAUSED DURING WORK UNDER THIS CONTRACT, SHALL BE REPAIRED TO ORIGINAL CONDITION OR BETTER AT NO ADDITIONAL COST TO THE GOVERNMENT.

200 0 200 400
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L500	TITLE OF SHEET OVERALL SITE PLAN UTILITY REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 49 OF 371

File Path
7/16/26 08:43 SKERSTIENS R:\25 P\DEN\VER\NPS GRTE 4LAZY F RANCH -198539_FINAL CD\CAD\LAL1-0_GRTE-L4_LAYOUT-PHASE1.DWG
XREFS: ..\BASES\26_0308_NPS GRTE 4 Lazy F_ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL

1 000 L501 STATION POINTS 0–7

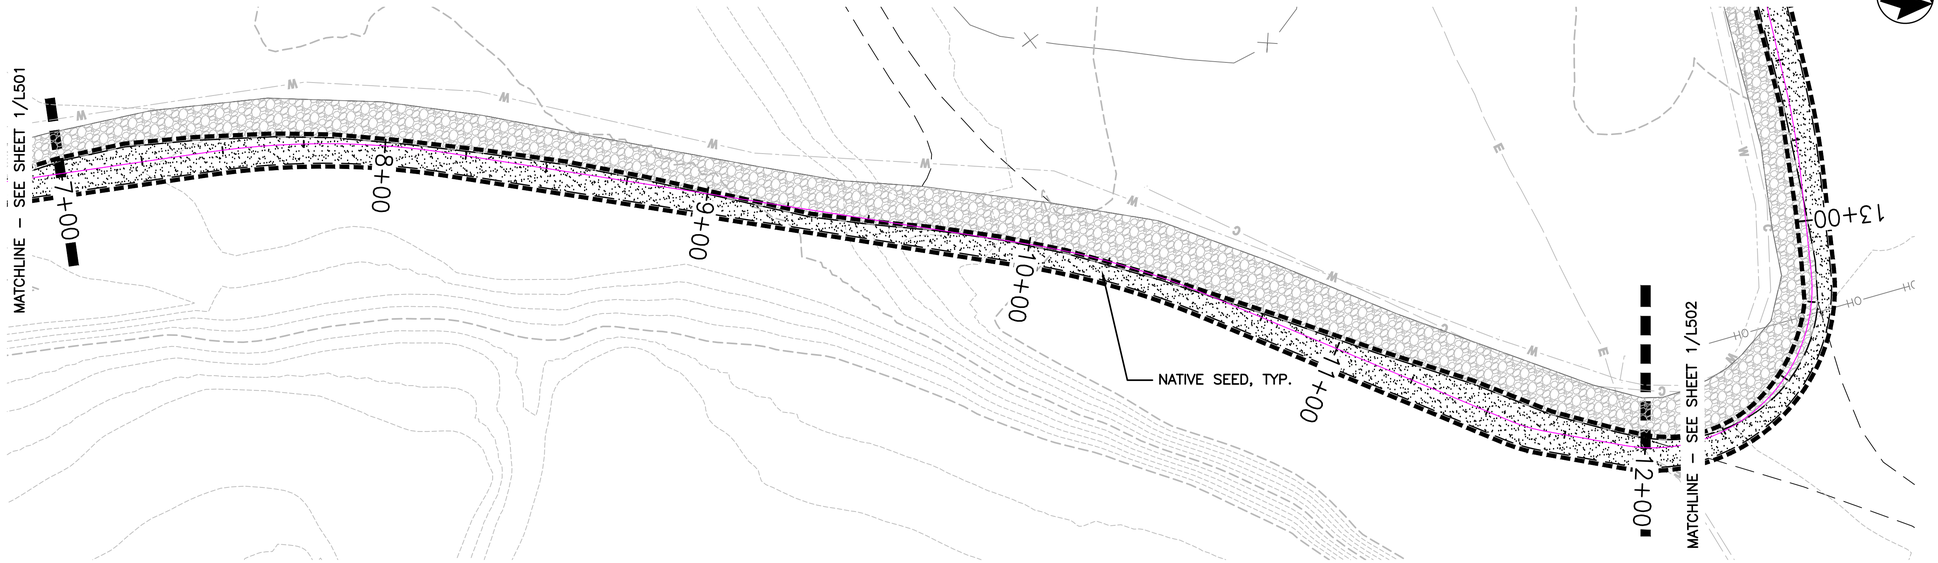

1 000 L501 STATION POINTS 7–12

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- (E) DITCH
- CLEAR & GRUB/ NATIVE SEED
- LIMIT OF CONSTRUCTION

KEY MAP

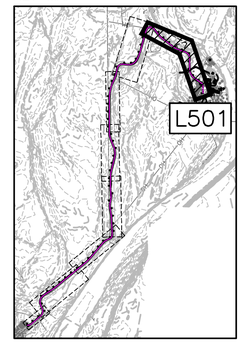

30 0 30 60
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/24
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L501	TITLE OF SHEET SITE PLAN 0+00.00 – 13+00.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 50 OF 371

File Path
7/16/26 08:43 SKERSTIENS R:\25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539\ FINAL CD\CAD\LAU1-0_GRTE-L4_LAYOUT-PHASE1.DWG
XREFS...\BASES\26_0308_NPS GRTE 4 Lazy F_ARCH -PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock 22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL

File Path
7/16/26 08:43 SKERSTIENS R:\25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539\9 FINAL CD\CAD\ALL\1-0_GRTE-L4 LAYOUT-PHASE1.DWG
XREFS: ..\BASES\26_0308_NPS GRTE 4 Lazy F_ARCH-PROJECT OVERVIEW SITE PLAN.dwg|INPS_Titleblock 22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_AERIAL.dwg

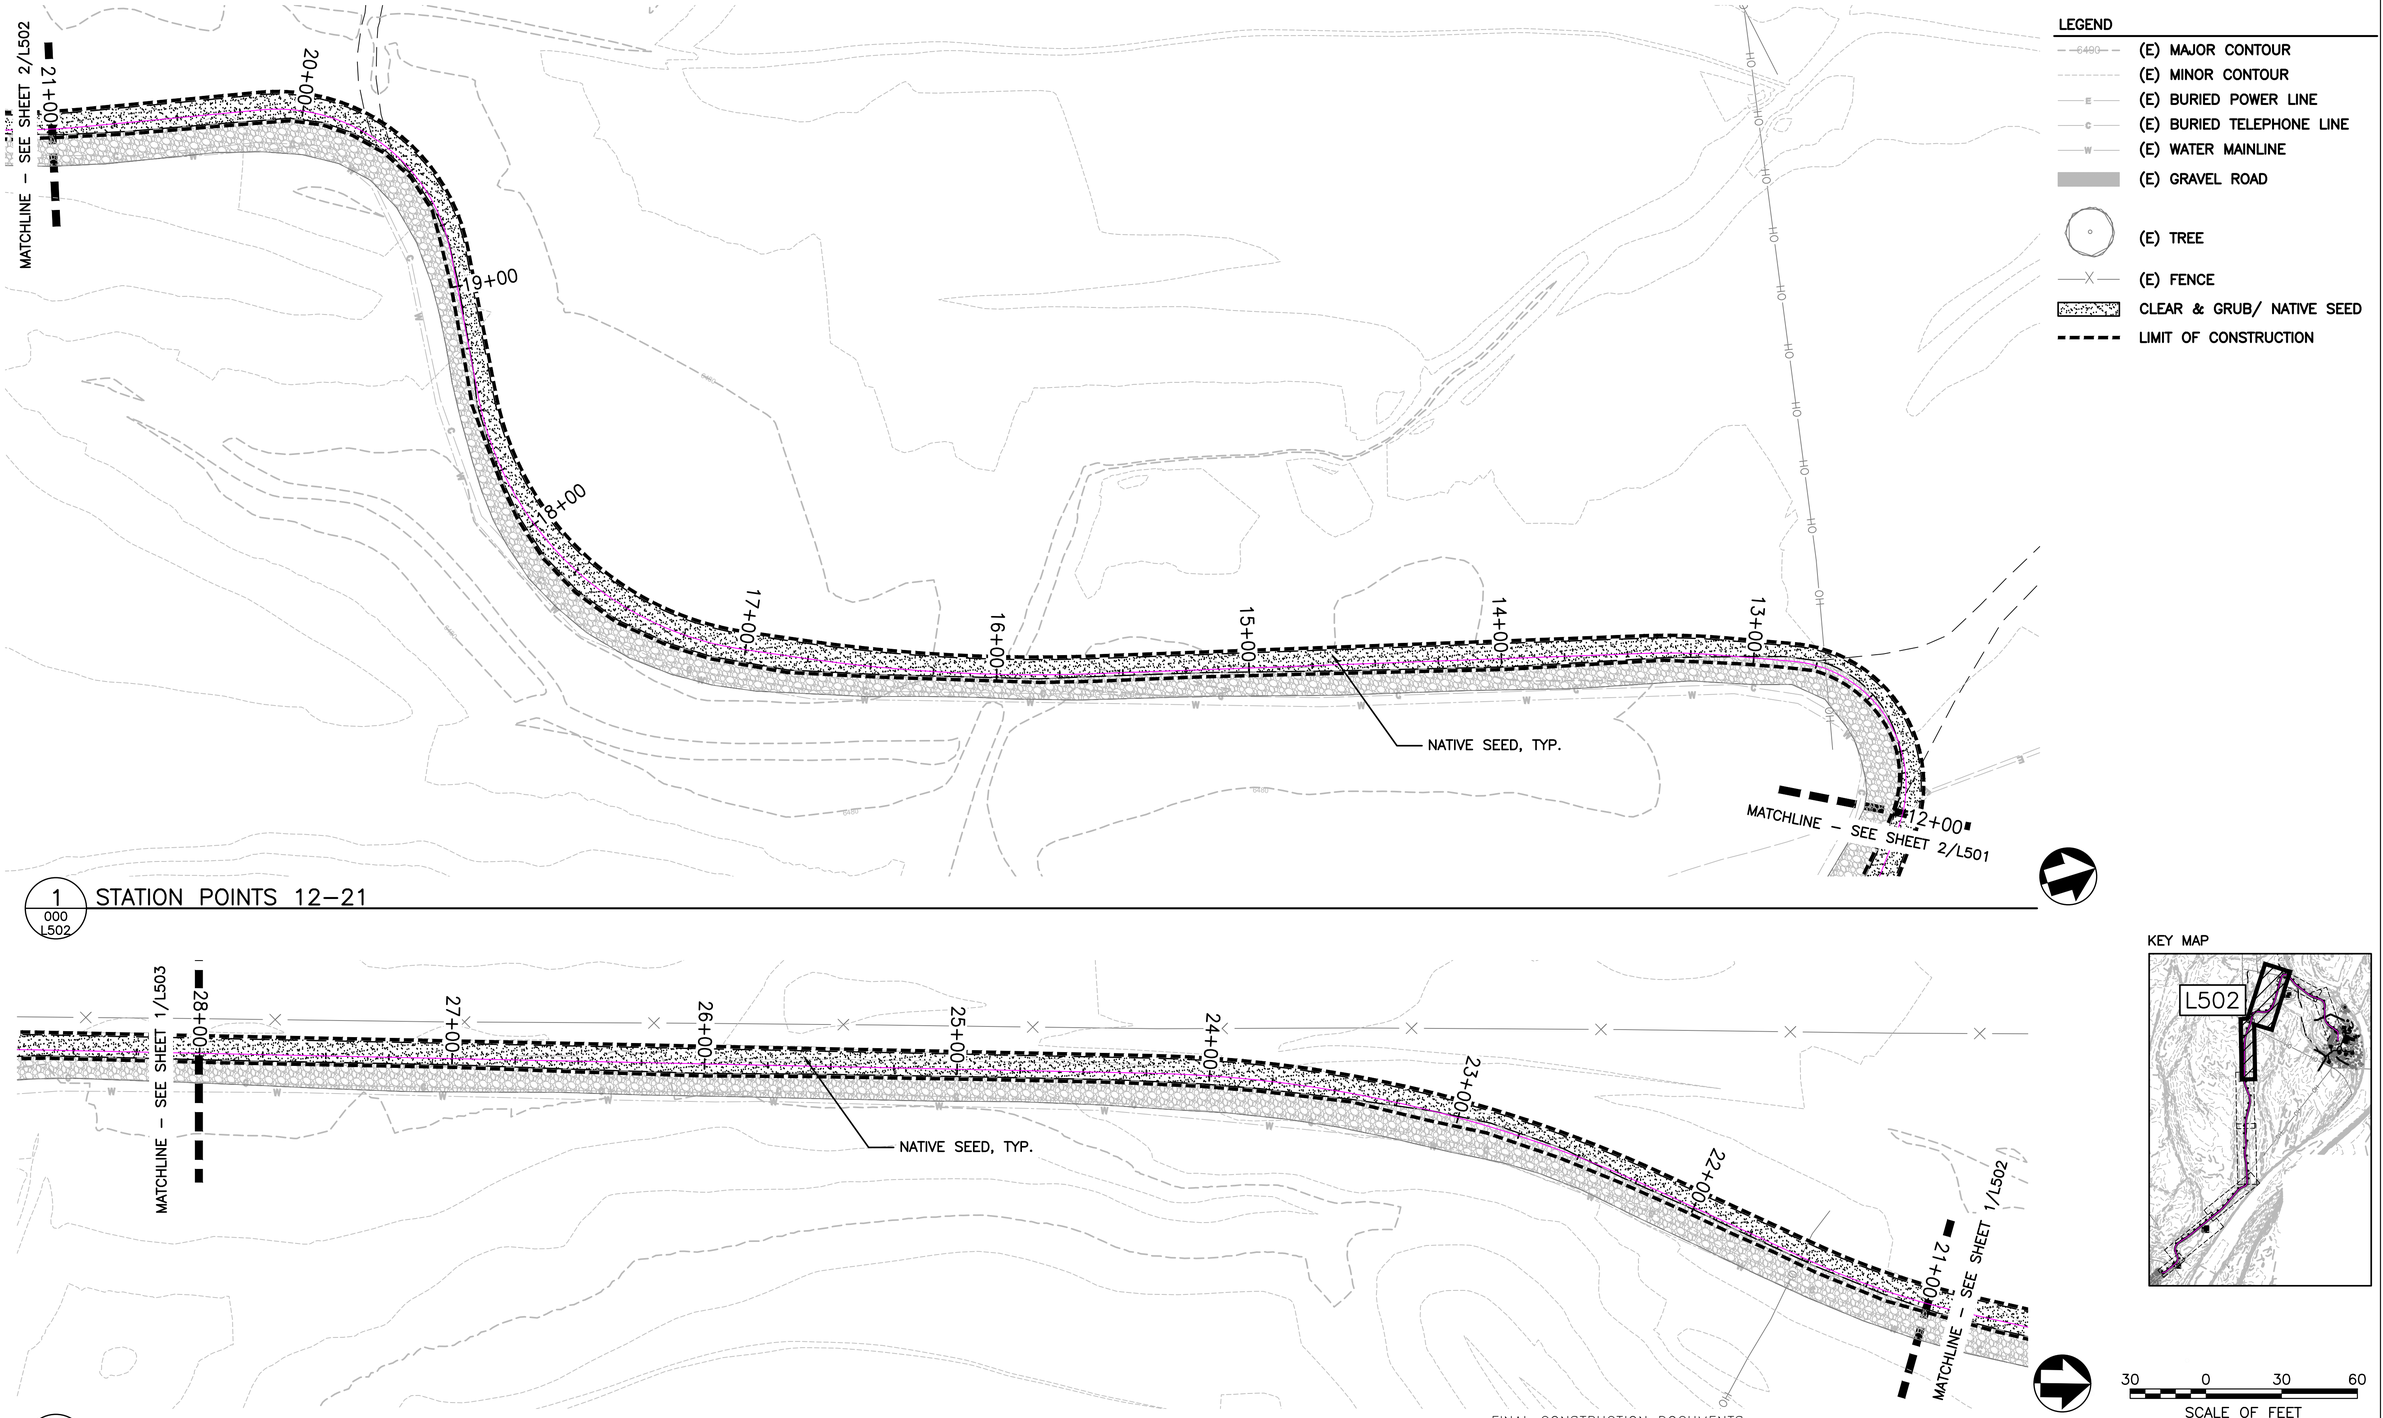

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) TREE
- (E) FENCE
- CLEAR & GRUB/ NATIVE SEED
- LIMIT OF CONSTRUCTION

1 / 000 / L502 STATION POINTS 12–21

1 / 000 / L502 STATION POINTS 21–28

KEY MAP

30 0 30 60
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
DATE 07/21/26
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L502	TITLE OF SHEET SITE PLAN 13+00.00 – 28+00.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 51 OF 371

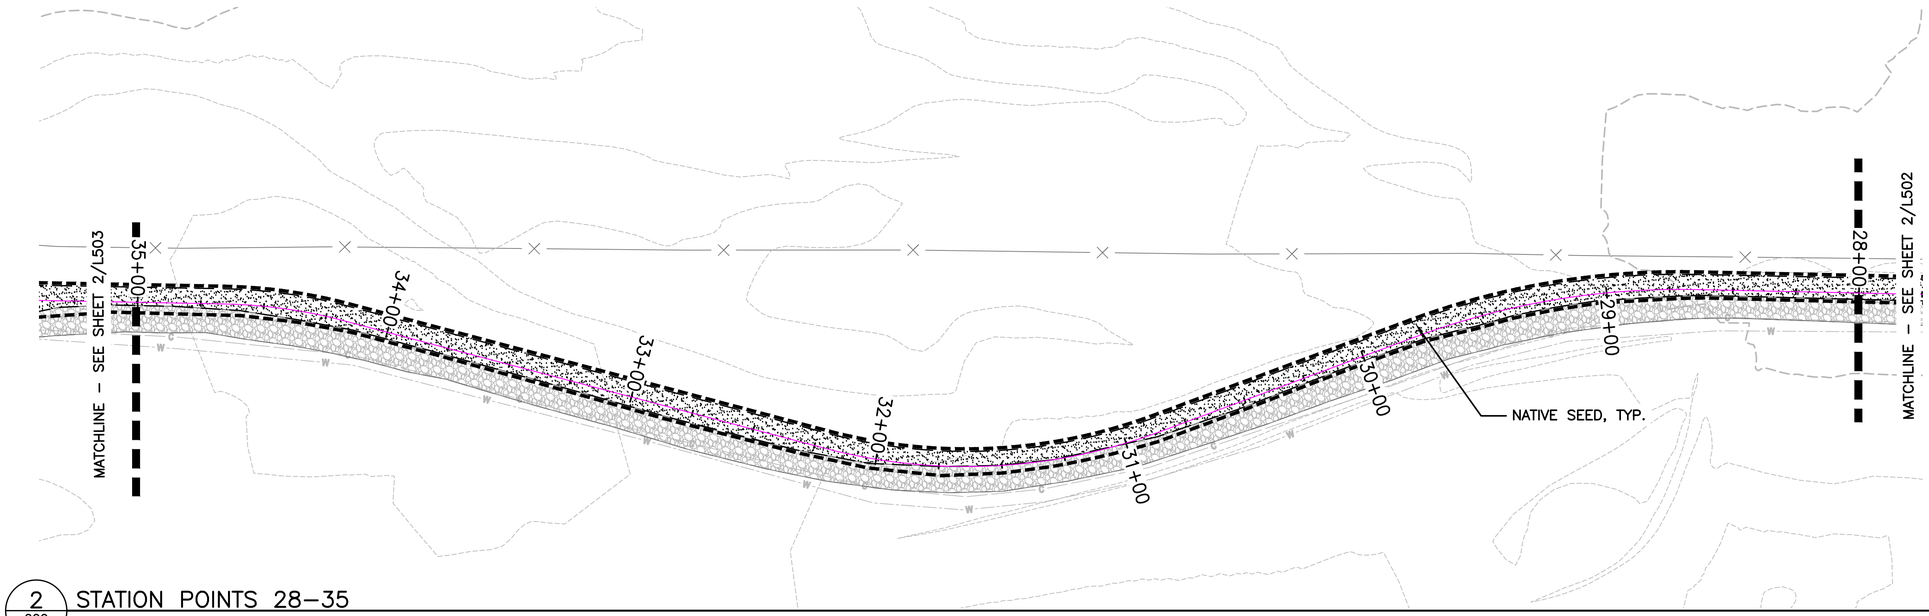

2 000 L503 STATION POINTS 28–35

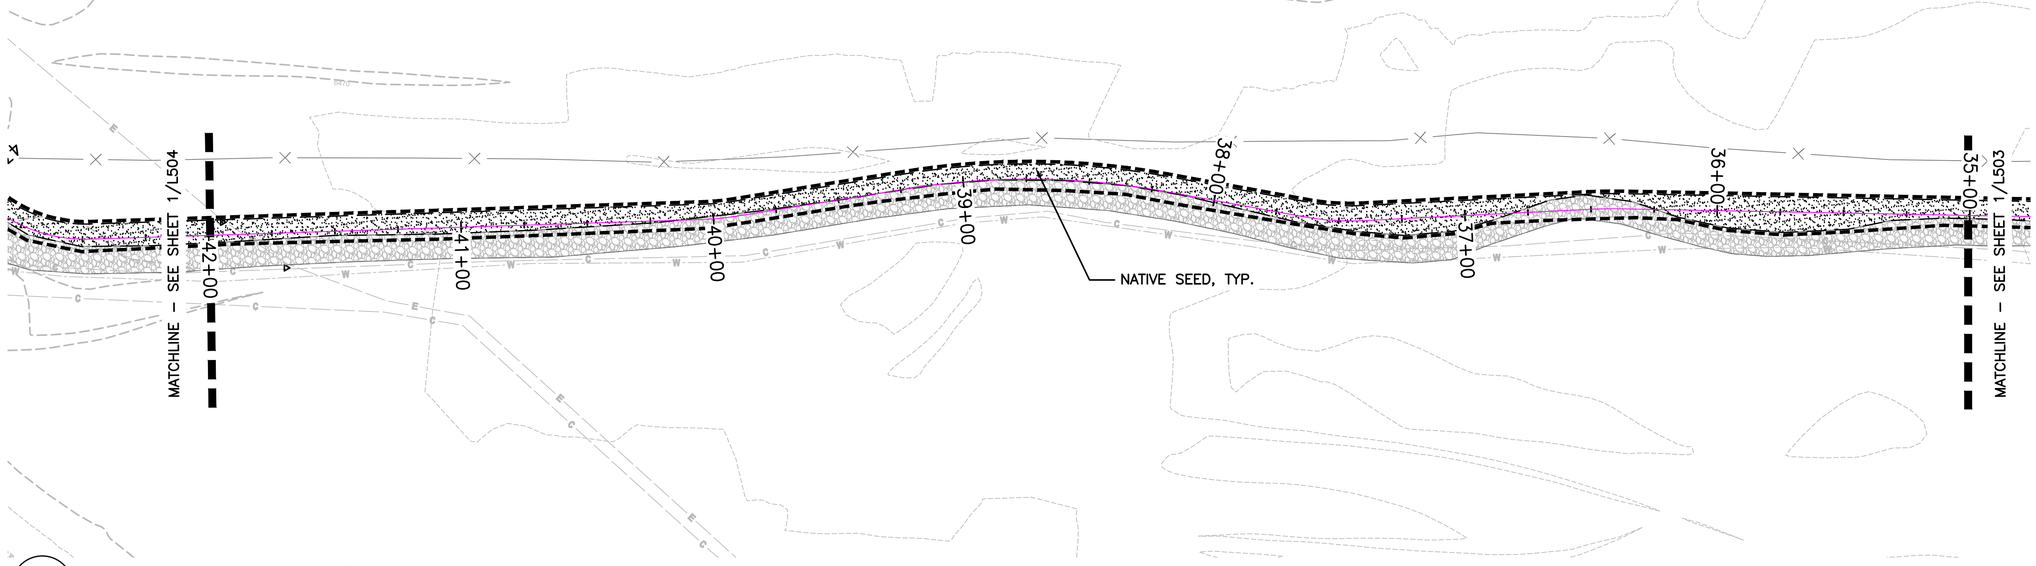

1 000 L503 STATION POINTS 35–42

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) TREE
- (E) FENCE
- CLEAR & GRUB/ NATIVE SEED
- LIMIT OF CONSTRUCTION

KEY MAP

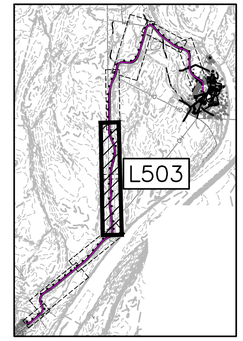

30 0 30 60
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L503	TITLE OF SHEET SITE PLAN 28+00.00 – 42+00.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 52 OF 371

File Path
7/16/26 08:43 SKERSTIENS R:\25 P:\DEN\VER\NPS GRTE 4LAZY F RANCH -198539_FINAL CD\CAD\ALL1-0_GRTE-L4_LAYOUT-PHASE1.DWG
XREFS: ..\BASES\26_0308_NPS GRTE 4 Lazy F_ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock 22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-

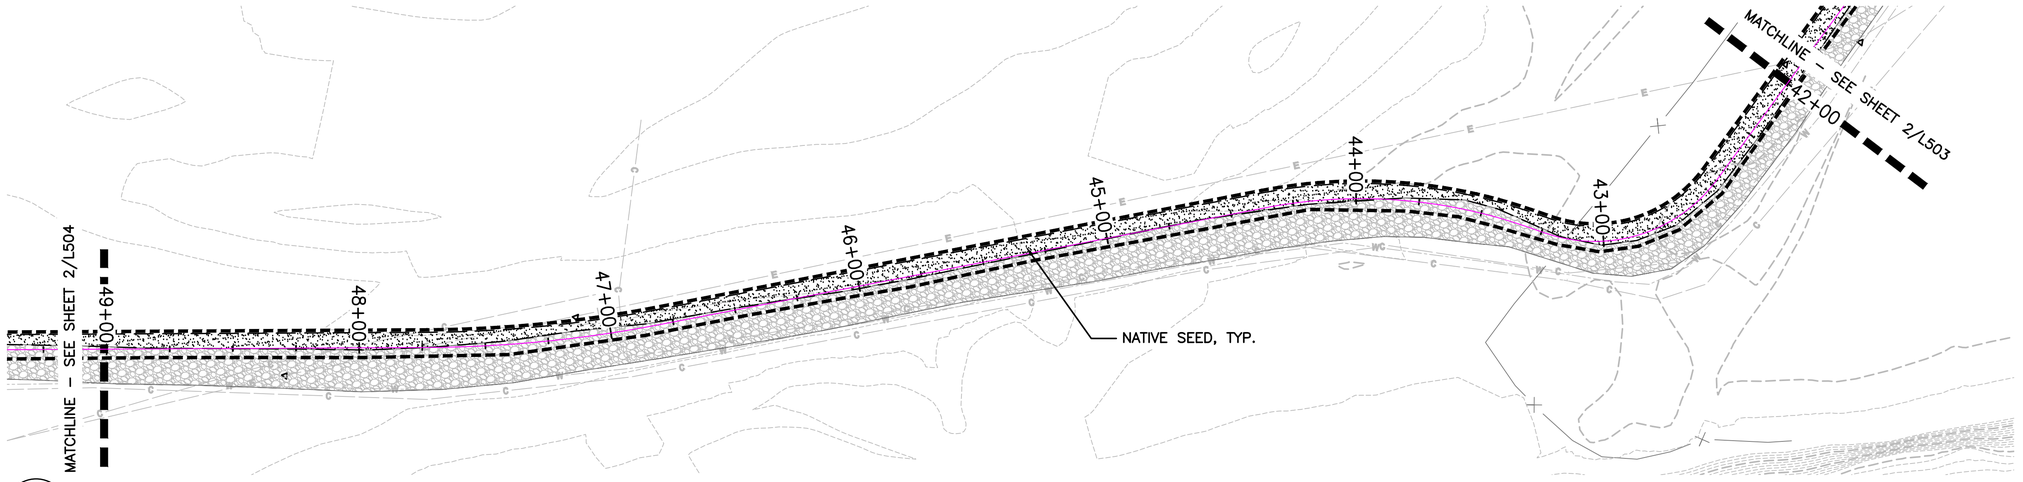

1 000 L504 STATION POINTS 42–49

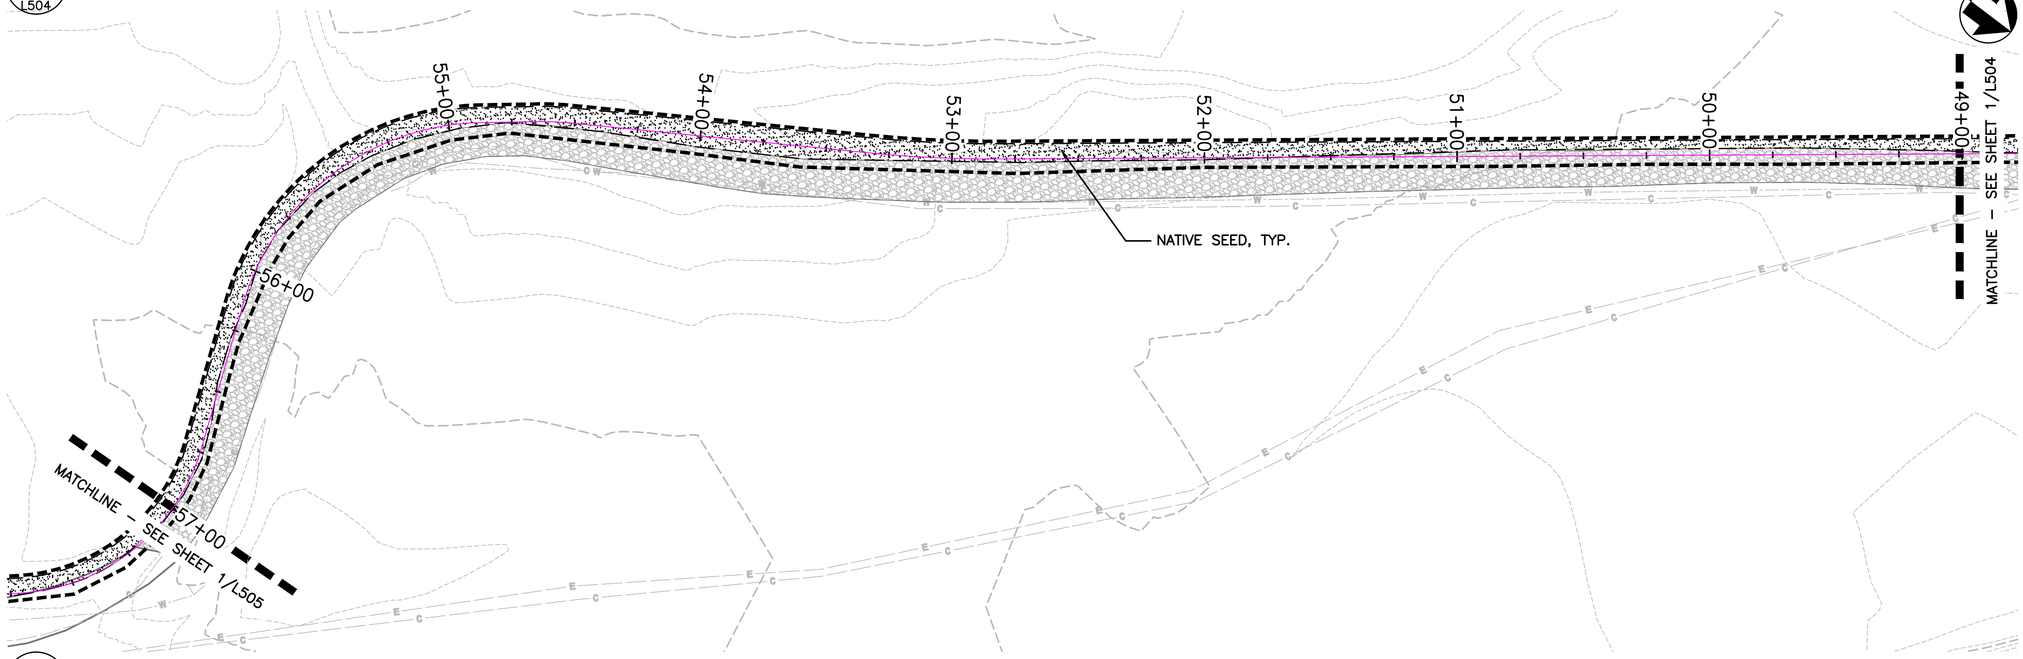

2 000 L504 STATION POINTS 49–57

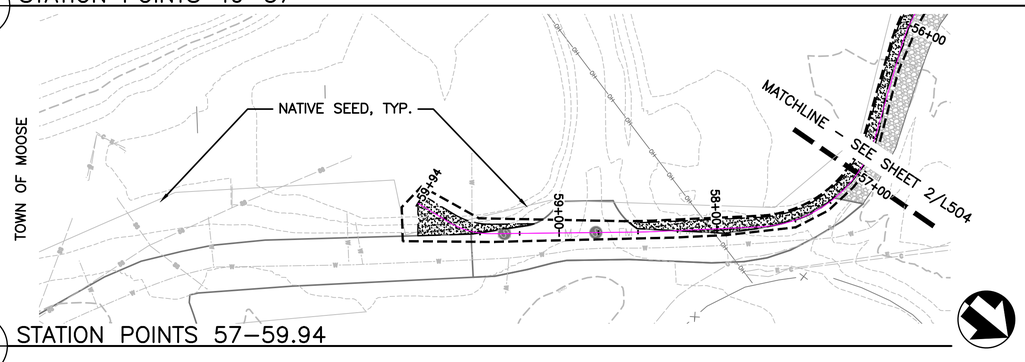

3 000 L504 STATION POINTS 57–59.94

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) TREE
- (E) FENCE
- CLEAR & GRUB/ NATIVE SEED
- LIMIT OF CONSTRUCTION

KEY MAP

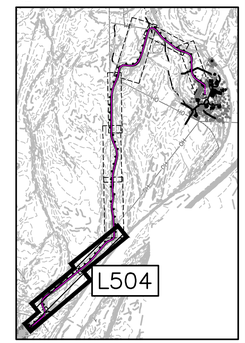

30 0 30 60
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/24 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 000 L504	TITLE OF SHEET SITE PLAN 42+00.00 – 60+00.00 REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 53 OF 371

File Path

7/16/26 08:43 SKERSTIENS R:\25 P:\DEN\ER\NPS GRTE-4 LAZY F RANCH - 198539_FINAL CD\CAD\LA\L1-0_GRTE-L4_LAYOUT-PHASE1.DWG
XREFS: ..\BASES\26_0308_NPS GRTE-4 Lazy F_ARCH-PROJECT OVERVIEW\SITE PLAN.dwg|NPS_Titleblock 22x34 - GRTE-4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXIST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL

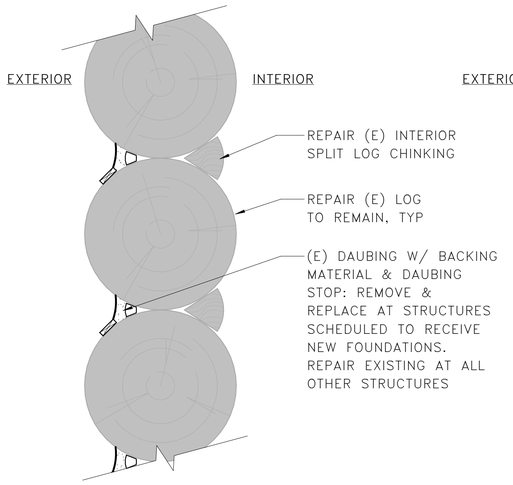

EXT L1 – EXTERIOR LOG WALL W/ INTERIOR SPLIT POLE CHINKING

LOCATED AT MAIN LODGE, 3 BAY GARAGE, MRS OLIVER'S CABIN, NEW CABIN. NURSE'S CABIN

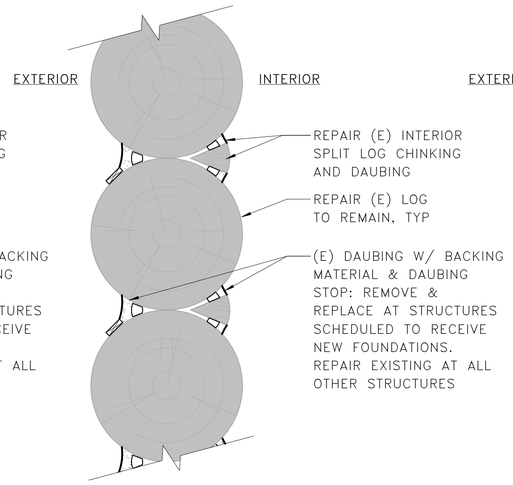

EXT L2 – EXTERIOR LOG WALL W/ INTERIOR HYBRID CHINKING

LOCATED AT GEORGES CABIN, HARRY'S CABIN, END CABIN, MIDDLE CABIN

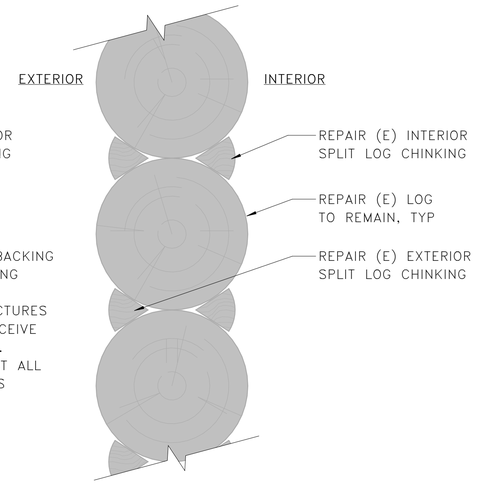

EXT L3 – EXTERIOR LOG WALL W/ EXTERIOR SPILT CHINKING

LOCATED AT RIVER CABIN, HARRY'S CABIN

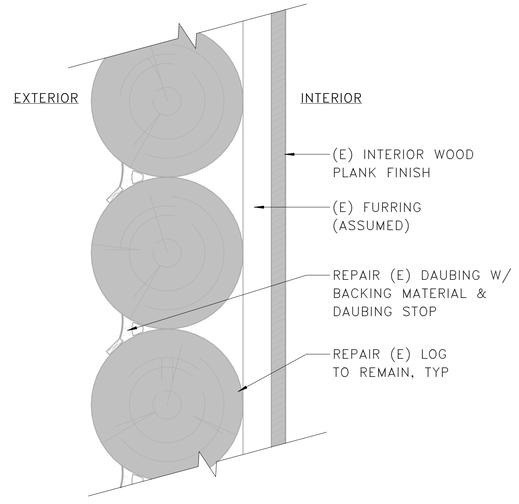

EXT L4 – EXTERIOR LOG WALL INTERIOR FINISH

LOCATED AT ICE HOUSE

1 EXTERIOR LOG WALL ASSEMBLIES (SECTION VIEW)

3" = 1'–0"

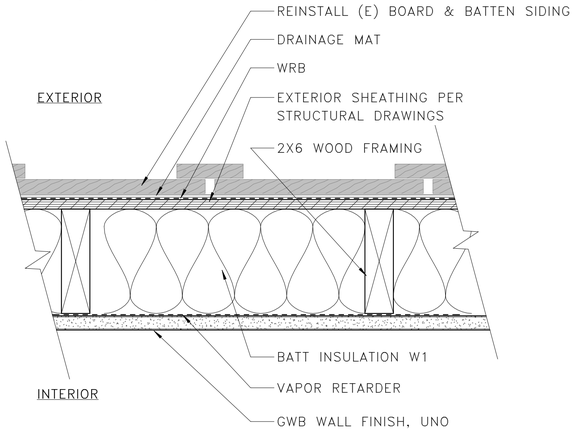

EXT F1 – EXTERIOR FRAMED WALL W/ BOARD & BATTEN SIDING

LOCATED AT NURSES CABIN

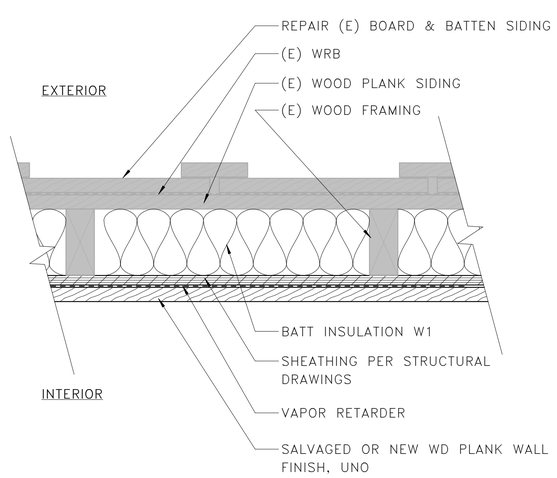

EXT F2 – EXISTING EXTERIOR FRAMED WALL W/ BOARD & BATTEN SIDING

LOCATED AT GEORGES CABIN

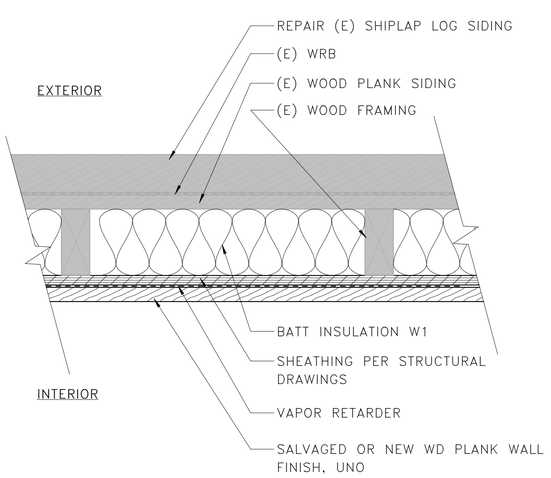

EXT F3 – EXISTING EXTERIOR FRAMED WALL W SHIP LAP LOG SIDING

LOCATED AT END CABIN, MIDDLE CABIN, MRS. OLIVER'S CABIN

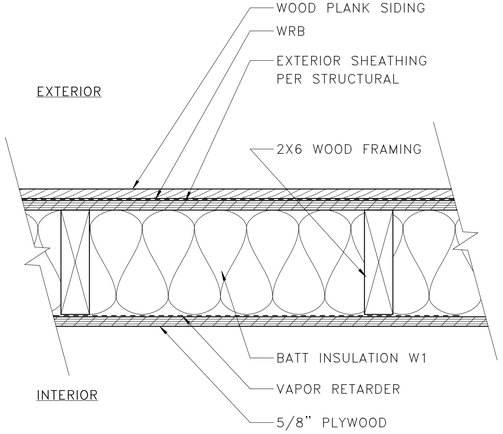

EXT F4 – EXTERIOR FRAMED WALL W/ WOOD SIDING

LOCATED AT MAIN LODGE BASEMENT

2 EXTERIOR FRAMED WALL ASSEMBLIES (PLAN VIEW)

3" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A800

TITLE OF SHEET
OVERALL – EXTERIOR WALL ASSEMBLIES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 54 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

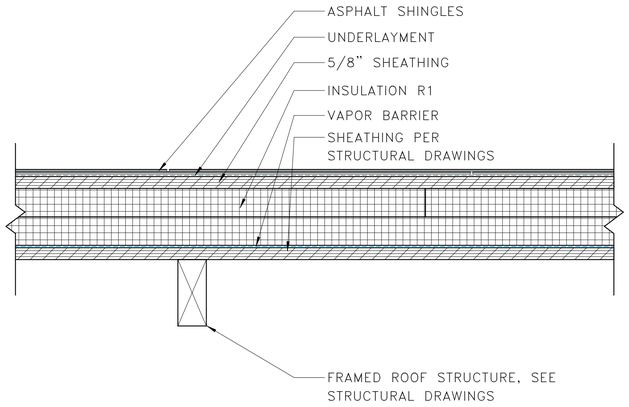

ROOF ASSEMBLY R5 – INSULATED ROOF ASSEMBLY AT FRAMED ROOF STRUCTURE

LOCATED AT NURSES CABIN

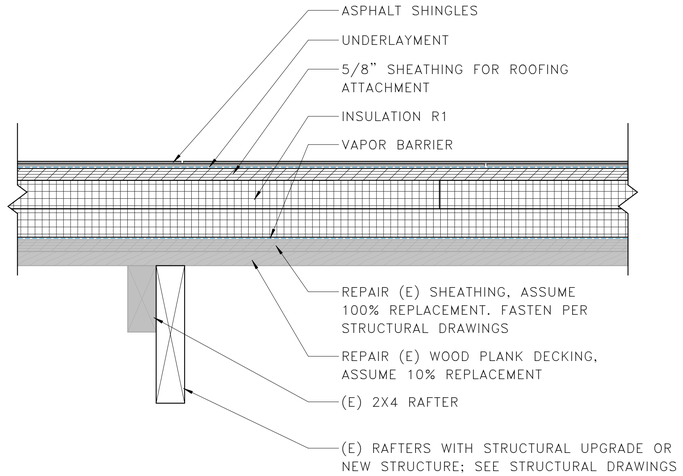

ROOF ASSEMBLY R3 – INSULATED ROOF ASSEMBLY AT (E) FRAMED ROOF STRUCTURE

LOCATED AT NURSES CABIN, END CABIN BATHROOM ADDITION,
MIDDLE CABIN BATHROOM ADDITION, MRS OLIVER'S CABIN BATHROOM ADDITION

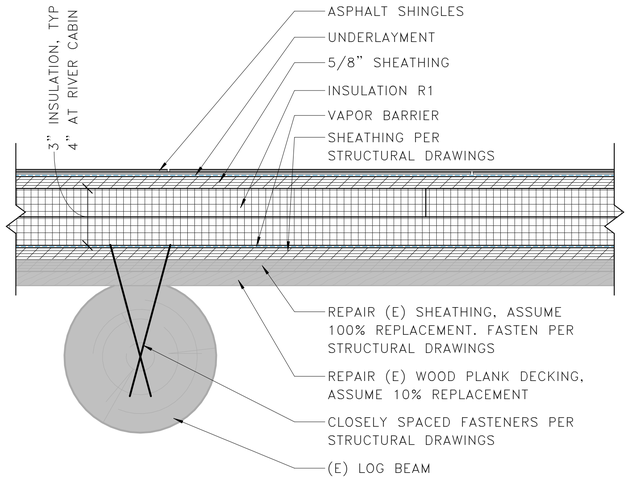

ROOF ASSEMBLY R1 – TYPICAL INSULATED ROOF ASSEMBLY AT (E) LOG STRUCTURE

LOCATED AT MAIN LODGE, RIVER CABIN, NURSES CABIN, GEORGES CABIN,
HARRY'S CABIN, END CABIN PORCH, MIDDLE CABIN PORCH,
MRS OLIVER'S CABIN PORCH, NEW CABIN

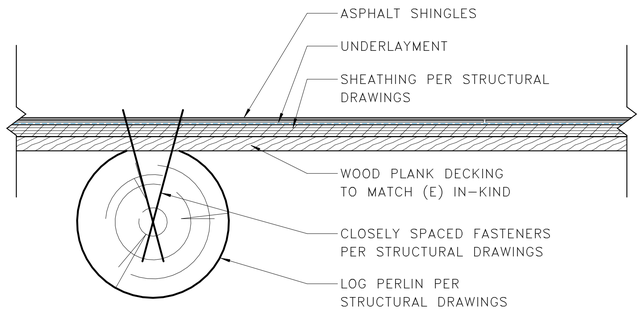

ROOF ASSEMBLY R6 – TYPICAL UNINSULATED ROOF ASSEMBLY AT LOG STRUCTURE

LOCATED AT 3-BAY GARAGE

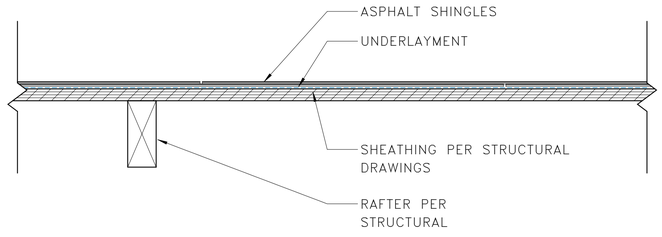

ROOF ASSEMBLY R4 – UN-INSULATED ROOF ASSEMBLY AT FRAMED ROOF STRUCTURE

LOCATED AT MOUSE HOUSE

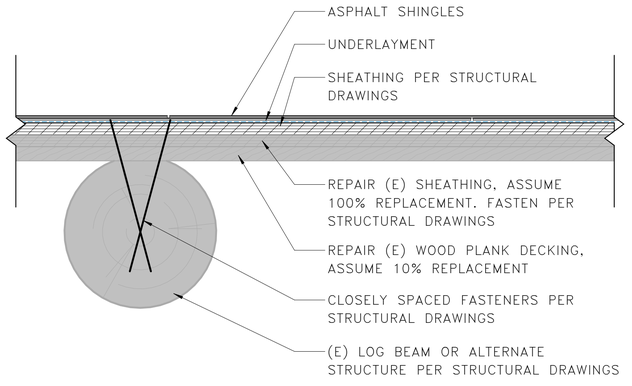

ROOF ASSEMBLY R2 – TYPICAL UNINSULATED ROOF ASSEMBLY AT (E) LOG STRUCTURE

MAIN LODGE AWNINGS, RIVER CABIN AWNINGS & PORCH, ICE HOUSE,
NEW CABIN PORCH

1 ROOF ASSEMBLIES

3" = 1'-0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. REED
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A801

TITLE OF SHEET
OVERALL – ROOF ASSEMBLIES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 55 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

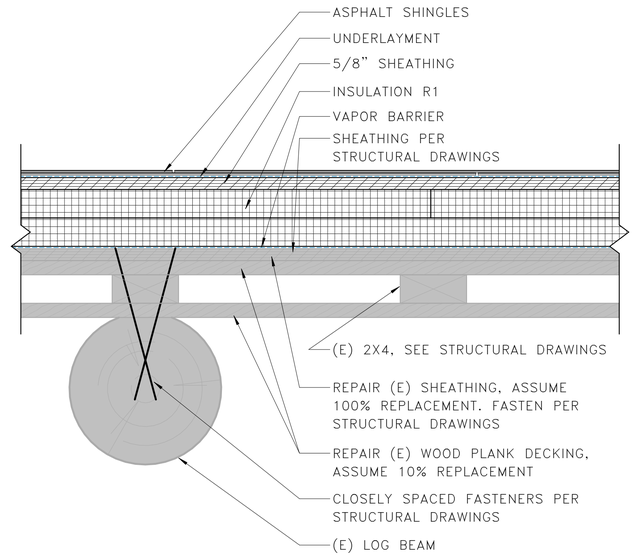

ROOF ASSEMBLY R7 – TYPICAL INSULATED ROOF ASSEMBLY AT (E) LOG STRUCTURE

LOCATED AT NURSES CABIN, END CABIN, MIDDLE CABIN, MRS OLIVER'S CABIN

1 ROOF ASSEMBLIES, CONTINUTED

3" = 1'-0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A802

TITLE OF SHEET
OVERALL – ROOF ASSEMBLIES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 56 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

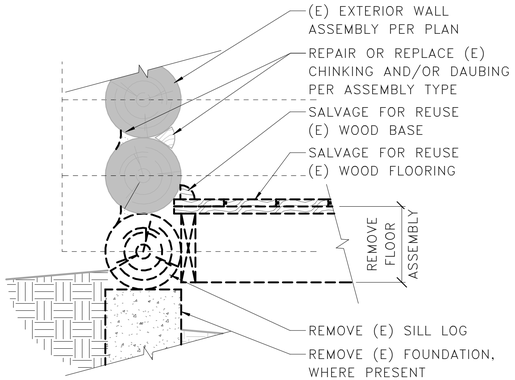

TYPICAL DEMOLITION DETAIL AT BASE OF LOG WALL

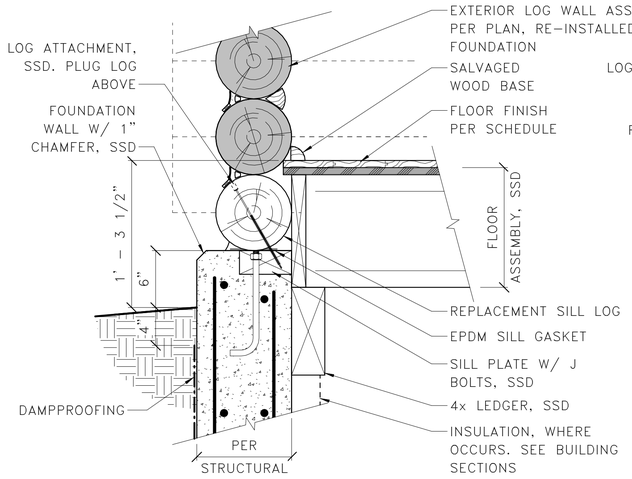

TYPICAL FULL LOG DETAIL AT BASE OF LOG WALL

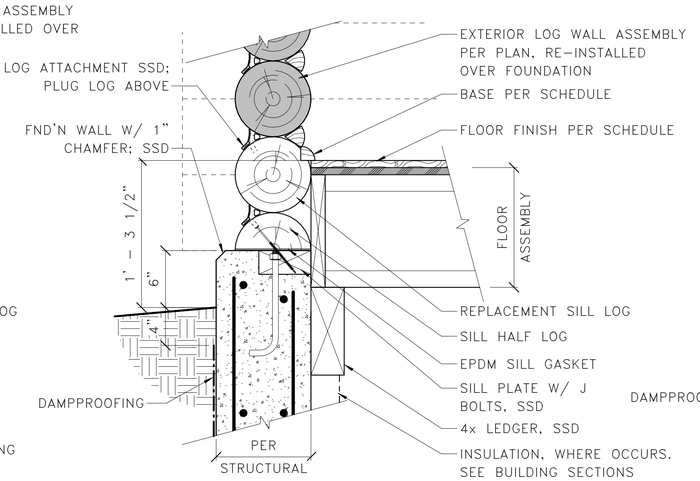

TYPICAL HALF LOG DETAIL AT BASE OF LOG WALL

NOTE: HALF SILL LOG DOES NOT EXIST AT MANY EXISTING STRUCTURES. HALF SILL LOGS TO BE USED ALL ALL LOG STRUCTURES WITH NEW FOUNDATIONS TO MAINTAIN CONSISTANT FOUNDATION HEIGHT.

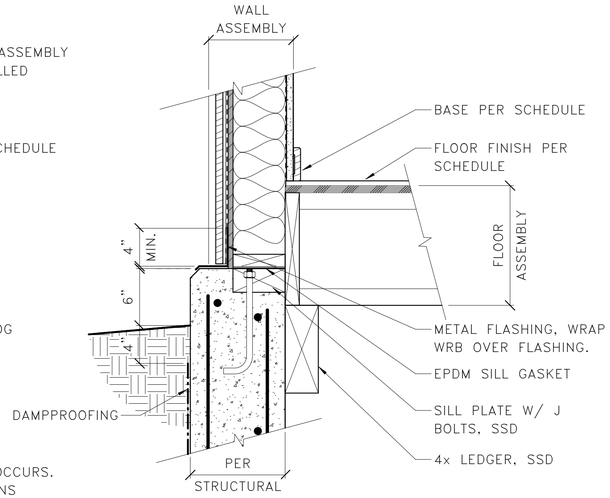

TYPICAL DETAIL AT BASE OF FRAMED WALL

1 000 – TYPICAL BASE OF WALL AT NEW FOUNDATIONS

1 1/2" = 1'–0"

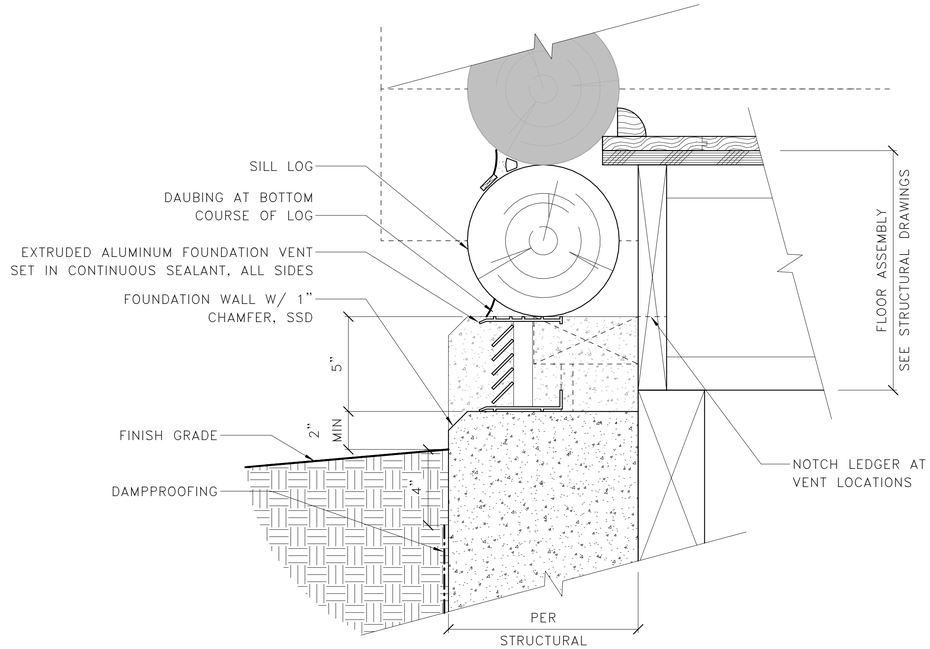

2 000 – TYPICAL FOUNDATION VENT DETAIL

3" = 1'–0"

SCALE (F) 4" 0 4" 8" SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4" SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYRES C-3530 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO. 000 A803

TITLE OF SHEET
OVERALL – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 57 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

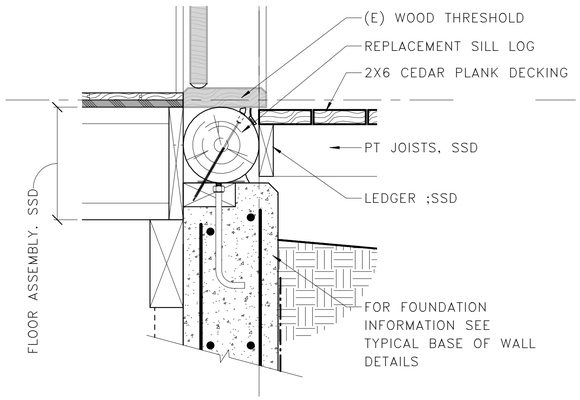

2 000 – TYPICAL PORCH TRANSITION DETAIL

1 1/2" = 1'-0"

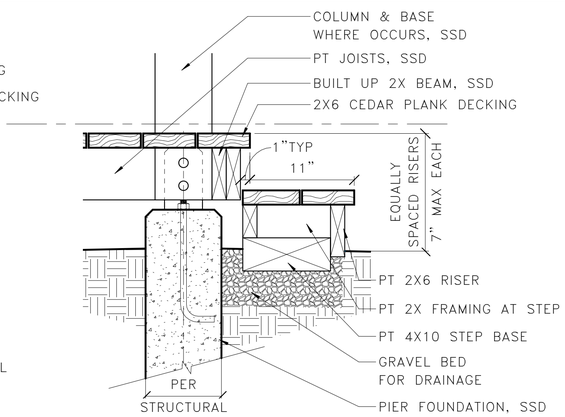

1 000 – TYPICAL PORCH STEP DETAIL

1 1/2" = 1'-0"

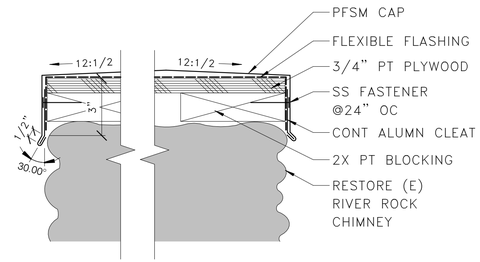

4 000 – TYPICAL CHIMNEY CAP

3" = 1'-0"

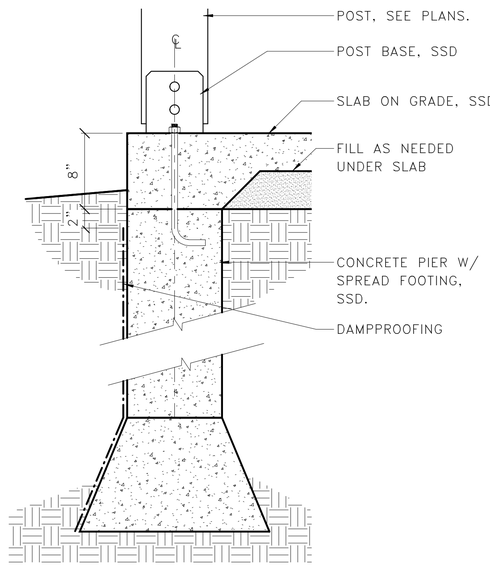

3 000 – TYP SPREAD FOOTING AT S.O.G.

1 1/2" = 1'-0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KYES C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A804

TITLE OF SHEET
OVERALL – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 58 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\Collaboration Cache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

GENERAL NOTES

1. SEE 000 A801–802 FOR ROOF ASSEMBLIES.

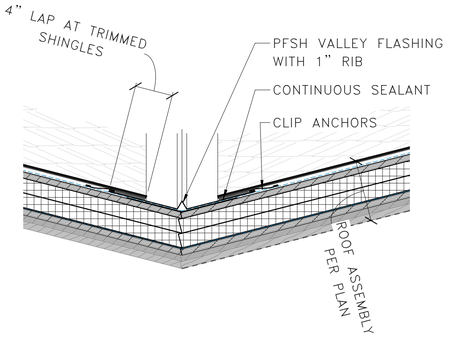

3 000 – TYPICAL VALLEY

1 1/2" = 1'–0"

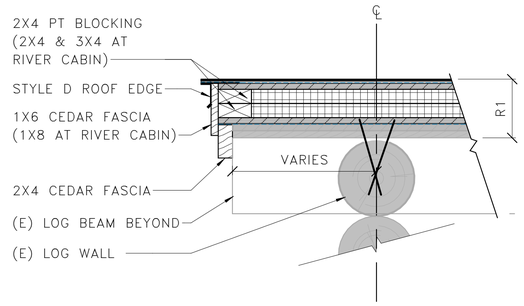

2 000 – TYPICAL RAKE @ R1

1 1/2" = 1'–0"

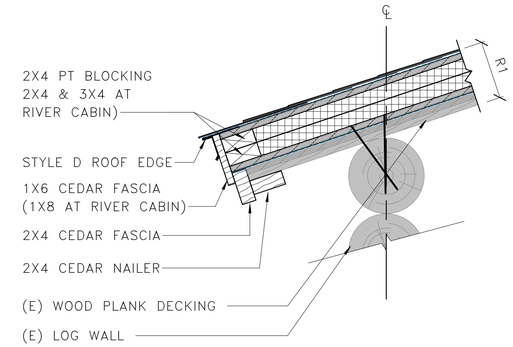

1 000 – TYPICAL EAVE @ R1

1 1/2" = 1'–0"

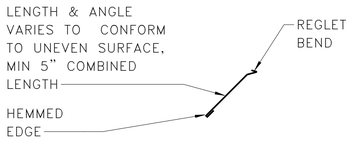

PFSM COUNTER–FLASHING



PFSH ROOF/WALL TRANSITION

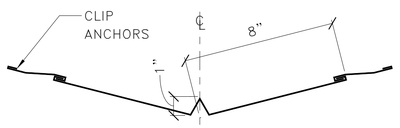

PFSH VALLEY FLASHING



PFSM STYLE D ROOF EDGE

11 000 – ROOF FLASHING PROFILES

3" = 1'–0"

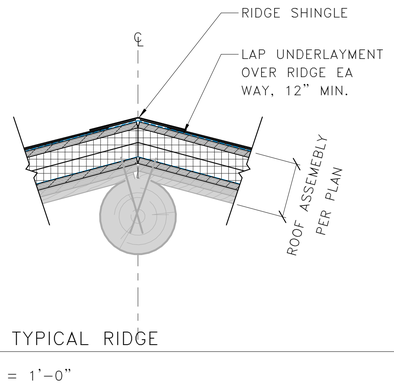

7 000 – TYPICAL RIDGE

1 1/2" = 1'–0"

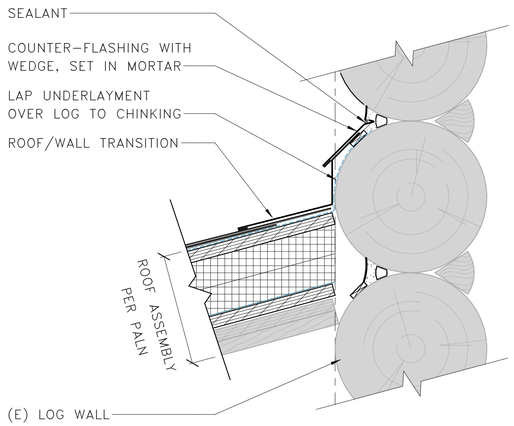

10 000 – TYPICAL ROOF TO WALL FLASHING

3" = 1'–0"

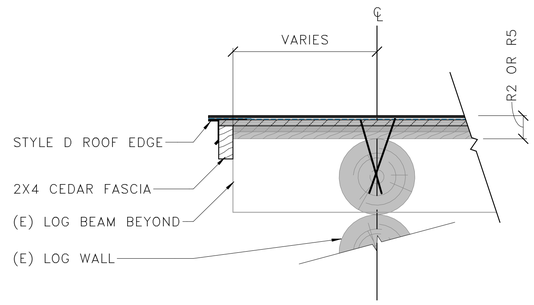

6 000 – TYPICAL RAKE @ R2

1 1/2" = 1'–0"

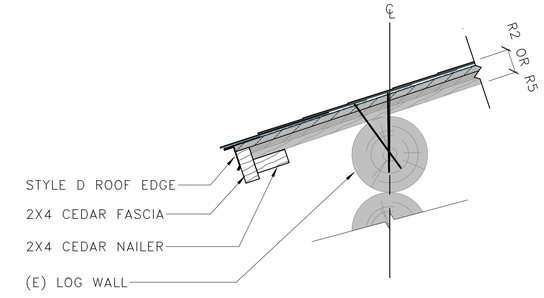

5 000 – TYPICAL EAVE @ R2 & R5

1 1/2" = 1'–0"

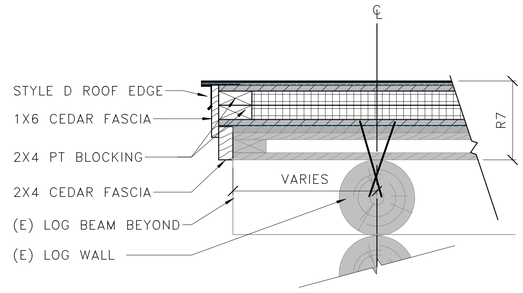

9 000 – TYPICAL RAKE @ R7

1 1/2" = 1'–0"

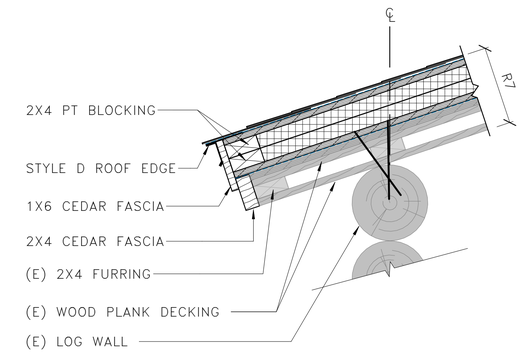

8 000 – TYPICAL EAVE @ R7

1 1/2" = 1'–0"

SCALE E 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM H. LYNES C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A805

TITLE OF SHEET
OVERALL – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 59 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

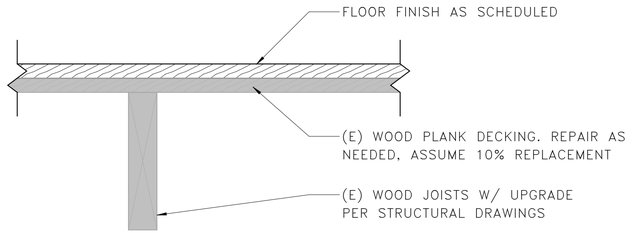

FLOOR ASSEMBLY F1 – TYPICAL WOOD FLOOR ASSEMBLY WHERE EXISTING STRUCTURE REMAINS

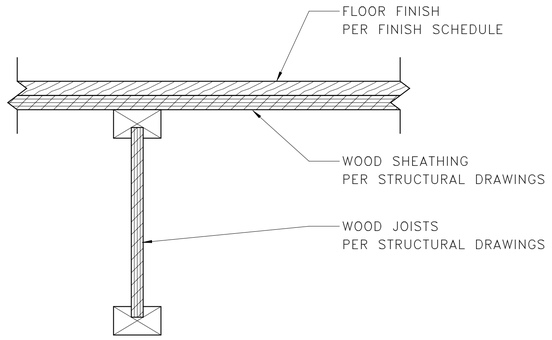

FLOOR ASSEMBLY F2 – TYPICAL WOOD FLOOR ASSEMBLY WHERE EXISTING STRUCTURE IS REPLACED

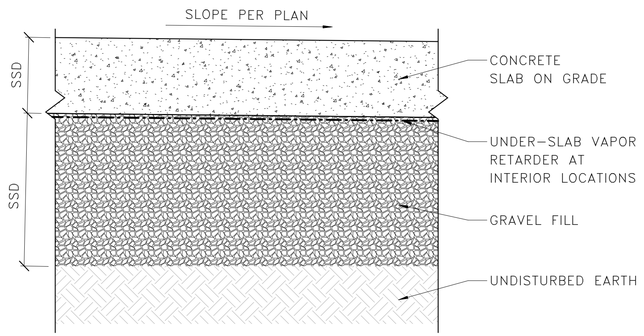

FLOOR ASSEMBLY F3 – CONCRETE SLAB–ON–GRADE

1 FLOOR ASSEMBLIES

3" = 1'–0"

INTERIOR PARTITION TYPES

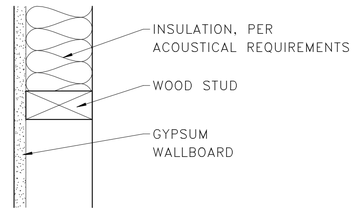

B1

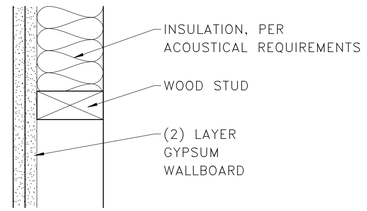

B2

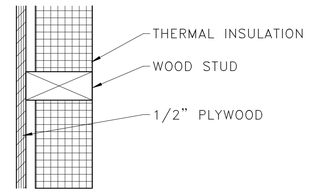

B3

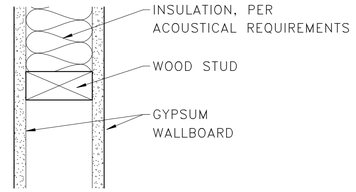

C2 TYP INT PARTITION TYPE

ALL INTERIOR PARTITIONS TO BE TYPE C2 UNLESS NOTED OTHERWISE

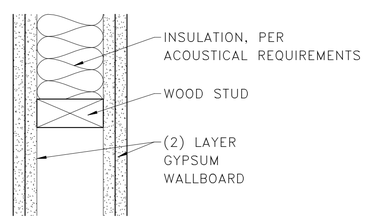

C4

GENERAL NOTES

1. NOT ALL WALL CONFIGURATIONS ON THIS SHEET MAY BE PRESENT IN THE PROJECT. COORDINATE WALLS TAGGED IN DRAWINGS WITH CONFIGURATIONS SHOWN ON THIS SHEET.
2. WOOD STUDS – DOUGLAS FIR NO. 2, UNLESS OTHERWISE NOTED.
3. WOOD STUD SPACING AT 16" OC UON, OR AS REQUIRED BY FIRE RATING, WHICHEVER IS STRICTEST.
4. 5/8" GYPSUM WALLBOARD, UON.
5. TYPE 'X' GYPSUM WALLBOARD ON RATED PARTITIONS, UON.
6. WALLS TO BE FULLY BRACED (SHEATHED) TO ABOVE FINISH CEILING, UON. 8'–0" MAX SPAN ABOVE BRACING.
7. MECHANICAL BRACING SHALL BE AT MAX SPACING INDICATED OR SHEATHING BOTH SIDES OF WALL.
8. ATTACH WALLS TO FLOOR OR ROOF/FLOOR STRUCTURE ABOVE, UON.
9. MAINTAIN FIRE RATING AROUND STRUCTURAL ELEMENTS AND BEHIND AND AROUND FIRE EXTINGUISHER CABINETS, ELECTRICAL CABINETS, AND OTHER RECESSESS.
10. PERIMETER PENETRATIONS OF SOUND–RATED PARTITIONS SHALL BE ACOUSTICALLY SEALED. ACHIEVE INDICATED STC RATING WHEN NOTED.
11. PARTITIONS AND CEILINGS AT ALL GRAB BARS, PLUMBING FIXTURES, WALL CABINETS, HARDWARE, AND ANY WALL MOUNTED ACCESSORIES REQUIRING SUPPORT SHALL HAVE SOLID WOOD BLOCKING OR APPROVED SHEET METAL BACKING TO WALL FRAMING.
12. ALL WOOD STUDS IN CONTACT WITH CONCRETE OR CMU SHALL BE PRESSURE TREATED.
13. FIRE BLOCKING SHALL BE IN ACCORDANCE WITH CURRENT BUILDING CODE.
14. FINISH MATERIALS SUCH AS TILE, WALL PANELING, TRIM, BASE, ETC. ARE NOT SHOWN AS AN INTEGRAL PART OF PARTITION TYPE. REFER TO FINISH PLAN AND INTERIOR ELEVATIONS FOR FINISH MATERIALS INSTALLED ON PARTITIONS.

INTERIOR PARTITION TYPE TAG

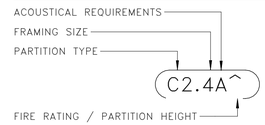

STUD FRAMING SIZE

ID	SIZE
2	2 x 4 NOMINAL ON FLAT
4	2 x 4 NOMINAL
6	2 x 6 NOMINAL
8	2 x 8 NOMINAL

ACOUSTICAL REQUIREMENTS

ID	REQUIREMENT
N	NO INSULATION
A	UNFACED SOUND ATTENUATION BATT, FULL HEIGHT OF CAVITY, ALL STUD BAYS

FIRE RATING / PARTITION HEIGHT DESIGNATION

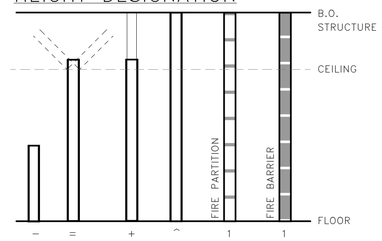

ID	REQUIREMENT
–	PARTIAL HEIGHT WALL.
=	TO UNDERSIDE OF CEILING BRACE FRAMING AS REQ'D.
+	EXTEND STUDS TO B.O. STRUCTURE ABOVE EXTEND GYPSUM WALLBOARD ABOVE ADJACENT CEILING 6" MIN.
^	EXTEND STUDS AND GYPSUM WALLBOARD TO B.O. STRUCTURE ABOVE.
1	1–HOUR FIRE RATED ASSEMBLY.

SCALE (F) 4" 0" 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO. 000 A900

TITLE OF SHEET: OVERALL – FLOOR & INT. PARTITION ASSEMBLIES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 60 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

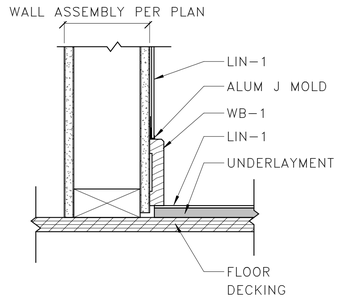

3 000 – TYP BASE OF WALL AT LIN-1

3" = 1'-0"

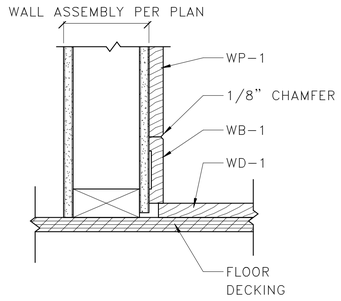

2 000 – TYP BASE OF WALL AT WP-1

3" = 1'-0"

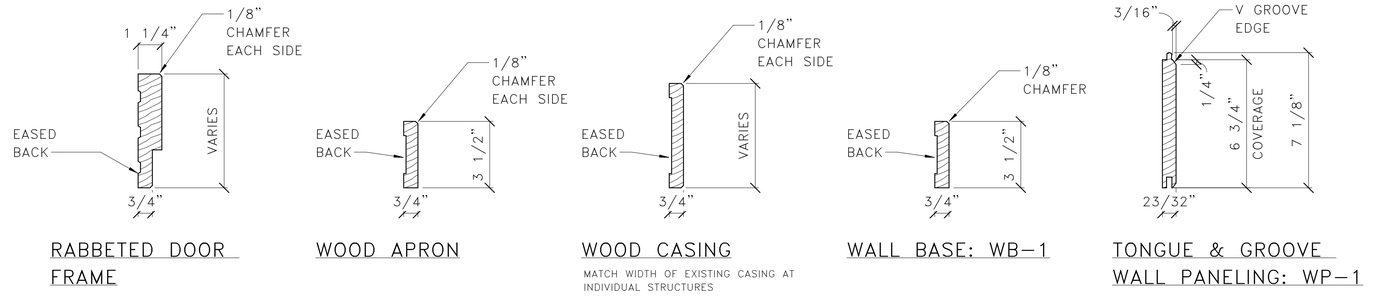

1 000 – TYPICAL INTERIOR WOOD TRIM PROFILES

3" = 1'-0"

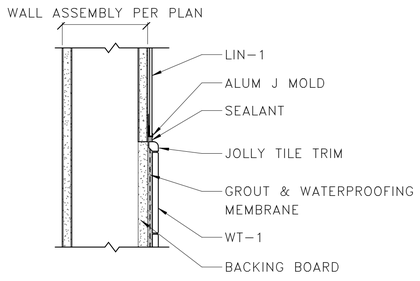

8 000 – TYP TRANSITION AT WT-1 / LIN-1

3" = 1'-0"

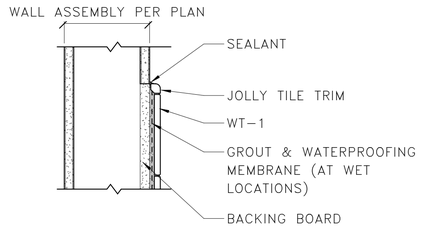

7 000 – TYP TERMINATION AT WT-1

3" = 1'-0"

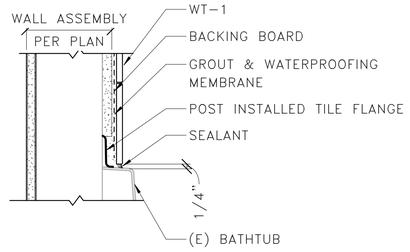

6 000 – TYP TUB BASE DETAIL

3" = 1'-0"

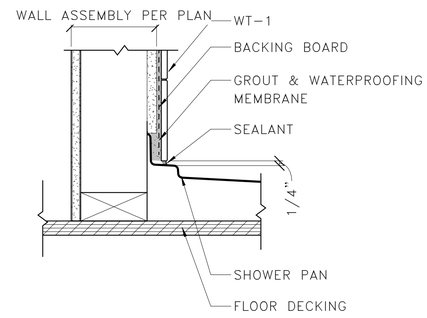

5 000 – TYP SHOWER BASE DETAIL

3" = 1'-0"

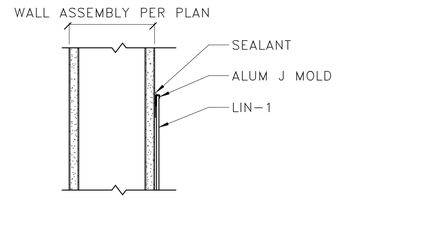

4 000 – TYP TERMINATION AT LIN-1

3" = 1'-0"

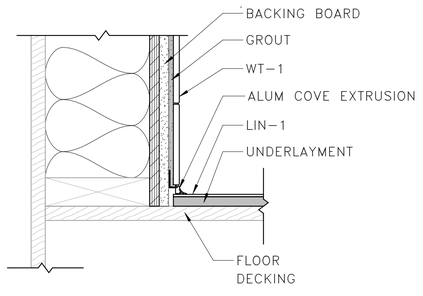

12 000 – BASE OF WALL AT WT-1

3" = 1'-0"

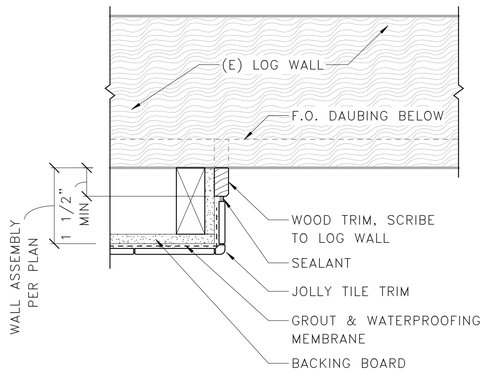

11 000 – TRANSITION AT WT-1 / (E) LOG

3" = 1'-0"

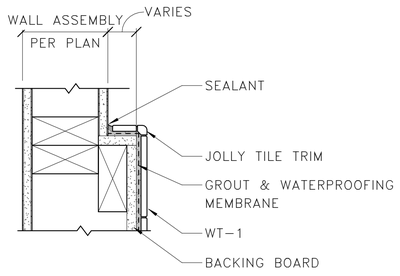

10 000 – TYP STEP AT WT-1

3" = 1'-0"

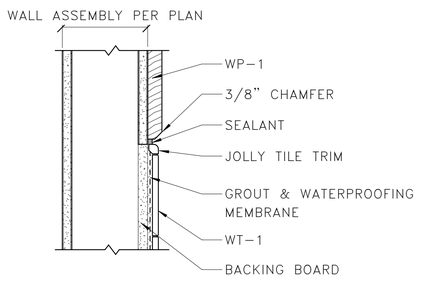

9 000 – TYP TRANSITION AT WT-1 / WP-1

3" = 1'-0"

SCALE (F) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVEY STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

000

A901

TITLE OF SHEET

OVERALL – TYPICAL INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 / 193826
PMIS/PKG NO.	237343
SHEET	61 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

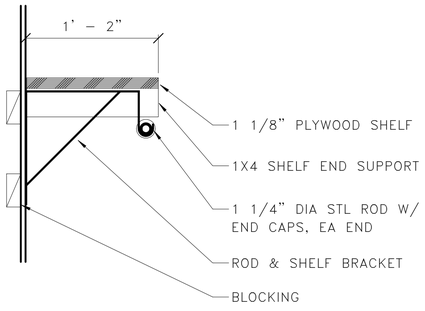

3 000 – CLOSET ROD & SHELF

1 1/2" = 1'–0"

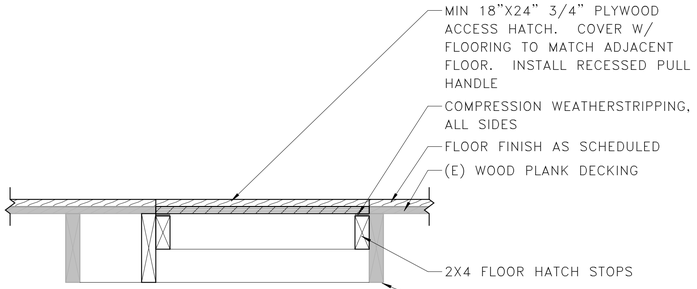

AT FLOOR ASSEMBLY F1

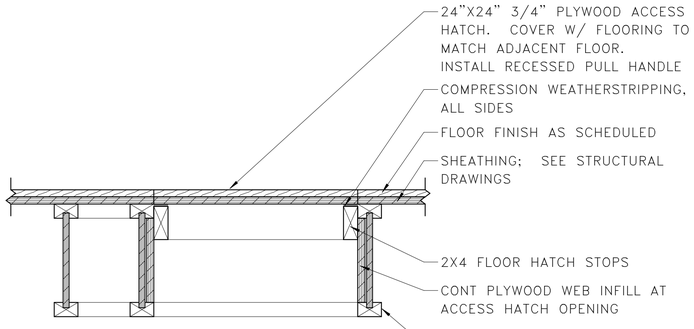

AT FLOOR ASSEMBLY F2

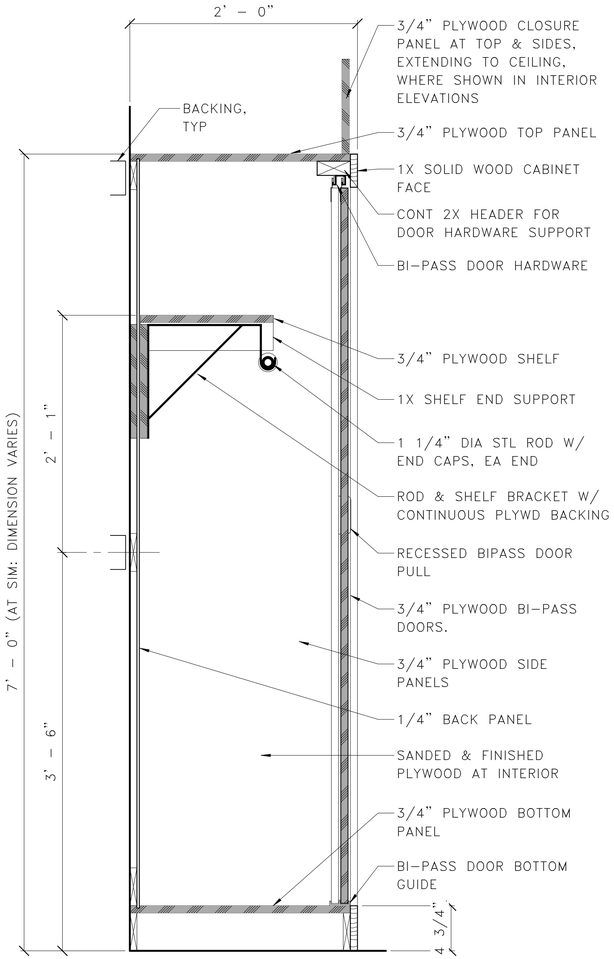

1 000 – WARDROBE CASEWORK

1 1/2" = 1'–0"

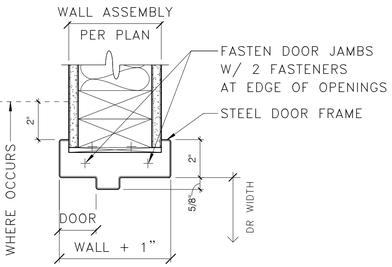

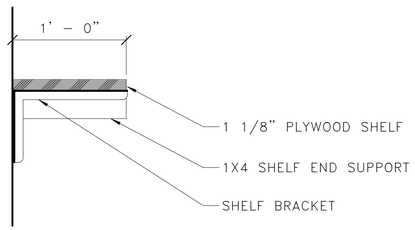

5 000 – MTL DOOR JAMB / HEAD

3" = 1'–0"

4 000 – TYPICAL WOOD SHELF

1 1/2" = 1'–0"

2 000 – TYPICAL CRAWLSPACE HATCH DETAIL

1 1/2" = 1'–0"

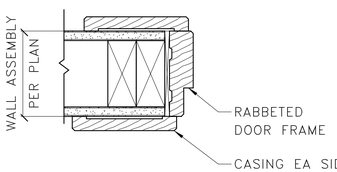

8 000 – TYPICAL INT WD DOOR JAMB

3" = 1'–0"

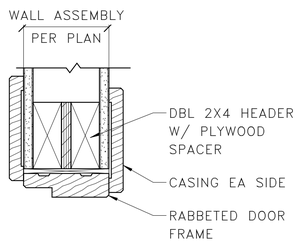

9 000 – TYPICAL INT WD DOOR HEAD

3" = 1'–0"

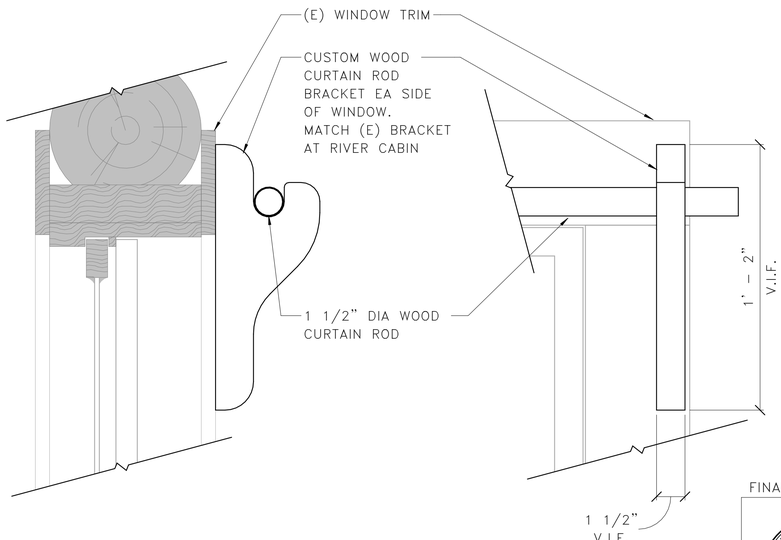

7 000 – WOOD CURTAIN ROD BRACKET

3" = 1'–0"

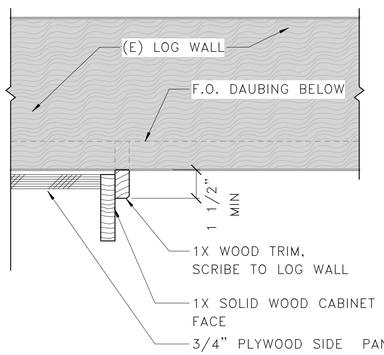

6 000 – TRANSITION AT CABINET / (E) LOG

3" = 1'–0"

SCALE (E) 8" 0 8" 1'–4"
SCALE OF FEET

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A902

TITLE OF SHEET
OVERALL – TYPICAL INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 62 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

DOOR TYPE SCHEDULE



DR-1
5-PANEL
WD DOOR



DR-2
5-PANEL WD SWING
DOOR W/ GLAZING

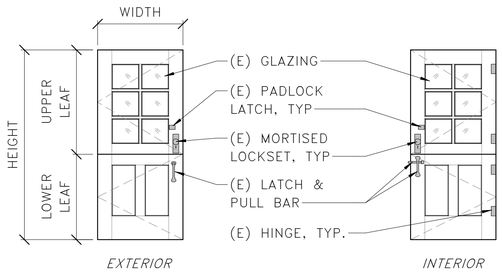

DR-3
2-PANEL DUTCH WD
DOOR W/ GLAZING

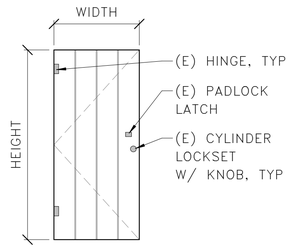

DR-4
4-BOARD WD DOOR

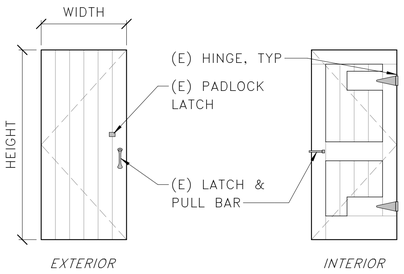

DR-5
6-BOARD WD DOOR

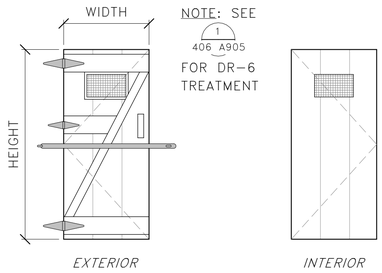

DR-6
WD BOARD DOOR
W/ MESH SCREEN

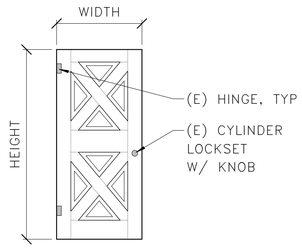

DR-7
X-PANEL WD DOOR

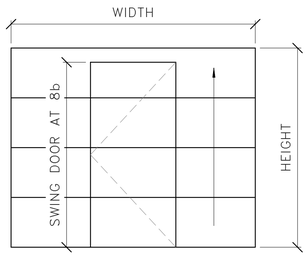

DR-8
8a: SECTIONAL MTL DOOR
8b: SECTIONAL MTL DOOR W/
BUILT-IN SWING DOOR

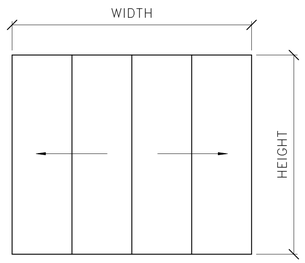

DR-9
BI-FOLD WD DOOR



DR-10
FLUSH DOOR
(WD OR MTL)

SCREEN DOOR TYPE SCHEDULE

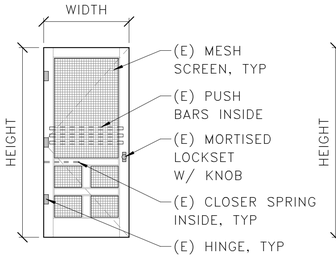

SDR-1
WD SCREEN DOOR
TYPE 1

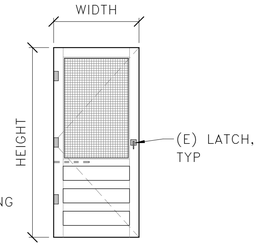

SDR-2
WD SCREEN DOOR
TYPE 2



SDR-3
WD SCREEN DOOR
TYPE 3

DOOR FRAME TYPE SCHEDULE

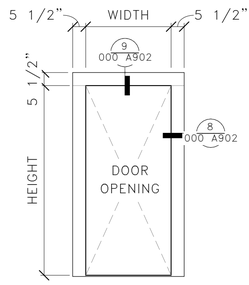

DRF-1
NARROW WD FRAME

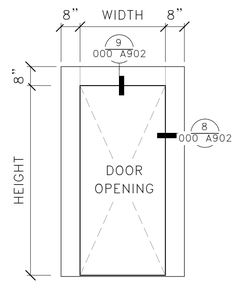

DRF-2
WIDE WD FRAME

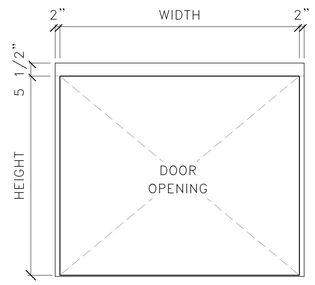

DRF-3
SECTIONAL WD FRAME

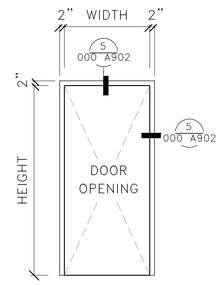

DRF-4
MTL FRAME

DOOR HARDWARE NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SECTION 087100 FOR ADDITIONAL HARDWARE INFORMATION.
3. PROVIDE CYLINDER LOCKSETS WITH LEVERS AT ALL EXTERIOR DOORS AND AT ALL DOORS ON AN ACCESSIBLE ROUTE, EXCEPT AT DR-6.
4. RESTORE ALL (E) HARDWARE TO REMAIN. ASSUME 25% IN-KIND HINGE REPLACEMENT.
5. 100% IN-KIND SPRING CLOSER REPLACEMENT AT SCREEN DOORS.
6. REMOVE ALL (E) PADLOCK LATCHES, EXCEPT AT DR-6.
7. AT DR-3, MODIFY BOTTOM LEAF TO LATCH TO UPPER LEAF INSTEAD OF FRAME.
8. PATCH AND REPAIR WOOD AT ALL AREAS OF HARDWARE REMOVAL.

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/01/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
000
A903

TITLE OF SHEET
OVERALL – DOOR TYPES SCHEDULE

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 63 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

SIGN TYPE H2

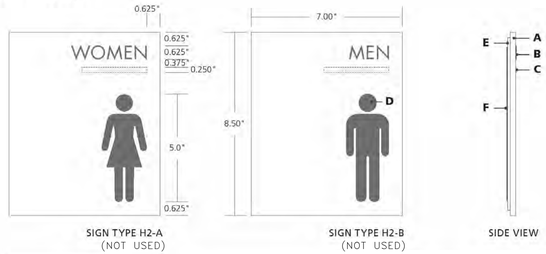

SIGN TYPE H2-A
(NOT USED)

SIGN TYPE H2-B
(NOT USED)

SIDE VIEW

SIGN TYPE H2-C

A 0.25" THICK CLEAR NON-GLARE ACRYLIC, BACK-PAINTED. RETURNS ARE EITHER (A) PAINTED, (B) SANDED, (C) POLISHED.

B ROWMARK® LETTERS INSET INTO ACRYLIC PANEL AND RAISED 0.03125" ABOVE ACRYLIC PANEL. PANEL IS ROUTED TO ACCEPT EACH INDIVIDUAL CHARACTER. EACH CHARACTER IS ADHERED INTO INSET.

C CLEAR BRAILLE BEADS ARE INSET INTO ACRYLIC PANEL BY 0.03125".

D SYMBOLS ARE SILKSCREENED TO NO. 1 SURFACE OF ACRYLIC PANEL.

E 0.125" THICK CLEAR ACRYLIC OFFSET PANEL IS CUT 0.25" SMALLER THAN SIGN PANEL ALL AROUND.

F 3M VHB MOUNTING TAPE ADHESIVE IS APPLIED TO BACK-SIDE OF OFFSET PANEL IN VERTICAL STRIPS.

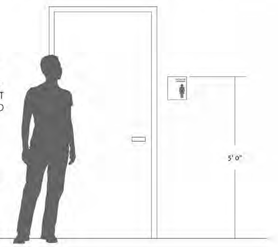

3 SIGN TYPE H2 – RESTROOM SIGNAGE

SIGN TYPE F1

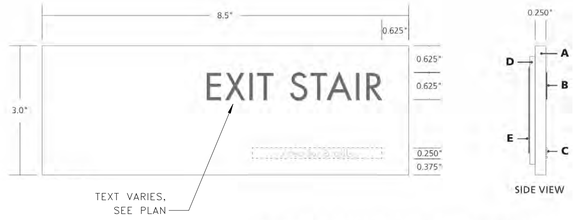

SIDE VIEW

A 0.25" THICK CLEAR NON-GLARE ACRYLIC, BACK-PAINTED. RETURNS ARE EITHER (A) PAINTED, (B) SANDED, (C) POLISHED.

B ROWMARK® LETTERS/NUMBERS INSET INTO ACRYLIC PANEL AND RAISED 0.03125" ABOVE ACRYLIC PANEL. PANEL IS ROUTED TO ACCEPT EACH INDIVIDUAL CHARACTER. EACH CHARACTER IS ADHERED INTO INSET.

C CLEAR BRAILLE BEADS ARE INSET INTO ACRYLIC PANEL BY 0.03125".

D 0.125" THICK CLEAR ACRYLIC OFFSET PANEL IS CUT 0.25" SMALLER THAN SIGN PANEL ALL AROUND.

E 3M VHB MOUNTING TAPE ADHESIVE IS APPLIED TO BACKSIDE OF OFFSET PANEL IN VERTICAL STRIPS.
PROVIDE FIELD–CUT WOOD BACKING AT LOG WALL WHERE NEEDED.

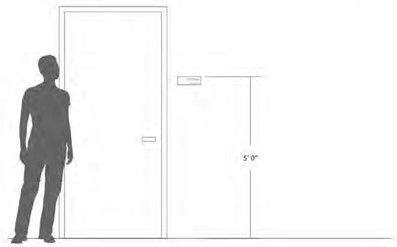

2 SIGN TYPE F1 – ROOM OR EXIT SIGNAGE

SIGN TYPE D3

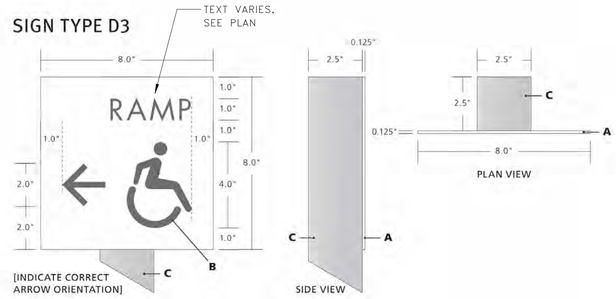

A 0.125" THICK ALUMINUM, FACE AND RETURNS ARE PAINTED.

B ALL GRAPHICS ARE SILKSCREENED ON NO.1 SURFACE OF ALUMINUM PANEL.

C 2.5" X 2.5" SQUARE EXTRUDED ALUMINUM TUBE POST. TOP OF POST IS COVERED WITH A WELDED 0.125" X 2.5" X 2.5" ALUMINUM PLATE. SIGN PANEL IS ADHERED TO FACE OF POST.

NOTE: SIGN TYPE D3 TO BE OFOI.

1 SIGN TYPE D3 – OUTDOOR DIRECTION SIGNAGE

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. IVEY
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
000
A904

TITLE OF SHEET
OVERALL – SIGNAGE TYPES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 64 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

STRUCTURAL – GENERAL NOTES

GENERAL REQUIREMENTS

GOVERNING CODE: THE DESIGN AND CONSTRUCTION OF THIS PROJECT IS GOVERNED BY THE "INTERNATIONAL BUILDING CODE (IBC)," 2024 EDITION, HEREAFTER REFERRED TO AS THE IBC AND BY THE "INTERNATIONAL EXISTING BUILDING CODE (IEBC)," 2024 EDITION, AS ADOPTED AND MODIFIED BY THE DENVER SERVICE CENTER (DSC) UNDERSTOOD TO BE THE AUTHORITY HAVING JURISDICTION (AHJ).

REFERENCE STANDARDS: REFER TO CHAPTER 35 OF THE 2021 IBC. WHERE OTHER STANDARDS ARE NOTED IN THE DRAWINGS, USE THE LATEST EDITION OF THE STANDARD UNLESS A SPECIFIC DATE IS INDICATED. REFERENCE TO A SPECIFIC SECTION IN A CODE DOES NOT RELIEVE THE CONTRACTOR FROM COMPLIANCE WITH THE ENTIRE STANDARD.

DEFINITIONS: THE FOLLOWING DEFINITIONS COVER THE MEANINGS OF CERTAIN TERMS USED IN THESE NOTES:

- "ARCHITECT/ENGINEER" – THE ARCHITECT OF RECORD AND THE STRUCTURAL ENGINEER OF RECORD.
- "STRUCTURAL ENGINEER OF RECORD" (SER) – THE STRUCTURAL ENGINEER WHO IS LICENSED TO STAMP AND SIGN THE STRUCTURAL DOCUMENTS FOR THE PROJECT. THE SER IS RESPONSIBLE FOR THE DESIGN OF THE PRIMARY STRUCTURAL SYSTEM.
- "SUBMIT FOR REVIEW" – SUBMIT TO THE ARCHITECT/SER FOR REVIEW PRIOR TO FABRICATION OR CONSTRUCTION.
- "PER PLAN" – INDICATES REFERENCES TO THE STRUCTURAL PLANS, ELEVATIONS, AND STRUCTURAL GENERAL NOTES.
- "SEISMIC FORCE RESISTING SYSTEM" (SFRS) – A RECOGNIZED STRUCTURAL SYSTEM OF COMPONENTS (BEAMS, BRACES, DRAGS, STRUTS, COLLECTORS, DIAPHRAGMS, COLUMNS, WALLS, ETC.) OF THE PRIMARY STRUCTURE THAT ARE SPECIALLY DESIGNED AND PROPORTIONED TO RESIST EARTHQUAKE–INDUCED GROUND MOTIONS AND MAINTAIN STABILITY OF THE STRUCTURE. FABRICATION AND INSTALLATION OF COMPONENTS DESIGNATED AS PART OF THE SFRS REQUIRE THE GENERAL CONTRACTOR, SUBCONTRACTOR, OR SUPPLIER WHO IS RESPONSIBLE FOR ANY PORTION OF SFRS FABRICATION OR INSTALLATION TO COMPLY WITH SPECIAL REQUIREMENTS (INCLUDING, BUT NOT LIMITED TO, MATERIAL CONTROL, COMPLIANCE CERTIFICATIONS, PERSONNEL QUALIFICATIONS, DOCUMENTATION, REPORTING REQUIREMENTS, ETC.) AND TO PROVIDE THE REQUIRED QUALITY CONTROL INCLUDING THE REQUIRED COORDINATION OF SPECIAL INSPECTIONS (QUALITY ASSURANCE – QA). SPECIAL PROVISIONS APPLY TO ANY MEMBER DESIGNATED AS PART OF THE SFRS. REFER TO PLANS, ELEVATIONS, DETAILS, DESIGN CRITERIA, AND SYMBOLS AND LEGENDS FOR APPLICABLE MEMBERS AND CONNECTIONS.

SPECIFICATIONS: REFER TO THE PROJECT SPECIFICATIONS ISSUED AS PART OF THE CONTRACT DOCUMENTS FOR INFORMATION SUPPLEMENTAL TO THESE DRAWINGS.

OTHER DRAWINGS: REFER TO THE ARCHITECTURAL, MECHANICAL, ELECTRICAL, CIVIL AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION INCLUDING, BUT NOT LIMITED TO, DIMENSIONS, ELEVATIONS, SLOPES, DOOR AND WINDOW OPENINGS, NON–BEARING WALLS, STAIRS, FINISHES, DRAINS, WATERPROOFING, RAILINGS, AND OTHER NON–STRUCTURAL ITEMS.

STRUCTURAL DETAILS: THE STRUCTURAL DRAWINGS ARE INTENDED TO SHOW THE GENERAL CHARACTER AND EXTENT OF THE PROJECT AND ARE NOT INTENDED TO SHOW ALL DETAILS OF THE WORK. USE ENTIRE DETAIL SHEETS AND SPECIFIC DETAILS REFERENCED IN THE PLANS AS "TYPICAL" WHEREVER THEY APPLY. SIMILARLY, USE DETAILS ON ENTIRE SHEETS WITH "TYPICAL" IN THE NAME WHEREVER THEY APPLY.

STRUCTURAL RESPONSIBILITIES: THE SER IS RESPONSIBLE FOR THE STRENGTH AND STABILITY OF THE PRIMARY STRUCTURE IN ITS COMPLETED FORM.

COORDINATION: THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING DETAILS AND ACCURACY OF THE WORK, CONFIRMING AND CORRELATING ALL QUANTITIES AND DIMENSIONS, SELECTING FABRICATION PROCESSES, TECHNIQUES OF ASSEMBLY, AND PERFORMING WORK IN A SAFE AND SECURE MANNER.

PRE–CONSTRUCTION MEETINGS: THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING PRE–CONSTRUCTION MEETINGS PRIOR TO COMMENCING WORK. PRE–CON MEETINGS, SCHEDULED APPROXIMATELY TWO WEEKS PRIOR TO THE START OF THE RELEVANT WORK, ARE REQUIRED FOR THE FOLLOWING PHASES OF CONSTRUCTION: WOOD FRAMING. ATTENDEES FOR PRE–CONSTRUCTION MEETING ARE TO INCLUDE THE CONTRACTOR, RELEVANT SUBCONTRACTORS, FABRICATORS, INSPECTORS, ARCHITECT/SER, AND A REPRESENTATIVE OF THE AHJ WHERE REQUIRED. MEETING AGENDAS ARE TO INCLUDE REVIEW OF THE WORK SCOPE, PROJECT SCHEDULE RELEVANT TO THE WORK, CONTACT INFORMATION OF RESPONSIBLE PARTIES, INSPECTION POINTS, REVIEW OF MATERIALS AND ANY SPECIAL CASES OR ISSUES, PROCEDURES FOR CLARIFICATIONS IF REQUIRED, TESTING AND ACCEPTANCE, ETC.

MEANS, METHODS, AND SAFETY REQUIREMENTS: THE CONTRACTOR IS RESPONSIBLE FOR THE MEANS AND METHODS OF CONSTRUCTION AND ALL JOB–RELATED SAFETY STANDARDS SUCH AS OSHA AND DOSH (DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH). THE CONTRACTOR IS RESPONSIBLE FOR MEANS AND METHODS OF CONSTRUCTION RELATED TO THE INTERMEDIATE STRUCTURAL CONDITIONS (I.E., MOVEMENT OF THE STRUCTURE DUE TO MOISTURE AND THERMAL EFFECTS, CONSTRUCTION SEQUENCE, TEMPORARY BRACING, ETC.).

BRACING/SHORING DESIGN ENGINEER: THE CONTRACTOR SHALL, AT THEIR DISCRETION, EMPLOY AN SSE FOR THE DESIGN OF ANY TEMPORARY BRACING AND SHORING. SUBMIT CONSTRUCTION SEQUENCE TO ARCHITECT/ENGINEER FOR REVIEW.

TEMPORARY SHORING, BRACING: THE CONTRACTOR IS RESPONSIBLE FOR THE STRENGTH AND STABILITY OF THE STRUCTURE DURING CONSTRUCTION AND SHALL PROVIDE TEMPORARY SHORING, BRACING, AND OTHER ELEMENTS REQUIRED TO MAINTAIN STABILITY UNTIL THE STRUCTURE IS COMPLETE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO BE FAMILIAR WITH THE WORK REQUIRED IN THE CONSTRUCTION DOCUMENTS AND THE REQUIREMENTS FOR EXECUTING IT PROPERLY.

CONSTRUCTION LOADS: LOADS ON THE STRUCTURE DURING CONSTRUCTION SHALL NOT EXCEED THE DESIGN LOADS AS NOTED IN DESIGN CRITERIA AND LOADS SECTION OF THESE GENERAL NOTES OR THE CAPACITY OF PARTIALLY COMPLETED CONSTRUCTION AS DETERMINED BY THE CONTRACTOR'S SSE FOR BRACING/SHORING.

CHANGES IN LOADING: THE CONTRACTOR HAS THE RESPONSIBILITY TO NOTIFY THE SER OF ANY ARCHITECTURAL, MECHANICAL, ELECTRICAL, OR PLUMBING LOAD IMPOSED ONTO THE STRUCTURE THAT DIFFERS FROM, OR THAT IS NOT DOCUMENTED ON, THE ORIGINAL CONTRACT DOCUMENTS (ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL, OR PLUMBING DRAWINGS). PROVIDE DOCUMENTATION OF THE LOCATION, LOAD, SIZE, AND ANCHORAGE OF ALL UNDOCUMENTED LOADS IN EXCESS OF 400 LB. PROVIDE MARKED–UP STRUCTURAL PLANS INDICATING THE LOCATIONS OF ANY NEW EQUIPMENT OR LOADS. SUBMIT THESE PLANS TO THE ARCHITECT/ENGINEER FOR REVIEW PRIOR TO INSTALLATION.

NOTE PRIORITIES: PLAN AND DETAIL NOTES AND SPECIFIC LOADING DATA PROVIDED ON INDIVIDUAL PLANS AND DETAIL DRAWINGS SUPPLEMENTS INFORMATION IN THESE GENERAL NOTES.

DISCREPANCIES: IN CASE OF DISCREPANCIES BETWEEN THE GENERAL NOTES, SPECIFICATIONS, PLANS/DETAILS, OR REFERENCE STANDARDS, THE ARCHITECT/ENGINEER SHALL DETERMINE WHICH SHALL GOVERN. DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT/ENGINEER BEFORE PROCEEDING WITH THE WORK. SHOULD ANY DISCREPANCY BE FOUND IN THE CONTRACT DOCUMENTS, THE CONTRACTOR WILL BE DEEMED TO HAVE INCLUDED IN THE PRICE THE MOST EXPENSIVE WAY OF COMPLETING THE WORK UNLESS PRIOR TO THE SUBMISSION OF THE PRICE, THE CONTRACTOR ASKS FOR A DECISION FROM THE ARCHITECT AS TO WHICH SHALL GOVERN. ACCORDINGLY, ANY CONFLICT IN OR BETWEEN THE CONTRACT DOCUMENTS SHALL NOT BE A BASIS FOR ADJUSTMENT IN THE CONTRACT PRICE.

SITE VERIFICATION: THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS AT THE SITE. CONFLICTS BETWEEN THE DRAWINGS AND ACTUAL SITE CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT/ENGINEER BEFORE PROCEEDING WITH THE WORK.

ADJACENT UTILITIES: THE CONTRACTOR SHALL DETERMINE THE LOCATION OF ALL ADJACENT UNDERGROUND UTILITIES PRIOR TO EARTHWORK, FOUNDATION WORK, SHORING AND EXCAVATION. ANY UTILITY INFORMATION SHOWN ON THE DRAWINGS AND DETAILS IS APPROXIMATE AND NOT NECESSARILY COMPLETE.

ALTERNATES: ALTERNATE PRODUCTS OF SIMILAR STRENGTH, NATURE, AND FORM FOR SPECIFIED ITEMS MAY BE SUBMITTED WITH ADEQUATE TECHNICAL DOCUMENTATION (PROPER TEST REPORT, ETC.) TO THE ARCHITECT/ENGINEER FOR REVIEW. ALTERNATE MATERIALS THAT ARE SUBMITTED WITHOUT ADEQUATE TECHNICAL DOCUMENTATION OR THAT SIGNIFICANTLY DEVIATE FROM THE DESIGN INTENT OF MATERIALS SPECIFIED MAY BE RETURNED WITHOUT REVIEW. ALTERNATES THAT REQUIRE SUBSTANTIAL EFFORT TO REVIEW WILL NOT BE REVIEWED UNLESS AUTHORIZED BY THE OWNER.

DESIGN CRITERIA AND LOADS

OCCUPANCY:

RISK CATEGORY OF BUILDING PER IBC TABLE 1604.5	II

WIND DESIGN: MAIN WIND FORCE RESISTING SYSTEM:

ULTIMATE DESIGN WIND SPEED, V_{ULT}	106 MPH
EXPOSURE CATEGORY	C
INTERNAL PRESSURE COEFFICIENT, C_{pi}	±0.18
TOPOGRAPHIC FACTOR, K_{zt}	1.0
WIND ANALYSIS PROCEDURE USED	DIRECTIONAL

WIND DESIGN: COMPONENTS AND CLADDING (C&C) PRESSURES FOR DESIGN (PSF, ULTIMATE):

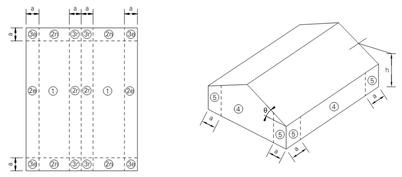

PLAN ISOMETRIC

EFFECTIVE WIND AREA (FT²)					
a = 3'–0"	10	20	50	100	500
ZONE 1	–33/+18	–28/+16	–22/+16	–17/+16	–17/+16
ZONE 2e	–33/+18	–28/+16	–22/+16	–17/+16	–17/+16
ZONE 2n	–36/+18	–32/+16	–27/+16	–24/+16	–20/+16
ZONE 2r	–33/+18	–28/+16	–22/+16	–17/+16	–17/+16
ZONE 3e	–44/+18	–39/+16	–33/+16	–28/+16	–20/+16
ZONE 3r	–36/+18	–32/+16	–27/+16	–24/+16	–20/+16
ZONE 4	–22/+20	–21/+19	–19/+18	–19/+17	–17/+16
ZONE 5	–26/+20	–25/+19	–22/+18	–21/+17	–17 +16

1. COMPONENTS AND CLADDING WIND PRESSURES ARE BASED ON ASCE 7 CHAPTER 30 PART 1 "LOW–RISE BUILDINGS."
2. COMPONENTS AND CLADDING ZONE LOCATIONS ARE BASED ON ASCE 7 FIGURE 30.3–2D FOR GABLE ROOFS 27° < Θ ≤ 45°.
3. COMPONENTS AND CLADDING ZONE LOCATIONS ARE BASED ON ASCE 7 FIGURE 30.3–1 FOR WALLS.
4. ALL PARAPET COMPONENTS AND CLADDING WIND PRESSURES SHALL BE DETERMINED THROUGH ASCE 7 FIGURE 30.6–1.

SEISMIC DESIGN:

SEISMIC DESIGN CATEGORY, SDC	D
SITE CLASS PER IBC SECTION 1613.3.2 AND ASCE 7 CHAPTER 20	D
SEISMIC IMPORTANCE FACTOR PER ASCE 7 TABLE 1.5–2, I_e	1.0
SPECTRAL RESPONSE ACCELERATION (SHORT PERIOD), S_S	1.31 g
SPECTRAL RESPONSE ACCELERATION (1–SECOND PERIOD), S_1	0.4 g
DESIGN RESPONSE ACCELERATION (SHORT PERIOD), S_{DS}	0.93 g
DESIGN RESPONSE ACCELERATION (SHORT PERIOD), S_{D1}	0.63 g
SEISMIC ANALYSIS PROCEDURE USED	EQUIVALENT LATERAL FORCE
BASIC STRUCTURAL SYSTEM	BEARING WALL SYSTEMS
SEISMIC FORCE RESISTING SYSTEM	LOG TIMBER FRAME
RESPONSE MODIFICATION COEFFICIENT, R	3
OVERSTRENGTH FACTOR, Ω_0	2.5
DEFLECTION AMPLIFICATION FACTOR, C_d	2
BASE SHEAR GOVERNED BY	SEISMIC

SNOW LOAD:

FLAT ROOF SNOW LOAD, P_f	140 PSF
SNOW DRIFT LOADING REQUIRED BY AHJ?	YES
SNOW LOAD IMPORTANCE FACTOR, I_s	1.00 [NOTE 2]
GROUND SNOW LOAD, P_g	166 PSF
SNOW EXPOSURE FACTOR, C_e	1.0
THERMAL FACTOR, C_t	1.2

1. SNOW LOAD BASED ON ASCE FIGURE 7.2–1A.
2. SNOW LOAD IMPORTANCE FACTOR PER ASCE 7 TABLE 1.5–2.

1. **DESIGN LIVE LOADS:** SEE STRUCTURAL LOADING PLANS FOR AREA LOADS AND LINE LOADS. LOADS LISTED BELOW ARE FOR MISCELLANEOUS ITEMS.

AREA	LIVE LOADS
HANDRAILS AND GUARDRAILS	50 PLF OR 200 LB [NOTE 1]
STAIRS AND EXITS	100 PSF OR 300 LB [NOTE 2]
RESIDENTIAL	40 PSF
ASSEMBLY	100 PSF
ROOFS	20 PSF (REDUCIBLE) OR 300 LB [NOTE 3]. SEE SECTION FOR SNOW LOAD

1. TOP RAIL SHALL BE DESIGNED TO RESIST A 50 PLF LINE LOAD OR 200 LB POINT LOAD APPLIED IN ANY DIRECTION AT ANY POINT. INTERMEDIATE RAILS (ALL THOSE EXCEPT THE HANDRAIL), BALUSTERS, AND PANEL FILLERS SHALL BE DESIGNED TO WITHSTAND A HORIZONTALLY APPLIED NORMAL LOAD OF 50 LB ON AN AREA NOT TO EXCEED 1'x1'. THESE THREE LOADS ARE TO BE CONSIDERED SEPARATELY WITH THE WORST CASE USED FOR DESIGN.
2. NEED NOT APPLY CONCURRENTLY WITH OTHER HANDRAIL AND GUARDRAIL LOADS; APPLIED OVER NOT MORE THAN A 1'x1' AREA.
3. UNLESS NOTED OTHERWISE, POINT LOADS ARE TO BE DISTRIBUTED OVER A 2–1/2'x2–1/2' AREA AND LOCATED TO PRODUCE MAXIMUM LOAD EFFECTS ON STRUCTURAL MEMBERS.

DESIGN DEAD LOADS:

FOR PREFABRICATED WOOD TRUSS DESIGN

ROOF DEAD LOAD, TOTAL	15 PSF
TOP CHORD LOAD, PARTIAL	8 PSF
BOTTOM CHORD LOAD, PARTIAL	7 PSF

SUBMITTALS

SUBMIT FOR REVIEW: SUBMITTALS OF SHOP DRAWINGS AND PRODUCT DATA ARE REQUIRED FOR ITEMS NOTED IN THE INDIVIDUAL MATERIALS SECTIONS OF THESE GENERAL NOTES AND FOR BIDDER–DESIGNED ELEMENTS.

SUBMITTAL REVIEW PERIOD: SUBMITTALS SHALL BE MADE IN TIME TO PROVIDE A MINIMUM OF TWO WEEKS OR TEN WORKING DAYS FOR REVIEW BY THE ARCHITECT/ENGINEER PRIOR TO THE ONSET OF FABRICATION.

GENERAL CONTRACTOR'S PRIOR REVIEW: PRIOR TO SUBMISSION TO THE ARCHITECT/ENGINEER, THE CONTRACTOR SHALL REVIEW THE SUBMITTAL FOR COMPLETENESS. DIMENSIONS AND QUANTITIES ARE NOT REVIEWED BY THE SER; THEREFORE, THEY MUST BE VERIFIED BY THE GENERAL CONTRACTOR. THE CONTRACTOR SHALL PROVIDE ANY NECESSARY DIMENSIONAL DETAILS REQUESTED BY THE DETAILER AND PROVIDE THE CONTRACTOR'S REVIEW STAMP AND SIGNATURE BEFORE FORWARDING TO THE ARCHITECT/ENGINEER.

SHOP DRAWING REVIEW: ONCE THE CONTRACTOR HAS COMPLETED THEIR REVIEW, THE SER WILL REVIEW THE SUBMITTAL FOR GENERAL CONFORMANCE WITH THE DESIGN CONCEPT AND THE CONTRACT DOCUMENTS OF THE BUILDING AND WILL STAMP THE SUBMITTAL ACCORDINGLY. MARKINGS OR COMMENTS SHALL NOT BE CONSTRUED AS RELIEVING THE CONTRACTOR FROM COMPLIANCE WITH THE PROJECT PLANS AND SPECIFICATIONS, NOR DEPARTURES THERE FROM. THE SER WILL RETURN SUBMITTALS IN THE FORM IN WHICH THEY ARE SUBMITTED (EITHER HARD COPY OR ELECTRONIC). FOR HARD COPY SUBMITTALS, THE CONTRACTOR IS RESPONSIBLE FOR SUBMITTING THE REQUIRED NUMBER OF COPIES TO THE SER FOR REVIEW.

SHOP DRAWING DEVIATIONS: WHEN SHOP DRAWINGS (COMPONENT DESIGN DRAWINGS) DIFFER FROM OR ADD TO THE REQUIREMENTS OF THE STRUCTURAL DRAWINGS, THEY SHALL BE DESIGNED AND STAMPED BY THE RESPONSIBLE SSE.

INSPECTIONS, QUALITY ASSURANCE, AND TEST REQUIREMENTS

INSPECTIONS: FOUNDATIONS, FOOTINGS, AND UNDER SLAB SYSTEMS AND FRAMING ARE SUBJECT TO INSPECTION BY THE BUILDING OFFICIAL IN ACCORDANCE WITH IBC SECTION 110.3. THE CONTRACTOR SHALL COORDINATE ALL REQUIRED INSPECTIONS WITH THE BUILDING OFFICIAL.

SPECIAL INSPECTIONS, VERIFICATIONS, AND TESTS: SPECIAL INSPECTIONS, VERIFICATIONS, AND TESTING SHALL BE DONE IN ACCORDANCE WITH IBC CHAPTER 17. THE STATEMENT AND SCHEDULES OF SPECIAL INSPECTIONS LISTED IN THESE DRAWINGS, AND THE AHJ STATEMENT OF SPECIAL INSPECTION AND/OR STATEMENT OF STRUCTURAL OBSERVATIONS.

STRUCTURAL OBSERVATION:

1. STRUCTURAL OBSERVATION FOR THIS PROJECT IS REQUIRED PER IBC SECTION 1704.6. THE CONTRACTOR SHALL NOTIFY THE SER IN A TIMELY MANNER TO ALLOW REQUIRED STRUCTURAL OBSERVATIONS TO OCCUR. REPORTS WILL BE DISTRIBUTED TO THE ARCHITECT, CONTRACTOR, SPECIAL INSPECTOR, AND AHJ.
   - A. THE FREQUENCY AND EXTENT OF OBSERVATIONS IS AT THE DISCRETION OF THE STRUCTURAL OBSERVER.
   - B. ONLY SIGNIFICANT STAGES OF CONSTRUCTION IDENTIFIED BY THE STRUCTURAL OBSERVER REQUIRE OBSERVATION.
   - C. FOR REPETITIVE OR SIMILAR STRUCTURAL ELEMENTS IDENTIFIED AS SIGNIFICANT, ONLY THE FIRST ELEMENT OF A STAGE REQUIRES OBSERVATION UNLESS NOTED OTHERWISE.
   - D. THE FOLLOWING SIGNIFICANT STAGES OF CONSTRUCTION REQUIRE OBSERVATION:
     1. PRIOR TO FOUNDATION CONCRETE PLACEMENT
     2. DURING STUD AND SHEAR WALL CONSTRUCTION
     3. PRIOR TO FIRST MILD REINFORCED SLAB PLACEMENT
     4. DURING ROOF FRAMING
     5. AFTER ROOF DIAPHRAGM IS COMPLETE PRIOR TO ROOFING

CONTRACTOR RESPONSIBILITY: PRIOR TO ISSUANCE OF THE BUILDING PERMIT, THE CONTRACTOR IS REQUIRED TO PROVIDE THE AHJ A SIGNED, WRITTEN ACKNOWLEDGEMENT OF THE CONTRACTOR'S RESPONSIBILITIES ASSOCIATED WITH THE STATEMENT OF SPECIAL INSPECTIONS, PREVIOUSLY REFERENCED, ADDRESSING THE REQUIREMENTS LISTED IN IBC SECTION 1704.4. THE CONTRACTOR IS REFERRED TO IBC SECTIONS 1705.13.5 AND 1705.13.6 FOR ARCHITECTURAL AND MEP BUILDING SYSTEMS THAT MAY BE SUBJECT TO ADDITIONAL INSPECTIONS (BASED ON THE BUILDING'S DESIGNATED SEISMIC DESIGN CATEGORY LISTED IN THE DESIGN CRITERIA AND LOADS SECTION OF THESE GENERAL NOTES), INCLUDING ANCHORAGE OF HVAC DUCTWORK CONTAINING HAZARDOUS MATERIALS, PIPING SYSTEMS AND MECHANICAL UNITS CONTAINING FLAMMABLE, COMBUSTIBLE, OR HIGHLY TOXIC MATERIALS, ELECTRICAL EQUIPMENT USED FOR EMERGENCY OR STANDBY POWER, EXTERIOR WALL PANELS, AND SUSPENDED CEILING SYSTEMS.

SOILS AND FOUNDATION

REFERENCE STANDARDS: CONFORM TO IBC CHAPTER 18 "SOILS AND FOUNDATIONS"

GEOTECHNICAL REPORT: RECOMMENDATIONS CONTAINED IN GEOTECHNICAL ENGINEERING REPORT: GRTE 4 LAZY F REHAB BY JORGENSEN GEOTECHNICAL DATED AUGST 19, 2025 WERE USED FOR DESIGN.

CONTRACTOR'S RESPONSIBILITIES: CONTRACTOR SHALL BE RESPONSIBLE TO REVIEW THE GEOTECHNICAL REPORT AND SHALL FOLLOW THE RECOMMENDATIONS SPECIFIED THEREIN INCLUDING, BUT NOT LIMITED TO, SUBGRADE PREPARATIONS, GROUND WATER MANAGEMENT, AND STEEP SLOPE BEST MANAGEMENT PRACTICES.

GEOTECHNICAL SUBGRADE INSPECTION: THE GEOTECHNICAL ENGINEER SHALL INSPECT ALL SUBGRADES AND PREPARED SOIL BEARING SURFACES PRIOR TO THE PLACEMENT OF FOUNDATION REINFORCING STEEL AND CONCRETE. GEOTECHNICAL ENGINEERS SHALL PROVIDE A LETTER TO THE OWNER STATING THAT SOILS ARE ADEQUATE TO SUPPORT THE "ALLOWABLE FOUNDATION BEARING PRESSURE(S)" SHOWN BELOW.

DESIGN SOIL VALUES:

SAFETY FACTOR PER SOILS REPORT	1.5
CONSTRUCTION ON NATIVE FILL NOT RECOMMENDED	-
ALLOWABLE FOUNDATION BEARING PRESSURE	4,000 PSF – STRUCTURAL FILL
PASSIVE LATERAL PRESSURE	498 PSF/FT
ACTIVE LATERAL PRESSURE (UNRESTRAINED)	37 PSF/FT
AT–REST LATERAL PRESSURE (RESTRAINED)	58 PSF/FT
COEFFICIENT OF SLIDING FRICTION	0.58

FOUNDATIONS AND FOOTINGS: FOUNDATIONS SHALL BEAR ON EITHER COMPETENT NATIVE SOIL OR COMPACTED STRUCTURAL FILL AS PER THE GEOTECHNICAL REPORT. EXTERIOR PERIMETER FOOTINGS SHALL BEAR NOT LESS THAN 34" BELOW FINISH GRADE UNLESS OTHERWISE SPECIFIED BY THE GEOTECHNICAL ENGINEER AND/OR THE BUILDING OFFICIAL.

FOOTING DEPTH: TOPS OF FOOTINGS SHALL BE AS SHOWN ON PLANS WITH VERTICAL CHANGES AS INDICATED WITH STEPS IN THE FOOTINGS. LOCATIONS OF STEPS SHOWN ARE APPROXIMATE AND SHALL BE COORDINATED WITH THE CIVIL GRADING PLANS.

SLABS–ON–GRADE: ALL SLABS–ON–GRADE SHALL BEAR ON COMPACTED STRUCTURAL FILL OR COMPETENT NATIVE SOIL PER THE GEOTECHNICAL REPORT. ALL MOISTURE SENSITIVE SLABS–ON–GRADE OR THOSE SUBJECT TO RECEIVE MOISTURE SENSITIVE COATINGS/COVERING SHALL BE PROVIDED WITH AN APPROPRIATE CAPILLARY BREAK AND VAPOR BARRIER/RETARDANT OVER THE SUBGRADE PREPARED AND INSTALLED AS NOTED IN THE GEOTECHNICAL REPORT AND BARRIER MANUFACTURER'S WRITTEN RECOMMENDATIONS AND COORDINATED WITH THE FINISHES SPECIFIED BY THE ARCHITECT.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHINDLER P.E.18351 WYOMING
Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S001

TITLE OF SHEET
OVERALL – STRUCTURAL GENERAL NOTES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 65 OF 371

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

GRADE 60 REINFORCING											
BAR SIZE	MISC. BARS		TOP BARS (see note #3)		HOOKED BARS	BAR SIZE	MISC. BARS		TOP BARS (see note #3)		HOOKED BARS
	Ld	Splice	Ld	Splice	Ldh		Ld	Splice	Ld	Splice	Ldh
f'c = 3000psi						f'c = 4000psi					
#3	17	22	22	28	8	#3	15	19	19	25	7
#4	22	29	29	38	12	#4	19	25	25	33	11
#5	28	36	36	47	16	#5	24	31	31	41	15
#6	33	43	43	56	21	#6	29	37	37	49	20
#7	48	63	63	81	27	#7	42	54	54	71	25
#8	55	72	72	93	32	#8	48	62	62	81	30

NOTES:

1. ALL TABULATED VALUES ARE IN INCHES.
2. VALUES FOR UNCOATED REINFORCING AND NORMAL WEIGHT CONCRETE WITH CLEAR SPACING > db, CLEAR COVER > db AND MINIMUM STIRRUPS OR TIES THROUGHOUT Ld OR CLEAR SPACING > 2db AND CLEAR COVER > db.
3. TOP REINFORCING = HORIZONTAL REINFORCING WITH MORE THAN 12" OF FRESH CONCRETE BELOW OR AS NOTED ON DOCUMENTS AS "TOP BAR".
4. Ldh = DEVELOPMENT LENGTH OF BAR WITH STANDARD HOOK.
5. LAP SPLICE OF DIFFERENT SIEZD BARS TO BE THE LARGER OF Ld OF THE LARGER BAR OR SPLICE LENGTH OF THE SMALLER BAR.

1 LAP SPLICE AND DEVELOPMENT LENGTH SCHEDULE

3/4" = 1'-0"



D = 6d FOR #3 THRU #8
D = 8d FOR #9, #10 & #11
D = 10d FOR #14 & #18

ALL REINFORCING EXCEPT COLUMN TIES AND BEAM STIRRUPS

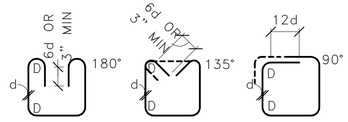

D = 4d FOR #3, #4 & #5
D = 6d FOR #6, #7 & #8

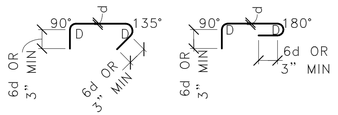

d = BAR DIAMETER, D = BEND DIAMETER

NOTE:

TIES AND CROSSTIES FOR SHEAR WALL BOUNDARY ELEMENTS SHALL BE DETAILED AS COLUMN TIES/CROSSTIES.

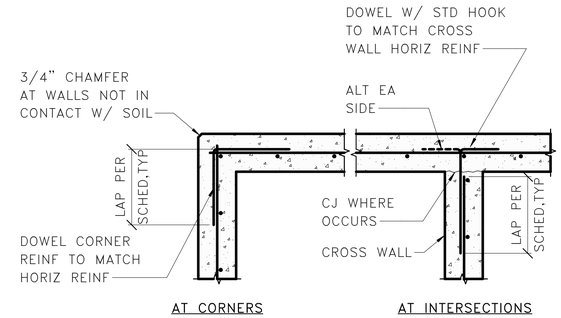

NOTES:

1. SPLICE LENGTHS PER LAP SPLICE AND DEVELOPMENT LENGTH SCHEDULE.
2. WALL REINFORCING PER PLAN OR ELEVATIONS, SECTIONS AND DETAILS.
3. AT FOOTINGS AND STEMWALLS, CORNER REINFORCING TO MATCH FOOTING AND STEMWALL HORIZONTAL REINFORCING.

4 PLAN – TYPICAL CORNER REINFORCING AT CONCRETE WALLS

3/4" = 1'-0"

POST BASE SCHEDULE	
POST SIZE	POST BASE
4x6	CB64
6x6	CB66

NOTES:

1. AT SIM CONDITION, NO (E) SLAB ON GRADE AND NO FOOTING EXTENSIONS REQUIRED.

5 INTERIOR SPREAD FOOTING AT WOOD POST

3/4" = 1'-0"

NOTES:

1. CRAWL SPACE ACCESS AND VENTING PER ARCHITECTURAL.

6 STANDARD HOOKS AND BENDS

3/4" = 1'-0"

7 TYPICAL CONCRETE WALL AND FOOTING CONSTRUCTION JOINT

3/4" = 1'-0"

NOTE:

1. CONTRACTOR OPTION TO PROVIDE 5/8"Ø×8" TITEN HD POST INSTALLED SCREW ANCHORS IN LIEU OF EMBED ANCHORS.

8 INTERIOR THICKENED SLAB FOOTING AT STUD WALL

3/4" = 1'-0"

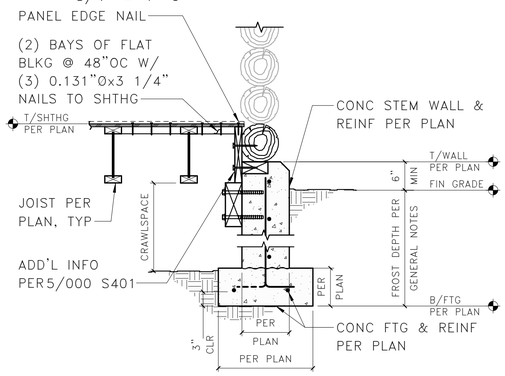

9 EXTERIOR STEM WALL & FOOTING PARALLEL TO JOISTS & LOG WALL

3/4" = 1'-0"

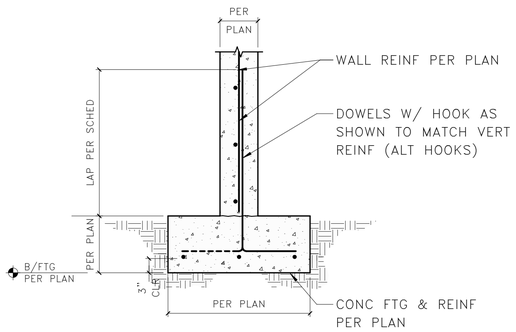

10 CONTINUOUS FOOTING AT INTERIOR CONCRETE WALL

3/4" = 1'-0"

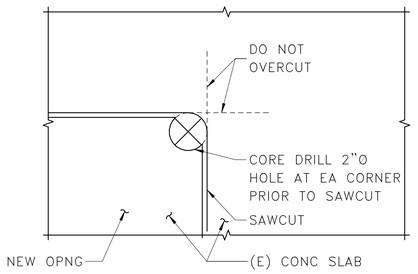

11 TYPICAL SAWCUT IN EXISTING CONCRETE SLAB

3" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING
Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S400

TITLE OF SHEET
STRUCTURAL FOUNDATION DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 66 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

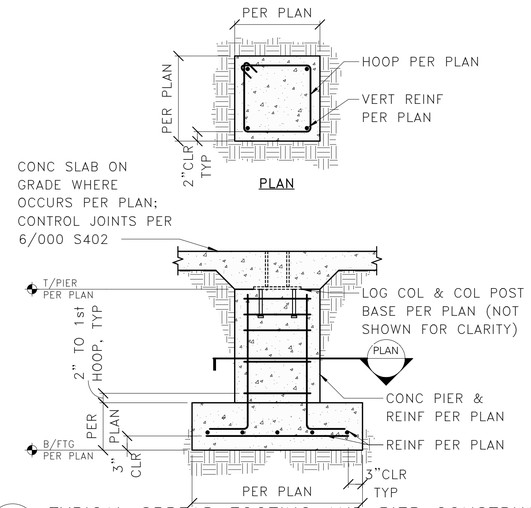

1 TYPICAL SPREAD FOOTING AND PIER CONSTRUCTION

3/4" = 1'–0"

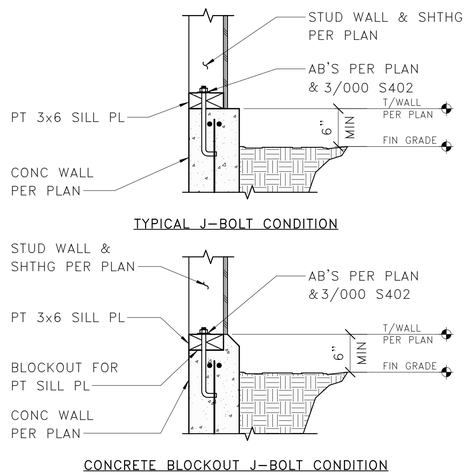

2 TYPICAL STUD WALL CONNECTION TO CONCRETE WALL

1" = 1'–0"

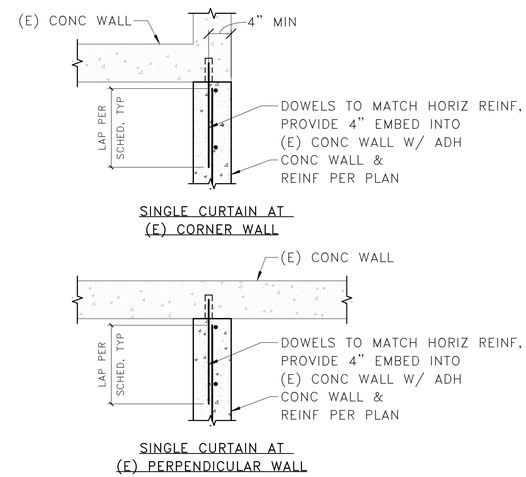

3 CONCRETE WALL CONNECTION TO (E) CONCRETE WALL

3/4" = 1'–0"

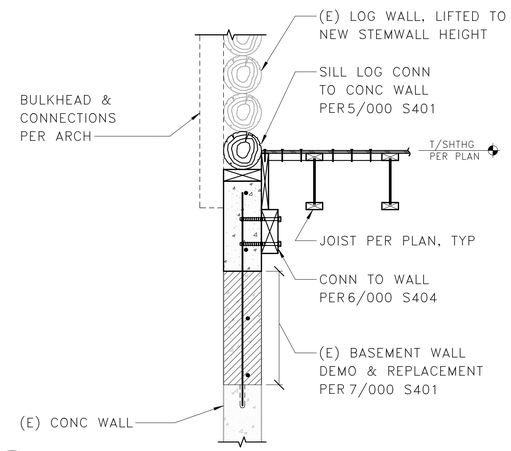

4 BASEMENT WALL & FOOTING AT BASEMENT STAIR

3/4" = 1'–0"

NOTE:
1. SILL LOG MAY BE HALF LOG, INSTALL AS SHOWN, BUT USE SHORTER SCREW LENGTH AS REQ'D FOR MIN SILL EMBED AS SHOWN.

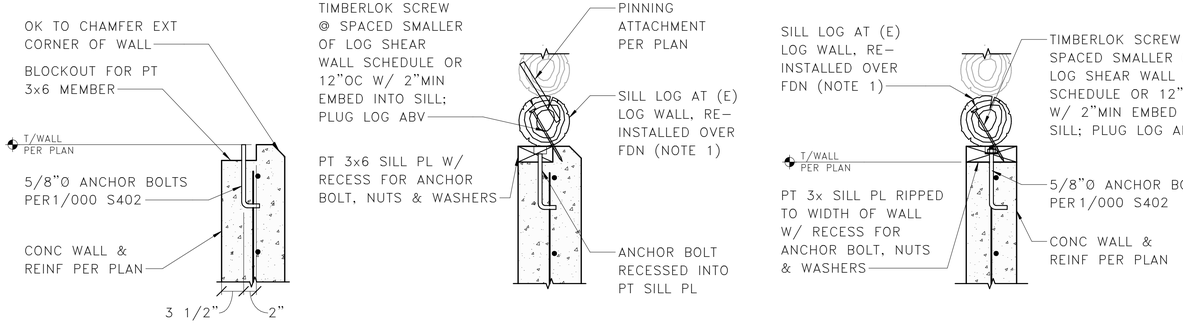

5 TYPICAL LOG WALL CONNECTION TO EXTERIOR CONCRETE WALL

1" = 1'–0"

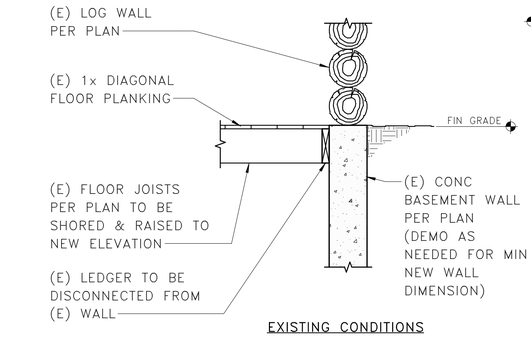

7 CONCRETE CAP CONNECTION TO (E) EXTERIOR CONCRETE WALL W/ ADJACENT GRADE

3/4" = 1'–0"

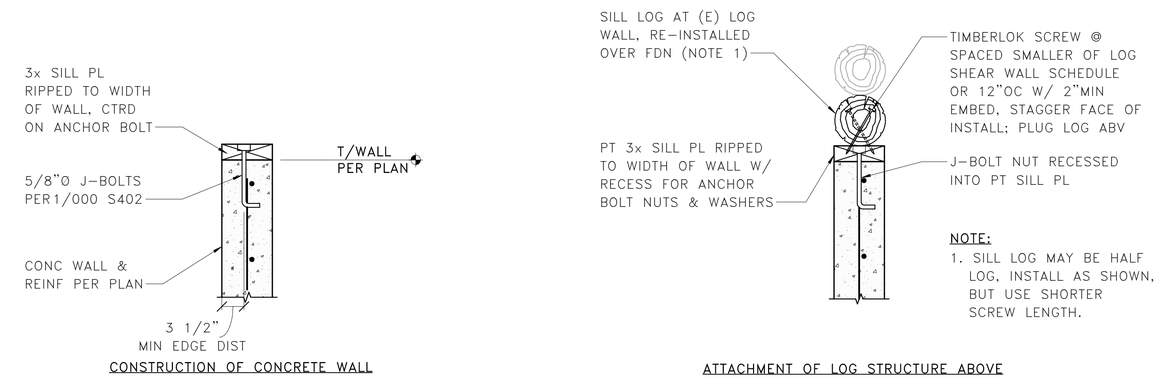

9 TYPICAL LOG WALL CONNECTION TO INTERIOR CONCRETE WALL

1" = 1'–0"

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S401

TITLE OF SHEET
STRUCTURAL FOUNDATION DETAILS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 67 OF 371

01901	TYPICAL ANCHOR BOLT SCHEDULE			
INSTALLATION TYPE	CAST–IN–PLACE (PRE–AUTHORIZED) [2]			DRILL–IN OPTIONS [3]
BOLT TYPE	STANDARD J–BOLT	HEADED ANCHOR	THREADED ROD ANCHOR	ADHESIVE ANCHOR
EMBEDMENT REQUIREMENTS	6"–7 1/2"	12x DIA	1/4" MIN TACK	NOTE [4]
LIMITS	5/8"Ø MAX	5/8"Ø THRU 2 1/2"Ø		5/8"Ø THRU 1"Ø
DIA = ANCHOR BOLT DIAMETER (NOMINAL)				

PROJECTION NOTE [1]

MIN EMBED AS SHOWN

NOTES:

[1] CONTRACTOR SHALL DETERMINE THE REQUIRED THREAD PROJECTION SUITABLE FOR THE THICKNESS OF MATERIAL BEING FASTENED PLUS GROUT ALLOWANCE, IF ANY, AND CONSTRUCTION TOLERANCES, UNO.

[2] CONTRACTOR MAY SELECT APPROPRIATE CAST–IN–PLACE ANCHOR BOLT OPTION WITHOUT SUBMITTAL.

[3] DRILL–IN OPTIONS ARE NOT APPROPRIATE AT ALL CONDITIONS. IF DRILL–IN METHOD IS PREFERRED, SUBMIT MANUFACTURER'S INFORMATION, ALLOWABLE LOAD VS EMBEDMENT DATA AND LOCATIONS OF WHERE SUBSTITUTIONS ARE REQUESTED. ENGINEER WILL DETERMINE IF SUBSTITUTION IS APPROPRIATE FOR LOCATION AND LOADING.

[4] EMBEDMENT OF DRILL–IN ANCHORS SHALL BE PER ENGINEERS'S SUBMITTAL REVIEW COMMENTS. EMBEDMENT SHALL BE (9) NINE TIMES THE NOMINAL ANCHOR DIAMETER, UNO.

[5] AT PRESSURE TREATED SILLS, PROVIDE HOT–DIPPED GALVANIZED OR STAINLESS STEEL ANCHORS.

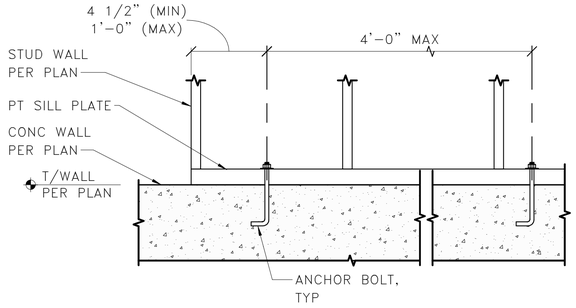

NOTES:

1. USE 5/8"Ø ANCHOR BOLTS WITH 7" MINIMUM EMBEDMENT INTO CONCRETE.

2. EACH SILL PLATE PIECE SHALL HAVE (2) BOLTS MINIMUM.

3. LOCATE BOLTS WITHIN 1'–0" OF SILL PLATE PIECE ENDS AND AT 4'–0"OC MAXIMUM.

4. USE PLATE WASHER PER SHEAR WALL SCHEDULE AT EACH BOLT. STANDARD CUT WASHERS ARE ACCEPTABLE AT NON–SHEAR WALLS.

5. DO NOT DRILL OVERSIZE HOLES THRU SILL PLATE. USE 11/16"Ø DRILL BIT.

6. SILL PLATE FASTENING AT SHEAR WALLS PER SHEAR WALL SCHEDULE.

7. CONTACT THE ENGINEER–OF–RECORD FOR POST INSTALLED ANCHOR OPTIONS.

8. SILL PLATE THICKNESS TO BE 3x.

1 TYPICAL ANCHOR BOLT SCHEDULE

1" = 1'–0"

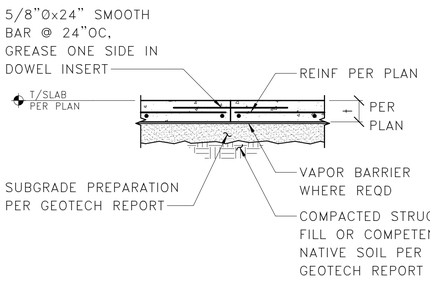

CONSTRUCTION JOINT

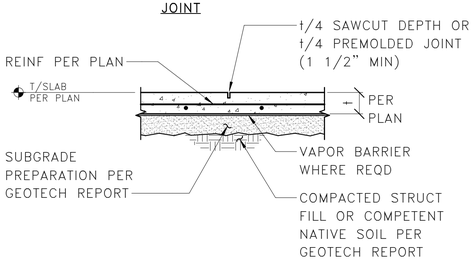

CONTROL JOINT

NOTES:

1. CONSTRUCTION JOINT IS A JOINT BETWEEN DIFFERENT POURS. CONTROL JOINT IS A CRACK CONTROL JOINT WITHIN THE SAME POUR.

2. USE "EARLY ENTRY DRY–CUT SAW" AS SOON AS POSSIBLE WITHOUT CAUSING RAVELING OF CONCRETE EDGES. SAWCUT ALONG SHORT DIRECTION OF POUR FIRST.

3. ALIGN A CONSTRUCTION OR CONTROL JOINT WITH RE–ENTRANT SLAB CORNERS, EACH WAY, TYPICAL.

4. CONSTRUCTION/CONTROL JOINT TO ENCLOSE APPROXIMATE SQUARE AREAS 225 SQUARE FEET MAXIMUM, WITH MAXIMUM PANEL ASPECT RATIO OF 1.3 TO 1.0.

5. CONTRACTOR TO SUBMIT CONSTRUCTION/CONTROL JOINT PLAN TO STRUCTURAL ENGINEER OF RECORD FOR REVIEW/APPROVAL.

9 TYPICAL SLAB ON GRADE JOINT DETAILS WITH REINFORCING

3/4" = 1'–0"

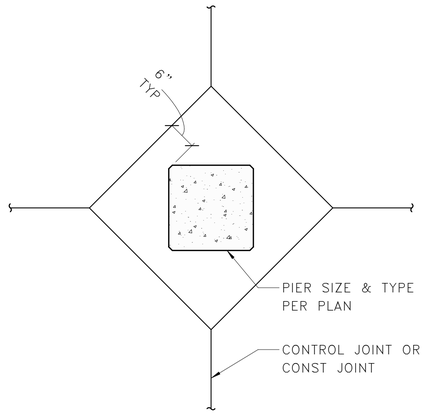

6 PLAN – CONTROL JOINT AT CONCRETE PIER AT GARAGE

3/4" = 1'–0"

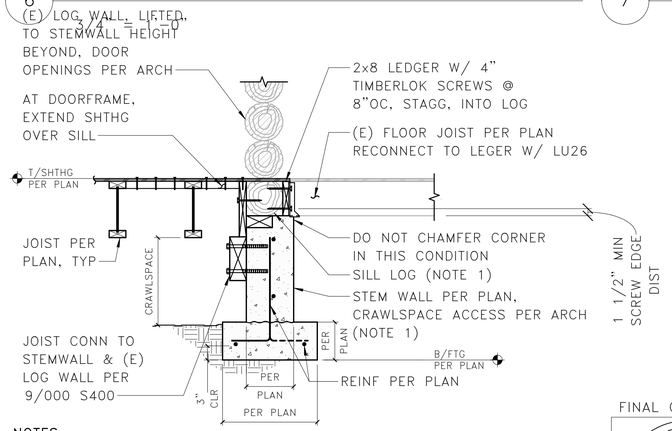

NOTES:

1. AT CRAWL SPACE ACCESS, ENSURE (E) LOG WALL SPANS OVER OPNG W/O BREAK PER 9/000 S403.

10 2 BEDROOM CABIN FLOOR FRAMING JOIST INTERFACE AT LOG WALL

3/4" = 1'–0"

3 TYPICAL SILL PLATE ANCHORAGE TO CONCRETE

1" = 1'–0"

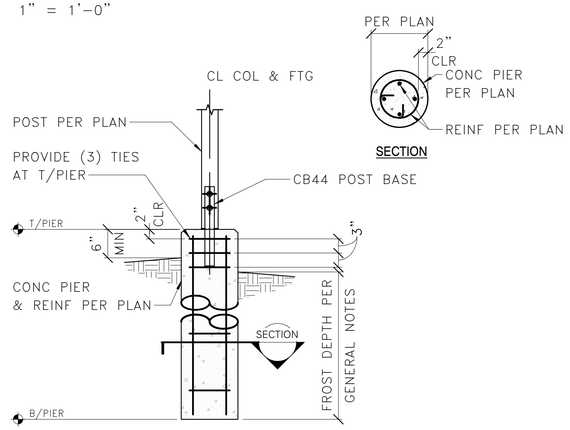

7 STAND ALONE SONOTUBE PIER AT TIMBER POST

3/4" = 1'–0"

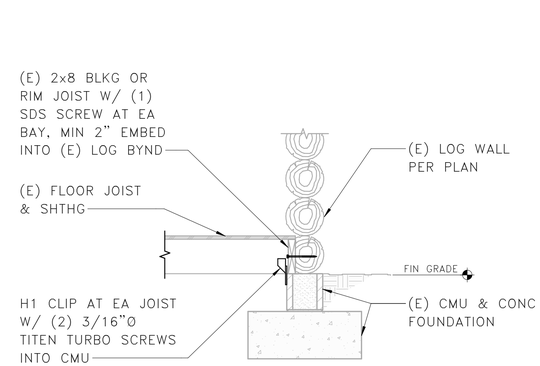

8 TYPICAL (E) LOG WALL CONNECTION TO (E) CMU WALL

3/4" = 1'–0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date: 07/21/2026 WYOMING

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 000 S402

TITLE OF SHEET: STRUCTURAL FOUNDATION DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 68 OF 371

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

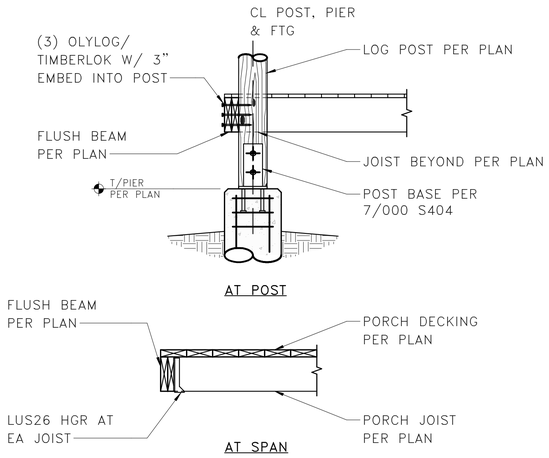

1 FLUSH FRAMED PORCH CONNECTIONS

3/4" = 1'–0"

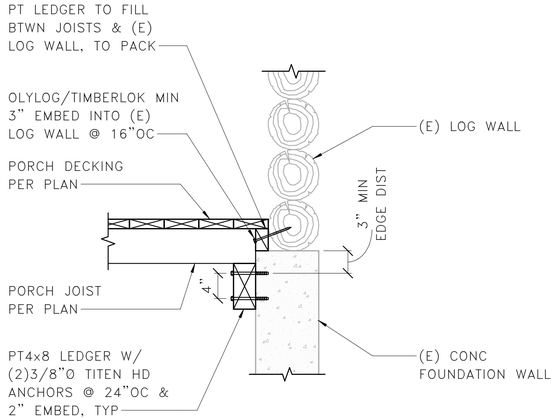

2 RIVER CABIN PORCH CONNECTION TO (E) FOUNDATION

1" = 1'–0"

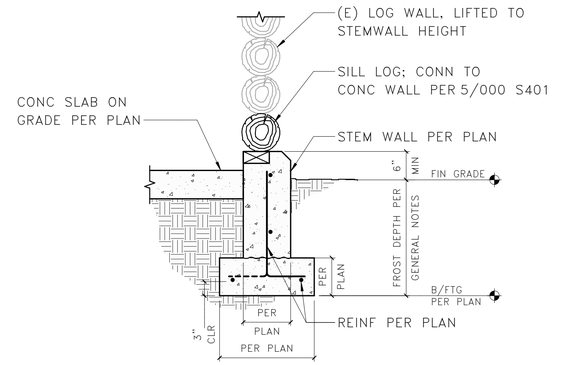

3 EXTERIOR STEMWALLS & FOOTING AT SOG

3/4" = 1'–0"

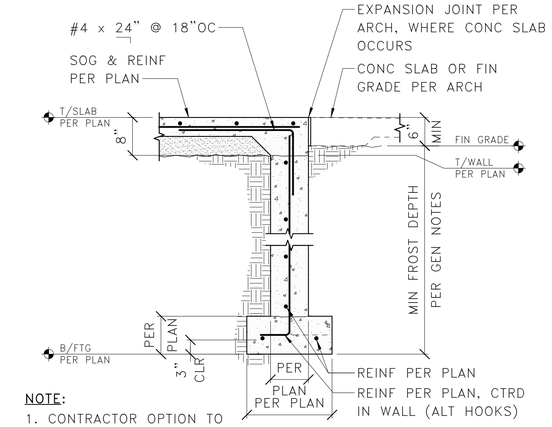

NOTE:
1. CONTRACTOR OPTION TO POST INSTALL TURNDOWN DOWLS, CONTACT DCI ENGINEERS FOR MORE INFO.

4 SLAB POUROVER AT EXTERIOR STEMWALLS

3/4" = 1'–0"

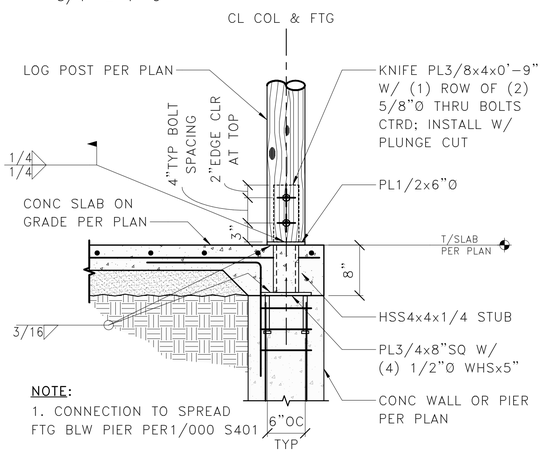

NOTE:
1. CONNECTION TO SPREAD FTG BLW PIER PER1/000 S401

5 DROPPED CONCEALED POST BASE AT LOG COLUMN

1" = 1'–0"

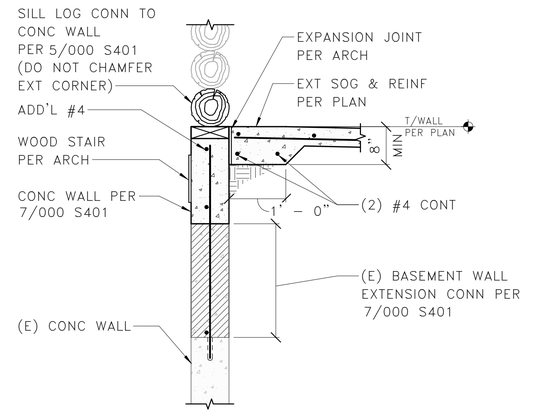

6 (E) BASEMENT WALL W/ ADJACENT SLAB ON GRADE AT STAIR

3/4" = 1'–0"

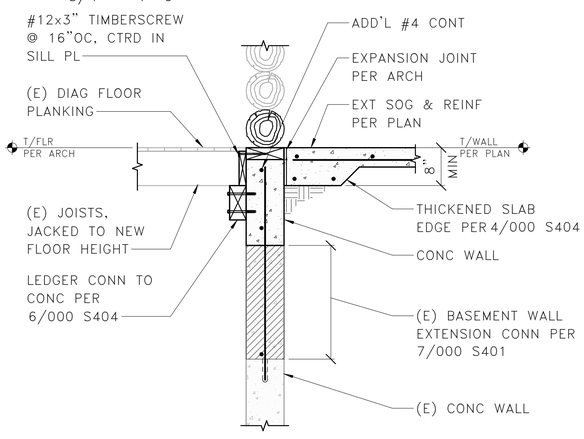

7 (E) BASEMENT WALL W/ ADJACENT SLAB ON GRADE

3/4" = 1'–0"

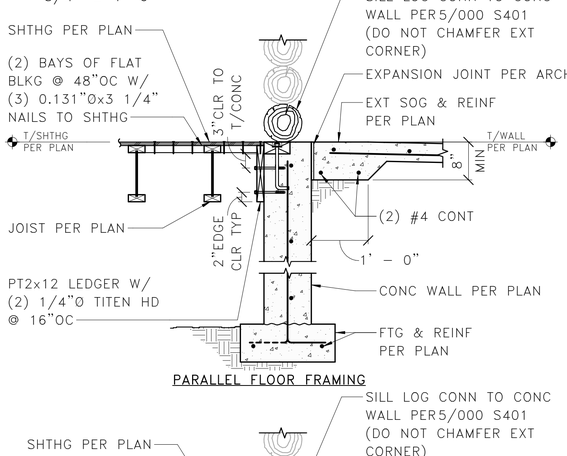

PARALLEL FLOOR FRAMING

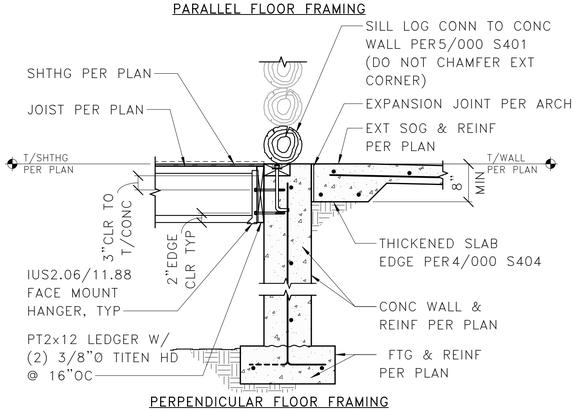

PERPENDICULAR FLOOR FRAMING

12 FOUNDATION WALL W/ ADJACENT SLAB ON GRADE

3/4" = 1'–0"

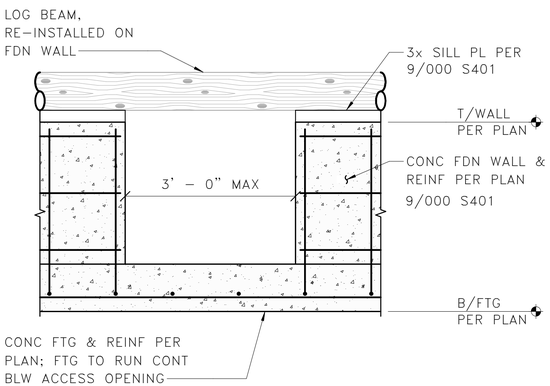

9 CRAWLSPACE ACCESS IN FOUNDATION WALL BELOW LOG

3/4" = 1'–0"

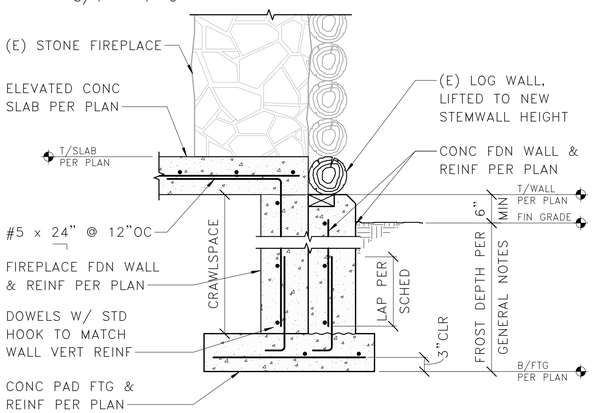

10 DOUBLE FOUNDATION WALL AT MAIN LODGE FIREPLACE

3/4" = 1'–0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date: 07/27/2026 WYOMING
EXPIRES: 12/31/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	DCI ENGINEERS BOZEMAN, MT
DESIGNED:	ACF
DRAWN:	JNH
TECH REVIEW:	LMB
DATE:	07/21/2026

SUB SHEET NO.
000
S403

TITLE OF SHEET
STRUCTURAL FOUNDATION DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	69 OF 371

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

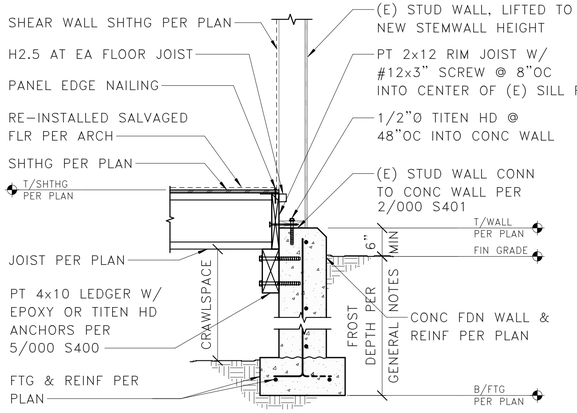

NOTE:
1. CRAWL SPACE ACCESS AND VENTING PER ARCHITECTURAL.

1 EXTERIOR STEM WALL & FOOTING AT PERPENDICULAR FLOOR FRAMING & (E) STUD WALL

3/4" = 1'-0"

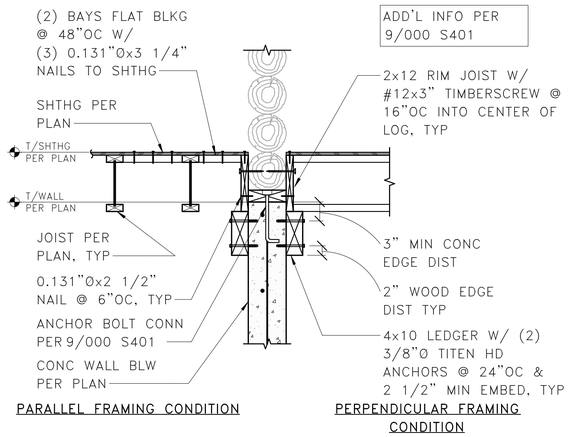

PARALLEL FRAMING CONDITION

PERPENDICULAR FRAMING CONDITION

5 FLOOR JOIST CONNECTION TO CONC WALL

3/4" = 1'-0"

2 EXTERIOR CRAWL SPACE FOOTING PARALLEL TO JOISTS

3/4" = 1'-0"

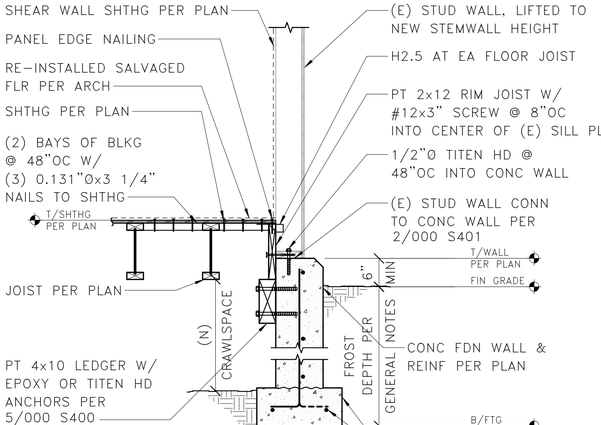

NOTE:
1. CRAWL SPACE ACCESS AND VENTING PER ARCHITECTURAL.

6 FLOOR JOIST CONNECTION TO CONC CAP ON (E) CONC BASEMENT WALL

3/4" = 1'-0"

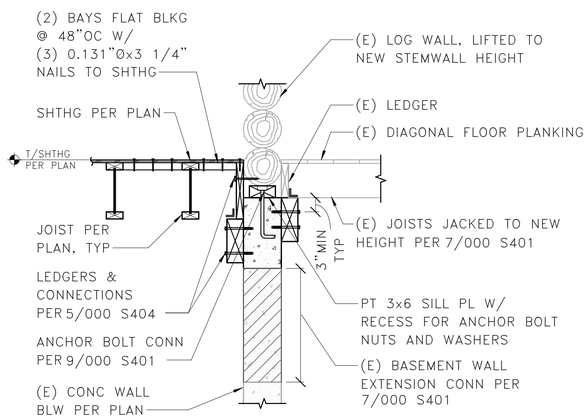

3 CONCRETE PAD AT FIREPLACE SUPPORT

3/4" = 1'-0"

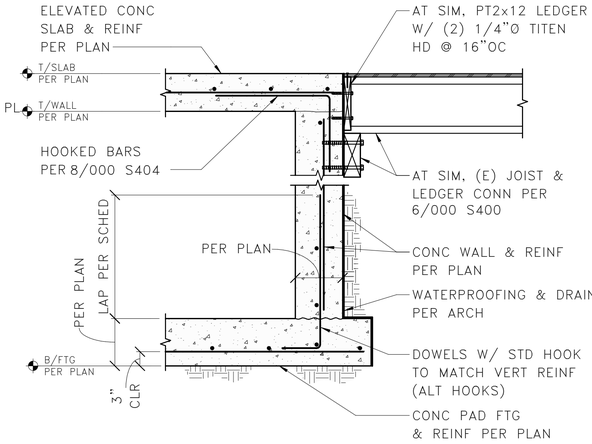



SECTION

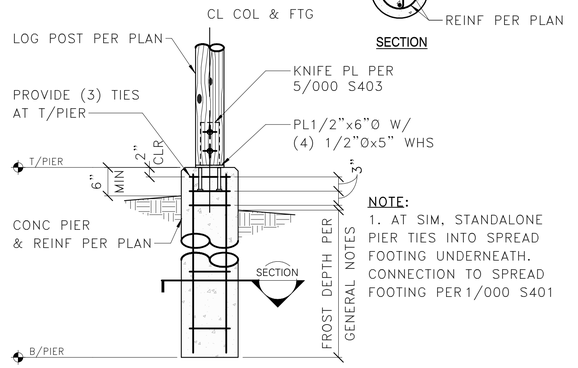

NOTE:
1. AT SIM, STANDALONE PIER TIES INTO SPREAD FOOTING UNDERNEATH. CONNECTION TO SPREAD FOOTING PER 1/000 S401

7 STAND ALONE SONOTUBE PIER AT LOG COLUMN

3/4" = 1'-0"

4 TYPICAL THICKENED SLAB EDGE FOOTING

3/4" = 1'-0"

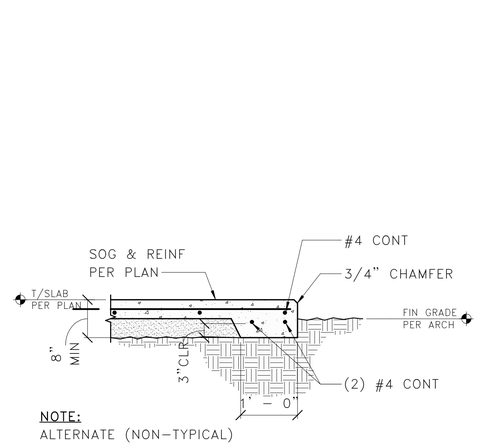

NOTE:
ALTERNATE (NON-TYPICAL) THICKENED EDGE AS REQ'D PER PLAN

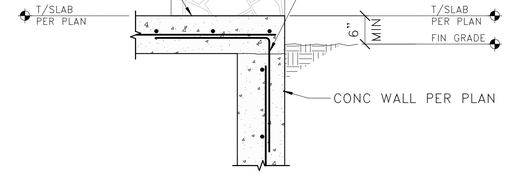

8 (E) STONE FIREPLACE AT FOUNDATION

3/4" = 1'-0"

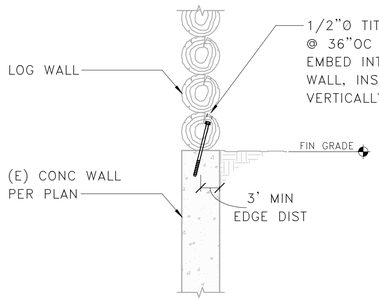

9 TYPICAL LOG WALL CONNECTION TO (E) CONCRETE WALL

3/4" = 1'-0"

EXAMPLE OF (E) CHIMNEY CRACK

CHIMNEY CRACK REPAIR NOTES:

1. VERIFY WITH ARCH THAT REPAIR MATERIALS ARE COMPATIBLE WITH EXISTING MORTAR THAT THE FINISHED PRODUCT PROVIDES AN ACCEPTABLE APPEARANCE. MOCK-UPS REQUIRED.
2. ALL LOOSE AND UNSOUNDS MORTAR TO BE REMOVED.
3. SURFACE PREPARATION SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATIONS.
4. ALLOW REPAIRS TO CURE COMPLETELY BEFORE CHIMNEY IS LIFTED AND/OR MOVED FOR CONSTRUCTION. ADDITIONAL REPAIRS MAY BE REQUIRED AFTER BUILDING MOVE.

10 STONE CHIMNEY REPAIR

3/4" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	DCI ENGINEERS BOZEMAN, MT
DESIGNED:	ACF
DRAWN:	JNH
TECH REVIEW:	LMB
DATE:	07/21/2026
SUB SHEET NO.	000 S404
TITLE OF SHEET	STRUCTURAL FOUNDATION DETAILS
	REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK
DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	70 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

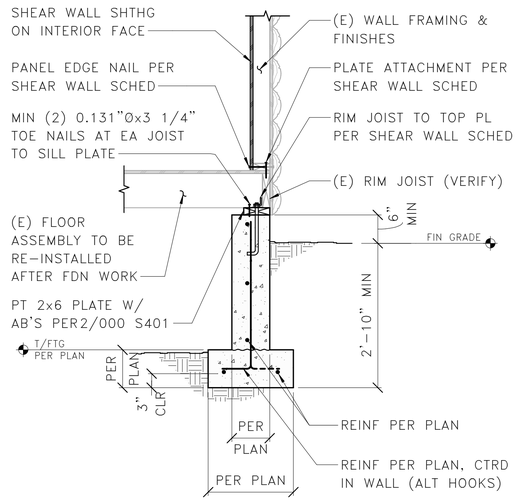

1 FOOTING & FOUNDATION WALL AT WOOD SHEARWALL – JOISTS PERPENDICULAR

3/4" = 1'-0"

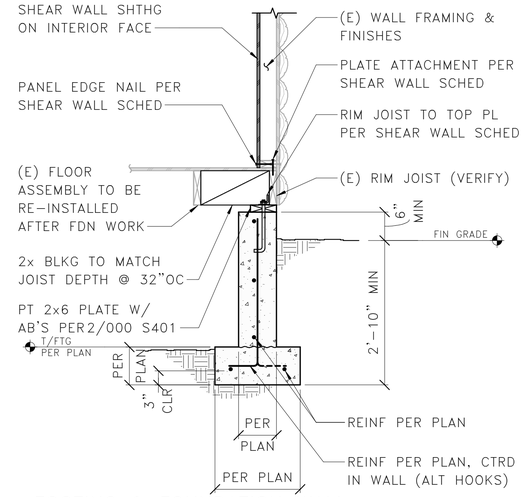

2 FOOTING & FOUNDATION WALL AT WOOD SHEAR WALL – JOISTS PARALLEL

3/4" = 1'-0"

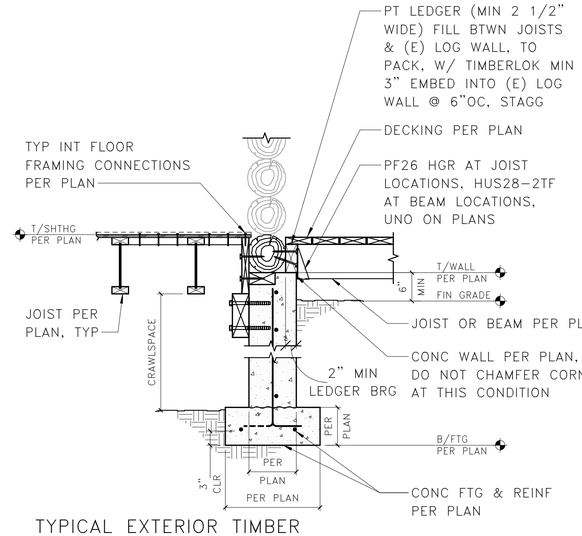

3 TYPICAL EXTERIOR TIMBER DECK CONNECTION AT LOG WALL

3/4" = 1'-0"

NOTES:
1. DECKING AND TYP JOISTS NOT SHOWN.
2. AT SIM CONDITION, POST IS (2)2x4

5 DECK BEAM TO POST – CORNER CONDITON

1" = 1'-0"

NOTE:
1. DECKING AND TYP JOISTS NOT SHOWN.

6 DECK BEAM TO POST – CENTER CONDITON

1" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural)
MATTHEW SCHMID
P.E. 18351
WYOMING
Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S405

TITLE OF SHEET
STRUCTURAL FOUNDATION DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 71 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

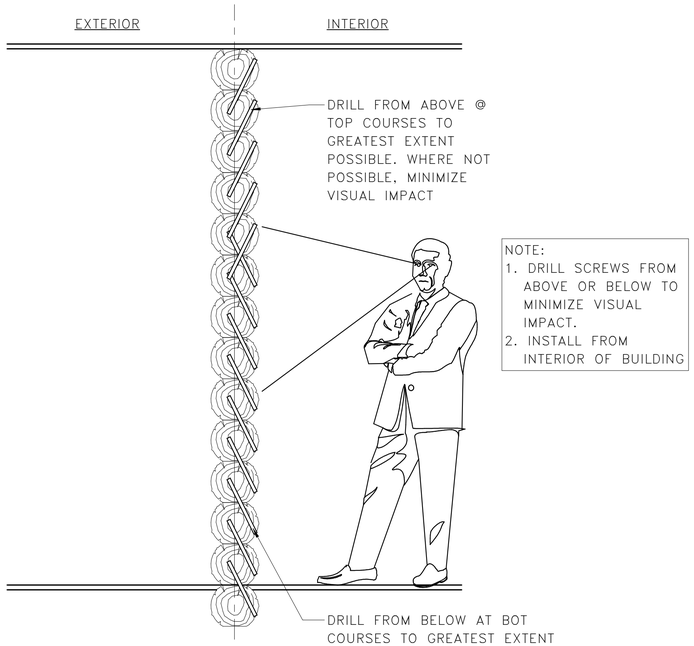

NOTE:
1. DRILL SCREWS FROM ABOVE OR BELOW TO MINIMIZE VISUAL IMPACT.
2. INSTALL FROM INTERIOR OF BUILDING

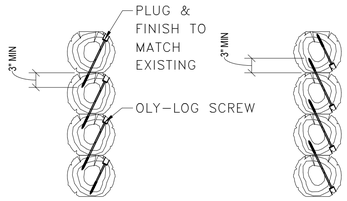

TYP OLY-LOG/TIMBERLOK/SCREW PINNING

1 TYPICAL PINS IN EXISTING LOG STACK

3/4" = 1'-0"

PLUG DIAMETER TABLE	
BOLT SIZE	PLUG DIAMETER RANGE
1/2"Ø	1 1/4" – 1 3/4"
5/8"Ø	1 1/2" – 2"
3/4"Ø	1 3/4" – 2 1/4"
1"Ø	2 1/4" – 2 3/4"
1 1/4"Ø	2 1/2" – 3"

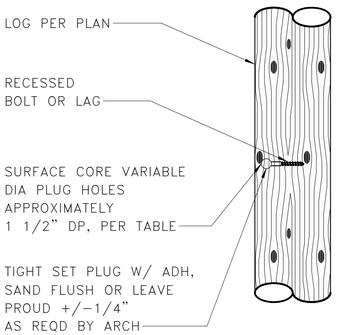

9 TYPICAL PLUG DETAIL

1" = 1'-0"

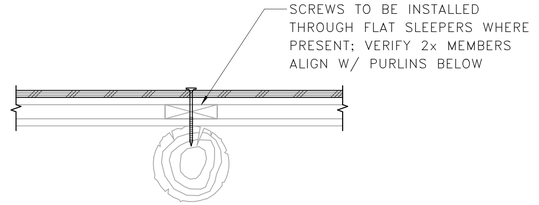

SLEEPER CONSTRUCTION VARIATION

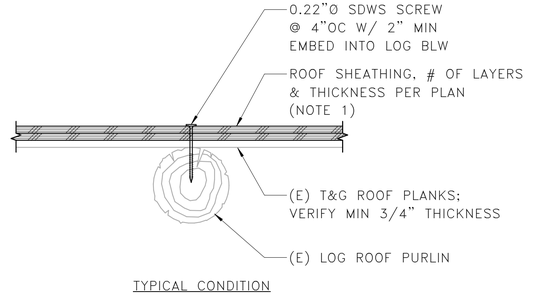

TYPICAL CONDITION

NOTE:
1. WHERE (E) 1/2" SHTHG EXISTS & IS IN GOOD CONDITION, MAY BE USED IN LIEU OF (1) NEW 1/2" SHTHG LAYER.

3 UPGRADES TO (E) ROOF LOG MEMBERS

1 1/2" = 1'-0"

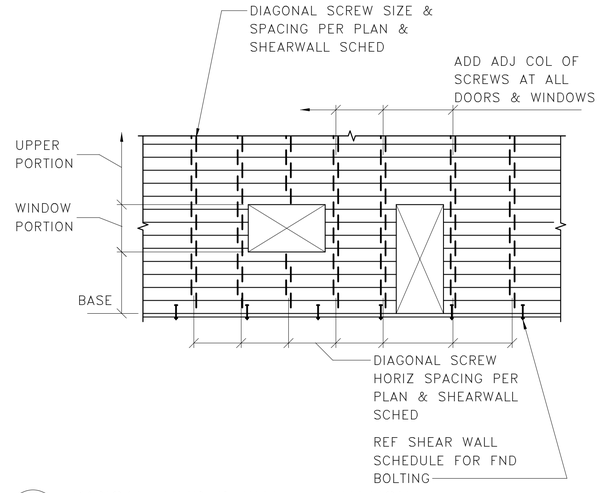

4 TYPICAL TIMBER WALL ELEVATION

3/4" = 1'-0"

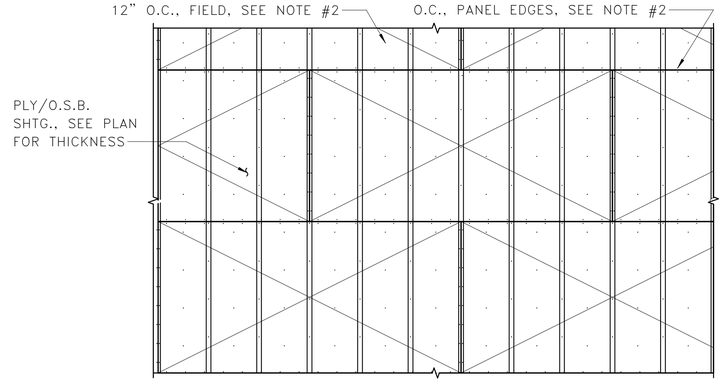

SHEATHING OVERLAY ATTACHMENT REQUIREMENTS

NOTES:
1. (E) PLANKING NOT SHOWN FOR CLARITY
2. CONTRACTOR TO VERIFY STAPLES DO NOT PENETRATE INTO BLDG.

7 (N) SHEATHING ATOP (E) PLANK ROOFING

1/2" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S500

TITLE OF SHEET
STRUCTURAL FRAMING DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 72 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

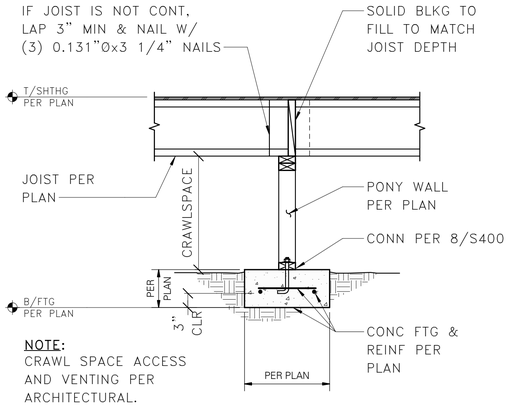

1 FLOOR FRAMING AT PONY WALL

3/4" = 1'-0"

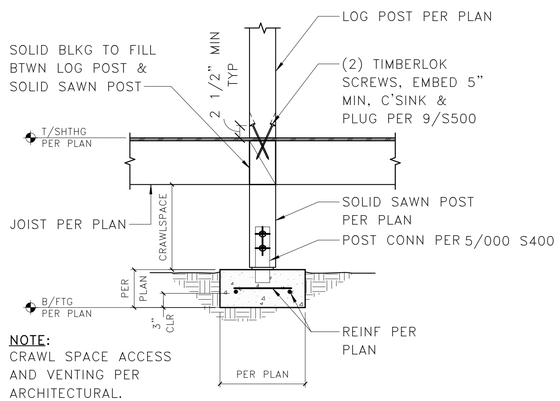

2 WOOD POST AT CRAWLSPACE

3/4" = 1'-0"

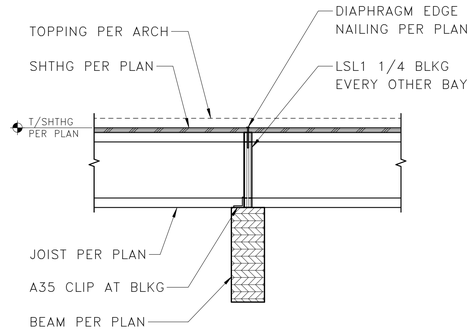

3 TYPICAL JOIST OVER DROPPED BEAM

1" = 1'-0"

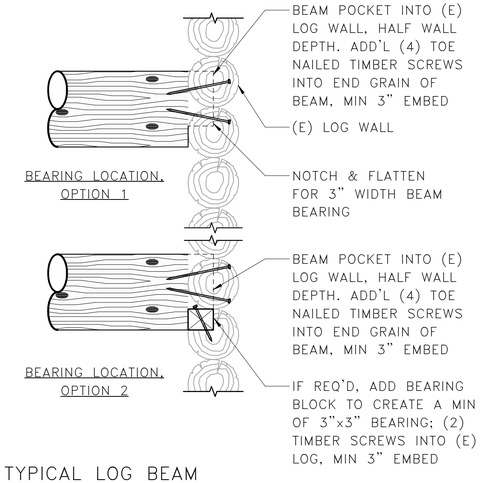

4 TYPICAL LOG BEAM CONNECTION TO (E) LOG WALL

1" = 1'-0"

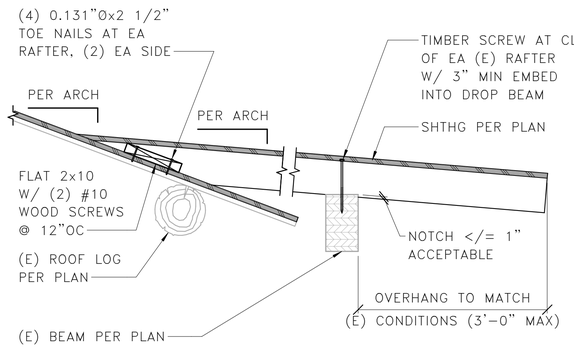

NOTES:

1. VERIFY (E) CONDITIONS MATCH REQUIREMENTS SHOWN IN THIS DETAIL AND PER PLAN

5 SLOPED RAFTER OVER BEAM AT LOW ROOF

1" = 1'-0"

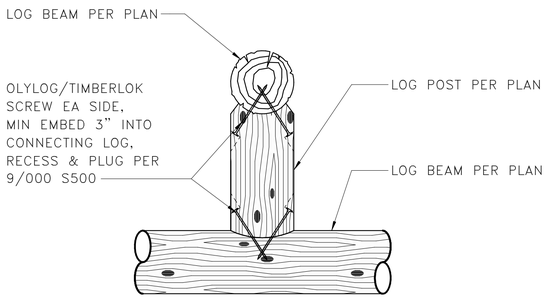

6 LOG POST FRAMING CONNECTION

1" = 1'-0"

WALL TYPE	FASTENER TYPE	FASTENER SPACING	SHEAR CAPACITY (LBS/FT)
L1	#14 WOOD SCREW	1'-0"OC	256
	OLYLOG/TIMBERLOK SCREW	3'-0"OC	
L2	OLYLOG/TIMBERLOK SCREW	1'-6"OC	533
L3	OLYLOG/TIMBERLOK SCREW	1'-0"OC	800

LOG SHEAR WALL SCHEDULE LX

7 LOG SHEAR WALL SCHEDULE

1" = 1'-0"

NOTE:
SEE 1/000 S500&4/000 S500 FOR ADD'L INFO

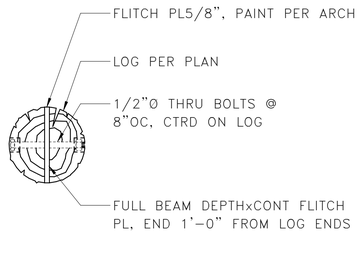

9 FLITCH PLATE CONNECTION TO LOG AT MAIN LODGE

1 1/2" = 1'-0"

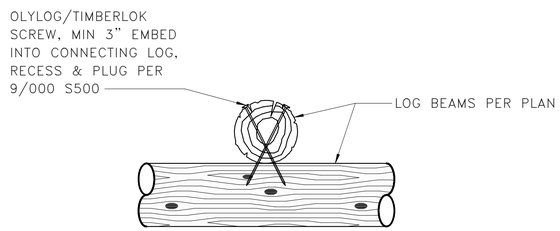

10 LOG DROP BEAM FRAMING CONNECTION

1" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date 07/21/2026 WYOMING
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S501

TITLE OF SHEET
STRUCTURAL FRAMING DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 73 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

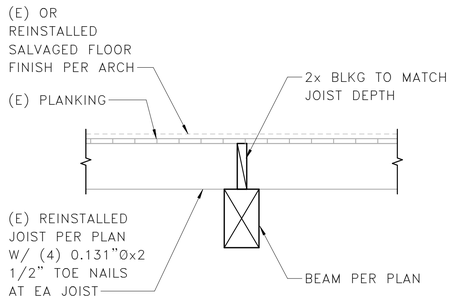

1 (E) JOIST OVER DROPPED BEAM AT MAIN LODGE KITCHEN

1" = 1'-0"

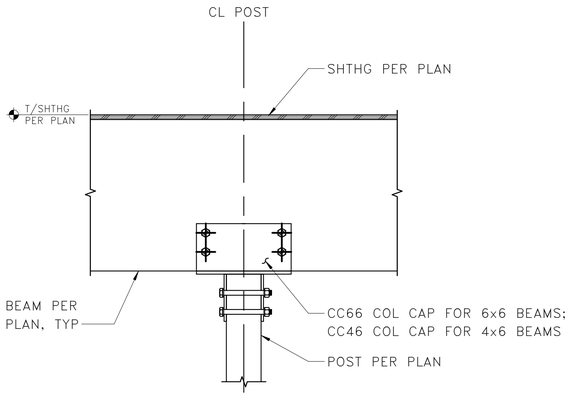

2 TYPICAL BEAM SADDLE AT INTERIOR – WOOD POST

1" = 1'-0"

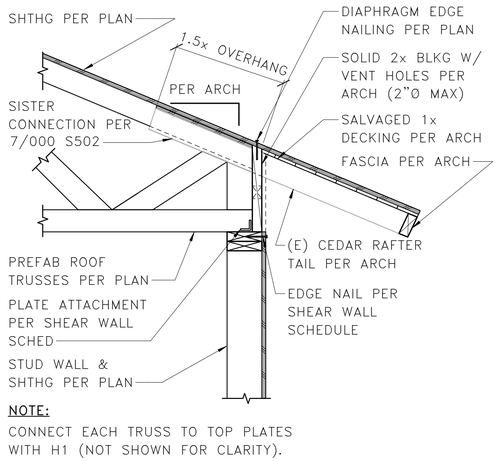

NOTE:
CONNECT EACH TRUSS TO TOP PLATES WITH H1 (NOT SHOWN FOR CLARITY).

3 EXTERIOR WALL PERPENDICULAR TO ROOF TRUSSES

1" = 1'-0"

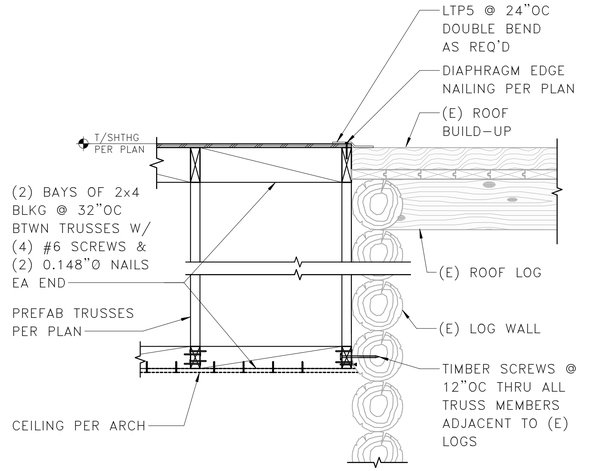

4 ROOF TRUSS PARALLEL TO (E) LOG WALL

1" = 1'-0"

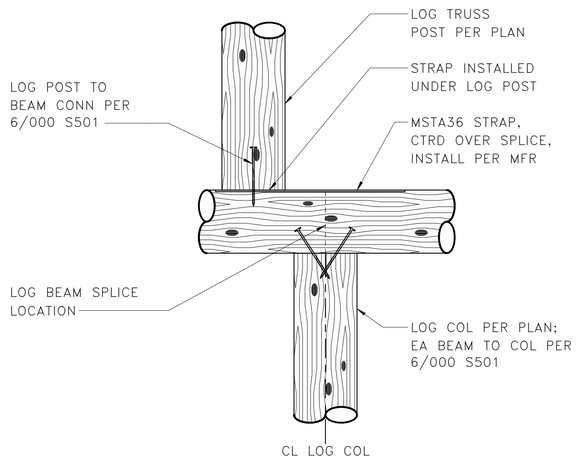

5 LOG FRAMING CONNECTION

1" = 1'-0"

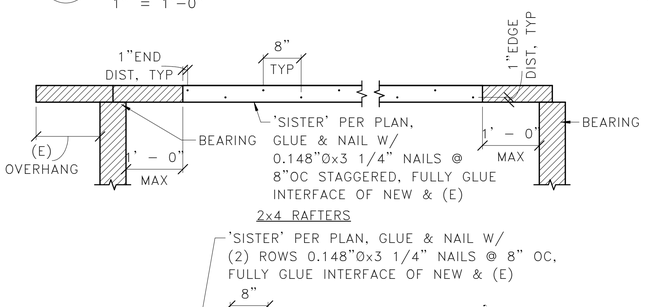

7 TYP 'SISTER' CONNECTION

3/4" = 1'-0"

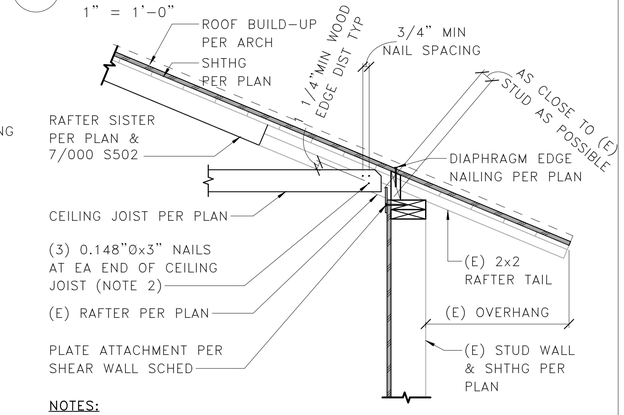

NOTES:
1. CONNECT EACH (E) RAFTER TO TOP PLATES WITH H2.5 (NOT SHOWN FOR CLARITY).
2. REPEAT SAME CONN FOR COLLAR TIE.

8 (E) EXTERIOR STUD WALL PERPENDICULAR TO (E) RAFTER W/ SISTER

1" = 1'-0"

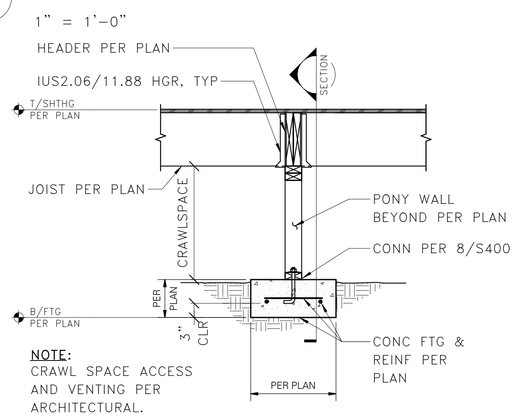

NOTE:
CRAWL SPACE ACCESS AND VENTING PER ARCHITECTURAL.

9 CRAWLSPACE HEADER AT MAIN LODGE

3/4" = 1'-0"

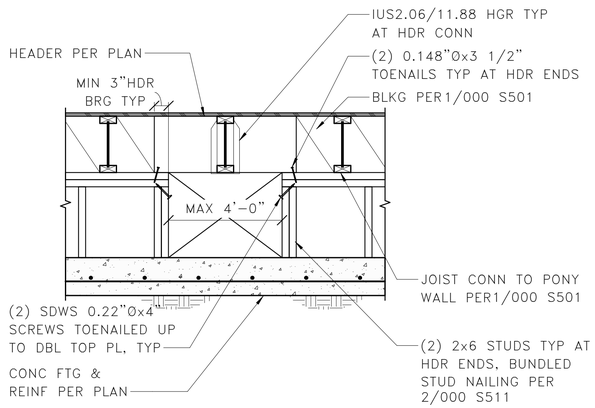

SECTION

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date 07/21/2026 WYOMING
EXPIRES: 12/31/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: DCI ENGINEERS BOZEMAN, MT	DESIGNED: ACF DRAWN: JNH TECH REVIEW: LMB DATE: 07/21/2026	SUB SHEET NO. 000 S502	TITLE OF SHEET STRUCTURAL FRAMING DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 74 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

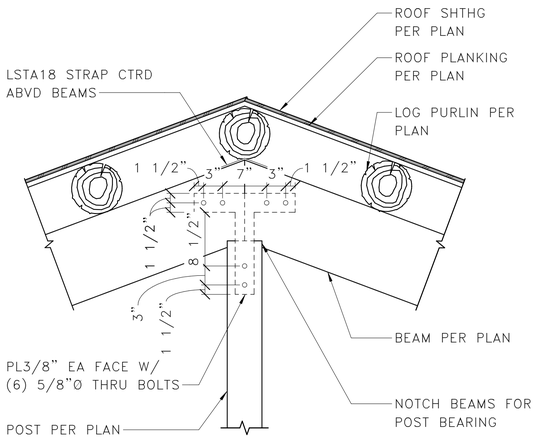

1 ROOF SUPPORT BEAMS & POST AT 3–BAY GARAGE

1" = 1'–0"

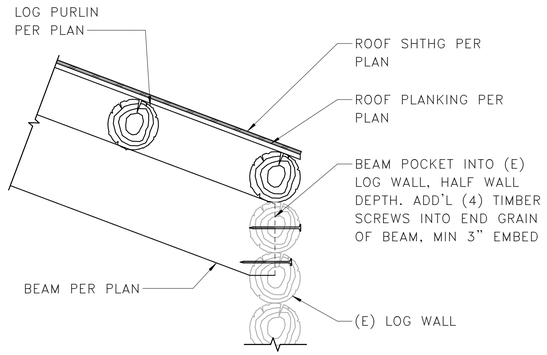

NOTE:

1. IF REQ'D, ADD BEARING BLOCK TO FILL VOIDS UNDER BEAM, PER 4/000 S501

2 ROOF SUPPORT BEAMS AT (E) LOG WALL AT 3–BAY GARAGE

1" = 1'–0"

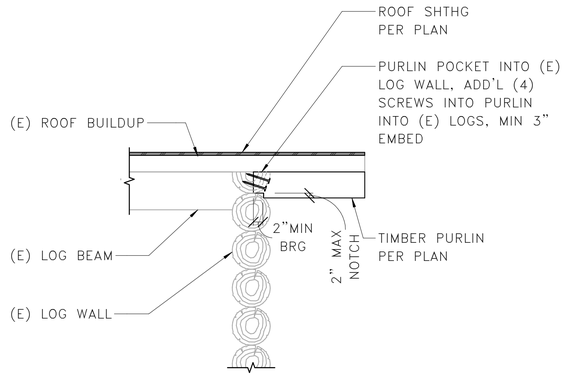

3 TIMBER PURLIN TO (E) LOG WALL CONNECTION AT GEORGE'S CABIN

3/4" = 1'–0"

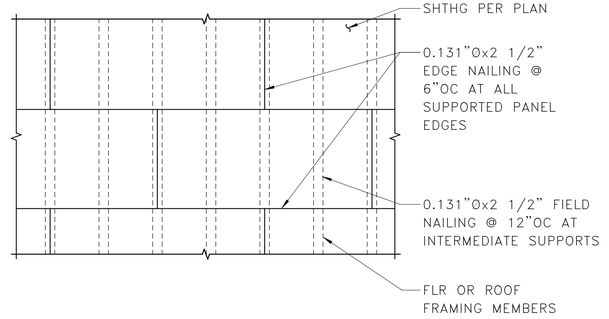

DIAPHRAGM SHEATHING – UNBLOCKED

NOTES:

1. MINIMUM EDGE DISTANCE FOR NAILS SHALL BE 3/8".
2. MINIMUM SHEATHING SHEET SIZE TO BE 24"x48".
3. NAILS SHALL NOT BE OVERDRIVEN.
4. NAILS SHALL BE COMMON WIRE TYPE OR APPROVED EQUAL.
5. LAY SHEATHING WITH FACE GRAIN (LONG DIRECTION) PERPENDICULAR TO SUPPORTS & STAGGER PANEL END JOINTS.
6. ALLOW 1/8" SPACE BETWEEN PANEL ENDS AND EDGES.
7. ADDITIONAL INFORMATION PER STRUCTURAL GENERAL NOTES.

4 PLAN – TYPICAL FLOOR AND ROOF SHEATHING ATTACHMENT

1" = 1'–0"

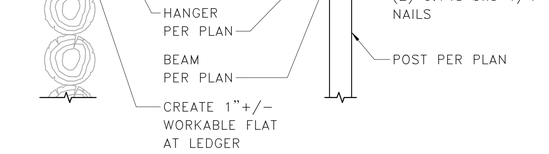

NOTES:

1. VERIFY (E) CONDITIONS MATCH REQUIREMENTS SHOWN IN THIS DETAIL AND PER PLAN

5 DIMENSIONAL LUMBER CANOPY FRAMING AT NURSES CABIN

1" = 1'–0"

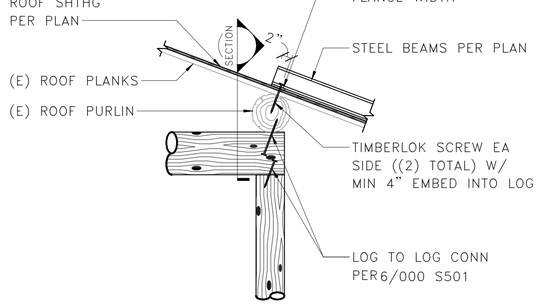

6 UPPER ROOF STEEL BEAM AT BEAM SUPPORT

3/4" = 1'–0"

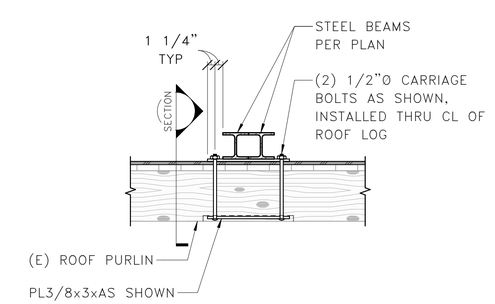

7 (E) PURLIN HANGING SUPPORT

1" = 1'–0"

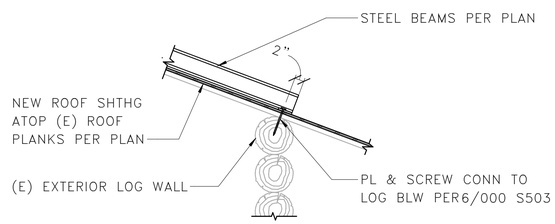

8 UPPER ROOF STEEL BEAM AT LOG WALL

3/4" = 1'–0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E. 18351 WYOMING
Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S503

TITLE OF SHEET
STRUCTURAL FRAMING DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 75 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

LUMBER SHEAR WALL SCHEDULE FOR 0.131"Ø x 2 1/2" NAILS IN DOUG-FIR LARCH (2021 IBC) [3,11]

WALL TYPE	WALL SHEATHING APA-RATED [1,9]	NAIL SIZE & SPACING AT ALL PANEL EDGES [2,12]	BLOCKING & STUD SIZE AT ADJOINING PANEL EDGES [4]	RIM JOIST OR BLOCKING CONN TO TOP PLATE BELOW [5,6]	2x PLATE ATTACHMENT	SILL PLATE ATTACHMENT	
					NAILING TO WOOD RIM JOIST OR BLOCKING BELOW	ANCHOR BOLT TO CONC OR STONE BELOW [7]	SILL PLATE AT FOUNDATION [8]
W6	15/32"	0.131"Ø x 2 1/2" @ 6"OC	2x	CLIP @ 16"OC	0.148"Ø x 3 1/4" @ 8"OC	5/8"Ø @ 48"OC	2x

NOTES:

[1] INSTALL PANELS EITHER HORIZONTALLY OR VERTICALLY.

[2] BLOCKING IS REQUIRED AT ALL PANEL EDGES.

[3] PROVIDE SHEAR WALL SHEATHING AND NAILING FOR THE ENTIRE LENGTH OF THE WALLS INDICATED ON THE PLANS. ENDS OF FULL HEIGHT WALLS ARE DESIGNATED BY WINDOWS OR DOORWAYS OR AS DESIGNATED ON PLANS. HOLD-DOWN REQUIREMENTS PER PLANS. (ALTERNATE NOTE: WALLS SHOWN WITH HORIZONTAL STRAPS BELOW AND/OR ABOVE OPENINGS REQUIRE SHEATHING, SHEAR WALL NAILING, ETC ABOVE AND BELOW ALL OPENINGS).

[4] INTERMEDIATE FRAMING TO BE 2x MINIMUM MEMBERS. ATTACH SHEATHING TO INTERMEDIATE FRAMING WITH 0.131"Ø x 2 1/2" NAILS AT 12"OC WHERE STUDS ARE SPACED AT 16"OC AND 0.131"Ø x 2 1/2" NAILS AT 6"OC WHERE STUDS ARE SPACED AT 24"OC.

[5] BASED ON 0.131"Ø x 1 1/2" NAILS USED TO ATTACH FRAMING CLIPS DIRECTLY TO FRAMING. USE 0.131"Ø x 2 1/2" NAILS WHERE INSTALLED OVER SHEATHING.

[6] FRAMING CLIPS: A35 OR LTP5 OR APPROVED EQUIVALENT.

[7] ANCHOR BOLTS SHALL BE PROVIDED WITH HOT-DIPPED GALVANIZED STEEL PLATE WASHERS 0.229"x3"x3" MINIMUM. THE HOLE IN THE PLATE WASHER MAY BE DIAGONALLY SLOTTED 13/16"x1 3/4" PROVIDED A STANDARD CUT WASHER IS PLACED BETWEEN THE PLATE WASHER AND NUT. PLATE WASHER TO EXTEND TO WITHIN 1/2" OF THE EDGE OF THE SILL PLATE ON THE SIDE(S) WITH SHEATHING. AT 2x6 WALLS WITH SHEATHING ON BOTH SIDES USE PLATE WASHER 0.229"x4 1/2"x4 1/2" MINIMUM. EMBED ANCHOR BOLTS 7" MINIMUM INTO THE CONCRETE.

[8] PRESSURE TREATED MATERIAL CAN CAUSE EXCESSIVE CORROSION IN THE FASTENERS. PROVIDE HOT-DIPPED GALVANIZED (ELECTRO-PLATING IS NOT ACCEPTABLE) NAILS AND CONNECTOR PLATES (FRAMING ANGLES, ETC) FOR ALL CONNECTORS IN CONTACT WITH PRESSURE TREATED FRAMING MEMBERS. ADDITIONAL INFORMATION PER STRUCTURAL GENERAL NOTES.

[9] 7/16" APA-RATED SHEATHING (OSB) MAY BE USED IN PLACE OF 15/32" SHEATHING PROVIDED THAT ALL STUDS ARE SPACED AT 16"OC MAXIMUM.

[10] NAIL STUDS TO 3x SILL PLATES WITH EITHER (2) 0.148"Ø x 4" END NAILS OR (4) 0.131"Ø x 2 1/2" TOENAILS.

[11] WX WHERE "W" INDICATES WOOD SHEATHING AND "X" INDICATES EDGE NAIL SPACING.

[12] EDGE NAILS SHALL BE LOCATED 3/8" FROM PANEL EDGES.

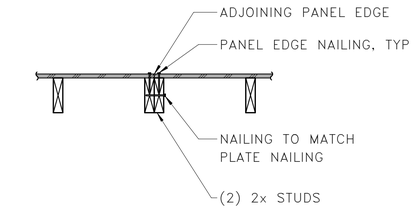

PLAN

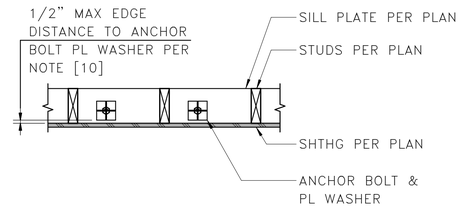

SINGLE SIDED SHEAR WALL

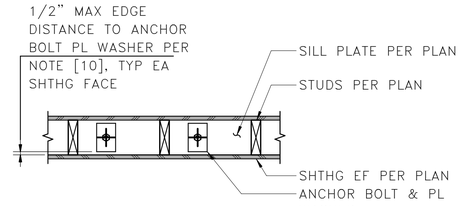

DOUBLE SIDED SHEAR WALL

PLANS – ANCHOR BOLT PLATE WASHER PLACEMENT

5 LUMBER SHEAR WALL SCHEDULE

1" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 000 S510

TITLE OF SHEET: STRUCTURAL STUD SHEARWALL DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 76 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

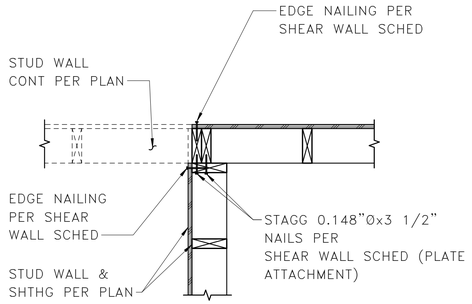

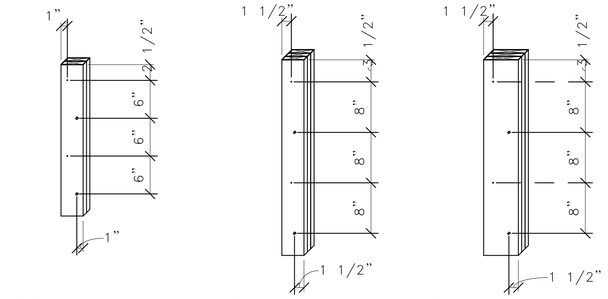

(2) 2x4 LAMINATIONS W/ (1) ROW OF 0.148"Ø x 3 1/2" NAILS, STAGGERED

(3) 2x4 LAMINATIONS W/ (1) ROW OF 0.148"Ø x 3 1/2" NAILS, EA LAYER, STAGGERED BTWN LAYERS EA SIDE

(3) 2x6 LAMINATIONS W/ (2) ROWS OF 0.148"Ø x 3 1/2" NAILS, EA LAYER, STAGGERED BTWN LAYERS EA SIDE

NOTE:

EACH ADDITIONAL LAMINATION OVER (3) LAMINATIONS SHALL BE NAILED TO THE ASSEMBLY W/ 0.148"Ø x 3 1/4" NAILS, STAGGERED EACH SIDE OF BUNDLED STUDS.

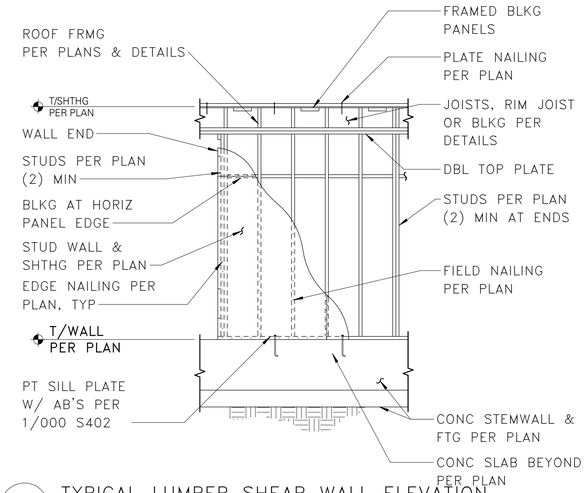

1 PLAN – INTERSECTING SHEAR WALLS

1" = 1'–0"

2 TYPICAL NAILING FOR BUNDLED STUDS

1" = 1'–0"

NOTES:

- MAXIMUM ALLOWABLE HOLE SIZE IS 4 1/2" IN ANY DIRECTION
- MAXIMUM ACCUMULATED LENGTH OF OPENINGS SHALL NOT EXCEED 20% OF WALL LENGTH
- EXAMPLE: 20% OF 4'–0" IS 9 5/8"
  - ACCUMLUATED LENGTH OF (2) 4 1/2"Ø HOLES EQUALS 9", THEREFORE PENETRATIONS ARE OK
- DO NOT OVERCUT HOLES
- CONTACT EOR IF LARGER OPENINGS ARE REQUIRED

3 TYPICAL LUMBER SHEAR WALL ELEVATION

1" = 1'–0"

5 ALLOWABLE PENETRATIONS IN LUMBER SHEAR WALL

3/4" = 1'–0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026 EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 000 S511

TITLE OF SHEET
STRUCTURAL STUD SHEARWALL DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 77 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

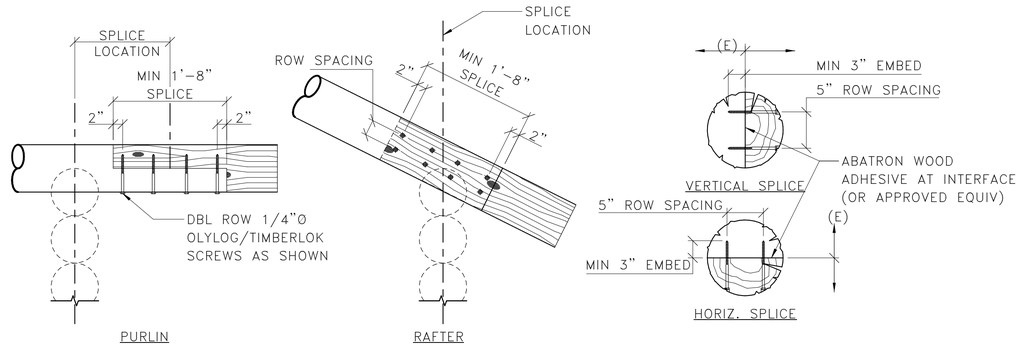

NOTES:

1. SPLICE LOCATION: LOCATE SPLICE AS REQUIRED TO REMOVE ALL UNSOUND WOOD MATERIAL. ACCEPTABLE LOCATIONS ARE WITHIN 2'-0" FROM INSIDE SUPPORT LOCATIONS, AT THE SUPPORT OR ANYWHERE ALONG LENGTH OF PURLIN OR RAFTER OVERHANG.

2. SPLICE ORIENTATION: HORIZONTAL OR VERTICAL SPLICE SHOULD BE DETERMINED BY EXTENT OF LOG DETERIORATION OR SPECIFIC LOG CONDITIONS.

3. NEW REPLACEMENT LOGS TO MATCH EXISTING HISTORIC SURFACE CONDITIONS AND SIZE. COORDINATE WITH ARCH.

4. RECESS & PLUG FASTENERS PER9/000 S500.

1 DUTCHMAN SPLICE

3/4" = 1'-0"

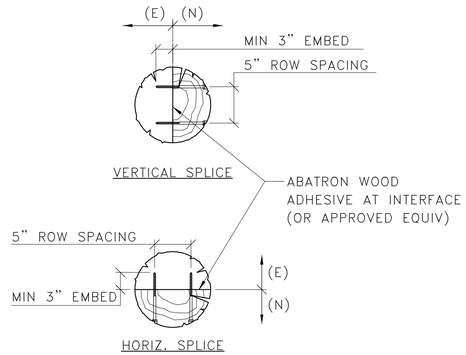

NOTE:
FASTENERS MAY BE INSTALLED ON EITHER OR (E) SIDE

3 (E) HALF LOG REPAIR

3/4" = 1'-0"

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 STATE OF WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
000
S520

TITLE OF SHEET
STRUCTURAL EXISTING LOG REPAIR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 78 OF 371

ABBREVIATIONS

ACC	AIR COOLED CONDENSER
ACU	AIR CONDITIONING UNIT
AD	ACCESS DOOR
ADJ	ADJUSTABLE
AF	AIR FOIL
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AFR	ABOVE FINISHED ROOF
AFS	AIR FLOW STATION
AHU	AIR HANDLING UNIT
AP	ACCESS PANEL
ATC	AUTOMATIC TEMPERATURE CONTROL
ATM	ATMOSPHERE
AWG	AMERICAN WIRE GAUGE
B	BOILER
BB	BASEBOARD
BC	BACKWARD CURVED
BD	BACKDRAFT DAMPER
BF	BOILER FEED
BHP	BRAKE HORSEPOWER
BI	BACKWARD INCLINED
BMS	BUILDING MANAGEMENT SYSTEM
BOD	BOTTOM OF DUCT
BOJ	BOTTOM OF JOIST
BOS	BOTTOM OF STEEL
BTU	BRITISH THERMAL UNIT
C	COMMON
CAV	CONSTANT AIR VOLUME
CC	COOLING COIL
CCW	COUNTER CLOCKWISE
CFM	CUBIC FEET PER MINUTE
CH	CHILLER
C&I	CONTROLS & INSTRUMENTATION
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
CND	CONDENSATE
CONT	CONTINUATION
CORR	CORRIDOR
CT	COOLING TOWER
CU	CONDENSING UNIT
CH	CABINET HEATER
CV	CONTROL VALVE
CVS	CONTROL VALVE STATION
CW	CLOCKWISE
dB	DECIBEL
DB	DRY BULB TEMPERATURE (°F)
DDC	DIRECT DIGITAL CONTROL
DH	DUCT HEATER
DP	DEW POINT TEMPERATURE (°F)
DX	DIRECT EXPANSION
E	EXHAUST
EA	EXHAUST AIR
EAT	ENTERING AIR TEMPERATURE (°F)
EC	ELECTRICAL CONTRACTOR
EDR	EQUIVALENT DIRECT RADIATION
EER	ENERGY EFFICIENCY RATIO
EF	EXHAUST FAN
EFF	EFFICIENCY
ELEV	ELEVATION
ERV	ENERGY RECOVERY VENTILATOR
ESP	EXTERNAL STATIC PRESSURE
ET	EXPANSION TANK
EWT	ENTERING WATER TEMPERATURE (°F)
F&T	FLOAT & THERMOSTATIC
FA	FACE AREA
FC	FORWARD CURVED
FC	FAN COIL
FP	FIRE PROTECTION
FPM	FEET PER MINUTE
FT	FEET
GA	GAUGE OR GAGE
GC	GENERAL CONTRACTOR
GEN	GENERATOR
GH	GRAVITY HOOD
GPD	GALLONS PER DAY
GPH	GALLONS PER HOUR
GPM	GALLONS PER MINUTE
H	HUMIDIFIER
HC	HEATING COIL
HG	MERCURY
HOA	HAND-OFF-AUTOMATIC
HP	HORSEPOWER
HR	HOUR
HX	HEAT EXCHANGER
ID	INSIDE DIAMETER
IFB	INTEGRAL FACE & BYPASS
IGV	INLET GUIDE VANES
IPS	IRON PIPE SIZE
IU	INDUCTION UNIT
KW	KILOWATTS
KWH	KILOWATT HOUR
LAT	LEAVING AIR TEMPERATURE (°F)
LF	LINEAR FEET
LWT	LEAVING WATER TEMPERATURE (°F)
M	MOTOR OPERATED
MAU	MAKEUP AIR UNIT
MB	MIXING BOX
MBH	1000 BTU/HR
MC	MECHANICAL CONTRACTOR
MFR	MANUFACTURER
MS	MINI-SPLIT
NC	NOISE CRITERIA
NC	NORMALLY CLOSED
NIC	NOT IN CONTRACT
NO	NORMALLY OPEN
NPS	NOMINAL PIPE SIZE
OA	OUTSIDE AIR
OAD	OUTSIDE AIR DAMPER
OBD	OPPOSED BLADE DAMPER
P	PUMP
PC	PLUMBING CONTRACTOR
PD	PRESSURE DROP
PH	PHASE
PHC	PREHEAT COIL
PPM	PART PER MILLION
PROP	PROPELLER
PRV	PRESSURE REDUCING VALVE
PSIA	PSI, ABSOLUTE
PSIG	PSI, GAUGE
QTY	QUANTITY
R	REGISTER
RA	RETURN AIR
RD	RADIAL DAMPER
RF	RETURN/RELIEF AIR FAN
RH	RELATIVE HUMIDITY
RHC	REHEAT COIL
SA	SUPPLY AIR
SAF	SUPPLY AIR FAN
SC	SENSIBLE COOLER
SCFM	CFM, STANDARD CONDITIONS
SD	SMOKE DETECTOR
SEER	SEASONAL ENERGY EFFICIENCY RATIO
SENS	SENSIBLE
SP	STATIC PRESSURE
SPS	STATIC PRESSURE SENSOR
SS	STAINLESS STEEL
T	THERMOSTAT
TA	TRANSFER AIR
TCC	TEMPERATURE CONTROL CONTRACTOR
TCP	TEMPERATURE CONTROL PANEL
TG	TRANSFER GRILL
TOS	TOP OF STEEL
TSP	TOTAL STATIC PRESSURE
TYP	TYPICAL
UH	UNIT HEATER
UNC	UNDERCUT
UV	UNIT VENTILATOR
VA	VOLT-AMPERE
VAV	VARIABLE AIR VOLUME
VD	VOLUME DAMPER
VEL	VELOCITY
VFD	VARIABLE FREQUENCY DRIVE
VRF	VARIABLE REFRIGERANT FLOW
WB	WET BULB TEMPERATURE (°F)
WC	WATER COLUMN
WG	WATER GAUGE
WSHP	WATER SOURCE HEAT PUMP
ΔT	TEMPERATURE DIFFERENCE (°F)

MECHANICAL LEGEND

ANNOTATION SYMBOLS

- X / X — 3D VIEW NUMBER / SHEET NUMBER
- X / X — DETAIL NUMBER / SHEET NUMBER
- X / X — SECTION NUMBER / SHEET NUMBER
- X / CFM — AIR DEVICE MARK AND CFM
- X / CFM / OBD — AIR DEVICE MARK AND CFM - PROVIDE OPPOSED BLADE DAMPER
- X / CFM / RD — AIR DEVICE MARK AND CFM - PROVIDE RADIAL DAMPER
- ME-# — MECHANICAL EQUIPMENT MARK
- (E) ME-# — EXISTING MECHANICAL EQUIPMENT
- (D) ME-# — DEMOLISHED MECHANICAL EQUIPMENT
- POINT OF NEW CONNECTION
- POINT OF DISCONNECTION

HVAC CONTROL SYMBOLS

- T — ADJUSTABLE THERMOSTAT
- T# — ADJUSTABLE THERMOSTAT W/ EQUIPMENT MARK
- T — ADJUSTABLE THERMOSTAT W/ LOCKABLE COVER
- C — ADJUSTABLE CO2 SENSOR
- $ — WALL SWITCH
- H — ADJUSTABLE HUMIDISTAT
- T — TEMPERATURE SENSOR
- H — HUMIDITY SENSOR
- C — CO2 SENSOR
- P — BUILDING PRESSURE SENSOR
- SP — STATIC PRESSURE SENSOR
- DP — DIFFERENTIAL PRESSURE SENSOR
- CO/NO — CARBON MONOXIDE / NITRIC OXIDE SENSOR

NOTE: THIS IS A STANDARD LEGEND. NOT ALL PIPE TYPES AND SYMBOLS ARE NECESSARILY UTILIZED IN THE DRAWINGS.

HVAC DUCTWORK

- W"xD" — RECTANGULAR DUCT WIDTH x DEPTH
- X"ø — ROUND DUCT DIAMETER
- W"/D" — OVAL DUCT WIDTH/DEPTH
- X"ø — FLEXIBLE DUCT DIAMETER
- FLOOR/CEILING SUPPLY DIFFUSER
- FLOOR/CEILING RETURN GRILLE
- FLOOR/CEILING EXHAUST GRILLE
- SIDEWALL SUPPLY DIFFUSER
- SIDEWALL RETURN/EXHAUST GRILLE
- SUPPLY DUCT (SECTION VIEW)
- RETURN DUCT (SECTION VIEW)
- EXHAUST DUCT (SECTION VIEW)
- OUTDOOR AIR DUCT (SECTION VIEW)
- DUCT UP (PLAN VIEW)
- DUCT DOWN (PLAN VIEW)
- R — INCLINED RISE - IN DIRECTION OF AIRFLOW
- D — INCLINED DROP - IN DIRECTION OF AIRFLOW
- INTERNAL DUCT LINING
- ELBOW WITH TURNING VANES
- RADIUS ELBOW
- MANUAL VOLUME DAMPER
- R — REMOTE VOLUME DAMPER
- BD — BACKDRAFT DAMPER
- Z — ZONE DAMPER
- B — BYPASS DAMPER
- M — MOTORIZED DAMPER
- F — FIRE DAMPER
- FS — FIRE/SMOKE DAMPER
- S — SMOKE DAMPER

GENERAL

- (E) NAME — EXISTING PIPE TO REMAIN
- (D) NAME — EXISTING PIPE TO BE DEMOLISHED
- NAME — NEW PIPING
- DIRECTION OF FLOW

HVAC PIPING

- HWS — HEATING WATER SUPPLY
- HWR — HEATING WATER RETURN
- CWS — CHILLED WATER SUPPLY
- CWR — CHILLED WATER RETURN
- CTS — COOLING TOWER SUPPLY
- CTR — COOLING TOWER RETURN
- HPWS — HEAT PUMP WATER SUPPLY
- HPWR — HEAT PUMP WATER RETURN
- HPS — HIGH PRESSURE STEAM
- MPS — MEDIUM PRESSURE STEAM
- LPS — LOW PRESSURE STEAM
- CND — STEAM CONDENSATE RETURN
- ATV — ATMOSPHERIC VENT
- REF — REFRIGERANT (LIQUID AND SUCTION)

PIPE FITTINGS

- ELBOW
- PIPE BREAK
- PIPE UP
- PIPE DOWN
- CHANGE IN ELEVATION OF PIPE
- SIDE CONNECTION, TEE FITTING
- TOP CONNECTION, TEE FITTING UP
- BOTTOM CONNECTION, TEE FITTING DOWN
- CAPPED OUTLET OR BLIND FLANGE
- CONCENTRIC REDUCER

VALVES

- MANUAL BALANCING VALVE
- AUTOMATIC BALANCING VALVE
- VENTURI VALVE
- ISOLATION VALVE
- MANUAL 3-WAY VALVE
- STRAINER
- CHECK VALVE
- BACKFLOW PREVENTER
- PRESSURE REDUCING VALVE
- GAS PRESSURE REGULATOR
- TEMPERATURE AND/OR PRESSURE RELIEF VALVE
- HOSE-END DRAIN W/ CAP
- BOILER DRAIN W/ CAP
- S — SOLENOID VALVE
- M — 2-WAY TEMPERATURE CONTROL VALVE
- M — 3-WAY TEMPERATURE CONTROL VALVE
- STEAM TRAP

PIPING SPECIALTIES

- AUTOMATIC AIR VENT
- MANUAL AIR VENT
- PRESSURE / TEMPERATURE PORT
- UNION OR FLANGE
- PIPE WELL - EMPTY
- T — TEMPERATURE SENSOR
- P — PRESSURE SENSOR
- FS — FLOW SWITCH
- PS — PRESSURE SWITCH
- P — PRESSURE GAUGE, SNUBBER & NEEDLE VALVE
- T — TEMPERATURE GAUGE
- FLEXIBLE CONNECTOR
- THERMAL/SEISMIC EXPANSION LOOP
- PIPE GUIDES
- ANCHOR
- F — FLOW METER

MECHANICAL GENERAL NOTES

INSTALLATION:

A. NEW PIPING, DUCTWORK AND EQUIPMENT TO BE INSTALLED IN ACCORDANCE WITH THE CURRENTLY ADOPTED INTERNATIONAL MECHANICAL AND INTERNATIONAL BUILDING CODES.
B. EQUIPMENT SHALL BE INSTALLED LEVEL, PLUMB, AND FIRMLY ANCHORED IN LOCATIONS INDICATED ON PLAN. OBSERVE MANUFACTURER'S INSTALLATION INSTRUCTIONS AND RECOGNIZED INDUSTRY PRACTICES TO ENSURE THAT PRODUCTS SERVE THEIR INTENDED FUNCTION.
C. INSTALL EQUIPMENT, DUCTWORK, AND PIPING SO AS TO MAINTAIN CODE REQUIRED CLEARANCES FOR ELECTRICAL AND TELECOMMUNICATION EQUIPMENT.
D. ELEMENTS PENETRATING BUILDING COMPONENTS (ROOF ASSEMBLIES, WALL ASSEMBLIES, ETC.) SHALL BE SEALED WEATHER AND WATER TIGHT. COORDINATE PENETRATIONS WITH GENERAL CONTRACTOR TO PATCH TO THE SATISFACTION OF THE ARCHITECT OR ENGINEER.
E. EQUIPMENT MANUFACTURED AFTER 1/1/2023 SHALL MEET MINIMUM SEER2 RATINGS.

COORDINATION:

A. IT SHALL BE THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR TO FIELD COORDINATE THE LOCATION OF EQUIPMENT, ROUTING OF DUCTWORK, AND ROUTING OF PIPING WITH OTHER TRADES.
B. IT SHALL BE THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR TO REVIEW THE DRAWINGS OF OTHER DISCIPLINES AND PROVIDE THE NECESSARY LABOR AND MATERIALS REQUIRED FOR A COMPLETE INSTALLATION.
C. COORDINATE THE INSTALLATION OF GRILLES, REGISTERS AND DIFFUSERS WITH THE ARCHITECTURAL REFLECTED CEILING PLANS, THE ELECTRICAL LIGHTING PLANS, AND IF RELEVANT, THE TELECOMMUNICATION AND FIRE SPRINKLER PLANS.

ELECTRICAL COORDINATION:

A. SEE THE MEP COORDINATION SCHEDULE FOR ELECTRICAL INFORMATION. COORDINATE WITH OTHER TRADES TO ENSURE THAT ELECTRICAL DISCONNECTS, MOTOR STARTERS, VARIABLE FREQUENCY DRIVES, CONTROLS, AND ELECTRICAL ACCESSORIES ARE FURNISHED AND/OR INSTALLED BY THE APPROPRIATE TRADES.

SITE ELEVATION:

A. EQUIPMENT SHALL BE SELECTED FOR THE PROJECT ELEVATION OF 6,480'.

BUY AMERICAN REQUIREMENT:

A. MATERIALS USED ON THIS PROJECT ARE SUBJECT TO THE FEDERAL BUY AMERICAN REQUIREMENT. PROJECT SUBMITTALS MUST BE ACCOMPANIED WITH THE APPROPRIATE BUY AMERICAN CERTIFICATION OR IF MATERIALS CANNOT MEET THE REQUIREMENT, CONTRACTOR SHALL SUBMIT A WAIVER USING THE FORM PROVIDED IN THE PROJECT SPECIFICATIONS. BUY AMERICAN REQUIREMENTS MUST BE LISTED IN THE PRODUCT DATA SUBMITTAL OR SUBMITTAL WILL BE REJECTED. THE PRODUCTS AND MANUFACTURERS SCHEDULED IN THE DRAWINGS ARE FOR BASIS OF DESIGN ONLY, AND DO NOT NECESSARILY CONFORM WITH BUY AMERICAN REQUIREMENTS.

MECHANICAL SHEET INDEX

NUMBER	SHEET NAME
000 M001	OVERALL - MECHANICAL LEGEND & NOTES
000 M002	OVERALL - MECHANICAL DETAILS
399 M001	MAIN LODGE - MECHANICAL SCHEDULES
399 M101	MAIN LODGE - MECHANICAL DEMO PLAN
399 M200	MAIN LODGE - UNDERFLOOR MECHANICAL PLAN
399 M201	MAIN LODGE - MECHANICAL PLAN
400 M001	RIVER CABIN - MECHANICAL SCHEDULES
400 M101	RIVER CABIN - MECHANICAL PLAN
401 M001	NURSES CABIN - MECHANICAL SCHEDULES
401 M101	NURSES CABIN - MECHANICAL PLAN
404 M001	GEORGES CABIN - MECHANICAL SCHEDULES
404 M201	GEORGES CABIN - MECHANICAL PLAN
407 M001	END CABIN - MECHANICAL SCHEDULES
407 M101	END CABIN - MECHANICAL PLAN
410 M001	HARRY'S CABIN - MECHANICAL SCHEDULES
410 M201	HARRY'S CABIN - MECHANICAL PLAN
411 M001	NEW CABIN - MECHANICAL SCHEDULES
411 M101	NEW CABIN - MECHANICAL PLAN

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — Joseph R. Hennebery — 16596 — 07/21/2026 — WYOMING

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: LAG

DRAWN: LAG

TECH REVIEW: JRH

DATE: 07/21/2026

SUB SHEET NO. 000 M001

TITLE OF SHEET: OVERALL – MECHANICAL LEGEND & NOTES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 79 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

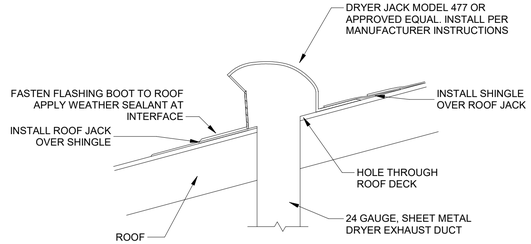

1 DRYER VENT ROOF TERMINATION DETAIL
N.T.S.

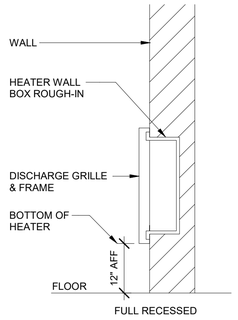

2 ELECTRIC UNIT HEATER DETAIL
N.T.S.

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEIER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
000
M002

TITLE OF SHEET
OVERALL – MECHANICAL DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
237343
SHEET 80 OF 371

ELECTRICAL ABBREVIATIONS LEGEND

A, AMP	AMPERES
AC	ALTERNATING CURRENT
A/C	AIR CONDITIONING
AF	AMP FUSE
AFC	AVAILABLE FAULT CURRENT
AFCI	ARC FAULT CIRCUIT INTERRUPTER
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AHU	AIR HANDLING UNIT
AL	ALUMINUM
AS	AMP SWITCH
ATS	AUTOMATIC TRANSFER SWITCH
BAS	BUILDING AUTOMATION SYSTEM
BKR	BREAKER
BOF	BOTTOM OF FIXTURE
C	RACEWAY/CONDUIT
CB	CIRCUIT BREAKER
CCT	COLOR RENDERING TEMPERATURE
CCTV	CLOSED CIRCUIT TELEVISION
CKT	CIRCUIT
CLG	CEILING
C.O.	RACEWAY/CONDUIT ONLY, WITH PULL STRING
COD	CENTER OF DEVICE
CNTRL	CONTROL
CU	COPPER
(D)	EXISTING TO BE DEMOLISHED
DISC	DISCONNECT
DIST	DISTRIBUTION
DPDT	DOUBLE POLE DOUBLE THROW
DWG	DRAWING
EA	EACH
EC	ELECTRICAL CONTRACTOR
EF	EXHAUST FAN
ELEC	ELECTRIC
EMT	ELECTRICAL METALLIC TUBING
EQUIP	EQUIPMENT
EX. EXIST	EXISTING
FA	FIRE ALARM
FAA	FIRE ALARM ANNUNCIATOR
FACP	FIRE ALARM CONTROL PANEL
FD	FUSED DISCONNECT
FLR	FLOOR
FO	FIBER OPTIC
FSD	FIRE SMOKE DAMPER RELAY, CONTROLLED BY ASSOCIATED SMOKE DETECTOR AND CIRCUITED BACK TO FACP
FVNR	FULL VOLTAGE NON-REVERSING
FVR	FULL VOLTAGE REVERSING
GEC	GROUNDED ELECTRODE CONDUCTOR
GFCI	GROUND FAULT CIRCUIT INTERRUPTER
GFI	GROUND FAULT INTERRUPTER
GFP	GROUND FAULT PROTECTION
GND	GROUND
GRC	GALVANIZED RIGID CONDUIT
HID	HIGH INTENSITY DISCHARGE
HOA	HAND-OFF-AUTOMATIC
HP	HORSEPOWER
HPS	HIGH PRESSURE SODIUM
HTR	HEATER
HVAC	HEATING, VENTILATION & AIR CONDITIONING
HZ	HERTZ
J-BOX	JUNCTION BOX
KVA	KILOVOLT-AMPERES
KW	KILOWATTS
LCP	LIGHTING CONTROL PANEL
LPW	LUMENS PER WATT
LTG	LIGHTING
LM	LUMENS
LV	LOW VOLTAGE
MAG	MAGNETIC STARTER
MAN	MANUAL
MAX	MAXIMUM
MC	MECHANICAL CONTRACTOR
MCA	MINIMUM CIRCUIT AMPACITY
MCC	MOTOR CONTROL CENTER
MDP	MAIN DISTRIBUTION PANEL
MECH	MECHANICAL
MEP	MECHANICAL, ELECTRICAL, PLUMBING
MH	METAL HALIDE
MIN	MINIMUM
MOCP	MAXIMUM OVERCURRENT PROTECTION
MSS	MOTOR STARTER SWITCH WITH THERMAL OVERLOADS
N	NEUTRAL
NC	NORMALLY CLOSED
NEC	NATIONAL ELECTRIC CODE
NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NFD	NON-FUSED DISCONNECT
NL	NIGHT LIGHT, UN-SWITCHED 24/7 OPERATION
NIC	NOT IN CONTRACT
NO	NORMALLY OPEN
#	NUMBER
OAE	OR APPROVED EQUAL
OC	ON CENTER
OCPD	OVERCURRENT PROTECTIVE DEVICE
OH	OVERHEAD
P	POLE
PB	PUSHBUTTON
PC	PLUMBING CONTRACTOR
PH	PHASE
PNL	PANEL
PVC	POLYVINYL CHLORIDE CONDUIT
PWR	POWER
(R)	EXISTING TO REMAIN
RCPT	RECEPTACLE
RECEPT	RECEPTACLE
RGS	RIGID GALVANIZED STEEL
RM	ROOM
RVNR	REDUCED VOLTAGE NON-REVERSING
RVR	REDUCED VOLTAGE REVERSING
SP	SINGLE POLE TOGGLE SWITCH
SPD	SURGE PROTECTIVE DEVICE (TVSS)
SPEC	SPECIFICATION
SPST	SINGLE POLE SINGLE THROW
SSPB	START-STOP PUSHBUTTON
SW	SWITCH
SWBD	SWITCHBOARD
SWGR	SWITCHGEAR
TB	TELEPHONE BOARD
TC	TIME CLOCK
TD	TIME DELAY
TEL	TELEPHONE
TR	TAMPER RESISTANT
TSP	TWISTED SHIELDED PAIR
TTB	TELEPHONE TERMINAL BOARD
TYP	TYPICAL
UG	UNDERGROUND
UH	UNIT HEATER
UNO	UNLESS NOTED OTHERWISE
V	VOLT
VA	VOLT-AMPERES
VFD	VARIABLE FREQUENCY DRIVE
W	WATTS
WAO	WORK AREA OUTLET
WP	WEATHERPROOF
WPI	WEATHERPROOF WHILE-IN-USE
WR	WEATHER RESISTANT
W/O	WITHOUT
XFMR	TRANSFORMER
Y	WYE-CONNECTED
Δ	DELTA-CONNECTED
ø	PHASE

ELECTRICAL LIGHTING FIXTURE LEGEND

- RECESSED LED FIXTURE - "a" & "b" DESIGNATES SWITCH
- RECESSED EMERGENCY LED FIXTURE - "a" & "b" DESIGNATES SWITCH
- SURFACE LED FIXTURE - "a" & "b" DESIGNATES SWITCH
- SURFACE EMERGENCY LED FIXTURE - "a" & "b" DESIGNATES SWITCH
- SURFACE WALL MOUNT LED FIXTURE
- LED STRIP OR INDUSTRIAL, SURFACE OR CHAIN HUNG
- EMERGENCY LED STRIP OR INDUSTRIAL, SURFACE OR CHAIN HUNG
- POLE MOUNTED FIXTURE
- LIGHTED BOLLARD
- PENDANT FIXTURE; HIGH BAY, LOW BAY, DECORATIVE
- EXIT SIGN - WALL MOUNT, CEILING MOUNT. ARROW INDICATES DIRECTION OF TRAVEL, SHADING INDICATES LIGHTED FACE.
- COMBINATION EXIT SIGN/ EGRESS LIGHTING UNIT - WALL MOUNT, CEILING MOUNT. ARROW INDICATES DIRECTION OF TRAVEL, SHADING INDICATES LIGHTED FACE.
- DUAL HEAD EMERGENCY EGRESS BATTERY PACK, WALL MOUNT OR CEILING MOUNT
- WALL MOUNTED SCONCE
- SURFACE DOWNLIGHT
- SURFACE EMERGENCY DOWNLIGHT
- RECESSED CAN DOWNLIGHT
- RECESSED CAN EMERGENCY DOWNLIGHT
- RECESSED CAN WALL WASHER
- TRACK LIGHTING. SEE FIXTURE SCHEDULE AND LIGHTING PLANS.

ELECTRICAL ONE-LINE LEGEND

- CT AND CUSTOMER POWER METER
- MOTOR
- UTILITY ELECTRIC METER AND BASE (BASE BY CUSTOMER)
- SURGE PROTECTION DEVICE
- LIGHTNING ARRESTER, TYPE 1 SPD, MOUNTED ON EXTERIOR OF MAIN SWITCHGEAR (SQUARE D. SDSA SERIES, OAE)
- STRESS RELIEF CONE
- PFC — POWER FACTOR CORRECTION CAPACITOR
- $X — EQUIPMENT TOGGLE DISCONNECT SWITCH
  "X" INDICATES TYPE:
  F - FUSTAT
  M - MOTOR STARTER SWITCH W/ THERMAL OVERLOADS
- CONTACTOR NORMALLY OPEN, NORMALLY CLOSED
- TRANSFORMER, 3-PH, 3-WIRE DELTA CONNECTION
- TRANSFORMER, 3-PH, 4-WIRE GROUNDED WYE CONNECTION
- AUTOMATIC TRANSFER SWITCH
- VFD — VARIABLE FREQUENCY DRIVE
- FIXED MOUNT LV BREAKER
- FUSED SWITCH ("XXAS/XXAF" - SW AND FUSE AMP RATING)
- G — GENERATOR
- CB — WALL MOUNTED BREAKER
- THERMAL OVERLOAD ELEMENT
- DISCONNECT SWITCH ("XXAS" = SWITCH AMP RATING)
- FUSED DISCONNECT SWITCH ("XXAS/XXAF" = SW AND FUSE AMP RATING)
- COMBINATION MOTOR STARTER (STR SIZE, TYP, AS, AF, SEE MEP COORDINATION SCHEDULE)
- SWITCHBOARD OR PANELBOARD; NAME, VOLTAGE, PHASE, NUMBER OF WIRES WHEN INDICATED

ELECTRICAL POWER LEGEND

- D-1 X — PANEL AND CIRCUIT DESIGNATION ARE NEXT TO EACH DEVICE (PANEL NAME - CIRCUIT NUMBER). MINIMUM BRANCH CIRCUIT WIRE SIZE IS #12, UNO. A SINGLE INSULATED GREEN GROUND CONDUCTOR SHALL BE PROVIDED WITH EACH HOME RUN. PROVIDE A SEPARATE NEUTRAL FOR EACH CIRCUIT. HOME RUNS SHALL HAVE NO MORE THAN THREE CIRCUITS. LINE VOLTAGE AND LOW VOLTAGE WIRING IS NOT SHOWN ON PLANS.
  "X" INDICATES TYPE:
  C - AUTOMATIC CONTROL
  GFI - GROUND FAULT INTERRUPTER
  WP - WEATHERPROOF FLIP COVER
  WPI - WEATHERPROOF WHILE-IN-USE COVER
  WR - WEATHER-RESISTANT TYPE, WITH GFI
  U - PROVIDE WITH (2) USB PORTS
  TR - TAMPER RESISTANT
- SIMPLEX RECEPTACLE - CEILING MOUNT, WALL MOUNT (+18", UNO)
- DUPLEX RECEPTACLE - CEILING MOUNT, WALL MOUNT (+18", UNO)
- QUADRUPLEX RECEPTACLE - CEILING MOUNT, WALL MOUNT (+18", UNO)
- ABOVE COUNTER RECEPTACLE - MOUNT AT +4" ABOVE BACKSPLASH
- $X — FLOOR BOX WITH (2) DUPLEX RECEPTACLES - FURNISH WITH (1) 3/4" MIN. CONDUIT FOR POWER FROM BOX. INCLUDE ALL HARDWARE/ACCESSORIES AS REQUIRED FOR COMPLETE INSTALLATION. PROVIDE COVER (COORDINATE WITH ARCHITECT FOR FLOORING TYPE AND FINISH).
  "X" INDICATES TYPE:
  A - 4-GANG FLOOR BOX, CORROSION RESISTANT COATING FOR CONCRETE FLOORS (3" MIN. POUR DEPTH), (HUBBELL NO. CFB4G30CR, OAE)
  B - 4-GANG FLOOR BOX FOR RAISED ACCESS FLOORS, (HUBBELL NO. AFB4G50, OAE)
  C - FIRE RATED POKE-THROUGH FLOOR BOX FOR ELEVATED CONCRETE SLABS, 3" DIA. CORE (HUBBELL NO. PT7FSD, OAE)
- H — ADJUSTABLE HUMIDISTAT
- T — ADJUSTABLE THERMOSTAT
- PANELBOARD OR LOAD CENTER
- SPECIAL PURPOSE RECEPTACLE (MOUNT AT +18", UNO)
  "X" INDICATES TYPE:
  A - NEMA 5-20R, #12 CU; B - NEMA 5-30R, #10 CU;
  C - NEMA 5-50R, #6 CU; D - NEMA 6-20R, #12 CU;
  E - NEMA 6-30R, #10 CU; F - NEMA 6-50R, #6 CU;
  G - NEMA 14-20R, #12 CU; H - NEMA 14-30R, #10 CU;
  I - NEMA 14-50R, #6 CU*
  * +4" AFF FOR RANGE
- PUSHBUTTON (MOUNT AT +48", UNO)
  "X" INDICATES TYPE:
  EPO - EMERGENCY POWER OFF
  ABA - HANDICAPPED ACCESSIBLE DOOR (DEVICE BY OTHERS)
  ODO - OVERHEAD DOOR OPERATOR (DEVICE BY OTHERS)
- RECESSED TV BOX, WITH BLANK COVERS FOR LOW VOLTAGE OPENINGS. MOUNT AT +72", UNO.
  X INDICATES TYPE:
  A - 2-GANG, WITH DUPLEX RECEPTACLE & SINGLE GANG DATA OPENING.
  HUBBELL RACO NSAV62M, WITH NSAV6C COVER
  B - 3-GANG, WITH DUPLEX RECEPTACLE, LOW VOLTAGE DIVIDER, SINGLE GANG FOR DATA (CENTER), AND REMOVABLE SINGLE GANG FOR AUDIO/VISUAL (SIDE).
  ARLINGTON TVBS507
  NOTE: ROUTE (1) 1" C. TO DATA OPENING AND (1) 1-1/4" C. TO AUDIO/VISUAL OPENING, FROM TOP OF GANG IN WALL INTO ACCESSIBLE CEILING SPACE. ALSO ROUTE 1-1/4" C. FROM AUDIO/VISUAL OPENING TO FLOOR BOX WHERE APPLICABLE.
- J — JUNCTION BOX
- SURFACE MOUNTED RACEWAY
- RACEWAY CONCEALED IN WALL, FLOOR, OR CEILING IN FINISHED SPACES, EXPOSED IN UNFINISHED SPACES
- RACEWAY BELOW FLOOR OR BELOW GRADE
- RACEWAY STUB-OUT WITH CAPPED END
- RACEWAY STUB-OUT WITH BUSHED END
- GROUNDING BUS

ELECTRICAL LOW VOLTAGE LEGEND

FIRE ALARM SYSTEM	TELEPHONE/DATA SYSTEM
FS — SPRINKLER FLOW SWITCH	TELEPHONE OUTLET (MOUNT AT +18", UNO). SEE NOTE.
TS — SPRINKLER TAMPER SWITCH	VOICE-DATA OUTLET (MOUNT AT +18", UNO). SEE NOTE.
FSD — FIRE/SMOKE DAMPER	DATA OUTLET (MOUNT AT +18", UNO). SEE NOTE.
SD$_X$ — SMOKE DETECTOR "X" INDICATES TYPE: BLANK - PHOTO-ELECTRIC SYSTEM DETECTOR CO - COMBINATION SMOKE/CARBON MONOXIDE DETECTOR D - DUCT SMOKE DETECTOR LF - PROVIDE LOW-FREQUENCY SOUNDER BASE	AP — WIRELESS ACCESS POINT NOTE: PROVIDE ROUGH-IN ONLY. 4-SQUARE BOX WITH MUD RING & 1" C. STUBBED UP TO ACCESSIBLE CEILING SPACE.
MF — MANUAL STATION (MOUNT AT +48", UNO)	
HORN/STROBE - WALL MOUNT (+90"), CEILING MOUNT	

ELECTRICAL LIGHTING CONTROL LEGEND

STANDARD LIGHTING CONTROLS:
SWITCHES AND LINE VOLTAGE DIMMERS

- $X — TOGGLE SWITCH (MOUNT AT +48", UNO)
  "X" INDICATES TYPE:
  BLANK - SINGLE POLE
  3 - INDICATES THREE-WAY
  4 - INDICATES FOUR-WAY
  D - INDICATES DIMMER SWITCH
  PHILIPS SUNRISE - ON/OFF
  K - INDICATES KEYED SWITCH
  T - INDICATES TIMER
  P - INDICATES PILOT LIGHT
  OS - INDICATES WALL SWITCH OCC SENSOR
  WATTSTOPPER DSW-301 (SINGLE OR DUAL DSW-302 SWITCH)
  OSD - INDICATES WALL SWITCH OCC SENSOR WITH 0-10V DIMMING - WATTSTOPPER DW-311
  a - SINGLE POLE LIGHTING SWITCH ZONE 'a'
  b - SINGLE POLE LIGHTING SWITCH ZONE 'b'
  ab - INDICATES LIGHTING SWITCHES WITH MULTIPLE ZONES
- OS — OCCUPANCY SENSOR - DUAL TECHNOLOGY CEILING MOUNT: WATTSTOPPER DT-300, OR EQUAL WALL MOUNT: WATTSTOPPER DT-200, OR EQUAL WALL MOUNTED SHALL BE AT +96", UNO PROVIDE WITH BZ-50 POWER PACKS AS NEEDED.
- P — PHOTOCELL - CEILING MOUNT, WATTSTOPPER LS-301, OR EQUAL
- PL — PLUG LOAD CONTROL RELAY
- TSD — UL1008 TRANSFER SWITCH DEVICE BODINE GTD20A, OR EQUAL
- EB — UL924 LIGHTING CONTROLS EMERGENCY BYPASS WATTSTOPPER ELCU-200, OR EQUAL

ABBREVIATIONS AND SYMBOLS GENERAL NOTES

A. THE ABBREVIATIONS ON THIS SHEET COMPRISE A STANDARD LIST; NOT ALL ABBREVIATIONS APPEAR ON THIS PROJECT.
B. THE SYMBOLS ON THIS SHEET COMPRISE A STANDARD LIST; NOT ALL SYMBOLS APPEAR ON THIS PROJECT.
C. ALL MOUNTING HEIGHTS ARE TO CENTER OF DEVICE ABOVE FINISHED FLOOR, UNLESS NOTED OTHERWISE. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH OTHER CONTRACTORS, MAKING ADJUSTMENTS AS REQUIRED TO AVOID INTERFERENCE WITH EQUIPMENT SUCH AS BASEBOARD FIN-TUBE, CABINET UNIT HEATERS, ETC. ARCHITECT/ENGINEER SHALL BE NOTIFIED OF ALL SUCH HEIGHT ADJUSTMENTS. MOUNTING HEIGHTS INDICATED ON ARCHITECTURAL WALL ELEVATIONS OR AS NOTED SPECIFICALLY ON THE DRAWINGS OR IN THE SPECIFICATIONS SHALL TAKE PRECEDENCE OVER MOUNTING HEIGHTS LISTED.

ELECTRICAL PROJECT GENERAL NOTES

A. PRIOR TO BID CONTRACTOR SHALL VISIT THE SITE. NOT ALL WORK REQUIRED TO COMPLETE THE PROJECT IS SHOWN ON THE DRAWINGS. THE CONTRACTOR SHALL BECOME THOROUGHLY FAMILIAR WITH ALL THE WORK REQUIRED TO COMPLETE THE PROJECT IN ADDITION TO THE LOCAL CONDITIONS AND INCLUDE SAID WORK IN THE BID.
B. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF ALL ELECTRICAL SERVICE WORK WITH UTILITY. OWNER PAYS ALL FEES, CONTRACTOR DOES ALL SCHEDULING AND COORDINATION OF WORK. IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE ALL SCHEDULES ARE MET.
C. GENERAL WORK PRACTICES FOR ELECTRICAL CONSTRUCTION SHALL BE IN ACCORDANCE WITH NECA 1, "STANDARD PRACTICES FOR GOOD WORKMANSHIP IN ELECTRICAL CONTRACTING." THIS PUBLICATION IS AVAILABLE FROM NECA BY TELEPHONE AT 301-657-3110 OR ON-LINE AT WWW.NECANET.ORG.
D. FIRE-RESISTANCE: PROVIDE A MINIMUM HORIZONTAL DISTANCE OF 24" BETWEEN OUTLET BOXES LOCATED ON OPPOSITE SIDES OF FIRE-RESISTANCE RATED WALLS. WHERE THIS IS NOT POSSIBLE INSTALL UL LISTED PUTTY PADS ON ALL OUTLET BOXES NOT MEETING THE 24" SEPARATION. PROVIDE A UL LISTED THROUGH -PENETRATION FIRESTOP FOR PENETRATIONS OF FIRE-RESISTANCE RATED ASSEMBLIES.
E. CONDUCTORS ARE SIZED PER THE 75 DEGREE C RATING COLUMN OF NEC TABLE 310.16. IF THE TERMINAL USED FOR A TERMINATION OF A PARTICULAR CONDUCTOR IS NOT MARKED, OR THE TERMINAL IS MARKED FOR 60 DEGREE C CONDUCTORS, IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO EITHER ADJUST THE AMPACITY OF THE CONDUCTOR TO MATCH THE 60 DEGREE COLUMN OF TABLE 310.16, OR REPLACE THE TERMINAL WITH ONE RATED FOR AT LEAST 75 DEGREES C.
F. BASED ON ACTUAL HOMERUN LENGTHS REQUIRED IN THE FIELD, THE CONTRACTOR SHALL CALCULATE AND INCREASE THE WIRE SIZES AS REQUIRED TO LIMIT BRANCH CIRCUIT VOLTAGE DROP TO 3%. FOR 20A BRANCH CIRCUITS THE MINIMUM CONDUCTOR SIZES SHALL BE AS FOLLOWS: #10 AWG CU FOR RUNS BETWEEN 100 AND 200 LINEAR FEET, #8 AWG CU FOR RUNS BETWEEN 200 AND 325 LINEAR FEET, AND AS CALCULATED BY THE CONTRACTOR FOR CIRCUITS EXTENDING BEYOND 325 LINEAR FEET. IN ALL CASES WHERE WIRE SIZES INCREASE, THE CONTRACTOR SHALL PROVIDE LARGER CONDUITS AS REQUIRED.
G. PROVIDE A DEDICATED NEUTRAL CONDUCTOR FOR EACH 120V BRANCH CIRCUIT.

ELECTRICAL PROJECT DEMO NOTES

A. DURING DEMOLITION, THE CONTRACTOR SHALL NOTE ALL EXISTING RACEWAY (BOTH SURFACE AND CONCEALED) TO THE EXTENT POSSIBLE. THESE RACEWAYS SHALL BE REUSED TO THE GREATEST EXTENT POSSIBLE TO INSURE A CLEAN FINISHED PRODUCT. WHERE PRACTICAL, AND ALLOWED PER CODE, FISHING THROUGH WALLS WITH MC CABLE IS PREFERRED TO SURFACE-MOUNTED CONDUIT.
B. CONTRACTOR SHALL REMOVE, TRANSPORT, AND LEGALLY DISPOSE OF LAMPS AND BALLASTS OFF-SITE. IT IS ASSUMED THAT THE BALLASTS DO NOT CONTAIN PCBs. THE CONTRACTOR SHALL NOTIFY THE OWNER IMMEDIATELY IF IT IS SUSPECTED THAT BALLASTS CONTAIN PCBs.
C. ALL POWER INTERRUPTIONS SHALL BE COORDINATED WITH OWNER. ANY DISRUPTION OF WORKERS IN THE SPACE SHALL BE KEPT TO A MINIMUM AND BE COORDINATED WITH THE OWNER PRIOR TO WORK COMMENCING IN THAT SPACE.
D. CONTRACTOR SHALL EXTEND UNSWITCHED HOT LEG FROM EXISTING EMERGENCY FIXTURE LOCATION TO NEW EMERGENCY FIXTURES, AS NEEDED. SEE DEMO PLANS FOR AN APPROXIMATION OF EXISTING EMERGENCY FIXTURE LOCATIONS. FIELD VERIFY EXACT LOCATION PRIOR TO BID.
E. ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR OF ANY EXISTING CONDUIT OR FEEDER CIRCUITS THAT ARE INTENDED TO REMAIN THAT ARE SAW-CUT, OR OTHERWISE DAMAGED, AS PART OF THE DEMOLITION PROCESS. PROVISION FOR THIS WORK SHALL INCLUDE, BUT NOT BE LIMITED TO: ALL NECESSARY CONDUIT AND CONDUCTORS, MOUNTING ACCESSORIES AND LABOR, TO RESTORE THE SYSTEM TO ITS INTENDED FUNCTION.
F. ELECTRICAL DRAWINGS SHOWING EXISTING BUILDING CONDITIONS, SUCH AS DEMOLITION DRAWINGS, EXISTING PANEL SCHEDULES, ETC ARE BASED ON RECORD DRAWINGS AND SITE VISITS. IF ACTUAL EXISTING CONDITIONS DIFFER FROM THOSE SHOWN ON DRAWINGS, PLEASE NOTIFY ENGINEER.

ELECTRICAL SHEET INDEX

NUMBER	SHEET NAME
000 E001	OVERALL - ELECTRICAL LEGENDS
000 E002	OVERALL - ELECTRICAL ONE-LINE DIAGRAMS
000 E003	OVERALL - ELECTRICAL DETAILS
000 E004	OVERALL - ELECTRICAL DETAILS
000 E100	OVERALL - ELECTRICAL SITE PLAN
399 E001	MAIN LODGE - ELECTRICAL SCHEDULES
399 E100	MAIN LODGE - ELECTRICAL DEMO PLAN
399 E101	MAIN LODGE - BASEMENT ELECTRICAL PLAN
399 E201	MAIN LODGE - POWER AND SIGNAL PLAN
399 E301	MAIN LODGE - LIGHTING PLAN
400 E001	RIVER CABIN - ELECTRICAL SCHEDULES
400 E101	RIVER CABIN - POWER AND SIGNAL PLAN
400 E201	RIVER CABIN - LIGHTING PLAN
401 E001	NURSES CABIN - ELECTRICAL SCHEDULES
401 E100	NURSES CABIN - ELECTRICAL DEMO PLAN

ELECTRICAL SHEET INDEX

NUMBER	SHEET NAME
401 E101	NURSES CABIN - ELECTRICAL RENOVATION PLAN
403 E100	3-BAY GARAGE - ELECTRICAL PLAN
404 E001	GEORGES CABIN - ELECTRICAL SCHEDULES
404 E100	GEORGES CABIN - ELECTRICAL DEMO PLAN
404 E101	GEORGES CABIN - ELECTRICAL RENOVATION PLAN
405 E100	MOUSE HOUSE - ELECTRICAL PLAN
406 E101	ICE HOUSE - ELECTRICAL PLAN
407 E001	END CABIN - ELECTRICAL SCHEDULES
407 E101	END CABIN - POWER AND SIGNAL PLAN
407 E201	END CABIN - LIGHTING PLAN
410 E001	HARRY'S CABIN - ELECTRICAL SCHEDULES
410 E100	HARRY'S CABIN - ELECTRICAL DEMO PLAN
410 E101	HARRY'S CABIN - ELECTRICAL RENOVATION PLAN
411 E001	NEW CABIN - ELECTRICAL SCHEDULES
411 E101	NEW CABIN - POWER AND SIGNAL PLAN
411 E201	NEW CABIN - LIGHTING PLAN

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — RYAN P. MARONEY — 18841 — Date 07/21/2026 — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
000
E001

TITLE OF SHEET
OVERALL – ELECTRICAL LEGENDS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 81 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

⟨#⟩ KEY NOTES:

1. REPLACE EXISTING 100A-2P CIRCUIT BREAKER WITH NEW 90A-2P CIRCUIT BREAKER.
2. EXISTING EMPTY 2" UNDERGROUND CONDUIT IS IN PLACE FROM EXTERIOR OF MAIN LODGE BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE.
3. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE.

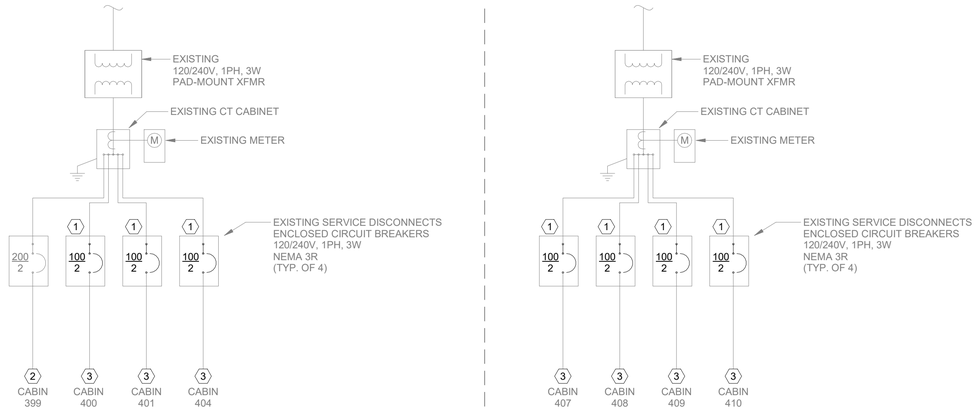

1 EXISTING ONE LINE DIAGRAM
N.T.S.

⟨#⟩ KEY NOTES:

1. REPLACE EXISTING 100A-2P CIRCUIT BREAKER WITH NEW 90A-2P CIRCUIT BREAKER.
2. EXISTING EMPTY 2" UNDERGROUND CONDUIT IS IN PLACE FROM EXTERIOR OF MAIN LODGE BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW CONDUCTORS AND RUN WITHIN CONDUIT PATHWAY FROM EXISTING 200A SERVICE DISCONNECT TO NEW MAIN LODGE DISCONNECT. PROVIDE (2) #250AL, #4/0AL NEUTRAL, & # 2AL GROUND.
3. PROVIDE 200A FEEDER BETWEEN DISCONNECT AND NEW PANEL P399: (2) # 250AL, #4/0AL NEUTRAL, & #2AL GROUND IN 2"C.
4. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
5. PROVIDE A NEW 90A-2P ENCLOSED NEMA 3R CIRCUIT BREAKER. MOUNT ADJACENT TO EXISTING SERVICE DISCONNECTS AND CONNECT TO EXISTING SERVICE CT CABINET WITH (2) #2AL, #4AL N, & #6AL GND IN 1-1/2"C. PROVIDE NEW LANDING LUGS WITHIN CABINET AS REQUIRED.
6. PROVIDE AN EMPTY 2" SPARE UNDERGROUND CONDUIT FROM GARAGE BACK TO EXISTING NORTH SERVICE PEDESTAL FOR FUTURE USE.
7. PROVIDE AN EMPTY 2" SPARE UNDERGROUND CONDUIT FROM PARKING AREA TO EXISTING NORTH SERVICE PEDESTAL FOR FUTURE USE.
8. PROVIDE DIRECT BURY FEEDER CONSISTING OF (2) #2AL, #4AL N, & #6AL GND FOR POWER TO NEW CABIN 411.
9. PROVIDE 100A FEEDER CONSISTING OF (2) #1AL, #1AL N, & #6AL GND IN 1-1/2" CONDUIT FOR POWER TO PANEL PLS.

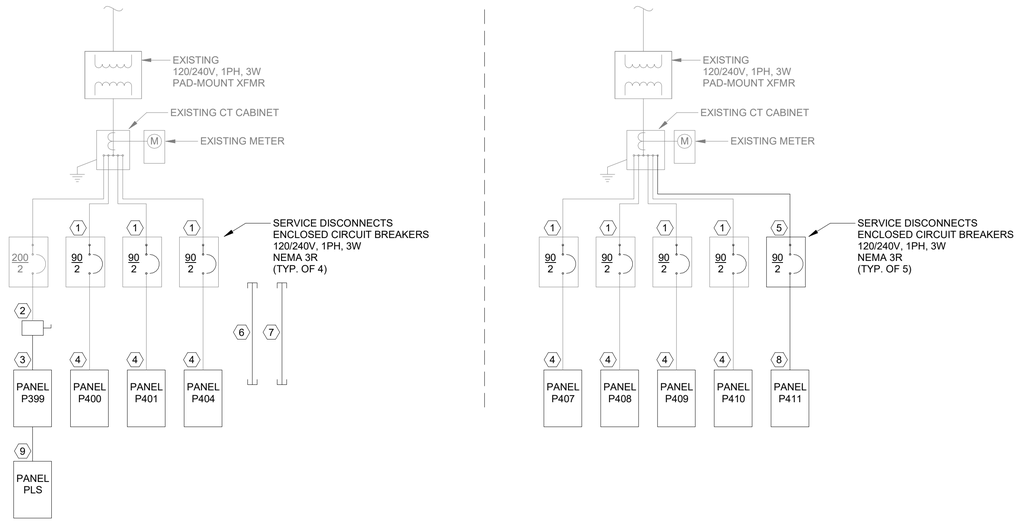

2 NEW ONE LINE DIAGRAM
N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
000
E002

TITLE OF SHEET
OVERALL – ELECTRICAL ONE–LINE DIAGRAMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 82 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

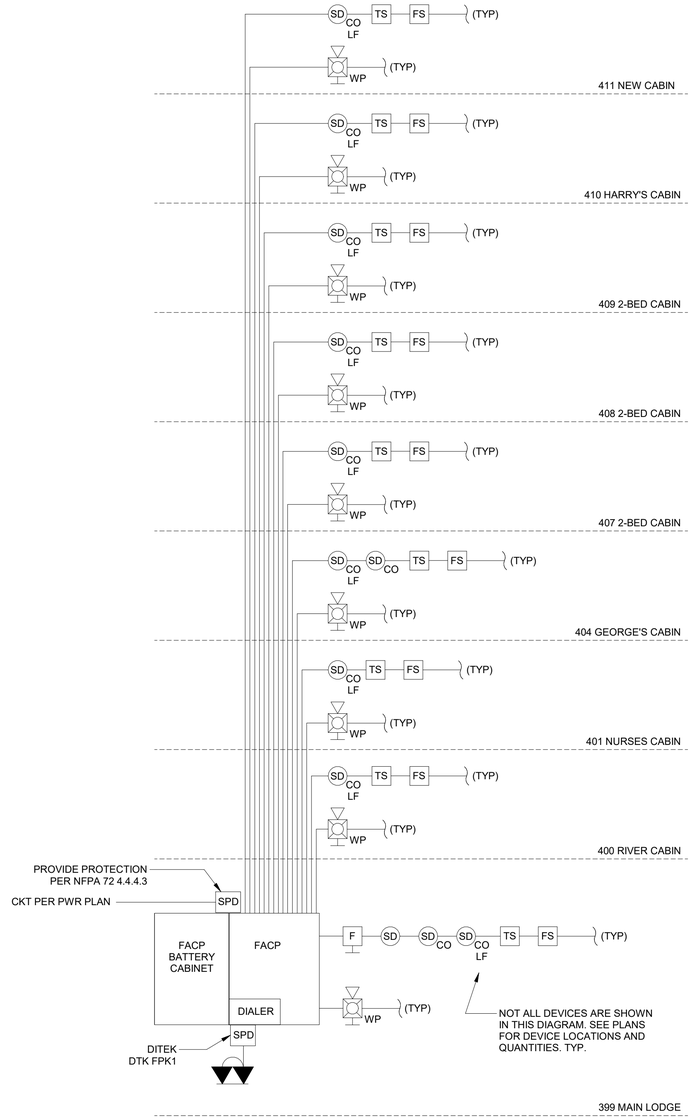

NOTES:
- FIRE ALARM SYSTEM INSTALLER SHALL SUBMIT NICET LEVEL III CERTIFICATION PRIOR TO UNDERTAKING PROJECT.
- ALL FIRE ALARM SYSTEM CONDUCTORS SHALL BE RUN IN CONDUIT.
- ALL FIRE ALARM BOX COVERS AND EXPOSED NON-PUBLIC CONDUITS SHALL BE PAINTED RED.
- PROVIDE POWER SUPPLIES AS REQUIRED FOR SIGNALING DEVICES. PROVIDE A SMOKE DETECTOR WITHIN 5 FEET OF EACH POWER SUPPLY LOCATION.
- ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
- ALL SMOKE DETECTORS LOCATED IN A COMMON STRUCTURE SHALL BE PROGRAMMED SUCH THAT IF ONE ALARMS ALL ALARM.

1 FIRE ALARM RISER DIAGRAM
N.T.S.

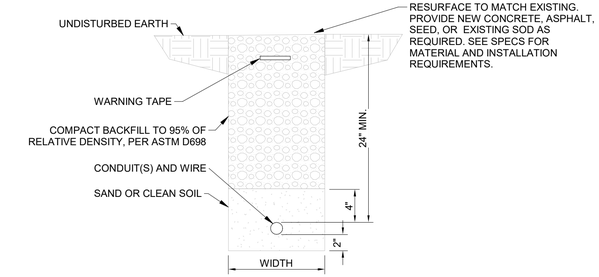

NOTES:
1. WIDTH: MINIMUM 6"
2. WHERE POSSIBLE PUSH CONDUIT UNDER SIDEWALKS AND DRIVES TO AVOID EXCAVATION.
3. CONTRACTOR MAY USE BORING MACHINE IN LIEU OF TRENCHING WHERE CONDITIONS PERMIT. EQUIPMENT AND CONDUIT SHALL BE PRE-APPROVED BY ARCHITECT/ENGINEER.

2 TRENCH DETAIL - SINGLE CONDUIT
N.T.S.

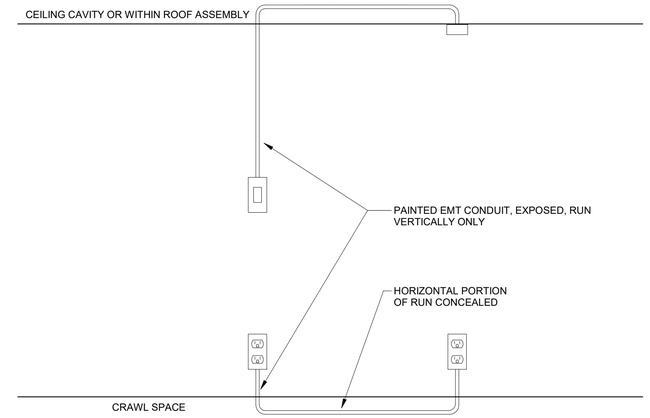

NOTES:
1. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

2. CAREFULLY PLAN AND COORDINATE ALL ROUTING WITH ARCHITECT PRIOR TO ROUGH-IN. IDENTIFY ALL PLANNED SURFACE MOUNT ROUTING FOR APPROVAL PRIOR TO COMMENCING WORK.

3 SURFACE MOUNT CONDUIT DETAIL
N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
WYOMING
Date 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: CDC DRAWN: CDC TECH REVIEW: RPM DATE: 07/21/2026	SUB SHEET NO. 000 E003	TITLE OF SHEET OVERALL – ELECTRICAL DETAILS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 83 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

Branch Panel: PLS

Location: SITE NEXT TO LIFT STATION
Supply From: P399
Mounting: Surface
Enclosure: Nema 3R

Volts: 120/240 Single
Phases: 1
Wires: 3

A.F.C.: 1,605
Mains Type: MLO
Mains Rating: 100 A
-

Equipment Notes:

CKT	Circuit Description	Circuit Notes	Trip	Poles	A	Poles	Trip	Circuit Notes	Circuit Description	CKT
1						1	--		SPACE	2
3	LIFT STATION CONTROL PANEL		60 A	2		1	--		SPACE	4
5	LIFT STATION HEATER		20 A	1		1	--		SPACE	6
7	CONVENIENCE RCPT		20 A	1		1	--		SPACE	8
9	SPARE		20 A	1		1	--		SPACE	10
11	SPARE		20 A	1		1	--		SPACE	12

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

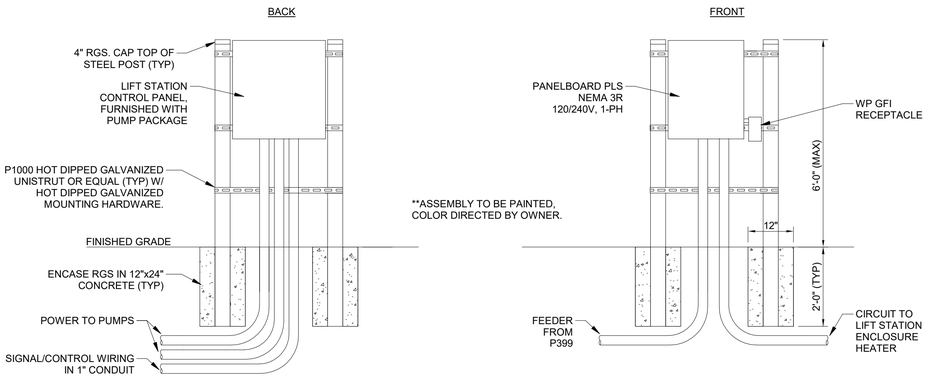

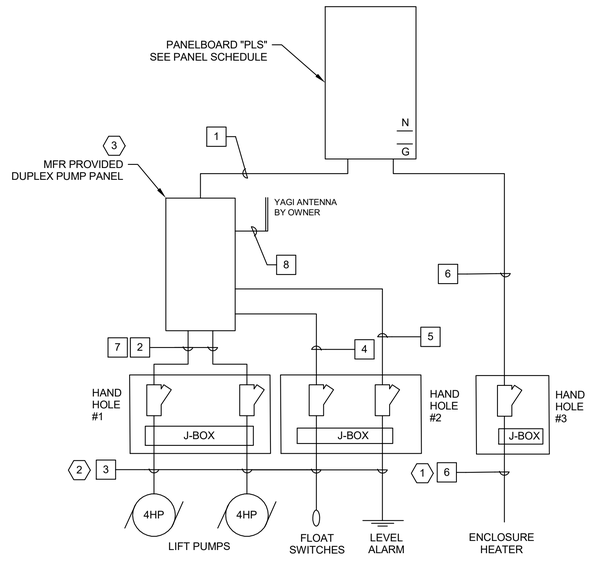

KEY NOTES:

1. PROVIDE CLASS 1 DIV 2 RATED WIRING METHODS FOR AREA WITHIN ABOVE-GROUND ENCLOSURE.
2. PROVIDE CLASS 1 DIV 1 RATED WIRING METHODS FOR AREA WITHIN WET WELL.
3. LIFT STATION CONTROL PANEL FURNISHED AS PART OF PUMP PACKAGE. CONTROL PANEL SHALL CONTAIN A VFD FOR EACH PUMP. VFDS WILL TAKE 240V 1-PHASE INPUT POWER AND CONVERT TO 240V 3-PHASE OUTPUT POWER FOR PUMPS.

GENERAL NOTES:

A. PROVIDE WIRING METHODS IN ACCORDANCE WITH NEC ARTICLE 501 REQUIREMENTS FOR CLASS 1 DIV 1 AREA WITHIN WET WELL AND CLASS 1 DIV 2 AREA WITHIN ABOVE-GROUND ENCLOSURE.
B. REFER TO SHEET 000 C305 FOR LIFT STATION DETAILS AND FURTHER INFORMATION.
C. REFER TO PUMP MANUFACTURER SHOP DRAWINGS FOR FINAL WIRING DIAGRAMS AND ELECTRICAL REQUIREMENTS.

FEEDER SCHEDULE

ALL CONDUCTORS TO BE COPPER

1. (3#6, 1#10GND, 1-1/4"C) DUPLEX PUMP CONTROL PANEL PWR FEEDER
2. (3#12, 1#12GND, 1"C) MOTOR FEEDERS, RUN VFD CABLE TO JBOX @ HANDHOLE.
3. (MFR SUPPLIED CABLE) PUMP MFR CABLE, FLOAT SWITCH CABLE, OR LEVEL ELEMENT CABLE
4. (6#14, 1"C) FLOAT SIGNAL CONDUCTORS
5. (1#16TSP, 3/4"C) LEVEL ELEMENT CONTROL CABLE
6. (2 #12, 1 #12 GND, 3/4"C) PWR TO ENCLOSURE HEATER.
7. (4#14, 1"C) MOTOR THERMAL/ SEAL
8. DUPLEX PUMP CONTROL SIGNALS TO SCADA.

1 PANEL PLS AND LIFT STATION CONTROLLER DETAIL

N.T.S.

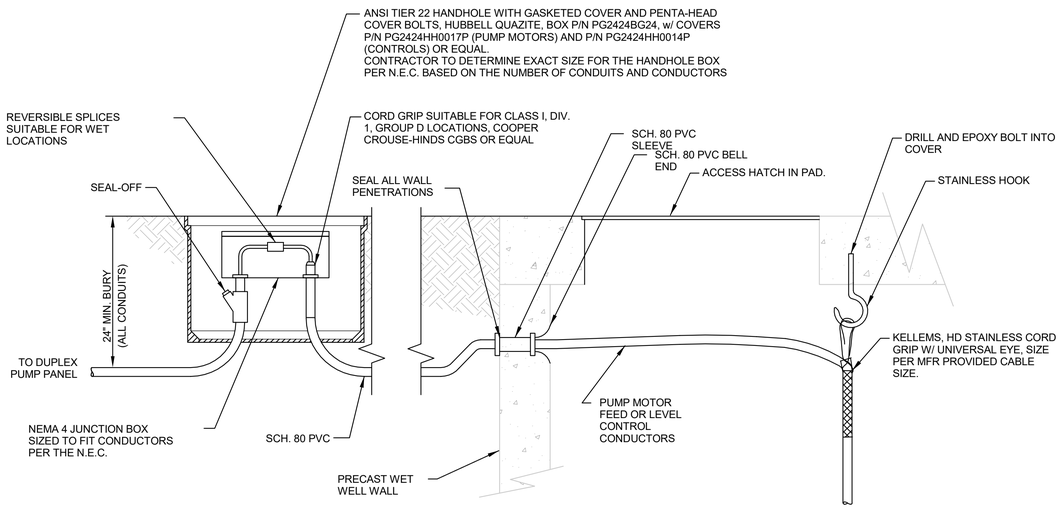

3 ELECTRICAL SEAL-OFF & JUNCTION-BOX DETAIL

N.T.S.

2 LIFT STATION ONE-LINE DIAGRAM

N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
000
E004

TITLE OF SHEET
OVERALL – ELECTRICAL DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 84 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

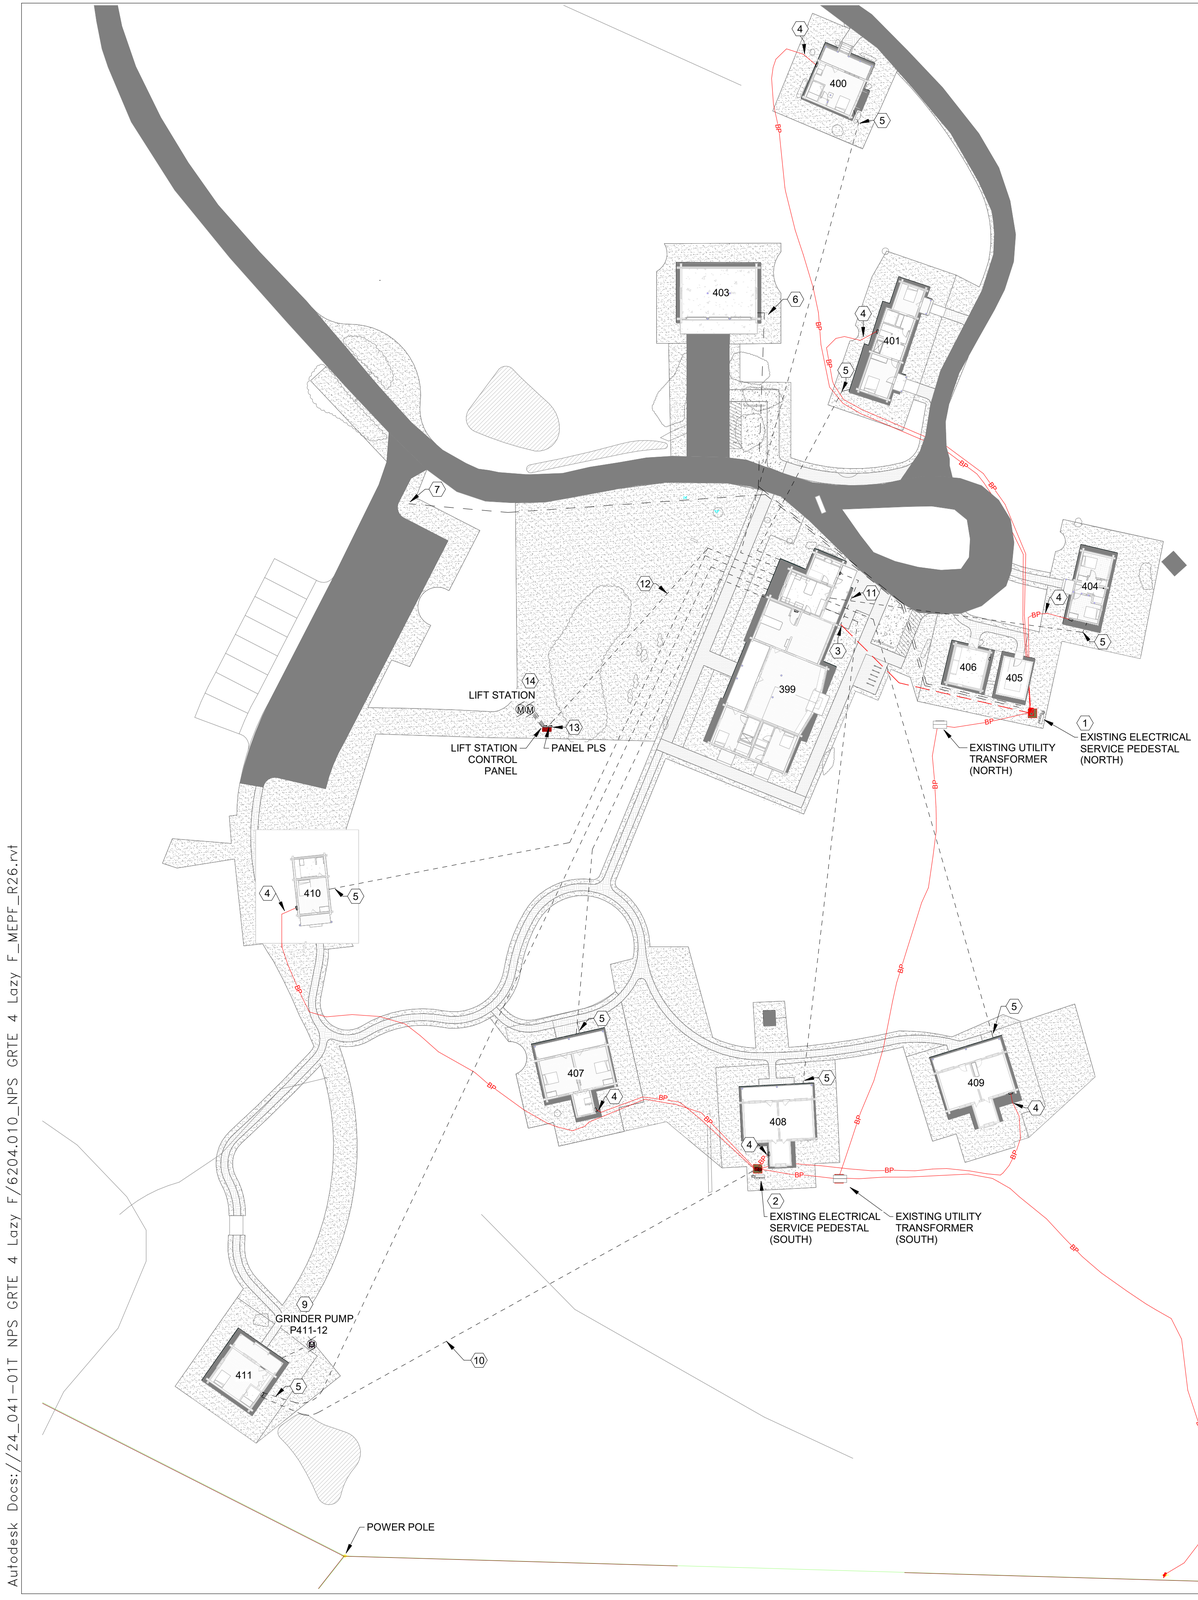



2 CARETAKERS CABIN ELECTRICAL PLAN

1/32" = 1'-0"

1 ELECTRICAL SITE PLAN

1/32" = 1'-0"

SCALE OF FEET

NORTH

ELECTRICAL SITE PLAN GENERAL NOTES

A. EXISTING BURIED POWER IS SHOWN WITH A RED SOLID LINE MARKED 'BP'.

B. CONTRACTOR SHALL LOCATE AND VERIFY ALL EXISTING BURIED UTILITIES ON SITE, INCLUDING ELECTRIC, PRIOR TO COMMENCING ANY WORK.

C. PROVIDE HANDHOLE AS REQUIRED ALONG CONDUIT RUNS EVERY 250' OR 270 DEGREES OF CONDUIT BEND.

(#) KEY NOTES:

1. REPLACE THE (3) EXISTING 100A-2P CIRCUIT BREAKERS WITH (3) NEW 90A-2P CIRCUIT BREAKERS. SEE ONE-LINE DIAGRAMS ON SHEET E002 FOR DETAILS.
2. REPLACE THE (4) EXISTING 100A-2P CIRCUIT BREAKERS WITH (5) NEW 90A-2P CIRCUIT BREAKERS. SEE ONE-LINE DIAGRAMS ON SHEET E002 FOR DETAILS.
3. EXISTING EMPTY 2" UNDERGROUND CONDUIT IS IN PLACE FROM EXTERIOR OF MAIN LODGE BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW CONDUCTORS AND RUN WITHIN CONDUIT PATHWAY FROM EXISTING 200A SERVICE DISCONNECT TO NEW MAIN LODGE DISCONNECT. PROVIDE (2) #250AL, #4/0AL NEUTRAL, & #2AL GROUND.
4. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
5. PROVIDE 2" UNDERGROUND CONDUIT WITH FIRE ALARM CONDUCTORS FROM CRAWL SPACE OF NOTED BUILDING AND ROUTE BACK TO BASEMENT OF MAIN LODGE, FOR CONNECTION OF CABIN FIRE ALARM DEVICES TO FIRE ALARM CONTROL PANEL.
6. PROVIDE AN EMPTY 2" SPARE UNDERGROUND CONDUIT FROM GARAGE BACK TO EXISTING NORTH SERVICE PEDESTAL FOR FUTURE USE.
7. PROVIDE AN EMPTY 2" SPARE UNDERGROUND CONDUIT FROM PARKING AREA TO EXISTING NORTH SERVICE PEDESTAL FOR FUTURE USE.
8. POWER GRINDER PUMP FROM EXISTING ELECTRICAL PANEL AT CARETAKERS CABIN. PROVIDE NEW 20A-1P BREAKER IN EXISTING PANEL TO SERVE NEW GRINDER PUMP.
9. PROVIDE (3) #12CU IN 3/4" CONDUIT FOR POWER TO GRINDER PUMP. REFER TO DETAIL 4 ON SHEET 000 C204. WIRE PUMP COMPLETE PER MANUFACTURER REQUIREMENTS.
10. PROVIDE DIRECT BURY FEEDER CONSISTING OF (2) #2AL, #4AL N, & #6AL GND FOR POWER TO NEW CABIN 411.
11. PROVIDE NEW 2" SCH 80 PVC CONDUIT AND EXTEND FROM EXISTING 2" BURIED CONDUIT OVER AND UP TO NEW 200A DISCONNECT SWITCH.
12. SEE ONE-LINE DIAGRAM FOR NEW FEEDER.
13. SEE SHEET 000 E004 FOR PANEL PLS AND LIFT STATION CONTROL PANEL DETAILS.
14. SEE SHEET 000 C305 AND SHEET 000 E004 FOR LIFT STATION DETAILS.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
000
E100

TITLE OF SHEET
OVERALL – ELECTRICAL SITE PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 85 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

ABBREVIATIONS

ACC	AIR COOLED CONDENSER
ACU	AIR CONDITIONING UNIT
AD	ACCESS DOOR
ADJ	ADJUSTABLE
AF	AIR FOIL
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AFR	ABOVE FINISHED ROOF
AFS	AIR FLOW STATION
AHU	AIR HANDLING UNIT
AP	ACCESS PANEL
ATC	AUTOMATIC TEMPERATURE CONTROL
ATM	ATMOSPHERE
AWG	AMERICAN WIRE GAUGE
B	BOILER
BB	BASEBOARD
BC	BACKWARD CURVED
BD	BACKDRAFT DAMPER
BF	BOILER FEED
BHP	BRAKE HORSEPOWER
BI	BACKWARD INCLINED
BMS	BUILDING MANAGEMENT SYSTEM
BOD	BOTTOM OF DUCT
BOJ	BOTTOM OF JOIST
BOS	BOTTOM OF STEEL
BTU	BRITISH THERMAL UNIT
C	COMMON
CAV	CONSTANT AIR VOLUME
CC	COOLING COIL
CCW	COUNTER CLOCKWISE
CFM	CUBIC FEET PER MINUTE
CH	CHILLER
C&I	CONTROLS & INSTRUMENTATION
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
CND	CONDENSATE
CO	CLEAN OUT
CONT	CONTINUATION
CORR	CORRIDOR
COTG	CLEANOUT TO GRADE
CT	COOLING TOWER
CU	CONDENSING UNIT
CH	CABINET HEATER
CV	CONTROL VALVE
CVS	CONTROL VALVE STATION
CW	CLOCKWISE
dB	DECIBEL
DB	DRY BULB TEMPERATURE (°F)
DDC	DIRECT DIGITAL CONTROL
DH	DUCT HEATER
DP	DEW POINT TEMPERATURE (°F)
DX	DIRECT EXPANSION
E	EXHAUST
EA	EXHAUST AIR
EAT	ENTERING AIR TEMPERATURE (°F)
EC	ELECTRICAL CONTRACTOR
EDR	EQUIVALENT DIRECT RADIATION
EER	ENERGY EFFICIENCY RATIO
EF	EXHAUST FAN
EFF	EFFICIENCY
ELEV	ELEVATION
ERV	ENERGY RECOVERY VENTILATOR
ESP	EXTERNAL STATIC PRESSURE
ET	EXPANSION TANK
EWT	ENTERING WATER TEMPERATURE (°F)
F&T	FLOAT & THERMOSTATIC
FA	FACE AREA
FC	FORWARD CURVED
FC	FAN COIL
FP	FIRE PROTECTION
FPM	FEET PER MINUTE
FT	FEET
GA	GAUGE OR GAGE
GC	GENERAL CONTRACTOR
GEN	GENERATOR
GH	GRAVITY HOOD
GPD	GALLONS PER DAY
GPH	GALLONS PER HOUR
GPM	GALLONS PER MINUTE
HC	HEATING COIL
HG	MERCURY
HOA	HAND-OFF-AUTOMATIC
HP	HORSEPOWER
HR	HOUR
HX	HEAT EXCHANGER
ID	INSIDE DIAMETER
IFB	INTEGRAL FACE & BYPASS
IGV	INLET GUIDE VANES
IPS	IRON PIPE SIZE
IU	INDUCTION UNIT
KW	KILOWATTS
KWH	KILOWATT HOUR
LAT	LEAVING AIR TEMPERATURE (°F)
LF	LINEAR FEET
LWT	LEAVING WATER TEMPERATURE (°F)
M	MOTOR OPERATED
MAU	MAKEUP AIR UNIT
MB	MIXING BOX
MBH	1000 BTU/HR
MC	MECHANICAL CONTRACTOR
MFR	MANUFACTURER
MS	MINI-SPLIT
NC	NOISE CRITERIA
NC	NORMALLY CLOSED
NIC	NOT IN CONTRACT
NO	NORMALLY OPEN
NPS	NOMINAL PIPE SIZE
OA	OUTSIDE AIR
OAD	OUTSIDE AIR DAMPER
OBD	OPPOSED BLADE DAMPER
P	PUMP
PC	PLUMBING CONTRACTOR
PD	PRESSURE DROP
PH	PHASE
PHC	PREHEAT COIL
PPM	PART PER MILLION
PROP	PROPELLER
PRV	PRESSURE REDUCING VALVE
PSIA	PSI, ABSOLUTE
PSIG	PSI, GAUGE
QTY	QUANTITY
R	REGISTER
RA	RETURN AIR
RD	RADIAL DAMPER
RF	RETURN/RELIEF AIR FAN
RH	RELATIVE HUMIDITY
RHC	REHEAT COIL
SA	SUPPLY AIR
SAF	SUPPLY AIR FAN
SC	SENSIBLE COOLER
SCFM	CFM, STANDARD CONDITIONS
SD	SMOKE DETECTOR
SEER	SEASONAL ENERGY EFFICIENCY RATIO
SENS	SENSIBLE
SP	STATIC PRESSURE
SPS	STATIC PRESSURE SENSOR
SS	STAINLESS STEEL
T	THERMOSTAT
TA	TRANSFER AIR
TCC	TEMPERATURE CONTROL CONTRACTOR
TCP	TEMPERATURE CONTROL PANEL
TG	TRANSFER GRILL
TOS	TOP OF STEEL
TSP	TOTAL STATIC PRESSURE
TYP	TYPICAL
UH	UNIT HEATER
UNC	UNDERCUT
UV	UNIT VENTILATOR
VA	VOLT-AMPERE
VAV	VARIABLE AIR VOLUME
VD	VOLUME DAMPER
VEL	VELOCITY
VFD	VARIABLE FREQUENCY DRIVE
VRF	VARIABLE REFRIGERANT FLOW
WB	WET BULB TEMPERATURE (°F)
WC	WATER COLUMN
WG	WATER GAUGE
WSHP	WATER SOURCE HEAT PUMP
ΔT	TEMPERATURE DIFFERENCE (°F)

PLUMBING LEGEND

ANNOTATION SYMBOLS

- X / X — 3D VIEW NUMBER / SHEET NUMBER
- X / X — DETAIL NUMBER / SHEET NUMBER
- X / X — SECTION NUMBER / SHEET NUMBER
- PF# — PLUMBING FIXTURE / EQUIPMENT MARK
- PF# — PLUMBING FIXTURE (LOCATED ON FLOOR ABOVE)
- (E) PF# — EXISTING PLUMBING FIXTURE / EQUIPMENT
- (D) PF# — DEMOLISHED PLUMBING FIXTURE / EQUIPMENT
- POINT OF NEW CONNECTION
- POINT OF DISCONNECTION
- 1/4" SLOPE — DIRECTION OF FLOW AND SLOPE PER FOOT

GENERAL

- NAME (E) — EXISTING PIPE TO REMAIN
- NAME (D) — EXISTING PIPE TO BE DEMOLISHED
- NAME — NEW PIPING
- DIRECTION OF FLOW

PLUMBING

- DCW — DOMESTIC COLD WATER
- DHW — DOMESTIC HOT WATER (120°F)
- DHWR — DOMESTIC HOT WATER RECIRC.
- HTHW — HIGH TEMPERATURE HOT WATER (140°F)
- IRR — IRRIGATION
- RO — REVERSE OSMOSIS TREATED
- TP — TRAP PRIMER LINES
- SAN — SANITARY WASTE
- V — SANITARY VENT
- GW — GREASE WASTE
- AW — ACID WASTE
- AV — ACID VENT
- NG — NATURAL GAS
- LPG — LIQUIFIED PETROLEUM GAS
- RWL — RAIN WATER LEADER
- ORL — RAIN WATER OVERFLOW
- CND — CONDENSATE DRAIN
- CA — COMPRESSED AIR

PIPE FITTINGS

- ELBOW
- PIPE BREAK
- PIPE UP
- PIPE DOWN
- CHANGE IN ELEVATION OF PIPE
- SIDE CONNECTION, TEE FITTING
- TOP CONNECTION, TEE FITTING UP
- BOTTOM CONNECTION, TEE FITTING DOWN
- CAPPED OUTLET OR BLIND FLANGE
- CONCENTRIC REDUCER

VALVES

- MANUAL BALANCING VALVE
- AUTOMATIC BALANCING VALVE
- VENTURI VALVE
- ISOLATION VALVE
- MANUAL 3-WAY VALVE
- STRAINER
- CHECK VALVE
- BACKFLOW PREVENTER
- PRESSURE REDUCING VALVE
- GAS PRESSURE REGULATOR
- TEMPERATURE AND/OR PRESSURE RELIEF VALVE
- HOSE-END DRAIN W/ CAP
- BOILER DRAIN W/ CAP
- S — SOLENOID VALVE

PIPING SPECIALTIES

- AUTOMATIC AIR VENT
- MANUAL AIR VENT
- PRESSURE / TEMPERATURE PORT
- UNION OR FLANGE
- PIPE WELL - EMPTY
- T — TEMPERATURE SENSOR
- P — PRESSURE SENSOR
- FS — FLOW SWITCH
- PS — PRESSURE SWITCH
- P — PRESSURE GAUGE, SNUBBER & NEEDLE VALVE
- T — TEMPERATURE GAUGE
- FLEXIBLE CONNECTOR
- THERMAL/SEISMIC EXPANSION LOOP
- PIPE GUIDES
- ANCHOR
- W — WATER METER
- FLOOR CLEAN OUT
- WALL CLEAN OUT
- WATER HAMMER ARRESTER
- HOSE BIBB
- WALL HYDRANT
- IRRIGATION BLOWOUT PORT

NOTE: THIS IS A STANDARD LEGEND. NOT ALL PIPE TYPES AND SYMBOLS ARE NECESSARILY UTILIZED IN THE DRAWINGS.

PLUMBING GENERAL NOTES

INSTALLATION:

A. NEW PIPING AND EQUIPMENT TO BE INSTALLED IN ACCORDANCE WITH THE CURRENTLY ADOPTED INTERNATIONAL PLUMBING AND INTERNATIONAL BUILDING CODES.
B. EQUIPMENT SHALL BE INSTALLED LEVEL, PLUMB, AND FIRMLY ANCHORED IN LOCATIONS INDICATED. OBSERVE MANUFACTURER'S INSTALLATION INSTRUCTIONS AND RECOGNIZED INDUSTRY PRACTICES TO ENSURE THAT PRODUCTS SERVE THEIR INTENDED FUNCTION.
C. DRAWINGS ARE DIAGRAMMATIC IN NATURE. THE PURPOSE OF THESE PLANS IS TO INDICATE THE INTENDED SIZES, APPROXIMATE LOCATION AND ROUTING OF MAJOR COMPONENTS. ACTUAL CONDITIONS AND LOCATIONS SHALL BE FIELD VERIFIED AND ADJUSTED IF NECESSARY.
D. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
E. ELEMENTS PENETRATING BUILDING COMPONENTS (ROOF ASSEMBLIES, WALL ASSEMBLIES, ETC.) SHALL BE SEALED WEATHER AND WATER TIGHT. COORDINATE PENETRATIONS WITH GENERAL CONTRACTOR TO PATCH TO THE SATISFACTION OF THE ARCHITECT OR ENGINEER.
F. MATERIAL THAT IS IN CONTACT WITH POTABLE DOMESTIC WATER SHALL BE NSF CERTIFIED LEAD FREE.

COORDINATION:

A. IT SHALL BE THE RESPONSIBILITY OF THE PLUMBING CONTRACTOR TO FIELD COORDINATE THE LOCATION OF EQUIPMENT AND ROUTING OF PIPING WITH OTHER TRADES.
B. IT SHALL BE THE RESPONSIBILITY OF THE PLUMBING CONTRACTOR TO REVIEW THE DRAWINGS OF OTHER DISCIPLINES AND PROVIDE LABOR AND MATERIALS REQUIRED FOR A COMPLETE INSTALLATION.

ELECTRICAL COORDINATION:

A. SEE THE MEP COORDINATION SCHEDULE FOR ELECTRICAL INFORMATION. COORDINATE WITH OTHER TRADES TO ENSURE THAT ELECTRICAL DISCONNECTS, MOTOR STARTERS, VARIABLE FREQUENCY DRIVES, CONTROLS, AND ELECTRICAL ACCESSORIES ARE FURNISHED AND/OR INSTALLED BY THE APPROPRIATE TRADE.

SITE ELEVATION:

A. EQUIPMENT SHALL BE SELECTED FOR THE PROJECT ELEVATION OF 6,480'.

BUY AMERICAN REQUIREMENT:

A. MATERIALS USED ON THIS PROJECT ARE SUBJECT TO THE FEDERAL BUY AMERICAN REQUIREMENT. PROJECT SUBMITTALS MUST BE ACCOMPANIED WITH THE APPROPRIATE BUY AMERICAN CERTIFICATION OR IF MATERIALS CANNOT MEET THE REQUIREMENT, CONTRACTOR SHALL SUBMIT A WAIVER USING THE FORM PROVIDED IN THE PROJECT SPECIFICATIONS. BUY AMERICAN REQUIREMENTS MUST BE LISTED IN THE PRODUCT DATA SUBMITTAL OR SUBMITTAL WILL BE REJECTED. THE PRODUCTS AND MANUFACTURERS SCHEDULED IN THE DRAWINGS ARE FOR BASIS OF DESIGN ONLY, AND DO NOT NECESSARILY CONFORM WITH BUY AMERICAN REQUIREMENTS.

PLUMBING SHEET INDEX

NUMBER	SHEET NAME
000 P001	OVERALL - PLUMBING LEGEND & NOTES
000 P002	OVERALL - PLUMBING DETAILS
399 P001	MAIN LODGE - PLUMBING SCHEDULES
399 P101	MAIN LODGE - MAIN LEVEL DEMO PLAN
399 P200	MAIN LODGE - UNDERFLOOR PLUMBING PLAN
399 P201	MAIN LODGE - PLUMBING PLAN
400 P001	RIVER CABIN - PLUMBING SCHEDULES
400 P101	RIVER CABIN - PLUMBING DEMO PLAN
400 P201	RIVER CABIN - PLUMBING PLAN
401 P001	NURSES CABIN - PLUMBING SCHEDULES
401 P101	NURSES CABIN - DEMO PLAN
401 P201	NURSES CABIN - PLUMBING PLAN
404 P001	GEORGES CABIN - PLUMBING SCHEDULES
404 P101	GEORGES CABIN - DEMO PLAN
404 P201	GEORGES CABIN - PLUMBING PLAN
407 P001	END CABIN - PLUMBING SCHEDULES
407 P101	END CABIN - PLUMBING DEMO PLAN
407 P201	END CABIN - PLUMBING PLANS
410 P001	HARRY'S CABIN - PLUMBING SCHEDULES
410 P101	HARRY'S CABIN - DEMO PLAN
410 P201	HARRY'S CABIN - PLUMBING PLAN
411 P001	NEW CABIN - PLUMBING SCHEDULES
411 P101	NEW CABIN - DEMO PLAN
411 P201	NEW CABIN - PLUMBING PLAN

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — JOSEPH R. HEGES — 16596 — 07/21/2026 — WYOMING

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
000 P001

TITLE OF SHEET
OVERALL – PLUMBING LEGEND & NOTES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 86 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

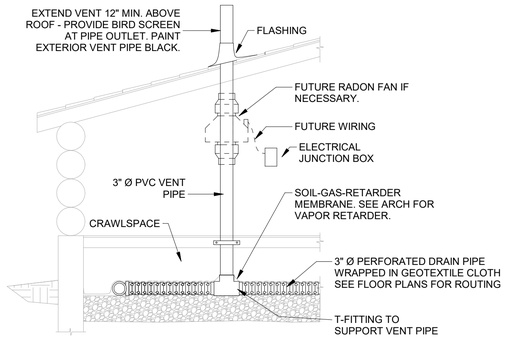

1 RADON PIPING DETAIL
N.T.S.

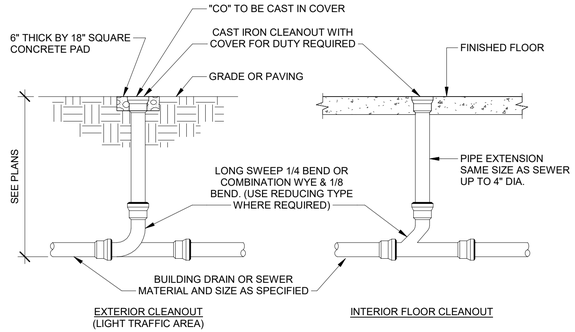

2 SEWER LINE CLEANOUT DETAIL
N.T.S.

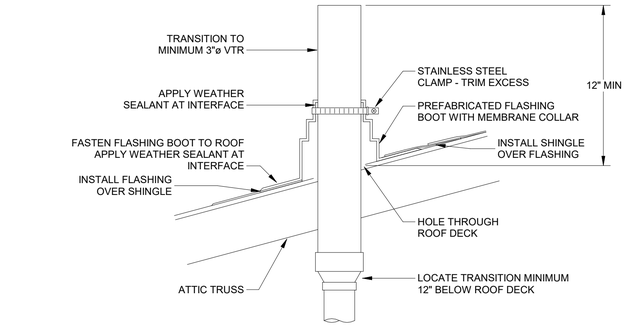

3 VENT THRU ROOF DETAIL
N.T.S.

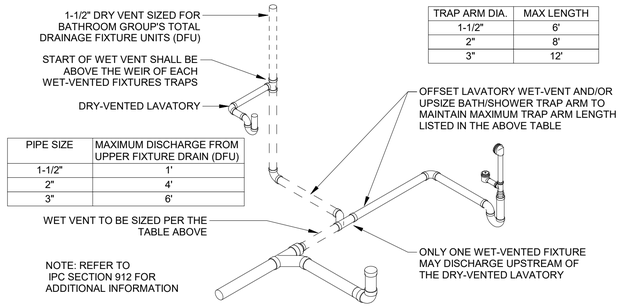

PIPE SIZE	MAXIMUM DISCHARGE FROM UPPER FIXTURE DRAIN (DFU)
1-1/2"	1'
2"	4'
3"	6'

TRAP ARM DIA.	MAX LENGTH
1-1/2"	6'
2"	8'
3"	12'

4 EXAMPLE BATHROOM WET VENTING DETAIL
N.T.S.

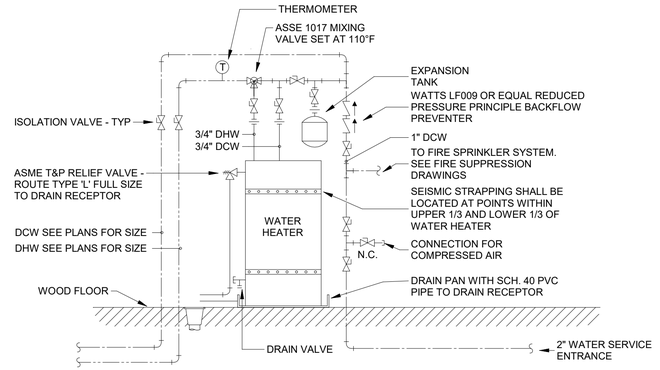

NOTES:
1. ALL PIPING WITHIN 18" OF WATER HEATER TO BE COPPER TYPE 'L'.
2. WATER HEATER, EXPANSION TANK, VALVING, AND FIRE SUPPRESSION EQUIPMENT SHALL BE LOCATED WITHIN EQUIPMENT CLOSET. COORDINATE WITH FIRE SPRINKLER CONTRACTOR TO MAINTAIN REQUIRED ACCESS FOR FIRE SUPPRESSION EQUIPMENT.

5 WATER ENTRANCE AND WATER HEATER SCHEMATIC
N.T.S.

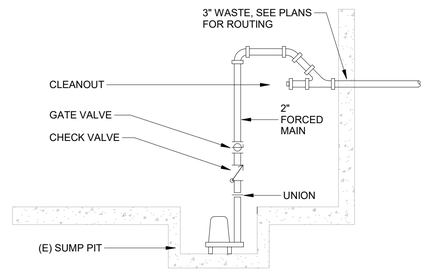

6 SUMP PUMP DETAIL
N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — JOSEPH R. HENNEBERY — 16596 — 07/21/2026 — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
000
P002

TITLE OF SHEET
OVERALL – PLUMBING DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 87 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FIRE SPRINKLER LEGEND

ANNOTATION SYMBOLS

- 3D VIEW NUMBER / SHEET NUMBER
- DETAIL NUMBER / SHEET NUMBER
- SECTION NUMBER / SHEET NUMBER
- POINT OF NEW CONNECTION
- POINT OF DISCONNECTION
- KEYNOTE
- HYDRAULIC NODE
- PIPE CENTERLINE FROM FINISHED FLOOR
- PIPE CENTERLINE BELOW DECK
- CEILING HEIGHT

FIRE SPRINKLER PIPING

- WET FIRE SPRINKLER PIPE (STEEL)
- FIRE SERVICE LINE
- EXISTING FIRE SPRINKLER PIPE

ABBREVIATIONS

AFF	ABOVE FINISHED FLOOR
BOD	BOTTOM OF DECK
BOJ	BOTTOM OF JOIST
CIF	CUT IN FIELD
GALV	GALVANIZED
GBE	GROOVE BOTH ENDS
GOE	GROOVE ONE END
GPM	GALLONS PER MINUTE
OS&Y	OUTSIDE STEM & YOKE
RN	RISER NIPPLE
TBE	THREAD BOTH ENDS
TOE	THREAD ONE END
W/	WITH
RA	REMOTE AREA
ZOI	ZONE OF INFLUENCE

PIPE FITTINGS

- ELBOW
- PIPE BREAK
- ELBOW UP
- ELBOW DOWN
- SIDE CONNECTION OR TEE FITTING
- TOP CONNECTION
- BOTTOM CONNECTION
- UNION
- FLANGE
- CAPPED OUTLET
- BLIND FLANGE
- COUPLING
- FLEXIBLE COUPLING

VALVES

- ISOLATION VALVE - SEE SPECIFICATIONS FOR TYPE
- BUTTERFLY VALVE
- HOSE END DRAIN
- STRAINER
- CHECK VALVE
- BACKFLOW PREVENTER
- PRESSURE REDUCING VALVE

NOTE: THIS IS A STANDARD LEGEND. NOT ALL PIPE TYPES AND SYMBOLS ARE NECESSARILY UTILIZED IN THE DRAWINGS.

SCOPE OF WORK

1. PROVIDE NEW FIRE SUPPRESSION SYSTEM THROUGHOUT BUILDINGS IN ACCORDANCE WITH NFPA 13D
2. REFER TO ARCHITECTURAL SHEETS FOR BUILDING OCCUPANCY,BUILDING CONSTRUCTION TYPE & BUILDING TOTAL AREA (SF).

CODES AND STANDARDS

1. 2024 INTERNATIONAL RESIDENTIAL BUILDING CODE-AS AMENDED.
2. 2024 INTERNATIONAL FIRE CODE-AS AMENDED.
3. 2022 NFPA 13D STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS IN ONE- AND TWO- FAMILY DWELLINGS AND MANUFACTURED HOMES.
4. CODES AS REQUIRED BY THE NATIONAL PARKS SERVICE AND THE REGIONAL STRUCTURAL FIRE MARSHAL.

FREEZE PROTECTION

IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40ºF. FAILURE TO MAINTAIN TEMPERATURES ABOVE 40ºF MAY RESULT IN DAMAGE.

IT IS THE OWNER'S RESPONSIBILITY TO DRAIN THE SYSTEM WHEN OCCUPANCY AND BUILDING CONDITIONING IS TO BE SUSPENDED.

CONTRACTOR RESPONSIBILITIES

1. THE CONTRACTOR SHALL SUBMIT THESE DRAWINGS AND CALCULATIONS TO THE NATIONAL PARKS SERVICE (NPS) FOR FIRE SPRINKLER PERMIT.
2. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING THE MATERIAL SUBMITTAL TO THE NATIONAL PARKS SERVICE (NPS) AND THE ENGINEER OF RECORD (E.O.R) WITH FINAL SELECTIONS AND SUBSTITUTIONS. APPROVAL SHALL BE OBTAINED BEFORE MATERIAL PROCUREMENT OCCURS.
3. THE CONTRACTOR SHALL COORDINATE ROUTING PREFERENCES WITH OTHER TRADES. CONFLICTS SHALL BE RESOLVED BEFORE INSTALLATION OF MATERIALS.
4. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF RECORD (E.O.R) OF CHANGES IN MAIN ROUTING, MATERIAL SELECTIONS OR OTHER ITEMS THAT AFFECTS THE PERFORMANCE OF THE FIRE PROTECTION SYSTEM.

HAZARD CLASSIFICATIONS

13D-RESIDENTIAL HAZARD
0.05 GPM/SQ. FT. OVER ALL THE SPRINKLERS WITHIN A COMPARTMENT, UP TO A MAX OF TWO

1. BEDROOMS
2. BATHROOMS
3. LIVING ROOMS

HYDRANT FLOW TEST

PERFORMED BY	NATIONAL PARKS SERVICE
DATE OF TEST	7/14/2026
STATIC PRESSURE, Ps	73 PSI
RESIDUAL PRESSURE DURING TEST, P1	29 PSI
FLOW AT HYDRANT	705 GPM

BUY AMERICAN REQUIREMENT

MATERIALS USED ON THIS PROJECT ARE SUBJECT TO THE FEDERAL BUY AMERICAN REQUIREMENT. PROJECT SUBMITTALS MUST BE ACCOMPANIED WITH THE APPROPRIATE BUY AMERICAN CERTIFICATION OR IF MATERIALS CANNOT MEET THE REQUIREMENT, CONTRACTOR SHALL SUBMIT A WAIVER USING THE FORM PROVIDED IN SPECIFICATIONS. ALL BUY AMERICAN REQUIREMENTS MUST BE LISTED IN THE PRODUCT DATA SUBMITTAL OR SUBMITTAL WILL BE REJECTED. THE PRODUCTS AND MANUFACTURERS SCHEDULED IN THE DRAWINGS ARE FOR BASIS OF DESIGN ONLY, AND DO NOT NECESSARILY CONFORM WITH BUY AMERICAN REQUIREMENTS.

GENERAL NOTES

1. DRAWINGS ARE INTENDED TO SHOW GENERAL ARRANGEMENT OF SYSTEM(S). FINAL SIZE AND LOCATION MUST MEET APPLICABLE CODES AND DESIGN REQUIREMENTS.
2. DIMENSIONS AND EXACT LOCATIONS ARE TO BE FIELD VERIFIED AND COORDINATED WITH OTHER TRADES.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR SUBMITTING SHOP DRAWINGS AND CALCULATIONS TO THE NATIONAL PARKS SERVICE (NPS) AND RECEIVING APPROVAL PRIOR TO STARTING CONSTRUCTION.
4. CONTRACTOR IS RESPONSIBLE FOR NECESSARY AND ASSOCIATED PERMITTING FEES.
5. CONTRACTOR TO PROVIDE A LISTED FIRESTOPPING SYSTEMS ASSEMBLY AT PIPE AND THROUGH PENETRATIONS PASSING THROUGH RATED CONSTRUCTION (FIRE RATED WALLS, FLOORS, CEILINGS, ETC.)
6. MATERIALS AND WORKMANSHIP SHALL CONFORM TO STATE ADOPTED CODES AND REGULATIONS AS AMENDED.
7. COORDINATE AUTOMATIC FIRE SUPPRESSION SYSTEM DESIGN WITH OTHER TRADES PRIOR TO ANY FABRICATION OR INSTALLATION.
8. CONTRACTOR SHALL PROVIDE REQUIRED PIPE, FITTINGS, VALVES, AND OTHER INCIDENTAL DEVICES REQUIRED FOR A COMPLETE, FUNCTIONING SYSTEM. EQUIPMENT TO BE INSTALLED IN ACCORDANCE WITH THE EQUIPMENT MANUFACTURER'S RECOMMENDATIONS.
9. CONTRACTOR SHALL PROVIDE NECESSARY TEST CONNECTIONS/DRAINS AND PIPE DISCHARGE TO AN APPROVED SAFE POINT OUTSIDE OF THE BUILDING.
10. SYSTEM PIPING SHALL BE HYDROSTATICALLY TESTED AT 200 PSI OR AT 50 PSI ABOVE THE SYSTEM OPERATING PRESSURE FOR NO LESS THAN 2 HOURS AS REQUIRED BY NFPA 13/13D, WHICHEVER IS GREATER AND WITNESSED BY OWNERS REPRESENTATIVE AND NATIONAL PARKS SERVICE (NPS).
11. PROVIDE SYSTEM TESTING AND CERTIFICATION DOCUMENTATION TO BE INCLUDED IN THE PROJECT O&M MANUAL.
12. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING AND PROVIDING PIPE SLEEVES, CORE DRILLING, FLOOR/WALL/CEILING CUTTING AND PATCHING.
13. CONTRACTOR SHALL PROVIDE REQUIRED SPARE SPRINKLER HEADS, HEAD CABINET(S), SIGNS, HYDRAULIC PLACARDS AND SYSTEM INFORMATION DISPLAYS AS SPECIFIED IN NFPA 13.
14. CONTRACTOR SHALL PROVIDE SPRINKLER GUARDS AT HEADS SUBJECT TO DAMAGE.
15. HEAT COLLECTORS SHALL NOT BE USED AS A MEANS TO ASSIST THE ACTIVATION OF SPRINKLER HEADS PER NFPA 13.
16. SPRINKLER HEAD AND ESCUTCHEON FINISHES TO BE COORDINATED WITH ARCHITECT UNLESS OTHERWISE INDICATED.
17. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION AND CONTRACTOR RESPONSIBILITIES.

PIPING REQUIREMENTS

SPRINKLER PIPING, ABOVE GROUND (STEEL PIPE):
1. THREADED PIPING: 1-INCH AND LARGER - ASTM A135 OR 795, GRADE A, SCHEDULE 40, WRW, BLACK STEEL PIPE.
2. PIPING ON THE EXTERIOR OF THE BUILDING SHALL BE CORROSION RESISTANT.

FIRE SHEET INDEX

NUMBER	SHEET NAME
000 F001	OVERALL - GENERAL NOTES
000 F002	OVERALL - SITE PLAN
000 F003	OVERALL - DETAILS
000 F004	OVERALL - DETAILS
399 F100	MAIN LODGE - UNDERFLOOR PLAN
399 F101	MAIN LODGE - MAIN LEVEL PLAN
400 F101	RIVER CABIN - MAIN LEVEL PLAN
401 F101	NURSES CABIN - MAIN LEVEL PLAN
404 F101	GEORGES CABIN - MAIN LEVEL PLAN
407 F101	END CABIN - MAIN LEVEL PLAN
410 F101	HARRY'S CABIN - MAIN LEVEL PLAN
411 F101	NEW CABIN - MAIN LEVEL PLAN

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — TRENT J. PEARSON — 20707 — Date — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
000
F001

TITLE OF SHEET
OVERALL – GENERAL NOTES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 88 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

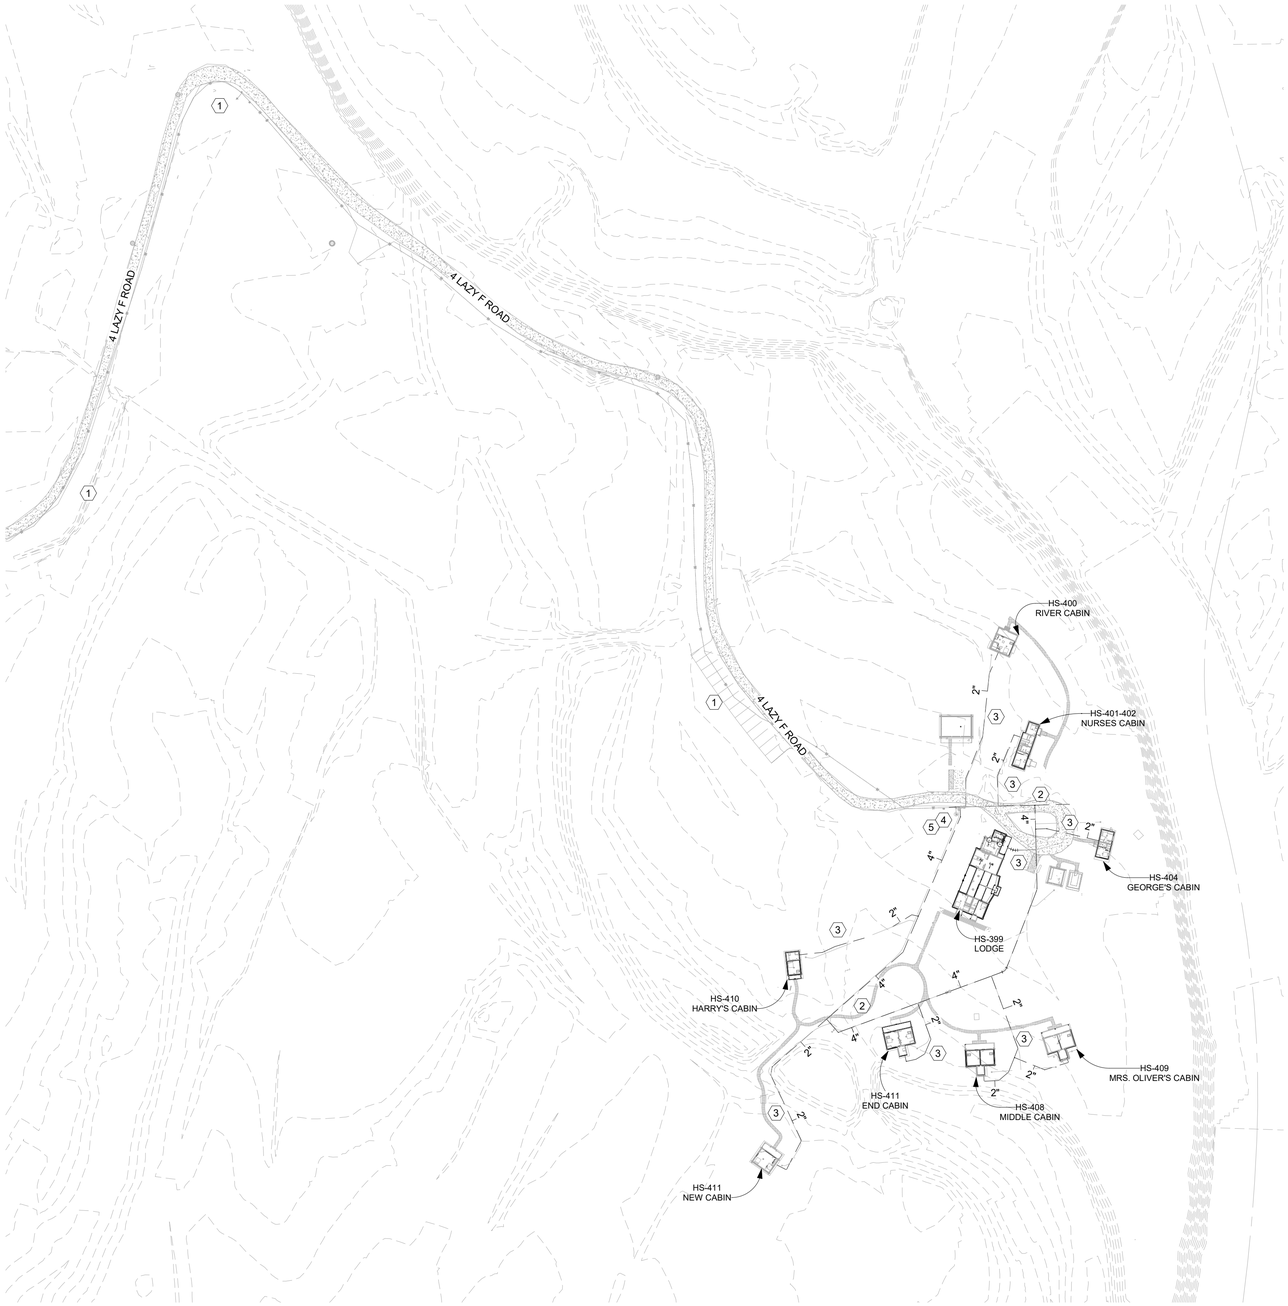

1 FIRE SUPPRESSION SITE PLAN
1" = 80'-0"

FIRE SUPPRESSION PLAN NOTES:

1. SITE PLAN IS FOR REFERENCE ONLY. REFER TO THE CIVIL SHEETS FOR MORE INFORMATION.
2. REFER TO INDIVIDUAL BUILDING SHEETS FOR RISER LOCATIONS.
3. REFER TO ELECTRICAL SHEETS FOR MORE DETAILS ON HORN & STROBE LOCATIONS.

(#) KEY NOTES:

1. EXISTING 8" UNDERGROUND WATER MAIN.
2. NEW 4" UNDERGROUND WATER MAIN.
3. NEW 2" COMBINED DOMESTIC AND FIRE SUPPRESSION SERVICE LINE. REFER TO CIVIL AND PLUMBING SHEETS FOR MORE INFORMATION.
4. EXISTING FIRE HYDRANT LOCATION.
5. LOCATION OF HYDRANT WATER FLOW DATA.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
000
F002

TITLE OF SHEET
OVERALL – SITE PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 89 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

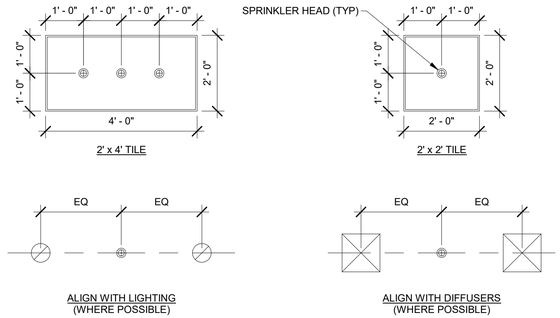

1 ACCEPTABLE SPRINKLER HEAD LOCATIONS
N.T.S.

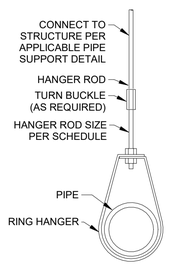

HANGER ROD SCHEDULE	
PIPE SIZE	ROD SIZE
4"ø & LESS	3/8"ø
5, 6, 8"ø	1/2"ø
10 & 12"ø	5/8"ø

HANGER SPACING CHART			
PIPE SIZE	DISTANCE BETWEEN HANGERS		
	STEEL PIPE	CPVC PIPE	THINWALL
3/4"	N/A	5'-6"	N/A
1"	12'-0"	6'-0"	12'-0"
1 1/4"	12'-0"	6'-6"	12'-0"
1 1/2"	15'-0"	7'-0"	12'-0"
2"	15'-0"	8'-0"	12'-0"
2 1/2"	15'-0"	9'-0"	12'-0"
3"	15'-0"	10'-0"	12'-0"
4"	15'-0"	N/A	N/A
6"	15'-0"	N/A	N/A

2 PIPE HANGER REQUIREMENT
N.T.S.

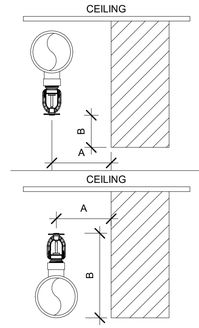

DISTANCE FROM SPRINKLER TO SIDE OF OBSTRUCTION (A)	MAXIMUM ALLOWABLE DISTANCE OF DEFLECTOR ABOVE BOTTOM OF OBSTRUCTION (B) (IN.)
< 1' - 0"	0
1' - 0" < 1' - 6"	0
1' - 6" < 2' - 0"	1
2' - 0" < 2' - 6"	1
2' - 6" < 3' - 0"	1
3' - 0" < 3' - 6"	3
3' - 6" < 4' - 0"	3
4' - 0" < 4' - 6"	5
4' - 6" < 5' - 0"	7
5' - 0" < 5' - 6"	7
5' - 6" < 6' - 0"	7
6' - 0" < 6' - 6"	9
6' - 6" < 7' - 0"	11
≥7' - 0"	14

3 RESIDENTIAL SPRINKLER CEILING OBSTRUCTION
N.T.S.

DISTANCE BETWEEN THE END SPRINKLER AND THE LAST HANGER ON THE LINE - MAXIMUM PRESSURE ≤ 100 PSI (STEEL PIPE, ALL SPRINKLER TYPES)

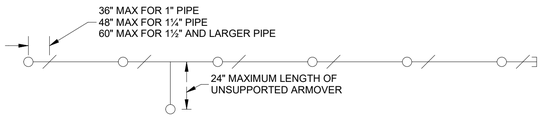

4 UNSUPPORTED STEEL PIPE HANGER REQUIREMENT
N.T.S.

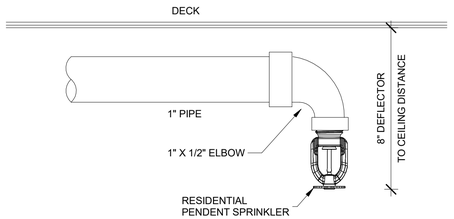

5 RESIDENTIAL PENDENT SPRINKLER
N.T.S.

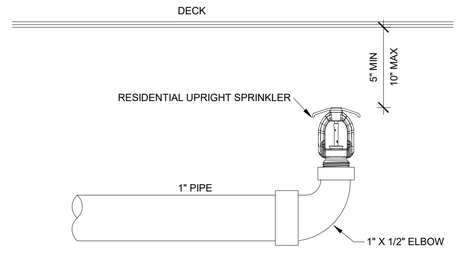

6 RESIDENTIAL UPRIGHT SPRINKLER
N.T.S.

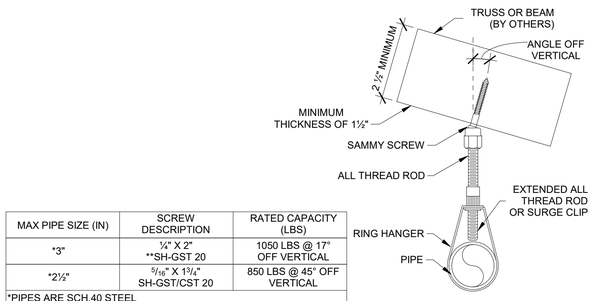

MAX PIPE SIZE (IN)	SCREW DESCRIPTION	RATED CAPACITY (LBS)
"3"	¼" X 2" **SH-GST 20	1050 LBS @ 17° OFF VERTICAL
"2½"	5/16" X 1¾" SH-GST/CST 20	850 LBS @ 45° OFF VERTICAL
*PIPES ARE SCH.40 STEEL ** MAXIMUM ROOF PITCH OF 3½" X 12		

7 SAMMY WOOD SCREW - SWIVEL
N.T.S.

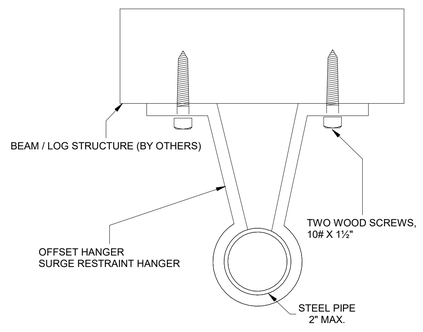

8 OFFSET HANGER
N.T.S.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
TRENT J. PEARSON
20707
Date
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
000
F003

TITLE OF SHEET
OVERALL – DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 90 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

⟨#⟩ RISER LEGEND:

1. COMBINED DOMESTIC AND FIRE SUPPRESSION LINE TO BE PROVIDED BY SITE CONTRACTOR. FIRE SERVICE PIPING SHALL FOLLOW NFPA 13D REQUIREMENTS.
2. SPRINKLER CONTRACTOR START OF WORK AT TEE INSIDE OF BUILDING. (BASE OR RISER)
3. AWWA APPROVED FITTINGS AND PIPE BEFORE THE BACKFLOW PREVENTER.
4. 1½" AMES 2000B-FP PROVIDE DOUBLE CHECK VALVE ASSEMBLY BACKFLOW PREVENTER WITH CONTROL VALVE (W/ TAMPER SWITCH)ON BOTH ENDS.
5. DRAIN ROUTED TO FLOOR DRAIN OR SUMP. REFER TO INDIVIDUAL CABIN PLANS FOR MORE DETAILS.
6. ISOLATION VALVE.
7. 1½" FIRE RISER ASSEMBLY CONSISTING OF THE FOLLOWING:
   A. 24V FLOW SWITCH
   B. 300 PSI PRESSURE GAUGE
   C. TEST AND DRAIN VALVE WITH SIGHT GLASS, AND PRESSURE RELIEF.
8. DOMESTIC WATER SUPPLY - SEE PLUMBING SHEETS FOR MORE DETAILS.
9. PENETRATION THROUGH FLOOR ASSEMBLY - SEE ARCHITECTURAL DRAWINGS FOR MORE DETAIL.
10. REFER TO PLUMBING SHEETS FOR MORE INFORMATION ON AIR CONNECTIONS.
11. REFER TO CABIN SHEETS FOR SIZE CONTINUATION.

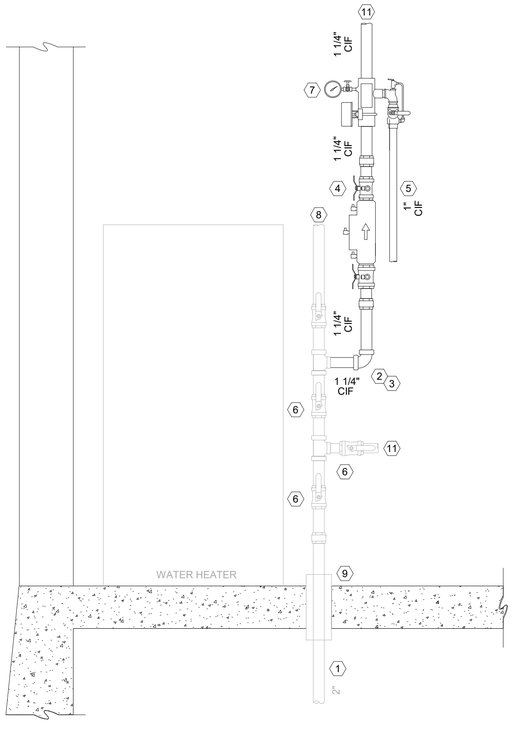

1 FIRE RISER DETAIL
N.T.S.

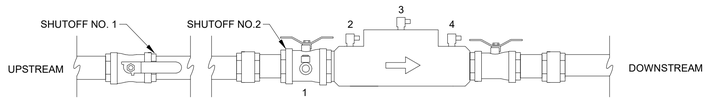

1. CLOSE MAIN SHUTOFF VALVE.
2. WITH SHUTOFF NO. 1 AND NO.2 OPEN, DEPRESSURIZE LINE.
3. OPEN ALL TEST COCKS
4. DOWNSTREAM LINE CAN BE PURGED WITH PRESSURIZED AIR THROUGH TEST COCK NO. 4.
5. TO PURGE UPSTREAM LINE,SHUTOFF VALVE NO. 1. PURGING WITH AIR CAN NOW BE DONE BETWEEN TEST COCK 1 AND INLET DRAIN.
6. WHEN AIR PURGING IS COMPLETE, OPEN NO.1 SHUTOFF TO DRAIN REST OF DCVA DEVICE.
7. LEAVE TEST COCKS OPEN, TURN SHUTOFF HANDLES TO A 45° POSITION.

* REFER TO MANUFACTURER'S SPECIFICATIONS FOR COMPLETE FREEZE PROTECTION GUIDELINES

2 PURGING DCVA ASSEMBLY WITH PRESSURIZED AIR
N.T.S.

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
000
F004

TITLE OF SHEET
OVERALL – DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 91 OF 371

LOOKING SOUTHEAST TOWARDS 399 MAIN LODGE

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

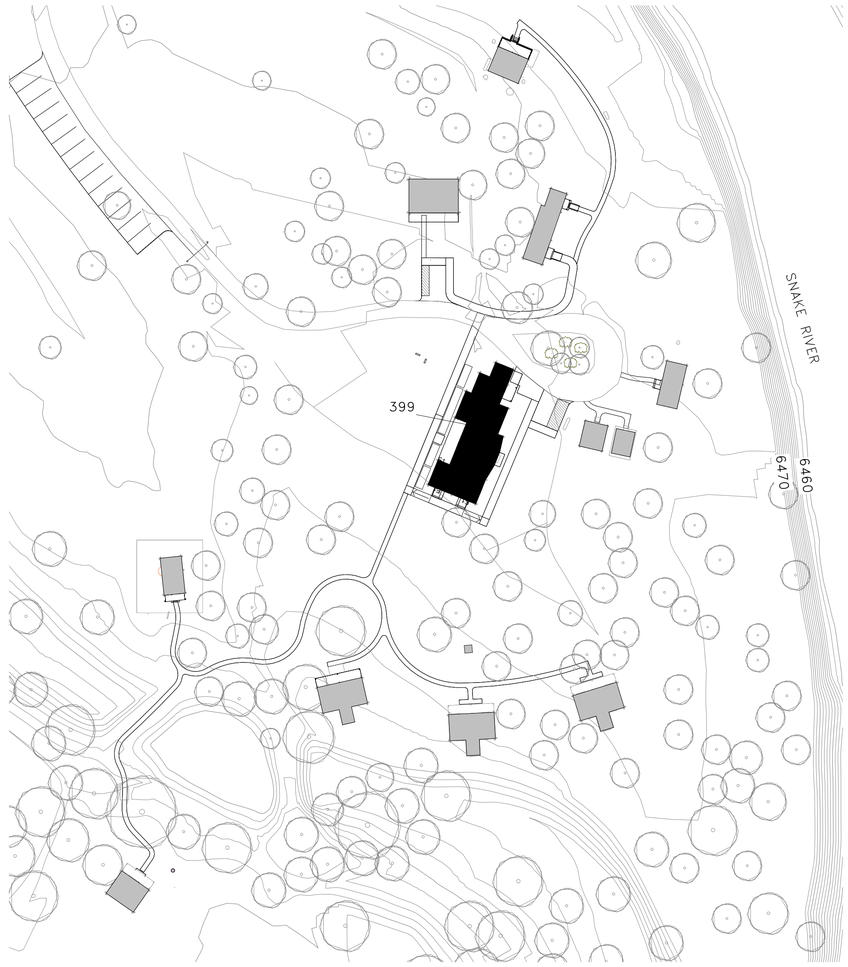

1 KEY PLAN – 399 MAIN LODGE

1" = 50'-0"

50 0 50 100

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. MYERS
C-3530
DATE 7/21/26
STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
G000

TITLE OF SHEET
MAIN LODGE – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826

PMIS/PKG NO. 237343

SHEET 92 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

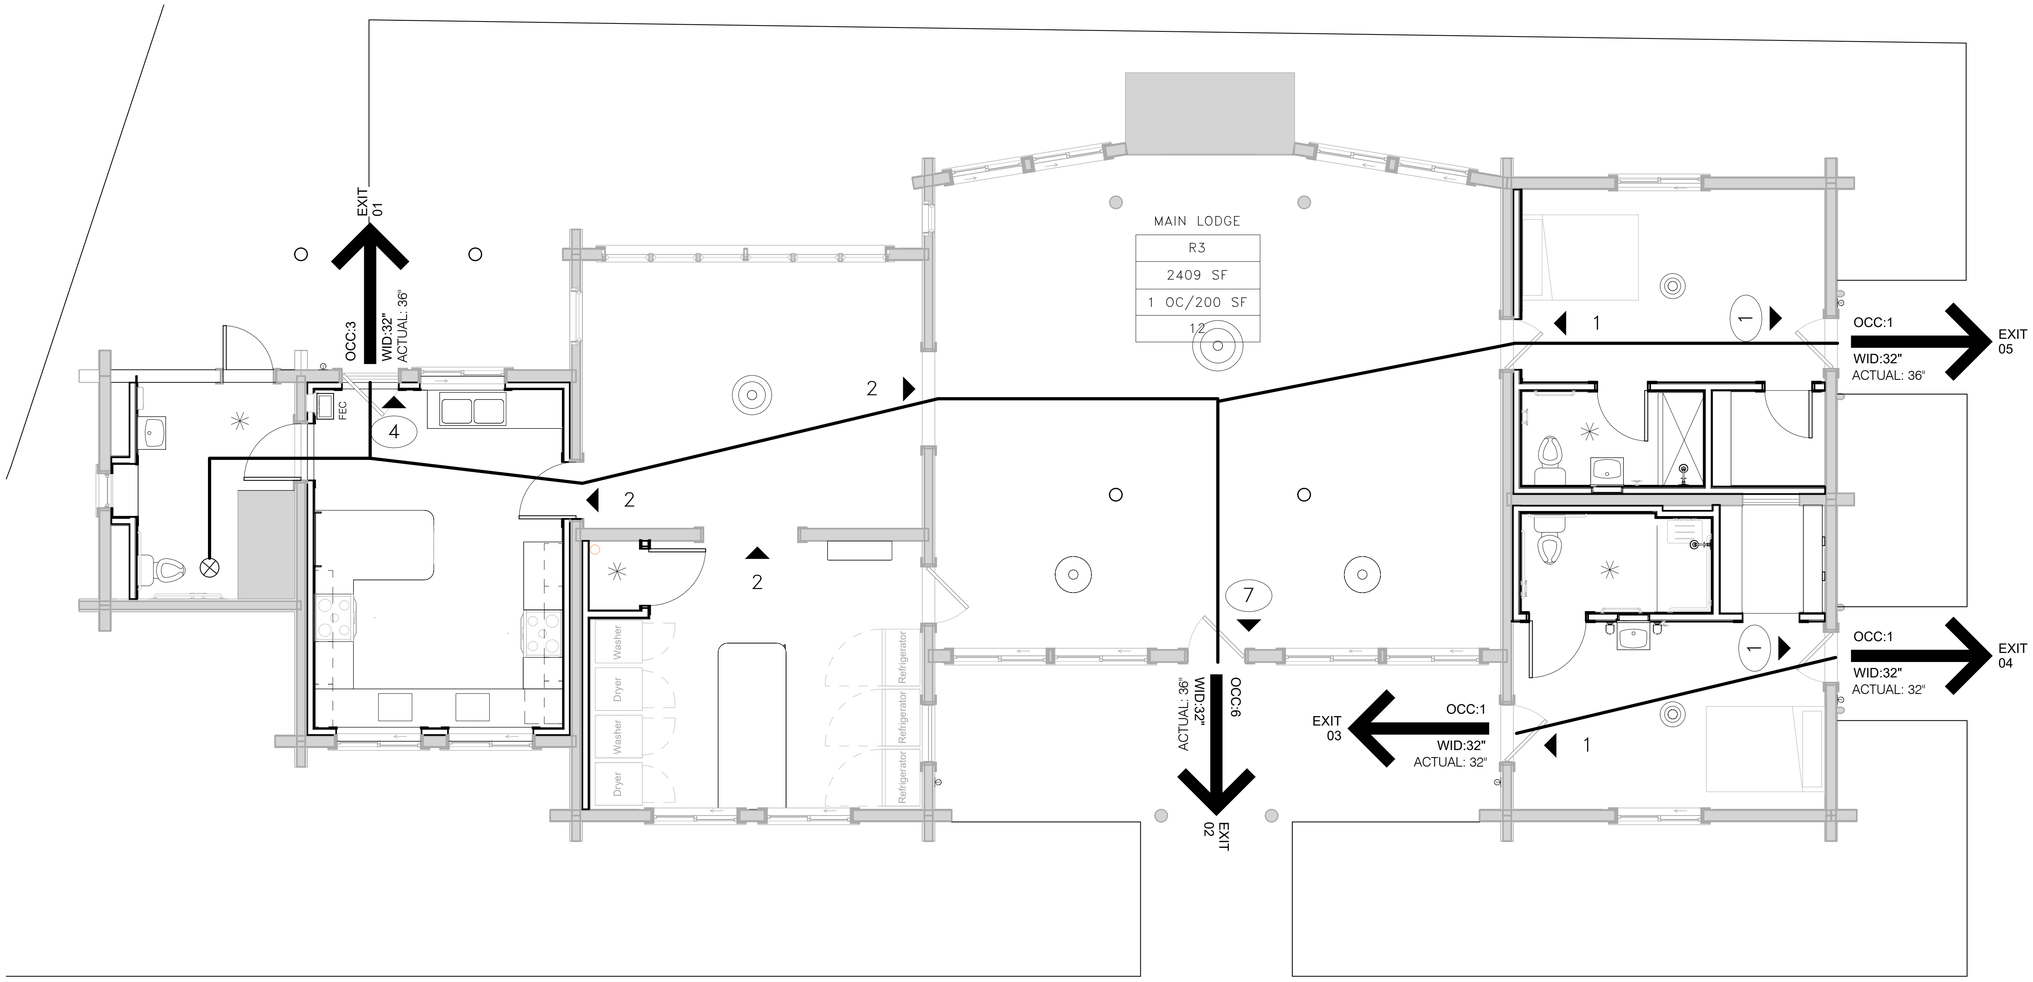

1 399 MAIN LODGE – CODE PLAN

1/4" = 1'-0"

LIFE SAFETY/ EGRESS PLAN LEGEND

OCC:7 / WID:32 / EXIT 01 / ACTUAL: 30" — NUMBER OF OCCUPANTS EXITING AS A PRIMARY GROUP; REQUIRED WIDTH OF EXIT DOOR; ACTUAL WIDTH OF EXIT DOOR

C.P. X'-XX" / E.A. X'-XX" — COMMON PATH OF EGRESS TRAVEL EXIT ACCESS DISTANCE

MAIN PATH OF EGRESS REQUIRING ILLUMINATION LEVEL NO LESS THAN 1 FOOT CANDLE (WIDTH BASED ON OCCUPANT NUMBER)

NOT NORMALLY OCCUPIED/ NOT INCLUDED IN THE NET LOAD CALCULATION

FE — FIRE EXTINGUISHER

FEC — FIRE EXTINGUISHER CABINET

ROOM TYPE — ROOM NAME
BUSINESS — OCCUPANCY CLASSIFICATION
150 SF — SQUARE FOOTAGE
1 OC/100 — OCCUPANT LOAD FACTOR
OCC LOAD — NUMBER OF OCCUPANTS

LIFE SAFETY/ EGRESS CODE PLAN NOTES

1. AREAS SHOWN ON CODE SHEETS ARE DIAGRAMMATIC ONLY AND SHOULD NOT BE USED AS THE BASIS OF MATERIAL CALCULATIONS OR QUANTITIES.
2. SEE ACCESSIBILITY PLAN FOR ACCESSIBILITY REQUIREMENTS.

SCALE (b) 4" 0 4" 8" — SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM H. EDDY — C-3530 — Date 7/23/26 — STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
G002

TITLE OF SHEET
MAIN LODGE – CODE PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 93 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

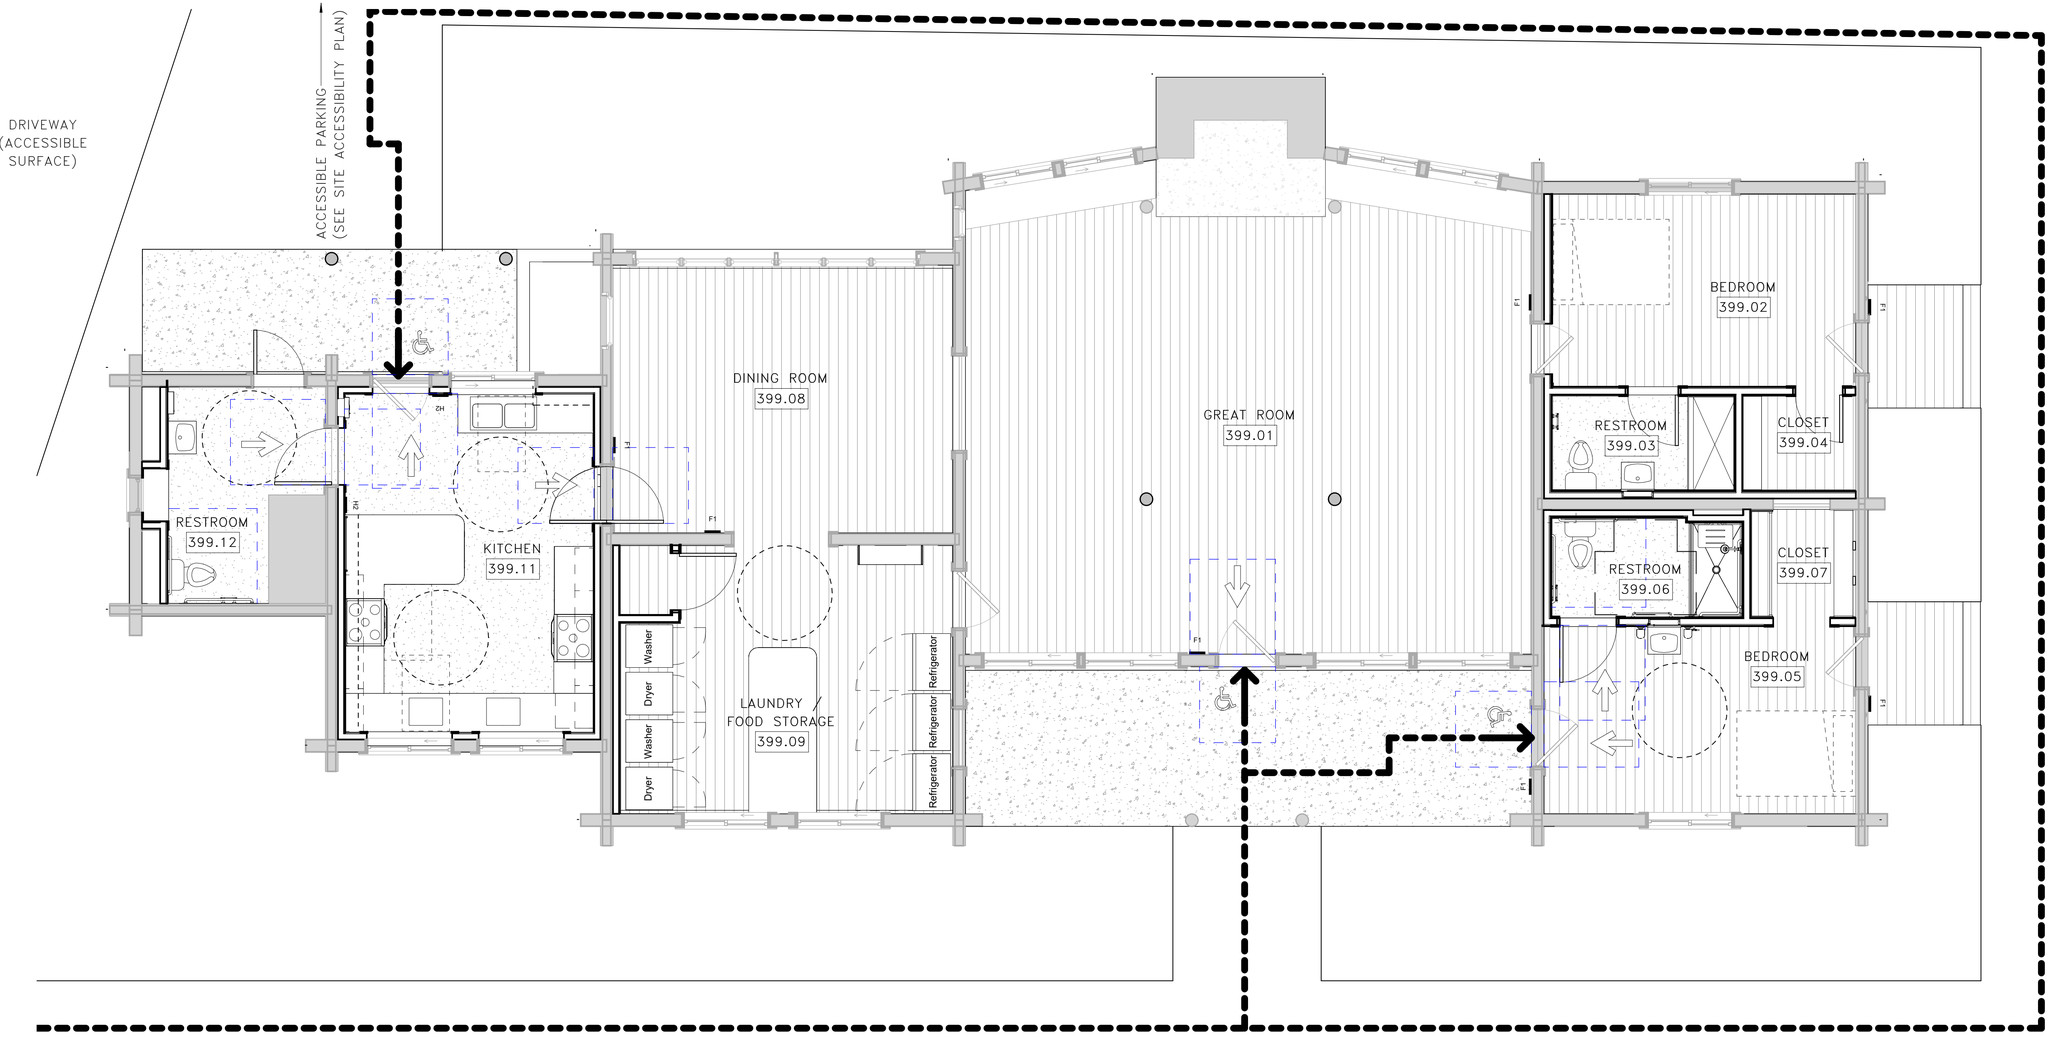

1 399 MAIN LODGE – ACCESSIBILITY PLAN

1/4" = 1'-0"

ACCESSIBILITY CODE PLAN NOTES

1. COORDINATE ACCESSIBILITY IMPROVEMENTS WITH SPECIFICATION SECTION 014000 QUALITY REQUIREMENTS.
2. NOT ALL ACCESSIBLE BARRIERS WITHIN THE REHABILITATION PROJECT ARE IDENTIFIED ON ACCESSIBILITY PLANS. REVIEW PROJECT SCOPE IN DRAWING SHEETS FOR ACCESSIBILITY IMPROVEMENTS.
3. SEE SIGN PLAN FOR SIGNAGE REQUIREMENTS.

ACCESSIBILITY LEGEND

- ACCESSIBLE ENTRANCE
- ABBAS ROUTE NOT TO EXCEED A 5% SLOPE (MEETS DSC DESIGN REQUIREMENTS)
- ABAAS ENTRANCE (MEETS DSC DESIGN REQUIREMENTS)
- X — ACCESSIBLE SIGN
- 60 INCH DIAMETER TURNING RADIUS ALLOWED AT EXISTING BUILDINGS
- 67 INCH DIAMETER TURNING RADIUS REQUIRED FOR NEW CONSTRUCTION
- T–SHAPED TURNING SPACE FOR NEW CONSTRUCTION (OPTION 3)
- MANEUVERING CLEAR FLOOR SPACE AT DOORS – ARROW INDICATES APPROACH DIRECTION

SCALE B 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM H. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
G003

TITLE OF SHEET
MAIN LODGE –
ACCESSIBILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 94 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

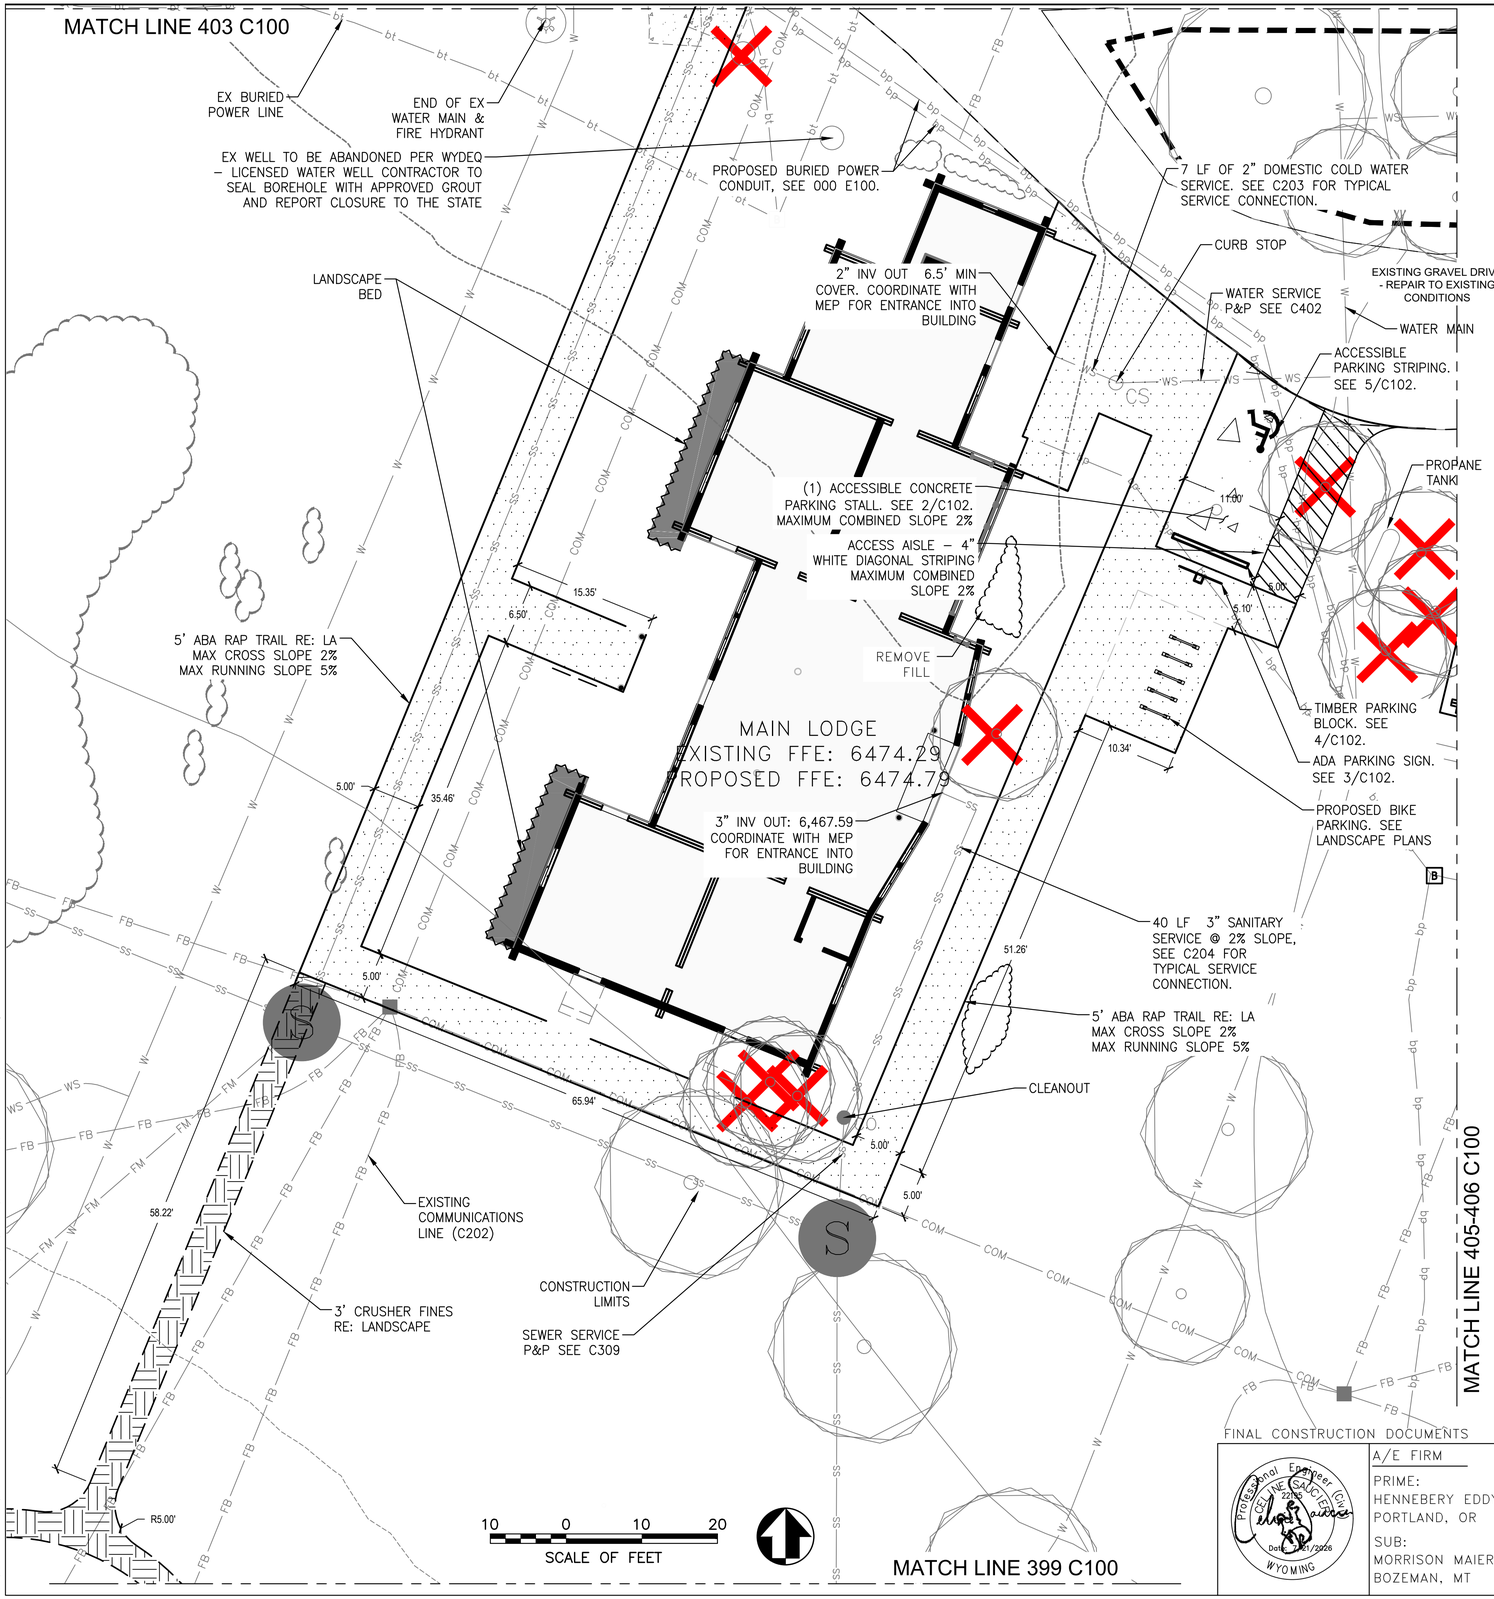

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22035 Date: 07/21/2026 WYOMING

A/E FIRM	DESIGNED: MMI	SUB SHEET NO. 399 C100
PRIME: HENNEBERY EDDY PORTLAND, OR	DRAWN: CMS	TITLE OF SHEET: MAIN LODGE – SITE AND UTILITY PLAN
SUB: MORRISON MAIERLE BOZEMAN, MT	TECH REVIEW: CMS	REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK
	DATE: 07/21/2026	DRAWING NO. 136 193826 / PMIS/PKG NO. 237343 / SHEET 95 OF 371

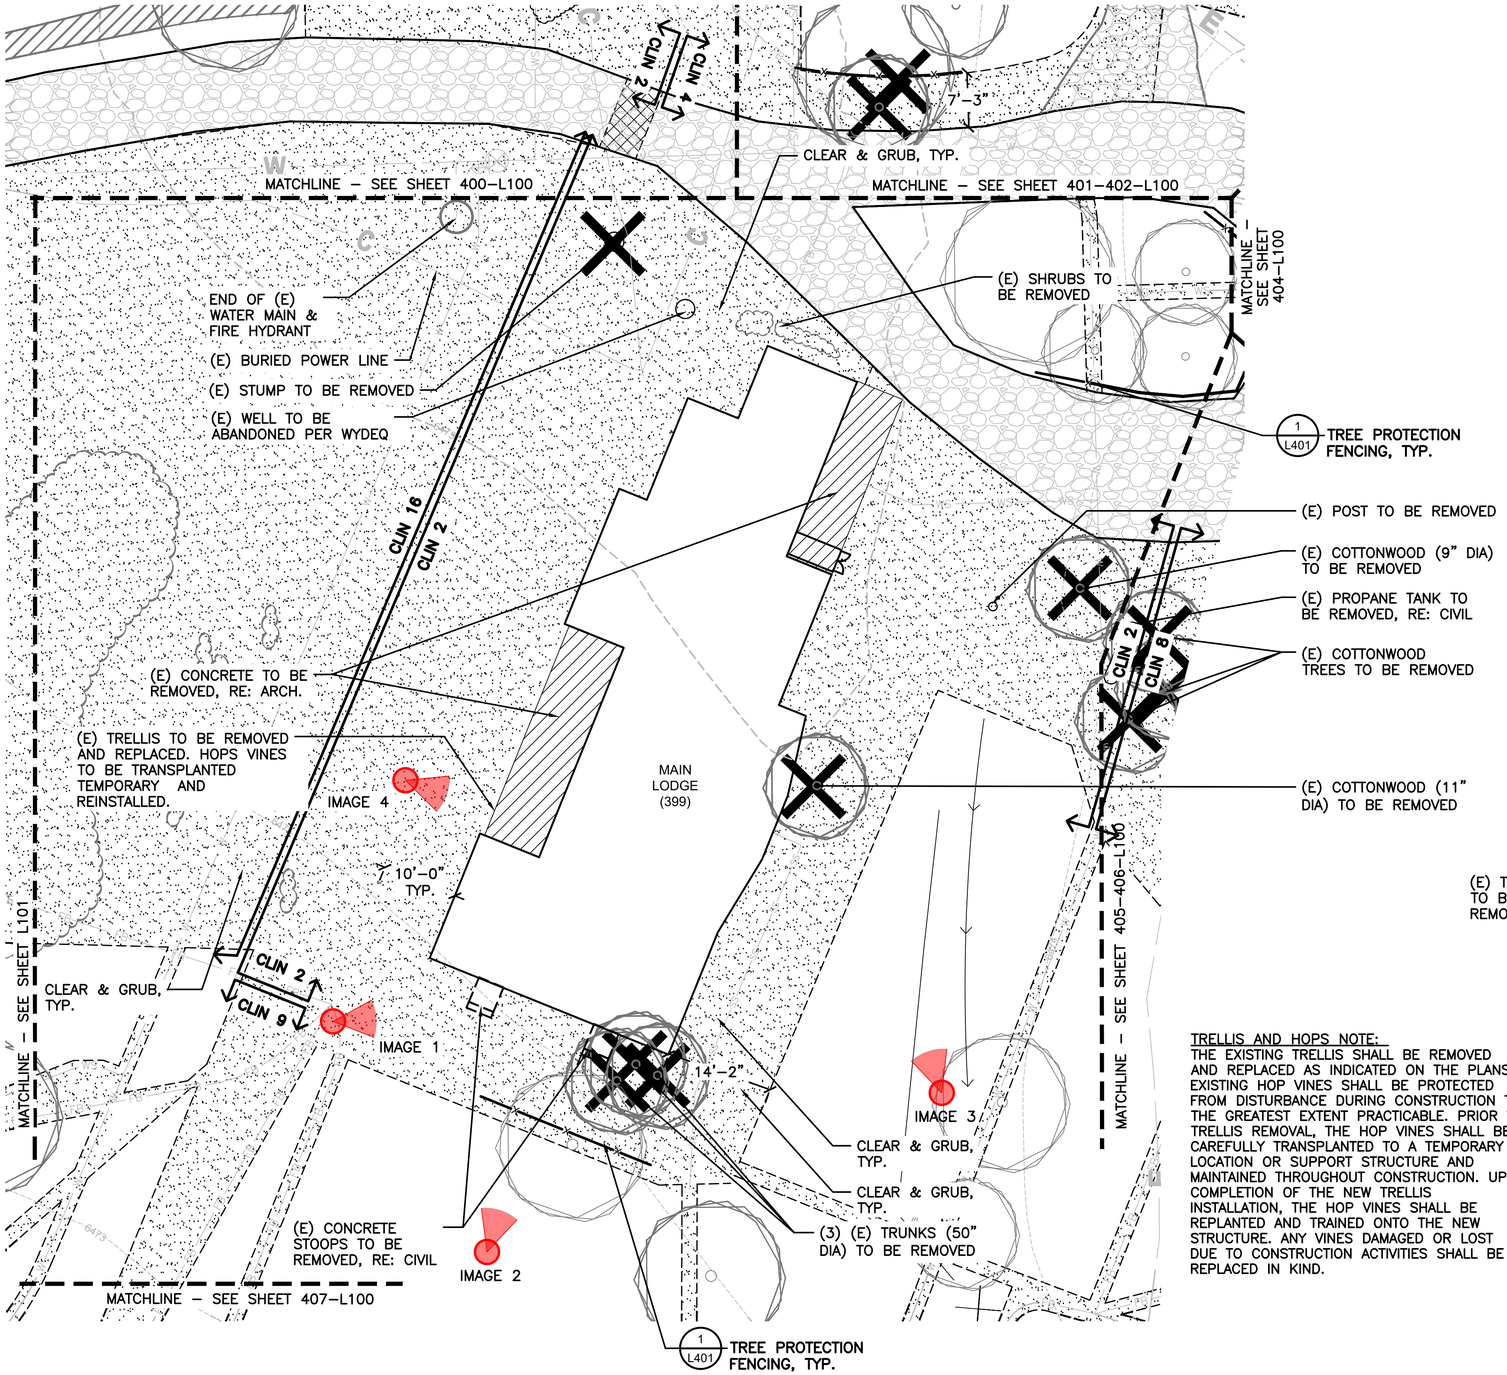

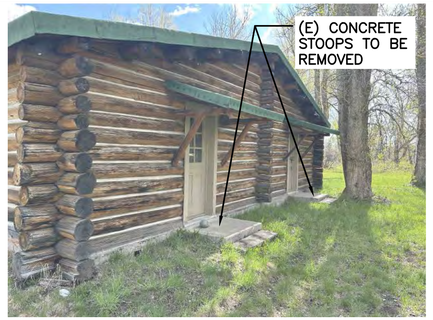

IMAGE 1: (E) CONCRETE STOOPS TO BE REMOVED, RE: CIVIL.

IMAGE 2: (E) TRUNKS TO BE REMOVED.

IMAGE 3: (E) TREE TO BE REMOVED.

IMAGE 4: (E) TRELLIS AND HOPS VINES.

TRELLIS AND HOPS NOTE:
THE EXISTING TRELLIS SHALL BE REMOVED AND REPLACED AS INDICATED ON THE PLANS. EXISTING HOP VINES SHALL BE PROTECTED FROM DISTURBANCE DURING CONSTRUCTION TO THE GREATEST EXTENT PRACTICABLE. PRIOR TO TRELLIS REMOVAL, THE HOP VINES SHALL BE CAREFULLY TRANSPLANTED TO A TEMPORARY LOCATION OR SUPPORT STRUCTURE AND MAINTAINED THROUGHOUT CONSTRUCTION. UPON COMPLETION OF THE NEW TRELLIS INSTALLATION, THE HOP VINES SHALL BE REPLANTED AND TRAINED ONTO THE NEW STRUCTURE. ANY VINES DAMAGED OR LOST DUE TO CONSTRUCTION ACTIVITIES SHALL BE REPLACED IN KIND.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- CONCRETE TO BE REMOVED, RE: ARCH.
- LIMIT OF CONSTRUCTION
- FENCE TO BE REMOVED
- TREE PROTECTION FENCING
- (E) TREE/ STUMP TO BE REMOV

KEY MAP

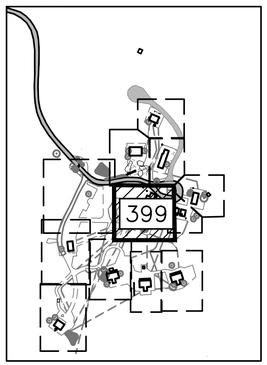

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/24 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 399 L100	TITLE OF SHEET MAIN LODGE – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 96 OF 371

File Path
Z:\Projects\SKERSTIENS_R25_P\DENVER\NPS_GRTE_4LAZY F RANCH - 198539_FINAL CD\CAD\ALL\4-0_GRTE-L4_DEMO.DWG
XREFS: 0843_SESS26_0808_NPS_GRTE_4 LAZY F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE_4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_AERIAL.dwg
IMAGES: ...\..\2_Admin\Photos\Garage\Debri-1.jpg\Debri-2.jpg\Debri-3.jpg\Debri-4.jpg\Debri.jpg\...\2_Admin\Photos\Gate\Gate-1.jpg\Gate.jpg\...\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.removes-1.jpg\...\2_Admin\Photos\IceHouse\Mouse and Ice .jpg\...\...

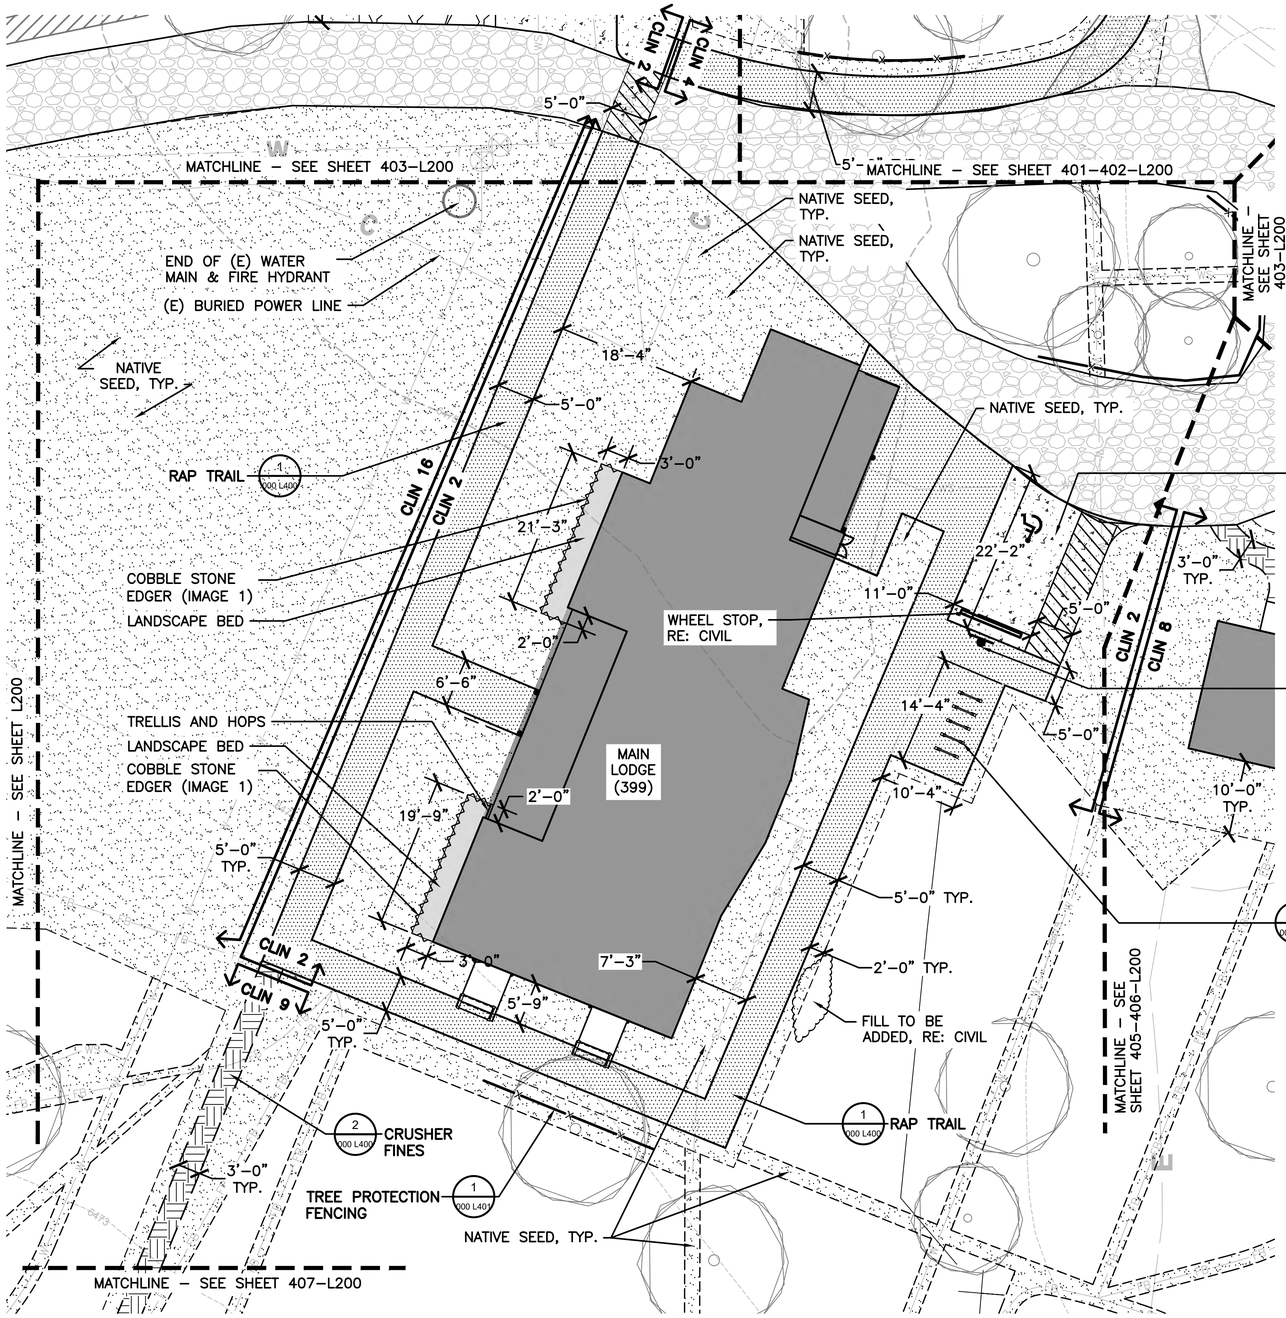

IMAGE 1: TRELLIS EXAMPLE, LOCATED AT WHITE GRASS.

IMAGE 2: COBBLE STONE EDGER FOR LANDSCAPE BED. MATCH HISTORIC LANDSCAPE BED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- (E) RIVER ROCK
- RAP TRAIL
- CRUSHER FINES
- CONCRETE,RE: CIVIL
- LANDSCAPE BED
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

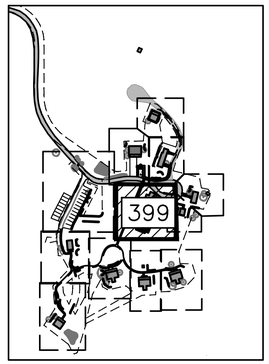

10 0 10 20
SCALE OF FEET

NOTES:

1. ACCESSIBLE WALKWAY TO BE 5' WIDE, RECYCLED ASPHALT.
2. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
3. ACCESSIBLE PARKING STALLS AND ACCESS AISLE TO BE EXPOSED AGGREGATE CONCRETE.
4. ACCESSIBLE WALKWAY SHALL HAVE A MAXIMUM RUNNING SLOPE 5% AND A MAXIMUM CROSS SLOPE IS 2%.
5. SIDE SLOPES FROM PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
6. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
7. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
8. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 02.
9. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 399 L200	TITLE OF SHEET MAIN LODGE – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 97 OF 371

File Path: T:\PROJECTS\DENVER\PNPS GRTE 4LAZY F RANCH - 199539\3 FINAL CD\CAD\LAN\1-0_GRTE-L4_LAYOUT.DWG
XREFs: 0184_SSURGO_0308.JPG GRTE4 LAZY F ARCH PROJECT OVERVIEW SITE PLAN_dwg|NPS_Titleblock 22x34 - GRTE 4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_EXISTING.dwg|XL-GRTE-L4_PROPOSED.dwg
IMAGES: ...\...\2_Admin\Photos\MainLodge\IMG_3706.JPG|...\...\2_Admin\Photos\NursesCabin\Trees to be removed.jpg|...\...\2_Admin\Photos\Parking\Parking lot-4.jpg|Parking lot toe-5.jpg|...\...\2_Admin\Photos\RiverCabin\RiverCabin-3.jpg|RiverCabin-4.jpg|Road connection...

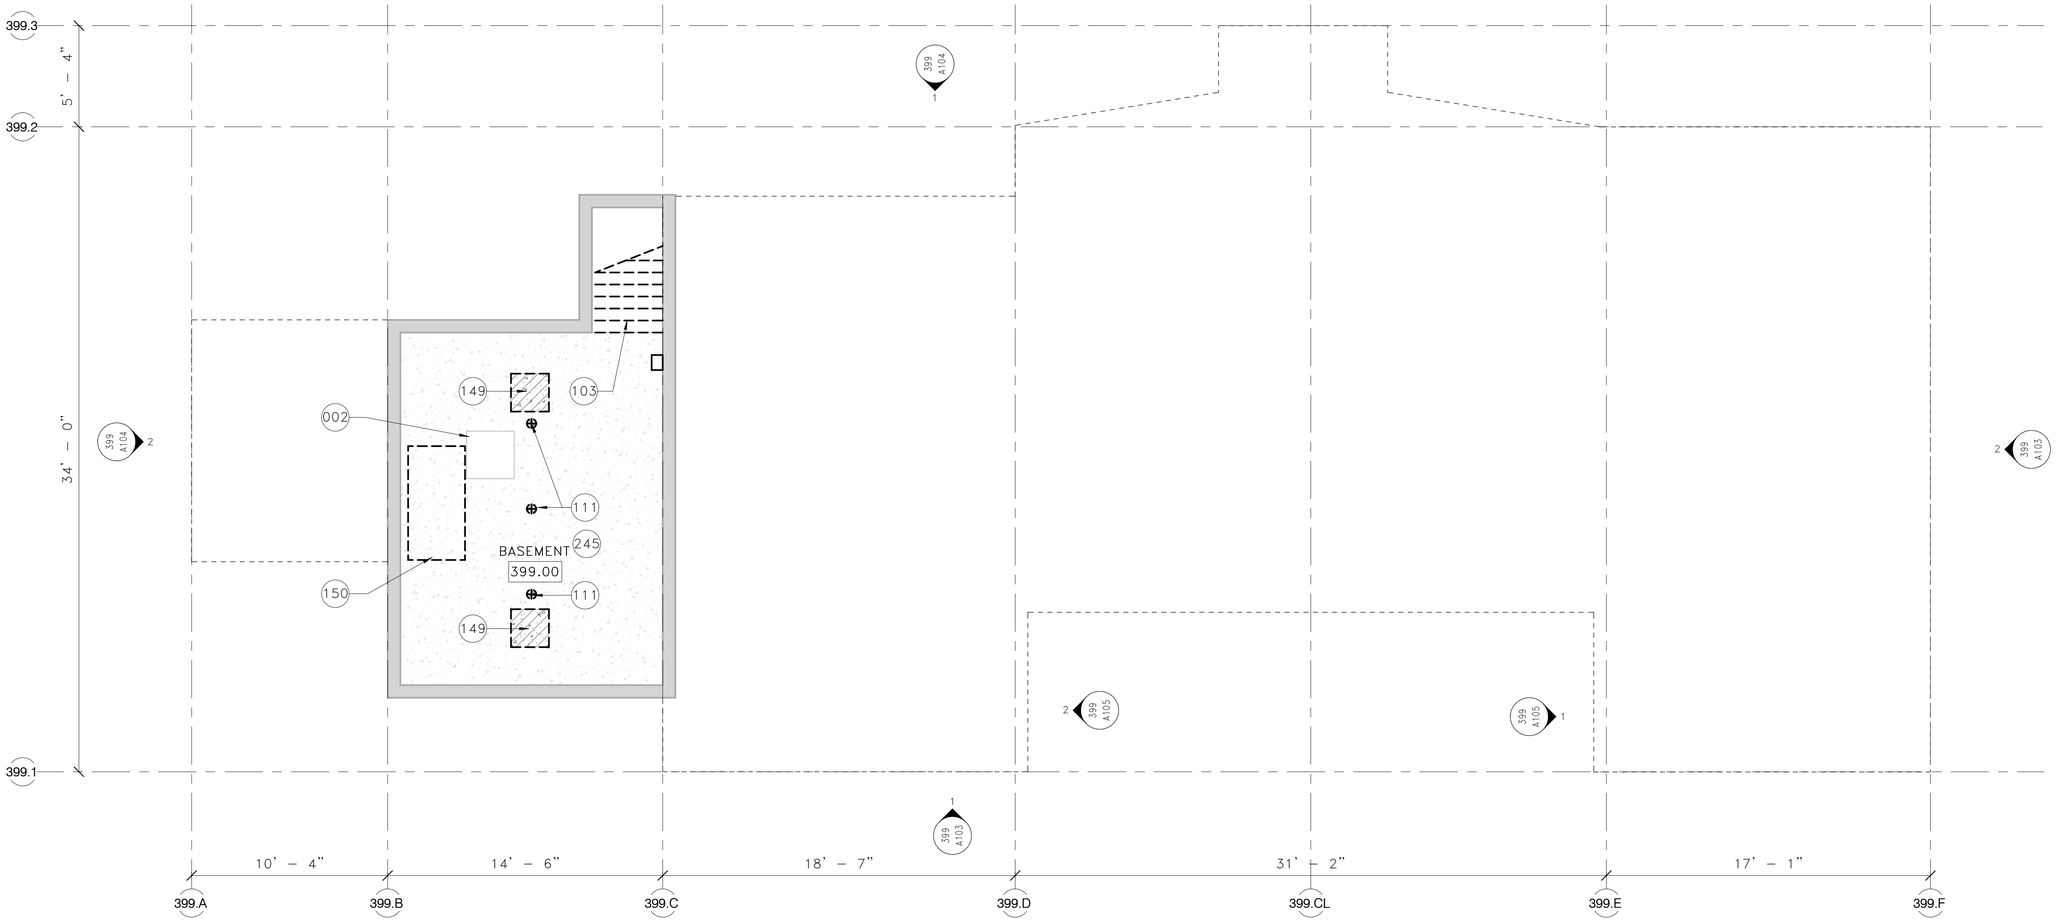

1 399 MAIN LODGE – BASEMENT DEMO PLAN

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL RUSTED AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

KEYNOTES

002 (E) SUMP TO REMAIN, INSTALL NEW PUMP PER PLUMBING DRAWING
103 REMOVE (E) WOOD STAIR, GUARDRAIL, AND GATE
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
149 REMOVE SECTION OF CONCRETE S.O.G. TO ACCOMMODATE NEW FOOTING; SEE STRUCTURAL DRAWINGS
150 REMOVE MECHANICAL EQUIPMENT
245 CLEAN AND REPAIR (E) EXPOSED CONCRETE SURFACES PER TECHNICAL SPECIFICATIONS

SCALE B 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TAGG C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A100

TITLE OF SHEET
MAIN LODGE – BASEMENT LEVEL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 98 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

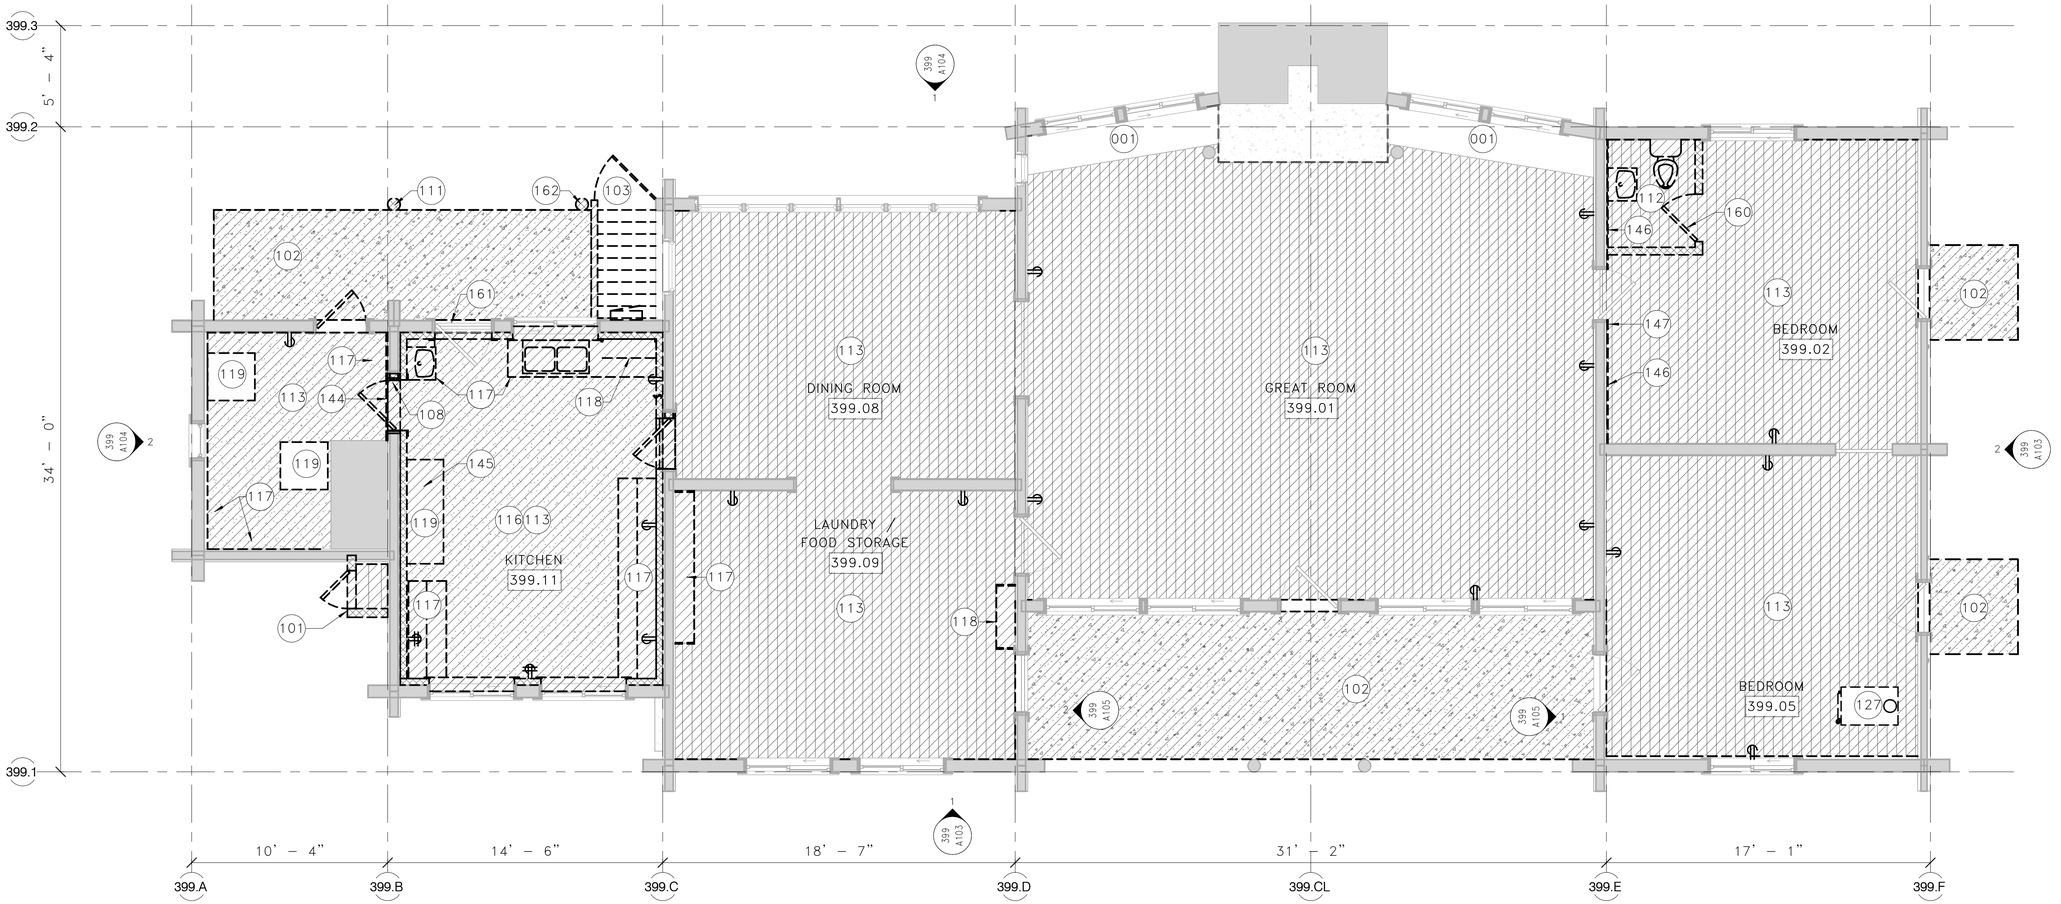

1 399 MAIN LODGE – FIRST LEVEL DEMO PLAN

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL RUSTED AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

KEYNOTES

001 (E) BENCH TO REMAIN
101 REMOVE (E) WATER HEATER ENCLOSURE, HEATER, AND ACCESSORIES
102 REMOVE (E) CONCRETE SLAB AND ASSOCIATED STEPS
103 REMOVE (E) WOOD STAIR, GUARDRAIL, AND GATE
108 SALVAGE (E) DOOR, MODIFY (E) FRAME, AND REMOVE PORTION OF WALL TO ACCOMMODATE WIDER DOOR
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
112 REMOVE (E) BATHROOM INCLUDING ALL FIXTURES, PLUMBING AND INTERIOR WALLS. SALVAGE FOR REINSTALLATION OF (E) LAVATORY
113 REMOVE (E) FLOOR ASSEMBLY AND ALL ACCESSORIES. SALVAGE FOR REUSE (E) UNDAMAGED WOOD FLOORING
116 REMOVE CEILING. CLEAN, PATCH, REPAIR, AND REFINISH EXPOSED STRUCTURE TO REMAIN
117 REMOVE (E) CASEWORK INCLUDING PLUMBING FIXTURES AND ALL ACCESSORIES AS APPLICABLE
118 SALVAGE FOR REINSTALLATION OF (E) CASEWORK
119 REMOVE (E) SPECIALTY KITCHEN EQUIPMENT
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
144 REMOVE WALL PANELING ON UPPER PORTION OF WALL
145 REMOVE KITCHEN HOOD, VENT, ROOF CURB AND ALL ACCESSORIES
146 SALVAGE FOR REINSTALLATION WOOD WALL PANELING
147 SALVAGE FOR REINSTALLATION (E) WOOD TRIM
160 SALVAGE FOR REUSE (E) DOOR, FRAME, AND HARDWARE AT CLOSET 399.04. PREP FOR NEW LOCKSET.
161 SALVAGE FOR REUSE (E) SCREEN DOOR AND ASSOCIATED HARDWARE AND PREP FOR REUSE. COORDINATE WITH CONTRACTING OFFICER POTENTIAL USE AT OTHER LOCATION. PATCH AND REPAIR (E) FRAME TO REMAIN
162 SALVAGE FOR REINSTALLATION (E) WOOD COLUMN, SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A101

TITLE OF SHEET
MAIN LODGE – FIRST LEVEL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 99 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

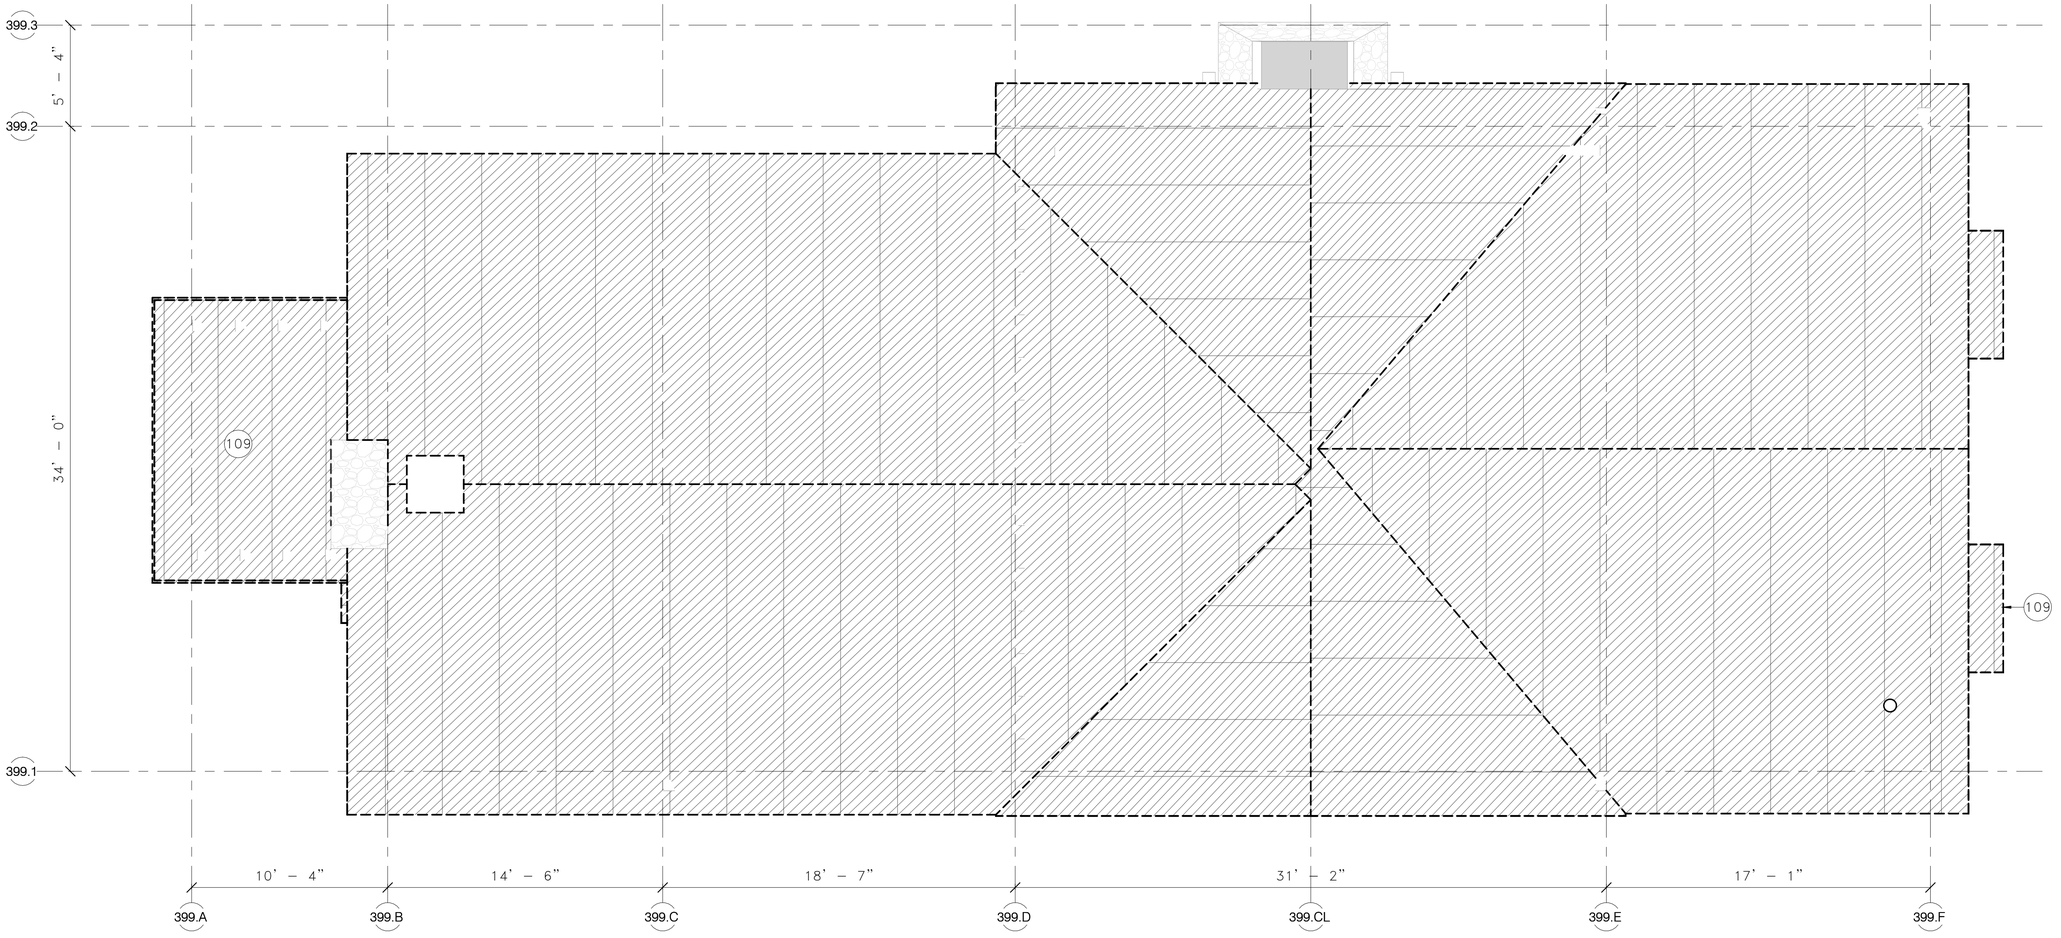

1 399 MAIN LODGE – ROOF LEVEL DEMO PLAN

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL RUSTED AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

KEYNOTES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

SCALE (B) 4 0 4 8 SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A102

TITLE OF SHEET
MAIN LODGE – ROOF LEVEL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 100 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

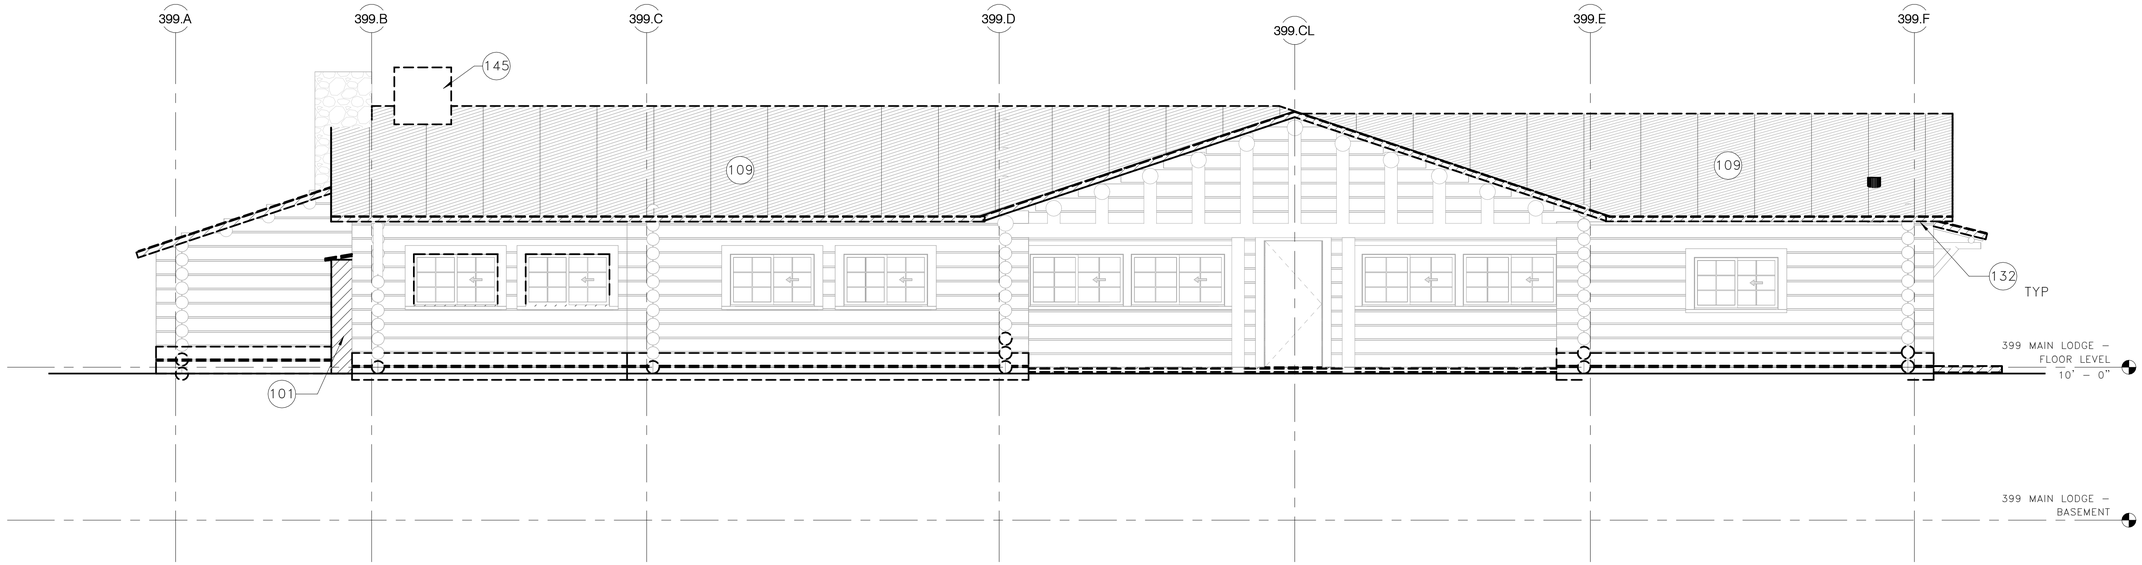

1 399 MAIN LODGE – WEST DEMO ELEVATION

1/4" = 1'–0"

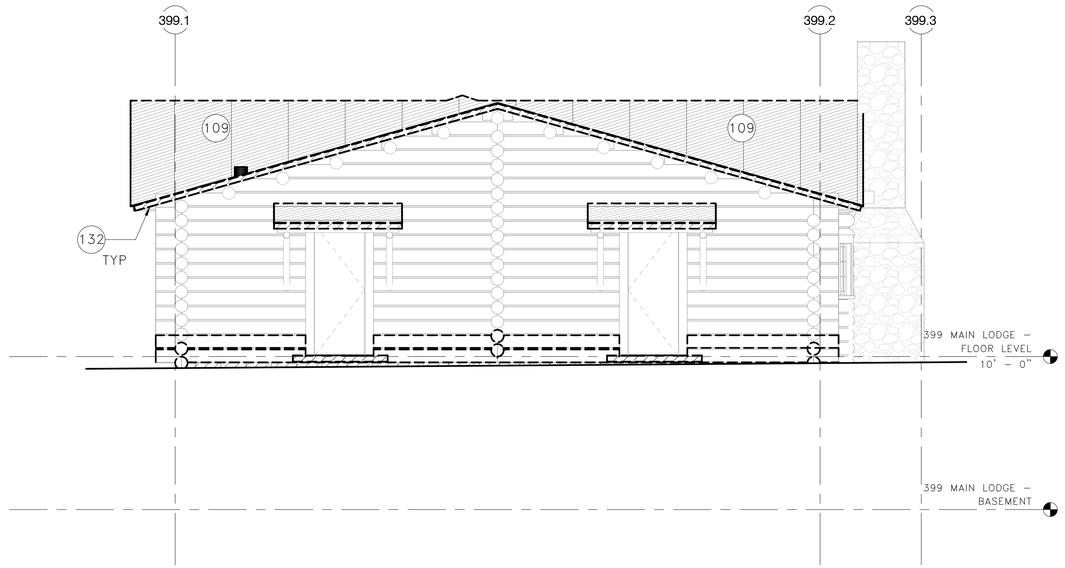

2 399 MAIN LODGE –SOUTH DEMO ELEVATION

1/4" = 1'–0"

KEYNOTES

101 REMOVE (E) WATER HEATER ENCLOSURE, HEATER, AND ACCESSORIES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

132 REMOVE (E) FASCIA

145 REMOVE KITCHEN HOOD, VENT, ROOF CURB AND ALL ACCESSORIES

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.

2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.

3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.

4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.

5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.

6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.

7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

SCALE (B) 0" 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EDDY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A103

TITLE OF SHEET
MAIN LODGE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 101 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

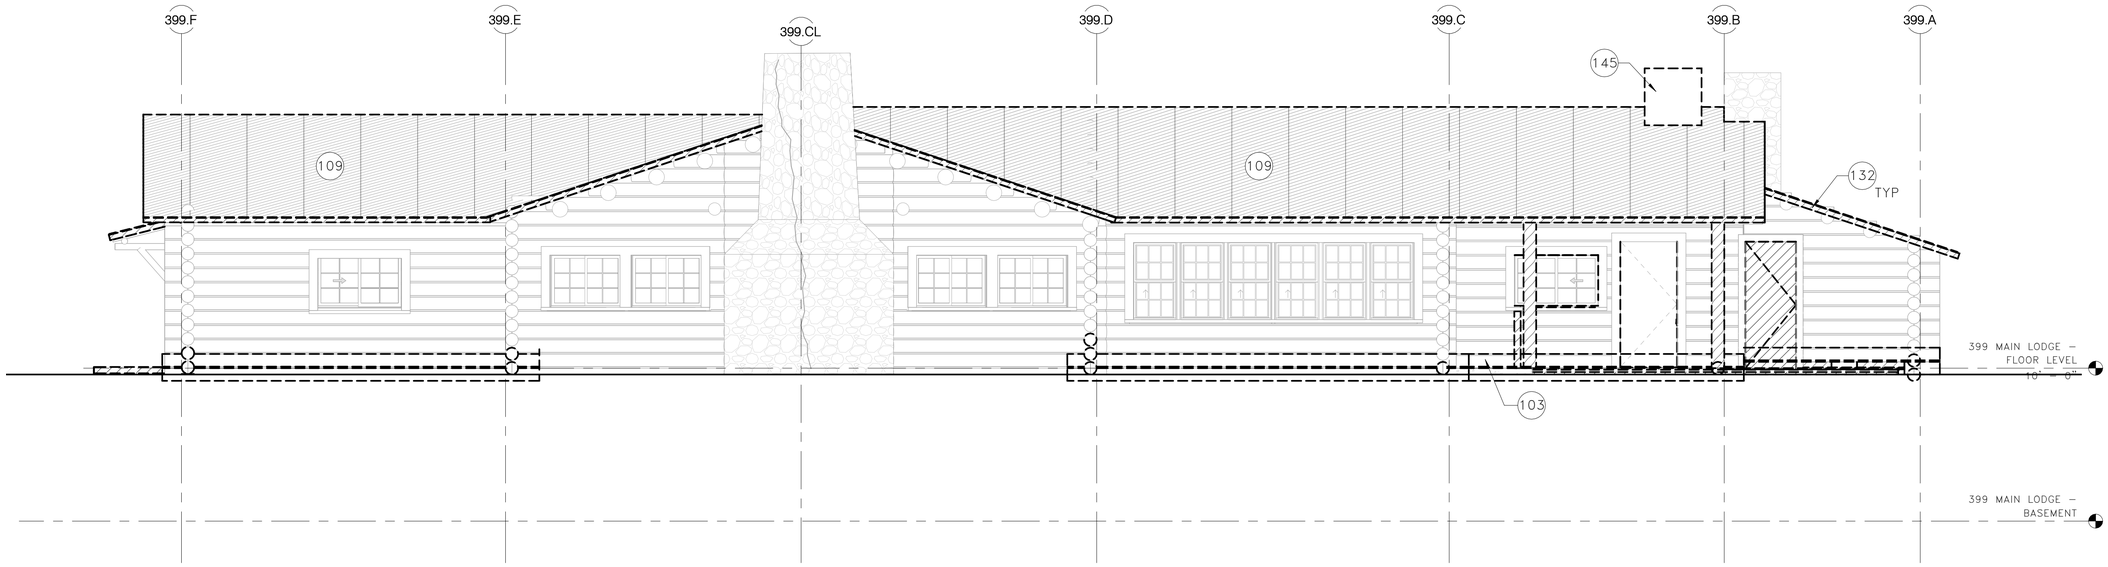

1 399 MAIN LODGE –EAST DEMO ELEVATION

1/4" = 1'–0"

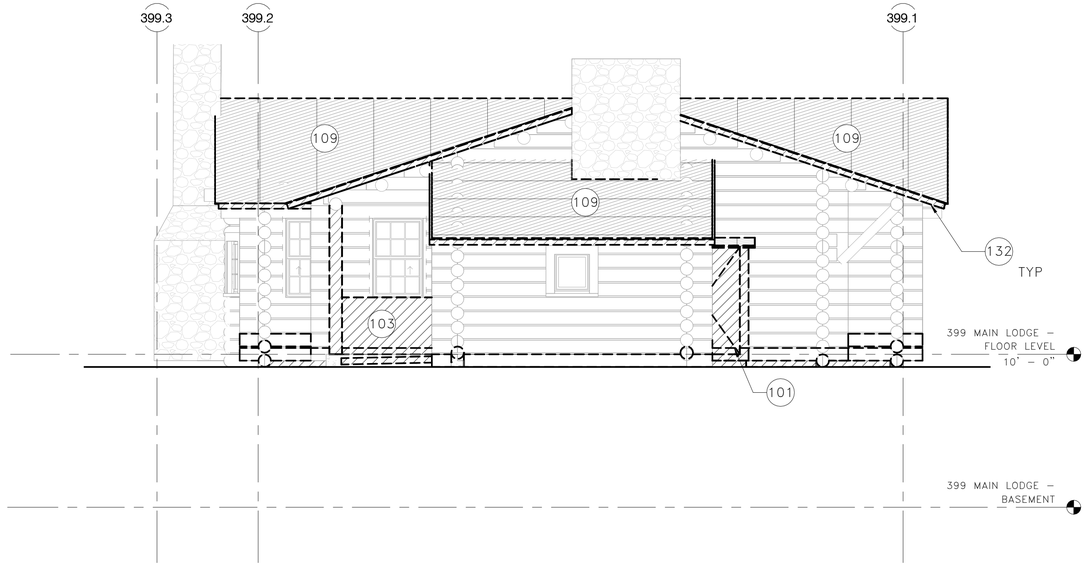

2 399 MAIN LODGE – NORTH DEMO ELEVATION

1/4" = 1'–0"

KEYNOTES

101 REMOVE (E) WATER HEATER ENCLOSURE, HEATER, AND ACCESSORIES

103 REMOVE (E) WOOD STAIR, GUARDRAIL, AND GATE

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

132 REMOVE (E) FASCIA

145 REMOVE KITCHEN HOOD, VENT, ROOF CURB AND ALL ACCESSORIES

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.

2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.

3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.

4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.

5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.

6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.

7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A104

TITLE OF SHEET
MAIN LODGE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 102 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

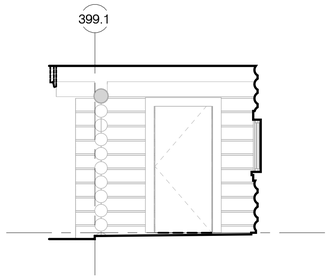

399 MAIN LODGE – NORTH DEMO ELEVATION (ENTRY PORCH)

2

1/4" = 1'–0"

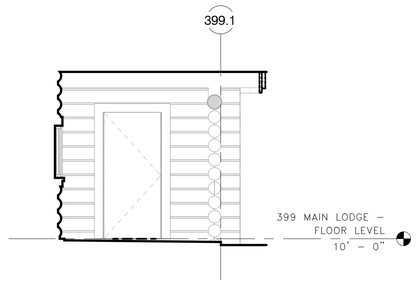

399 MAIN LODGE – SOUTH DEMO ELEVATION (ENTRY PORCH)

1

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3638 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A105

TITLE OF SHEET
MAIN LODGE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 103 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

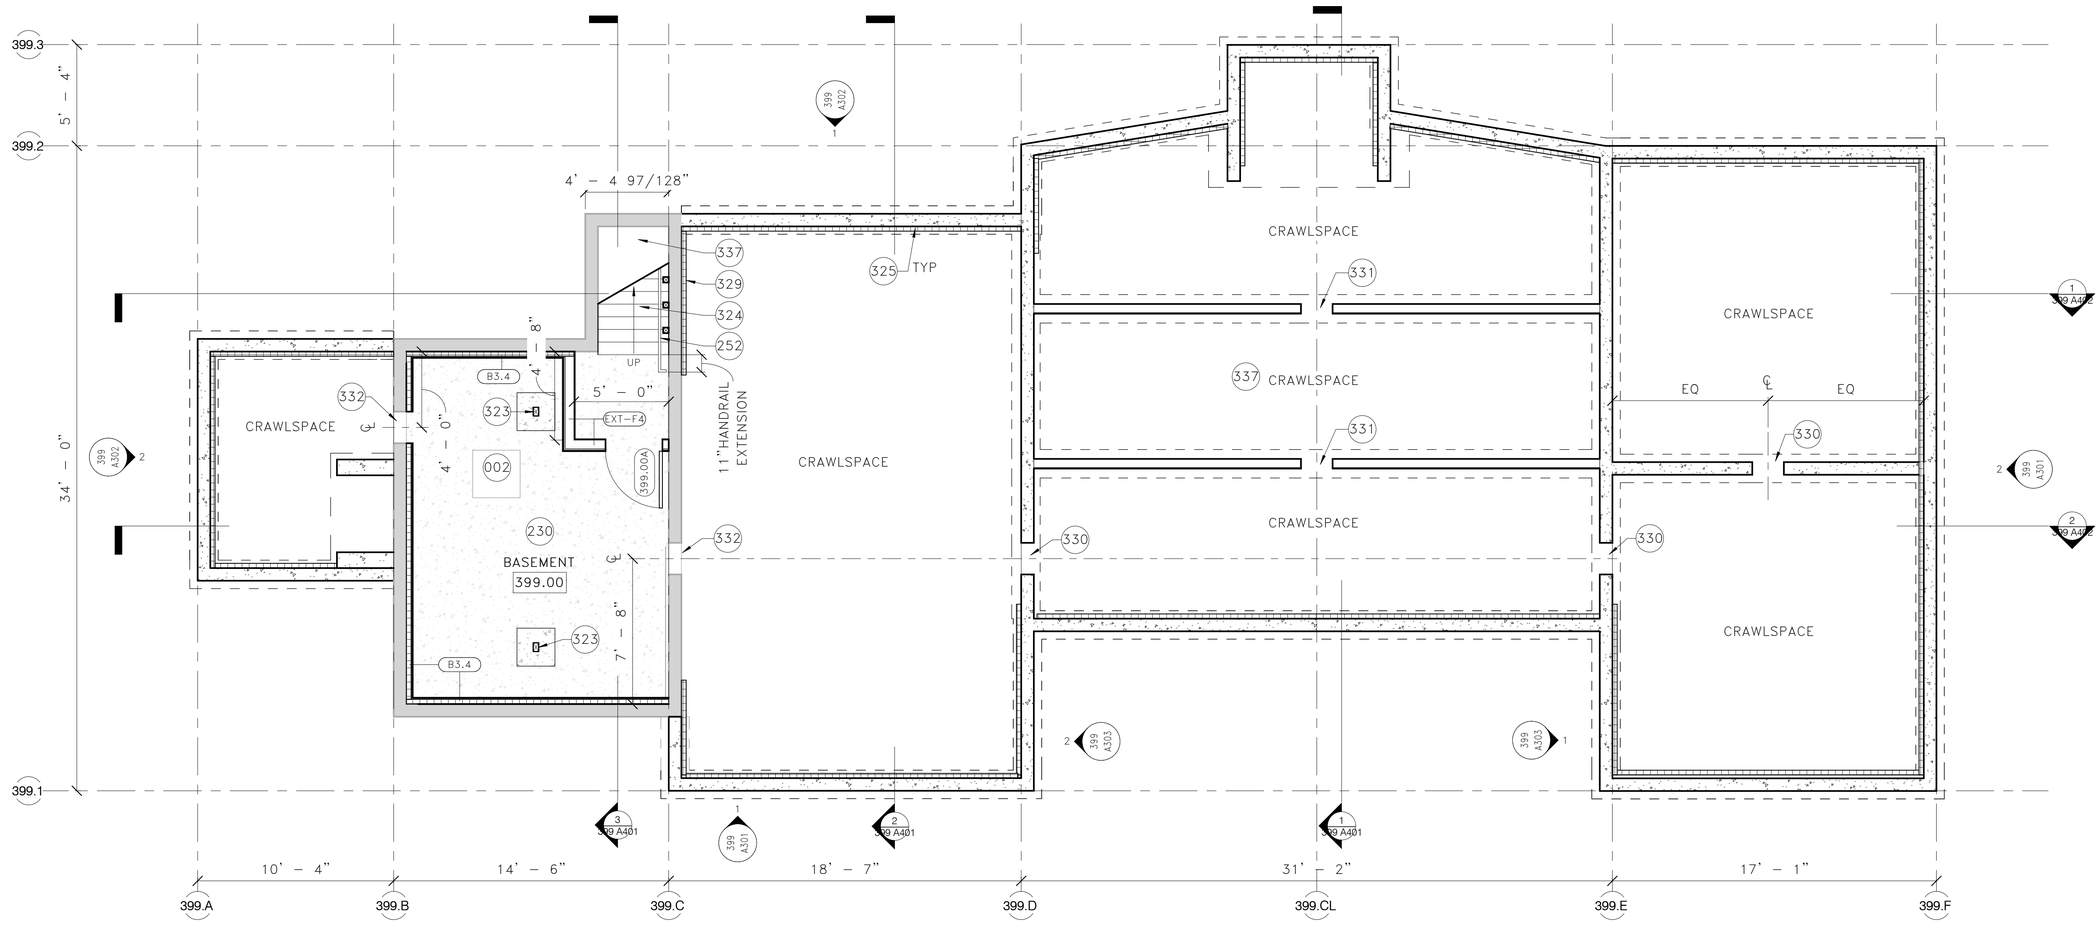

1 399 MAIN LODGE – BASEMENT LEVEL PLAN

1/4" = 1'-0"

KEYNOTES

002 (E) SUMP TO REMAIN, INSTALL NEW PUMP PER PLUMBING DRAWING
230 REPAIR (E) CONCRETE WALLS AND FLOOR
252 PROVIDE WALL-MOUNTED PAINTED METAL HANDRAIL
323 PROVIDE WOOD POST PER STRUCTURAL
324 RECONSTRUCT WOOD STAIR
325 PROVIDE FOUNDATION WALL AND FOOTING PER STRUCTURAL
329 PROVIDE RIGID INSULATION (B1) AT INTERIOR F.O. CONC STEMWALL, TYPICAL AT ALL PERIMETER WALLS
330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS
331 INSTALL 20" WIDE BY 24" TALL OPENING IN PONY WALL FOR CRAWSPACE ACCESS; SEE STRUCTURAL DRAWINGS
332 INSTALL 20" WIDE BY 24" TALL OPENING (E) FOUNDATION WALL; SEE STRUCTURAL DRAWINGS
337 PROVIDE VAPOR BARRIER, TYPICAL AT CRAWLSPACES

FLOOR PLAN LEGEND

(E) WOOD FRAMED, CONCRETE, OR LOG WALL
WALL PER WALL TYPE
DOOR PER SCHEDULE
(E) OR (S) DOOR PER SCHEDULE
(E) WINDOW PER SCHEDULE
###.## DOOR TAG
EXT-XX WALL TAG
EDGE OF ROOF ABOVE
KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A201

TITLE OF SHEET
MAIN LODGE – BASEMENT LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 104 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

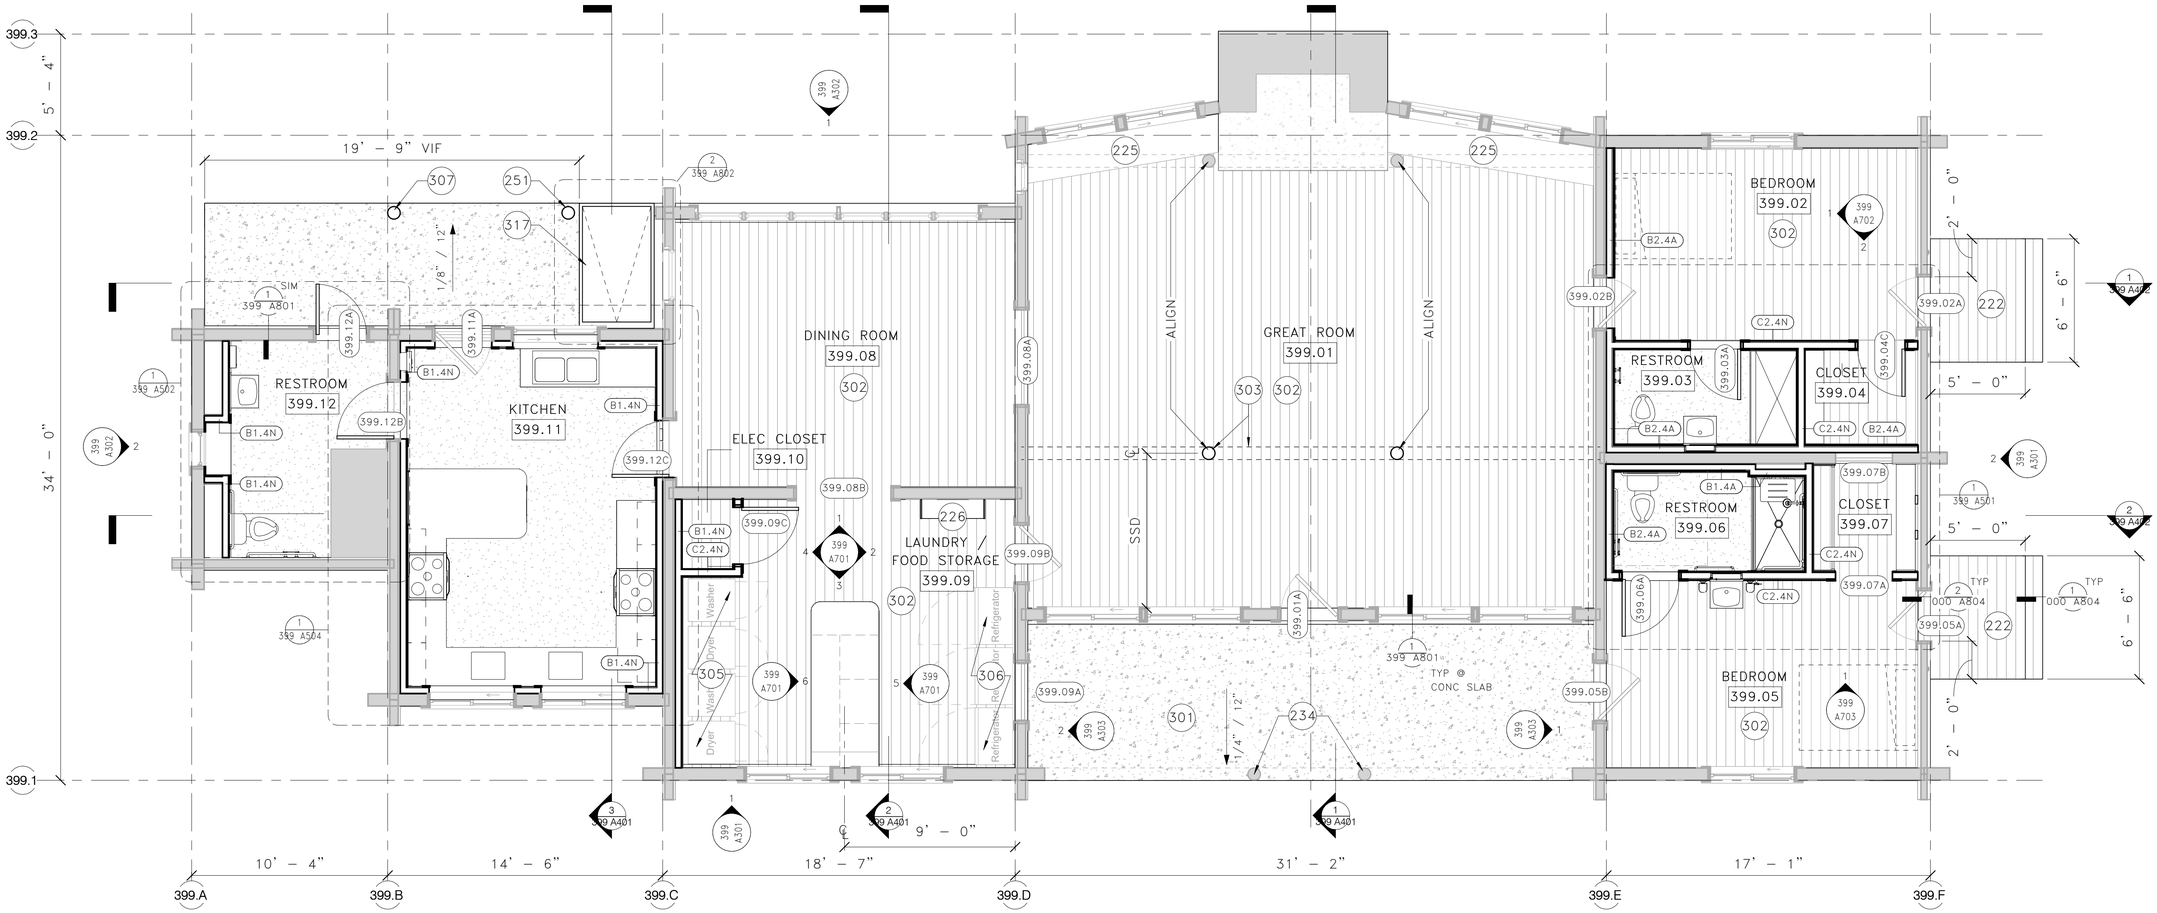

1 399 MAIN LODGE – FIRST LEVEL PLAN

1/4" = 1'–0"

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
225 RESTORE (E) BENCHES
226 RESTORE (E) CASEWORK UNIT
234 MODIFY LOG COLUMN TO AVOID DIRECT CONTACT WITH FLOOR; SSD
251 REINSTALL SALVAGED (E) LOG COLUMN. MODIFY TO AVOID DIRECT CONTACT WITH FLOOR. COORDINATE WITH BULKHEAD DOOR; SSD
301 PROVIDE CONCRETE SLAB ON GRADE
302 PROVIDE PLANK WOOD FLOORING TO MATCH (E). REUSE ANY SALVAGED WOOD FLOORING MATERIAL
303 PROVIDE LOG COLUMN AND BEAM ASSEMBLY PER STRUCTURAL
305 COMMON USE LAUNDRY MACHINES, N.I.C.
306 COMMON USE REFRIGERATORS, N.I.C.
307 PROVIDE LOG COLUMN PER STRUCTURAL
317 PROVIDE CUSTOM BULKHEAD METAL DOOR

FLOOR PLAN LEGEND

(E) WOOD FRAMED, CONCRETE, OR LOG WALL
WALL PER WALL TYPE
DOOR PER SCHEDULE
(E) OR (S) DOOR PER SCHEDULE
(E) WINDOW PER SCHEDULE
###.## DOOR TAG
EXT-XX WALL TAG
EDGE OF ROOF ABOVE
KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET
NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TODD C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A202

TITLE OF SHEET
MAIN LODGE – FIRST LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 105 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

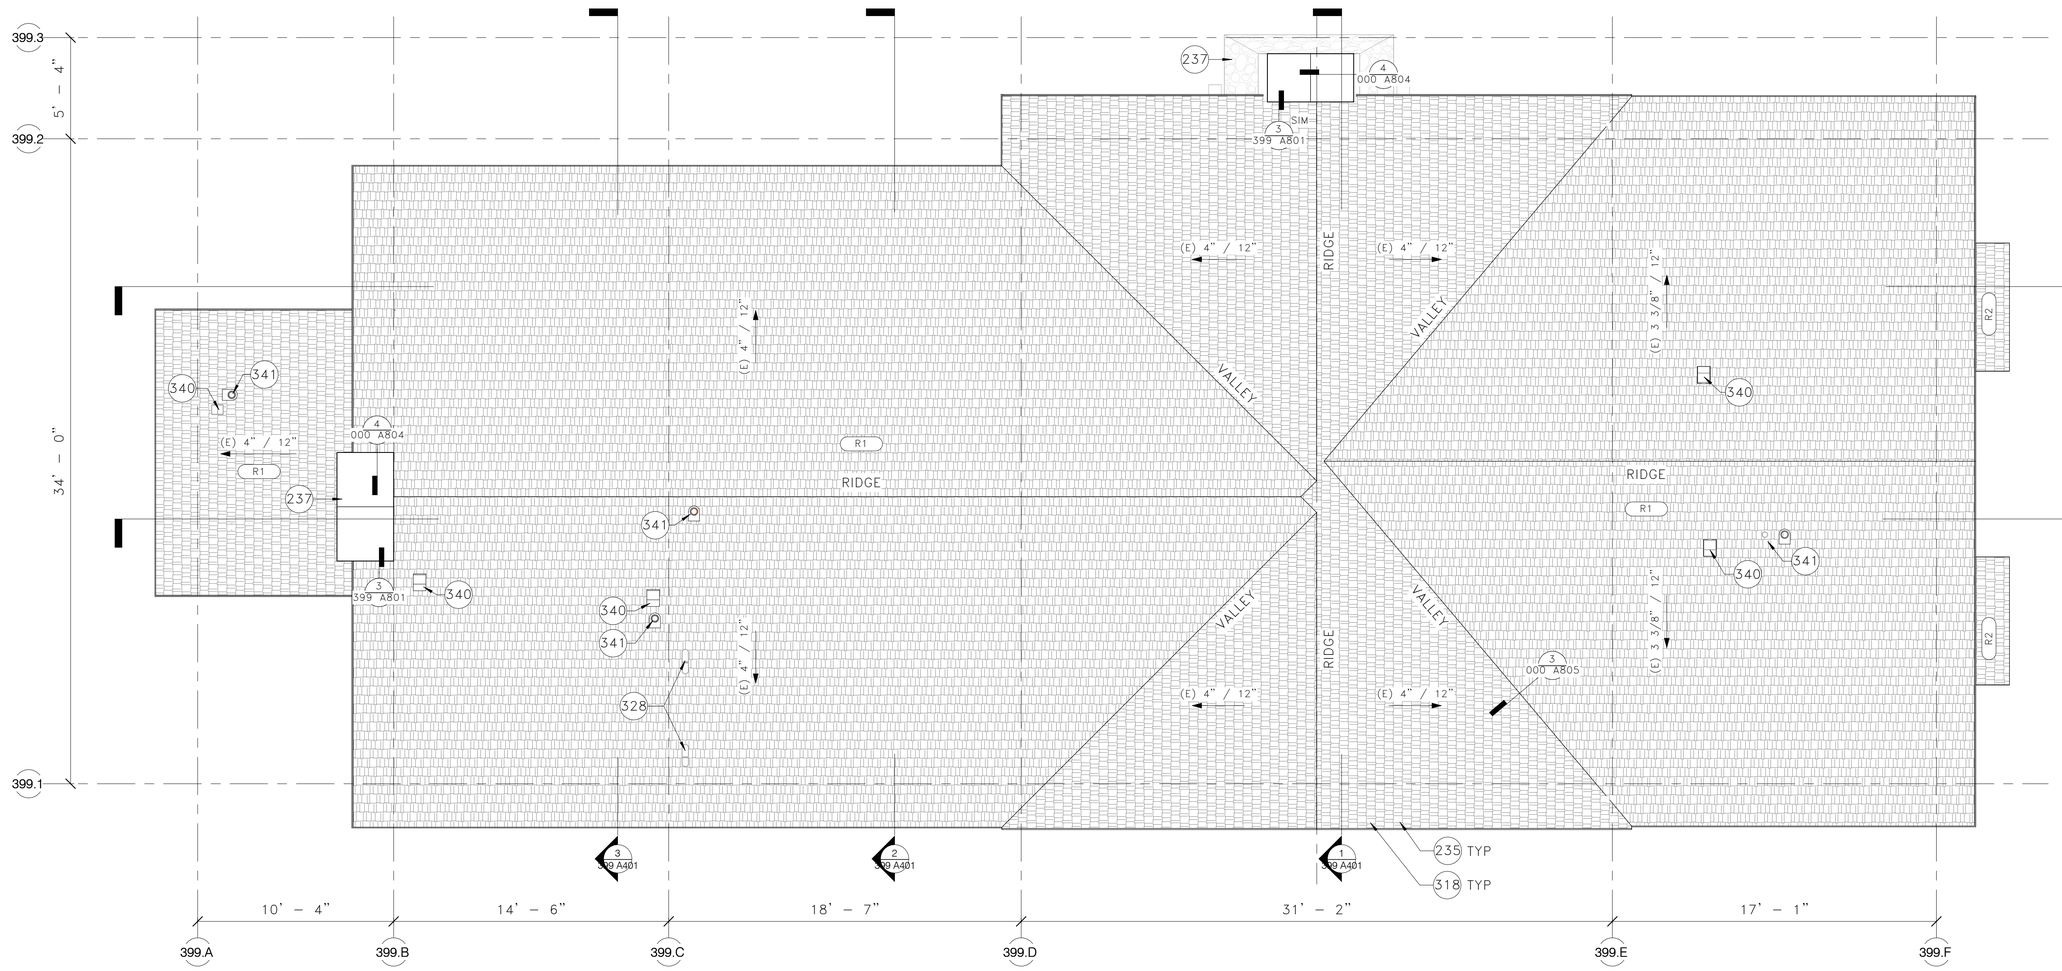

1 399 MAIN LODGE – T.O. PLATE

1/4" = 1'-0"

KEYNOTES

235 REPLACE (E) WOOD FASCIA

237 CLEAN AND REPAIR (E) CHIMNEY, BOTH INSIDE AND OUT. PROVIDE CHIMNEY CAP

318 PROVIDE SECONDARY WOOD FASCIA

328 PROVIDE ROOF MOUNTED DRYER VENT CAP; SEE MECH DRAWINGS

340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS

341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

ROOF PLAN LEGEND

ROOFING

(E) RIVER ROCK CHIMNEY

R# ROOF TAG

KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO.
399
A203

TITLE OF SHEET
MAIN LODGE – ROOF PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 106 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

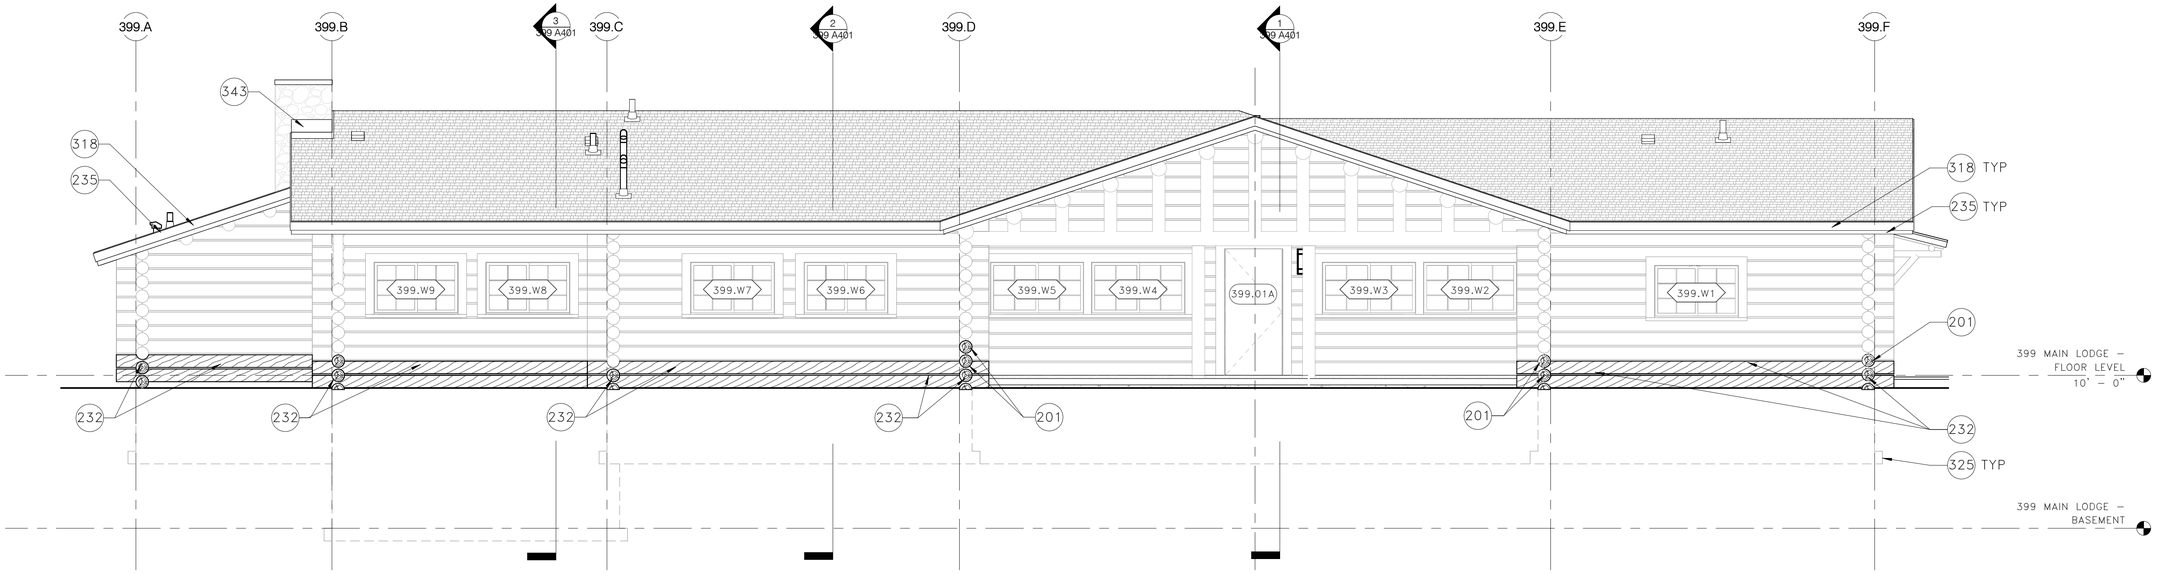

1 399 MAIN LODGE – WEST ELEVATIONS

1/4" = 1'-0"

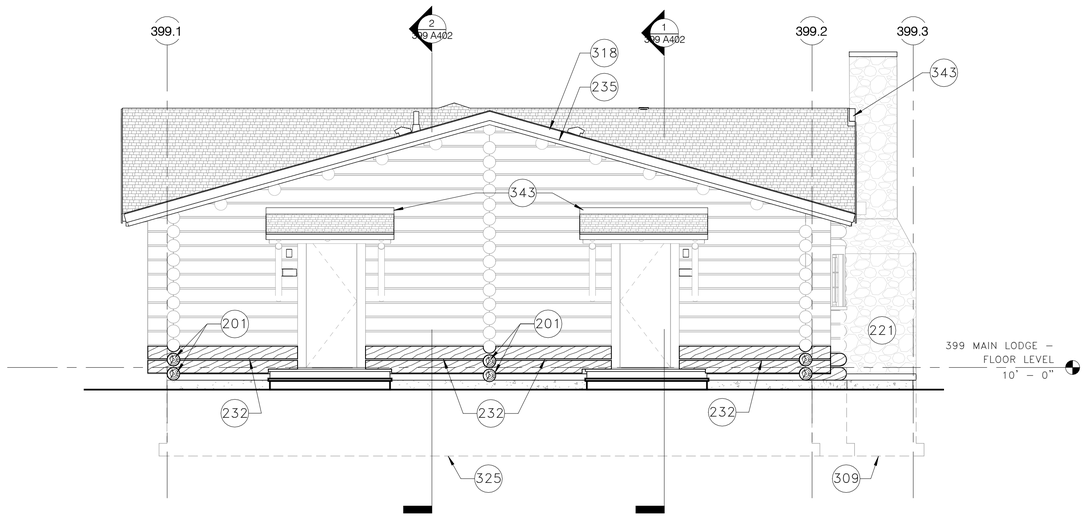

2 399 MAIN LODGE – SOUTH ELEVATIONS

1/4" = 1'-0"

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ### XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

201 LOG DUTCHMAN REPAIR
221 RESTORE (E) CHIMNEY BOTH INSIDE AND OUT
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
309 PROVIDE CONCRETE PAD FOOTING PER STRUCTURAL
318 PROVIDE SECONDARY WOOD FASCIA
325 PROVIDE FOUNDATION WALL AND FOOTING PER STRUCTURAL
343 SM FLASHING; SEE BUILDING SECTIONS AND DETAILS

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL-1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL-2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN-KIND REPLACEMENT.
12. ST-2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. HYDE
C-3530
STATE OF WYOMING
Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
399
A301

TITLE OF SHEET
MAIN LODGE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 / 193826
PMIS/PKG NO.	237343
SHEET	107 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

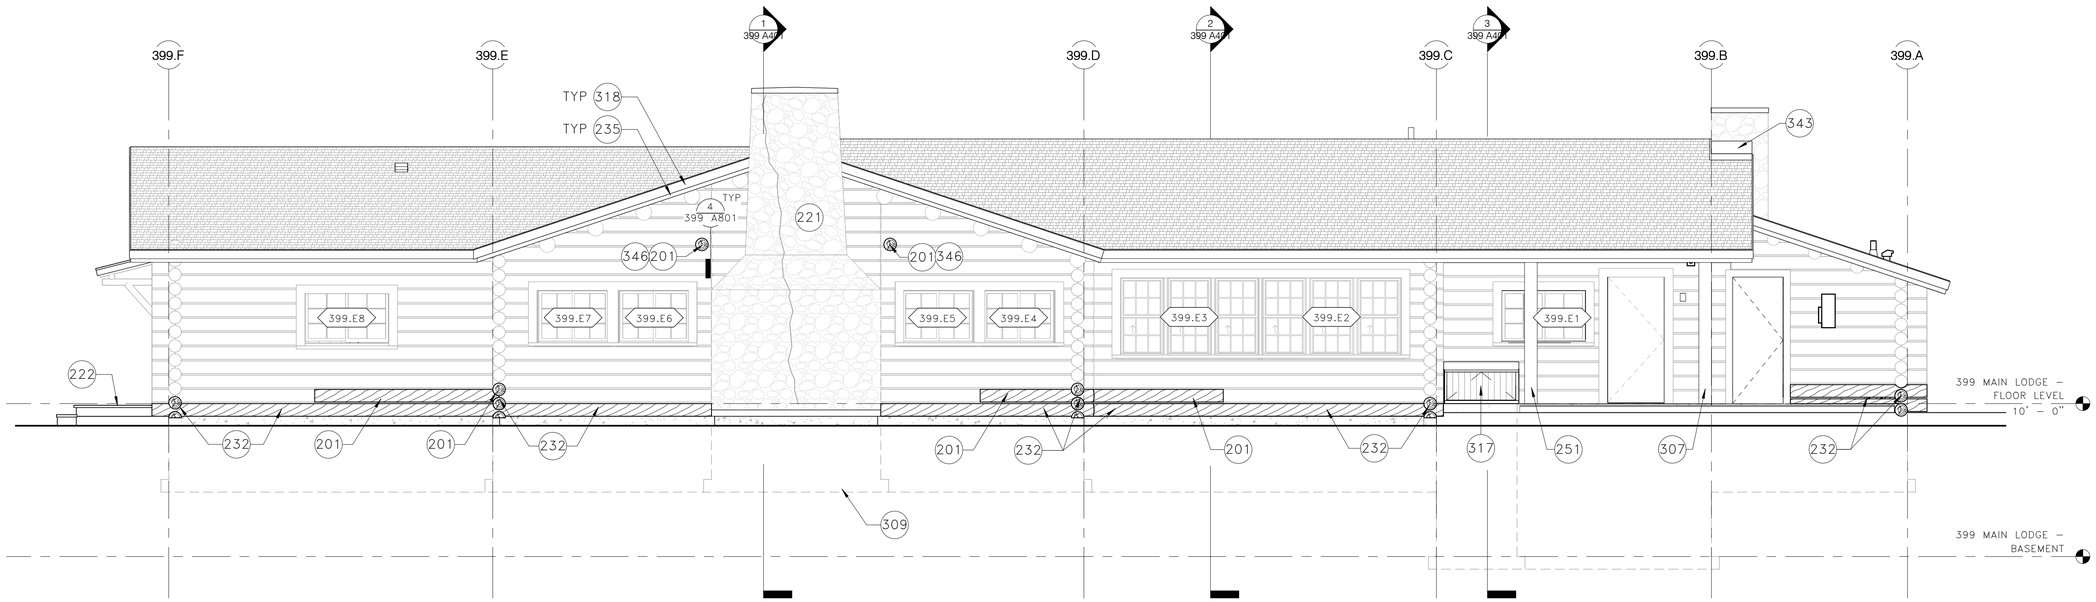

1 399 MAIN LODGE – EAST ELEVATIONS

1/4" = 1'-0"

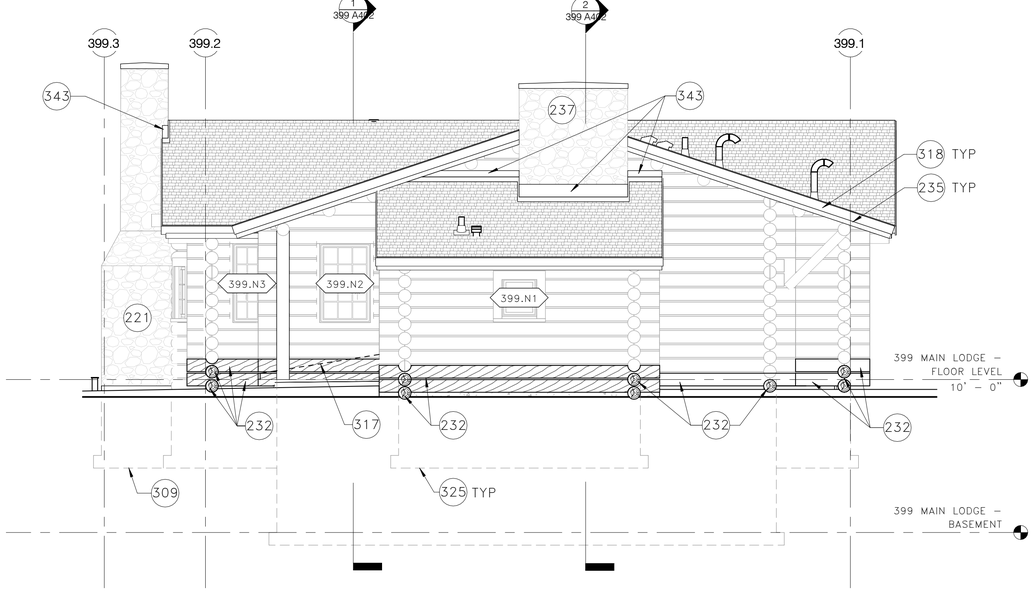

2 399 MAIN LODGE – NORTH ELEVATIONS

1/4" = 1'-0"

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

201 LOG DUTCHMAN REPAIR
221 RESTORE (E) CHIMNEY BOTH INSIDE AND OUT
222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
237 CLEAN AND REPAIR (E) CHIMNEY, BOTH INSIDE AND OUT. PROVIDE CHIMNEY CAP
251 REINSTALL SALVAGED (E) LOG COLUMN. MODIFY TO AVOID DIRECT CONTACT WITH FLOOR. COORDINATE WITH BULKHEAD DOOR; SSD
307 PROVIDE LOG COLUMN PER STRUCTURAL
309 PROVIDE CONCRETE PAD FOOTING PER STRUCTURAL
317 PROVIDE CUSTOM BULKHEAD METAL DOOR
318 PROVIDE SECONDARY WOOD FASCIA
325 PROVIDE FOUNDATION WALL AND FOOTING PER STRUCTURAL
343 SM FLASHING; SEE BUILDING SECTIONS AND DETAILS
346 PROVIDE HALF ROUND SM FLASHING OVER PROJECTING LOG

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL-1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL-2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN-KIND REPLACEMENT.
12. ST-2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. YATES C-3530 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
399
A302

TITLE OF SHEET
MAIN LODGE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	108 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

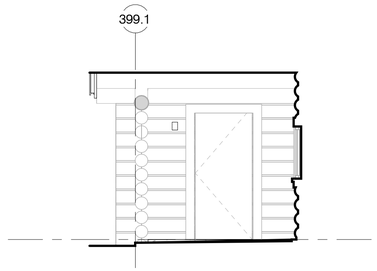

2 399 MAIN LODGE – NORTH ELEVATION (ENTRY PORCH)

1/4" = 1'-0"

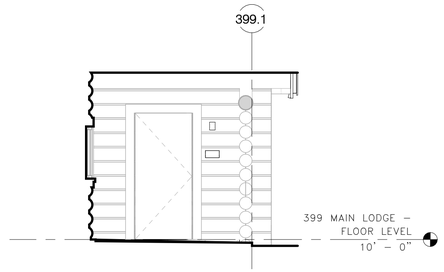

1 399 MAIN LODGE – SOUTH ELEVATION (ENTRY PORCH)

1/4" = 1'-0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL-1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL-2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN-KIND REPLACEMENT.
12. ST-2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- (###) KEYNOTE TAG

KEYNOTES

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TAYLOR C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO. 399 A303

TITLE OF SHEET

MAIN LODGE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 109 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

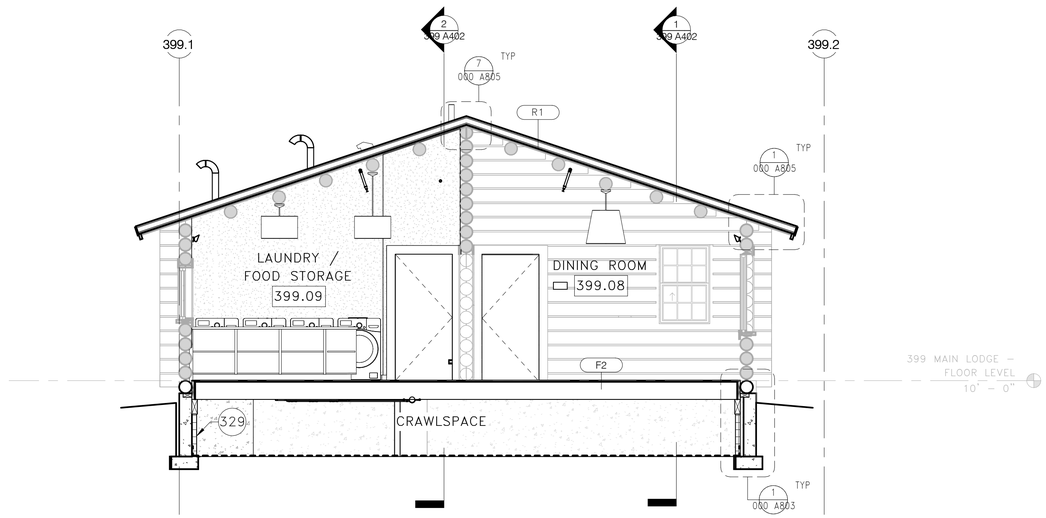

2 399 MAIN LODGE – BUILDING SECTION "B"

1/4" = 1'–0"

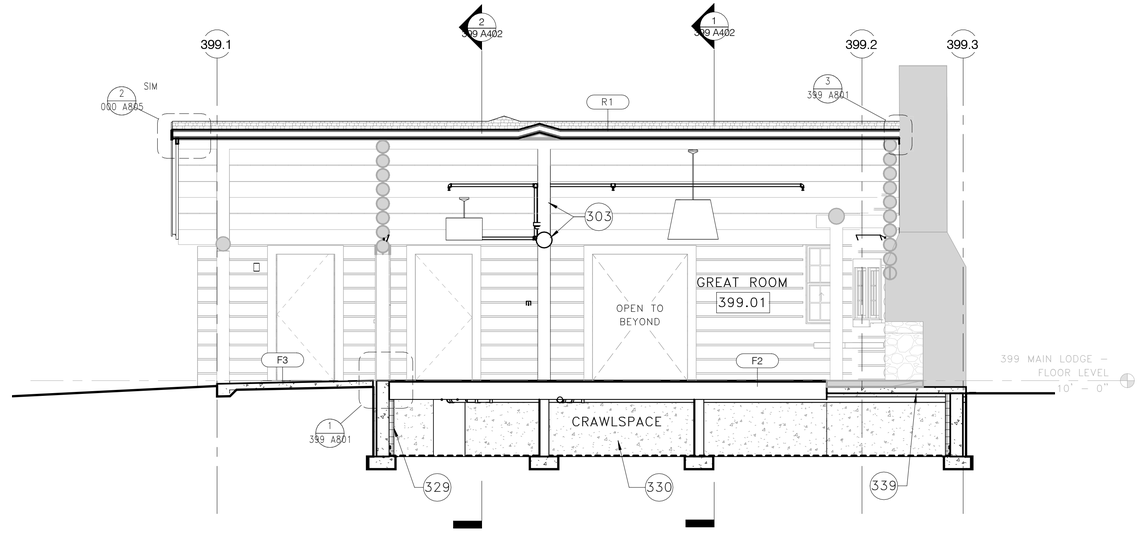

1 399 MAIN LODGE – BUILDING SECTION "A"

1/4" = 1'–0"

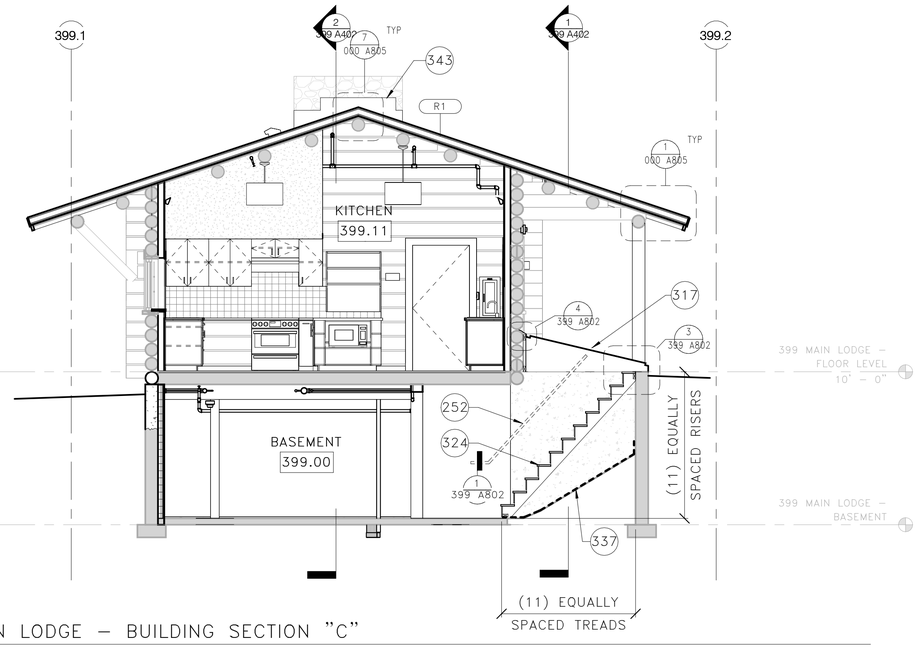

3 399 MAIN LODGE – BUILDING SECTION "C"

1/4" = 1'–0"

KEYNOTES

252 PROVIDE WALL–MOUNTED PAINTED METAL HANDRAIL
303 PROVIDE LOG COLUMN AND BEAM ASSEMBLY PER STRUCTURAL
317 PROVIDE CUSTOM BULKHEAD METAL DOOR
324 RECONSTRUCT WOOD STAIR
329 PROVIDE RIGID INSULATION (B1) AT INTERIOR F.O. CONC STEMWALL, TYPICAL AT ALL PERIMETER WALLS
330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS
337 PROVIDE VAPOR BARRIER, TYPICAL AT CRAWLSPACES
339 PROVIDE CONC SLAB PER STRUCTURAL
343 SM FLASHING; SEE BUILDING SECTIONS AND DETAILS

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVES Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A401

TITLE OF SHEET
MAIN LODGE – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 110 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

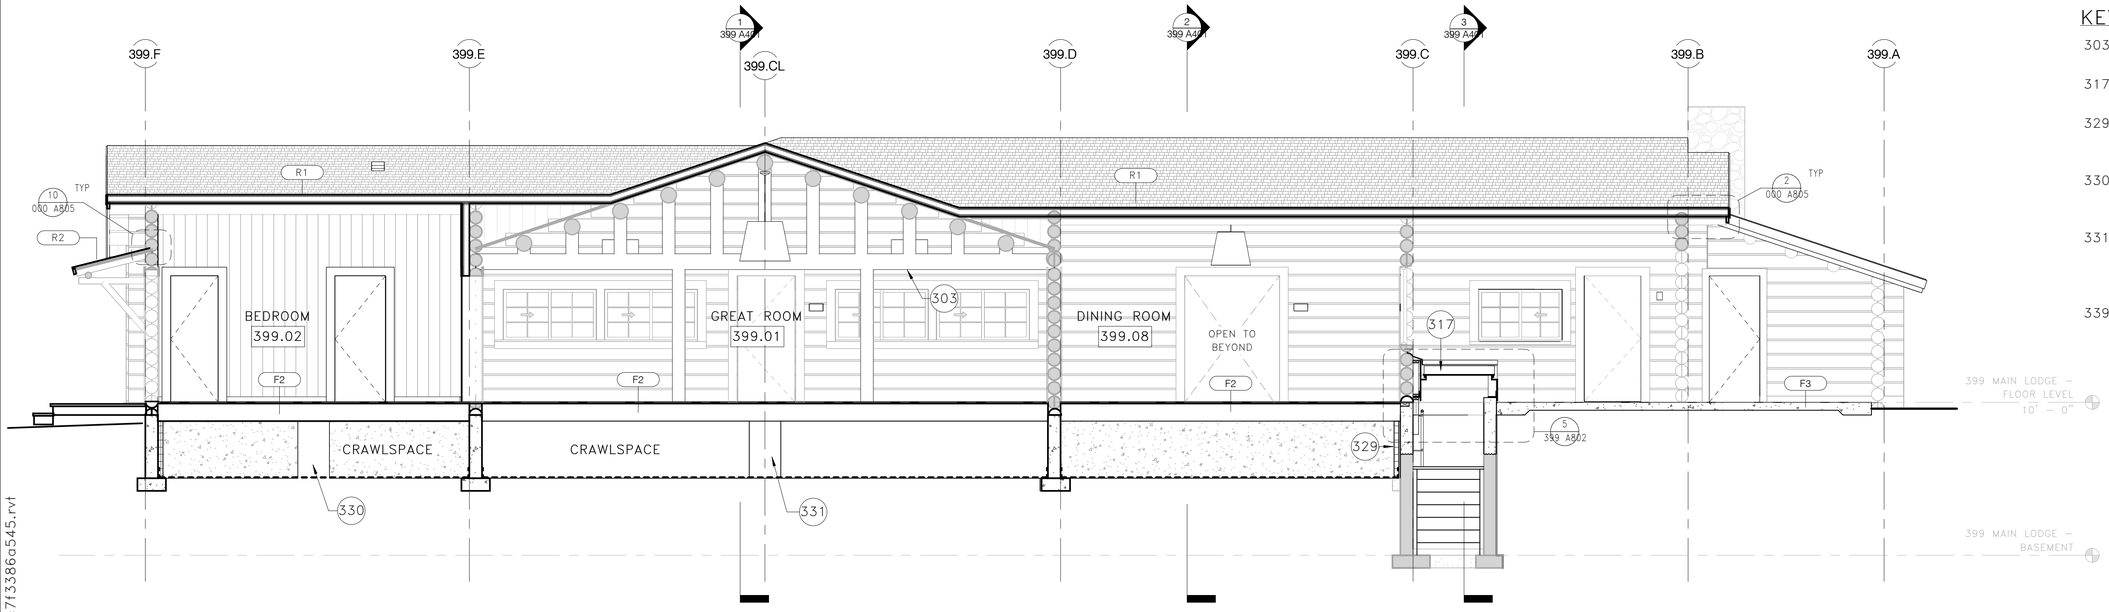

1 399 MAIN LODGE – SECTION "D"

1/4" = 1'-0"

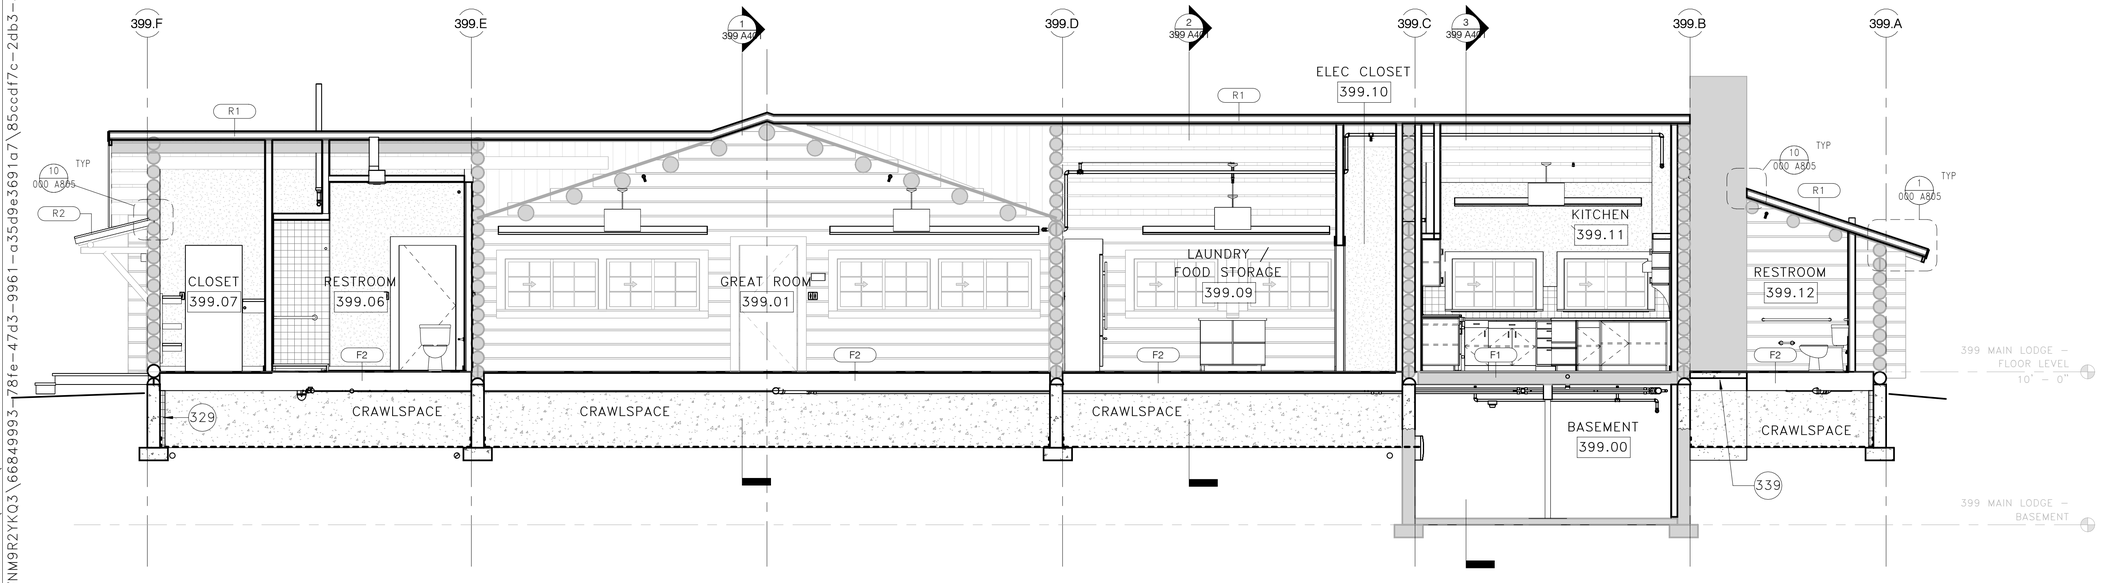

2 399 MAIN LODGE – SECTION "E"

1/4" = 1'-0"

KEYNOTES

303 PROVIDE LOG COLUMN AND BEAM ASSEMBLY PER STRUCTURAL

317 PROVIDE CUSTOM BULKHEAD METAL DOOR

329 PROVIDE RIGID INSULATION (B1) AT INTERIOR F.O. CONC STEMWALL, TYPICAL AT ALL PERIMETER WALLS

330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS

331 INSTALL 20" WIDE BY 24" TALL OPENING IN PONY WALL FOR CRAWSPACE ACCESS; SEE STRUCTURAL DRAWINGS

339 PROVIDE CONC SLAB PER STRUCTURAL

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A402

TITLE OF SHEET
MAIN LODGE – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 111 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

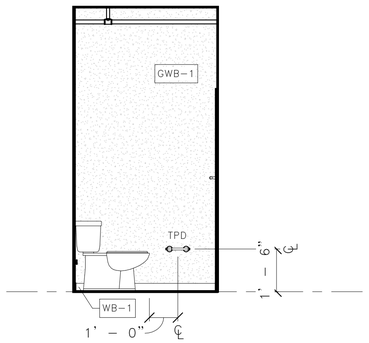

3 RESTROOM 399.03 NORTH

3/8" = 1'–0"

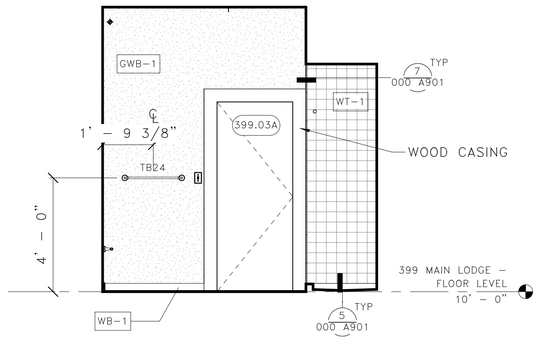

2 RESTROOM 399.03 EAST

3/8" = 1'–0"

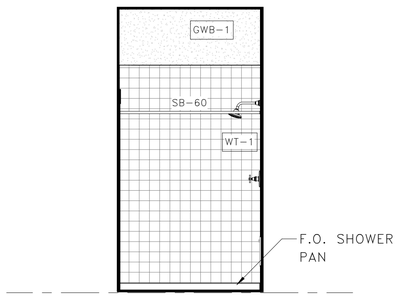

5 RESTROOM 399.03 SOUTH

3/8" = 1'–0"

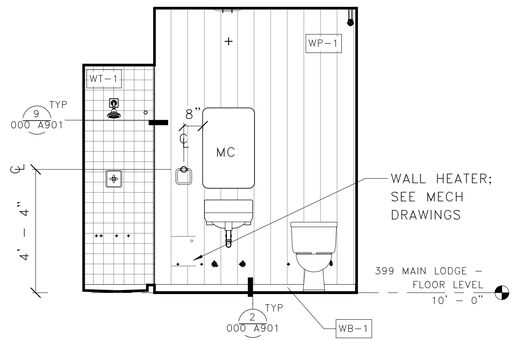

4 RESTROOM 399.03 WEST

3/8" = 1'–0"

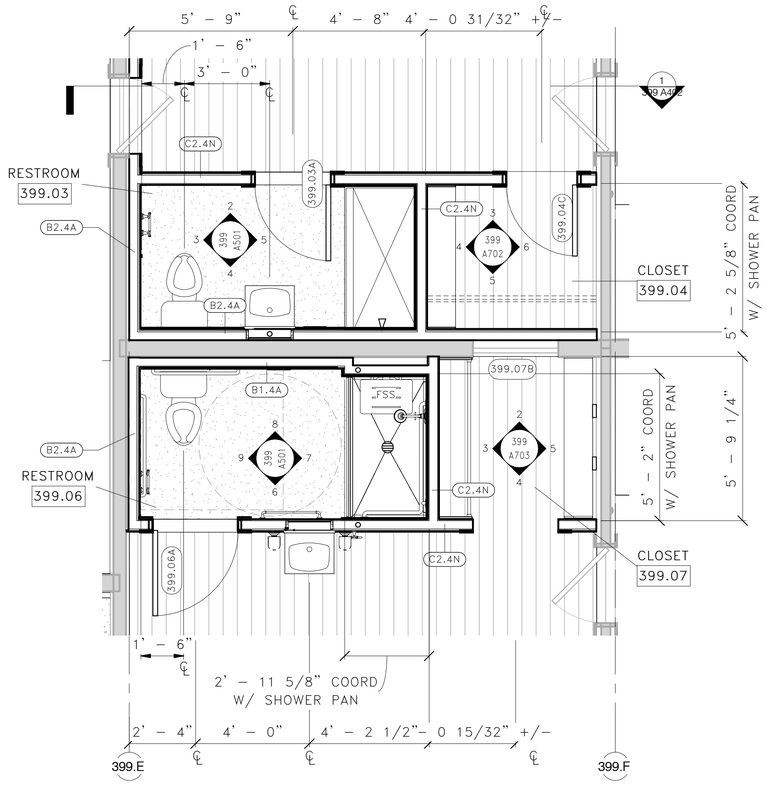

1 399 MAIN LODGE – ENLARGED BATHROOMS PRIVATE

3/8" = 1'–0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- EXT-XX WALL TAG
- ###.## DOOR TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

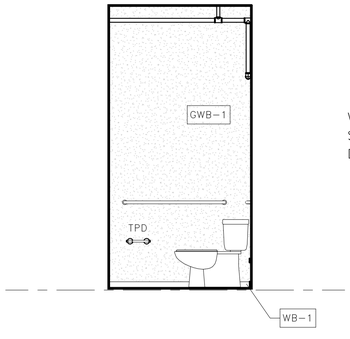

9 RESTROOM 399.05 NORTH

3/8" = 1'–0"

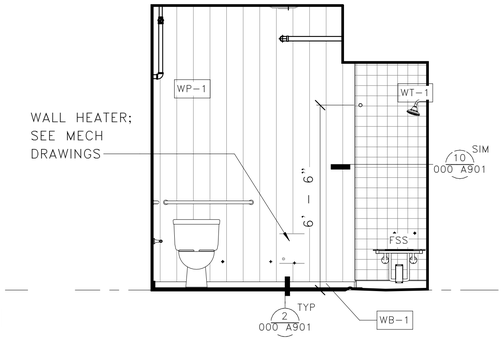

8 RESTROOM 399.05 EAST

3/8" = 1'–0"

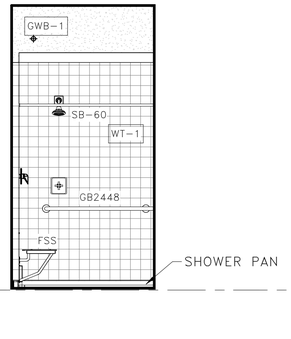

7 RESTROOM 399.05 SOUTH

3/8" = 1'–0"

KEYNOTES

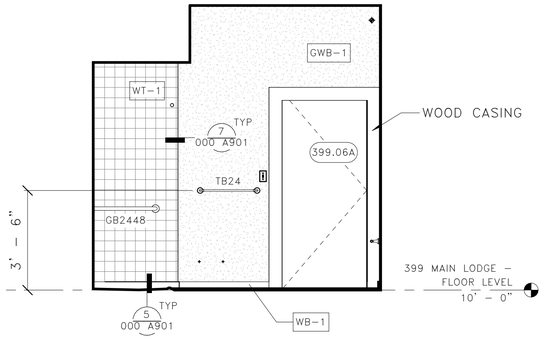

6 RESTROOM 399.05 WEST

3/8" = 1'–0"

2' 8" 0 2' 8" 5' 4"
SCALE OF FEET
NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. LOEB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A501

TITLE OF SHEET
MAIN LODGE – ENLARGED BATHROOM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 112 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

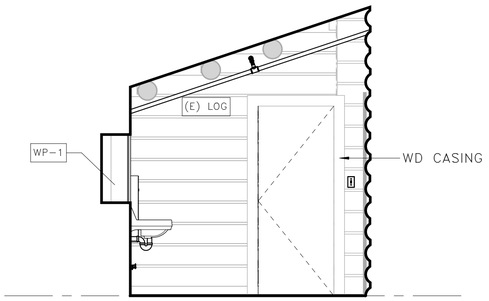

3 RESTROOM 399.12 EAST

3/8" = 1'-0"

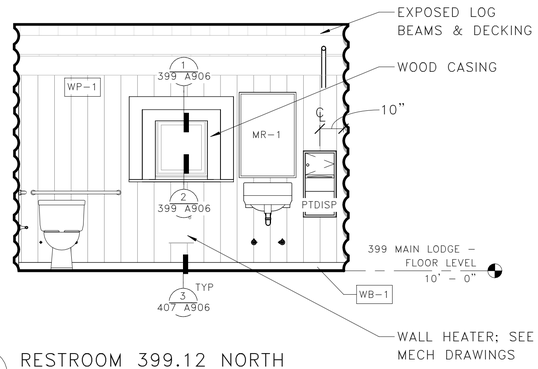

2 RESTROOM 399.12 NORTH

3/8" = 1'-0"

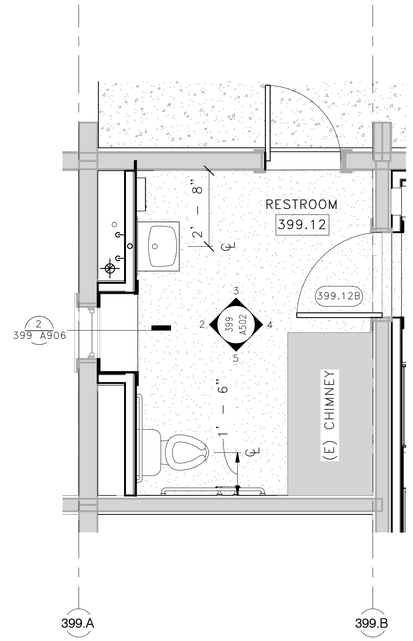

1 399 MAIN LODGE – ENLARGED ABA RESTROOM

3/8" = 1'-0"

5 RESTROOM 399.12 WEST

3/8" = 1'-0"

4 RESTROOM 399.12 SOUTH

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KYLE C-3530 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A502

TITLE OF SHEET
MAIN LODGE – ENLARGED BATHROOM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 113 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

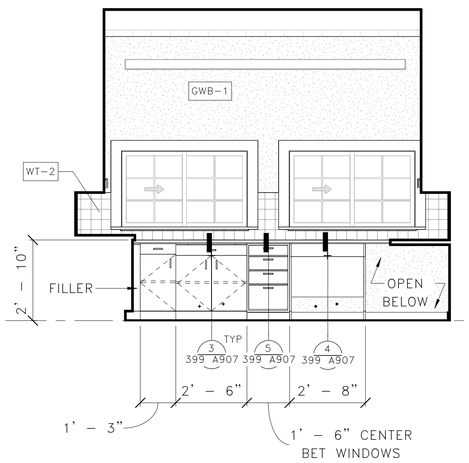

3 KITCHEN 399.08 WEST

3/8" = 1'-0"

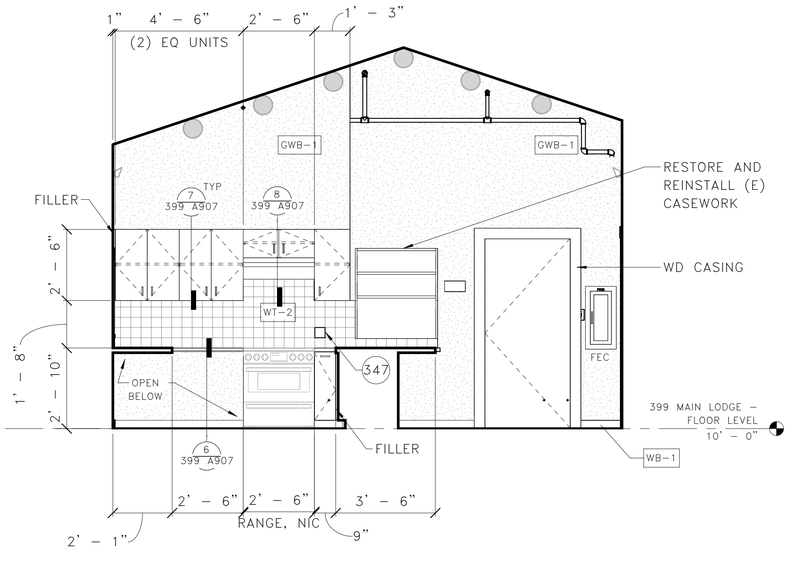

2 KITCHEN 399.08 NORTH

3/8" = 1'-0"

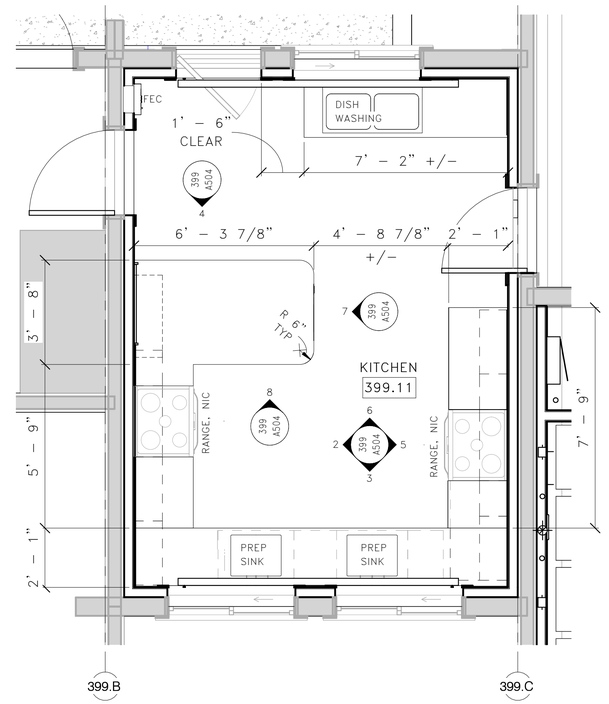

1 399 MAIN LODGE - ENLARGED KITCHEN

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- EXT-XX WALL TAG
- ###.## DOOR TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

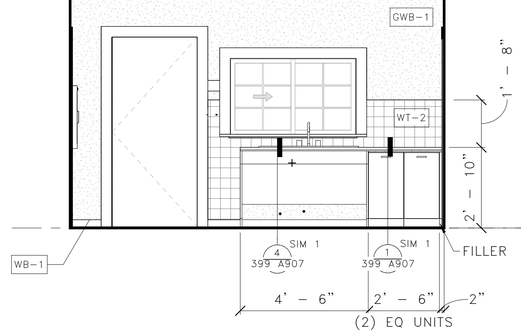

6 KITCHEN 399.08 EAST

3/8" = 1'-0"

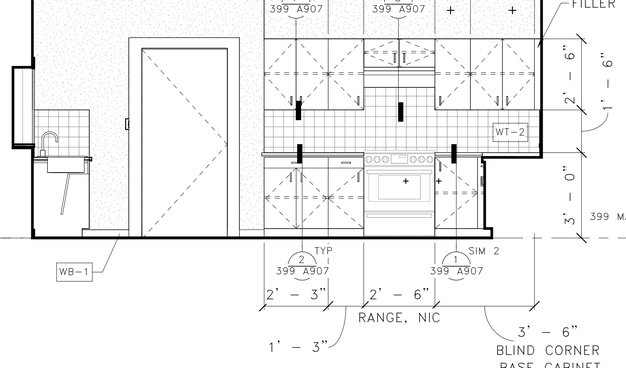

5 KITCHEN 399.08 SOUTH

3/8" = 1'-0"

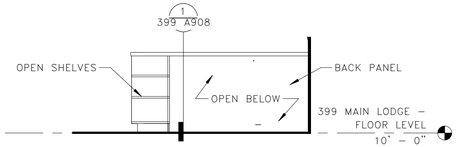

4 KITCHEN 399.08 ISLAND EAST SIDE

3/8" = 1'-0"

KEYNOTES

347 ACCESSIBLE FAN CONTROLS

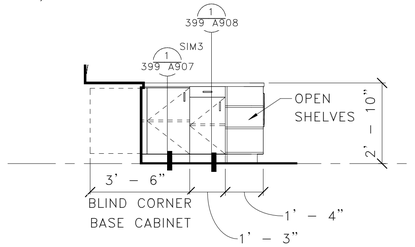

8 KITCHEN 399.08 ISLAND WEST SIDE

3/8" = 1'-0"

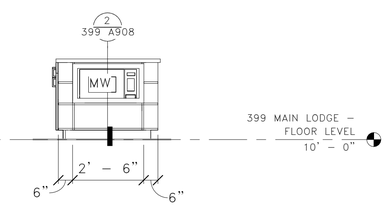

7 KITCHEN 399.08 ISLAND SOUTH SIDE

3/8" = 1'-0"

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A504

TITLE OF SHEET
MAIN LODGE - ENLARGED KITCHEN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 114 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

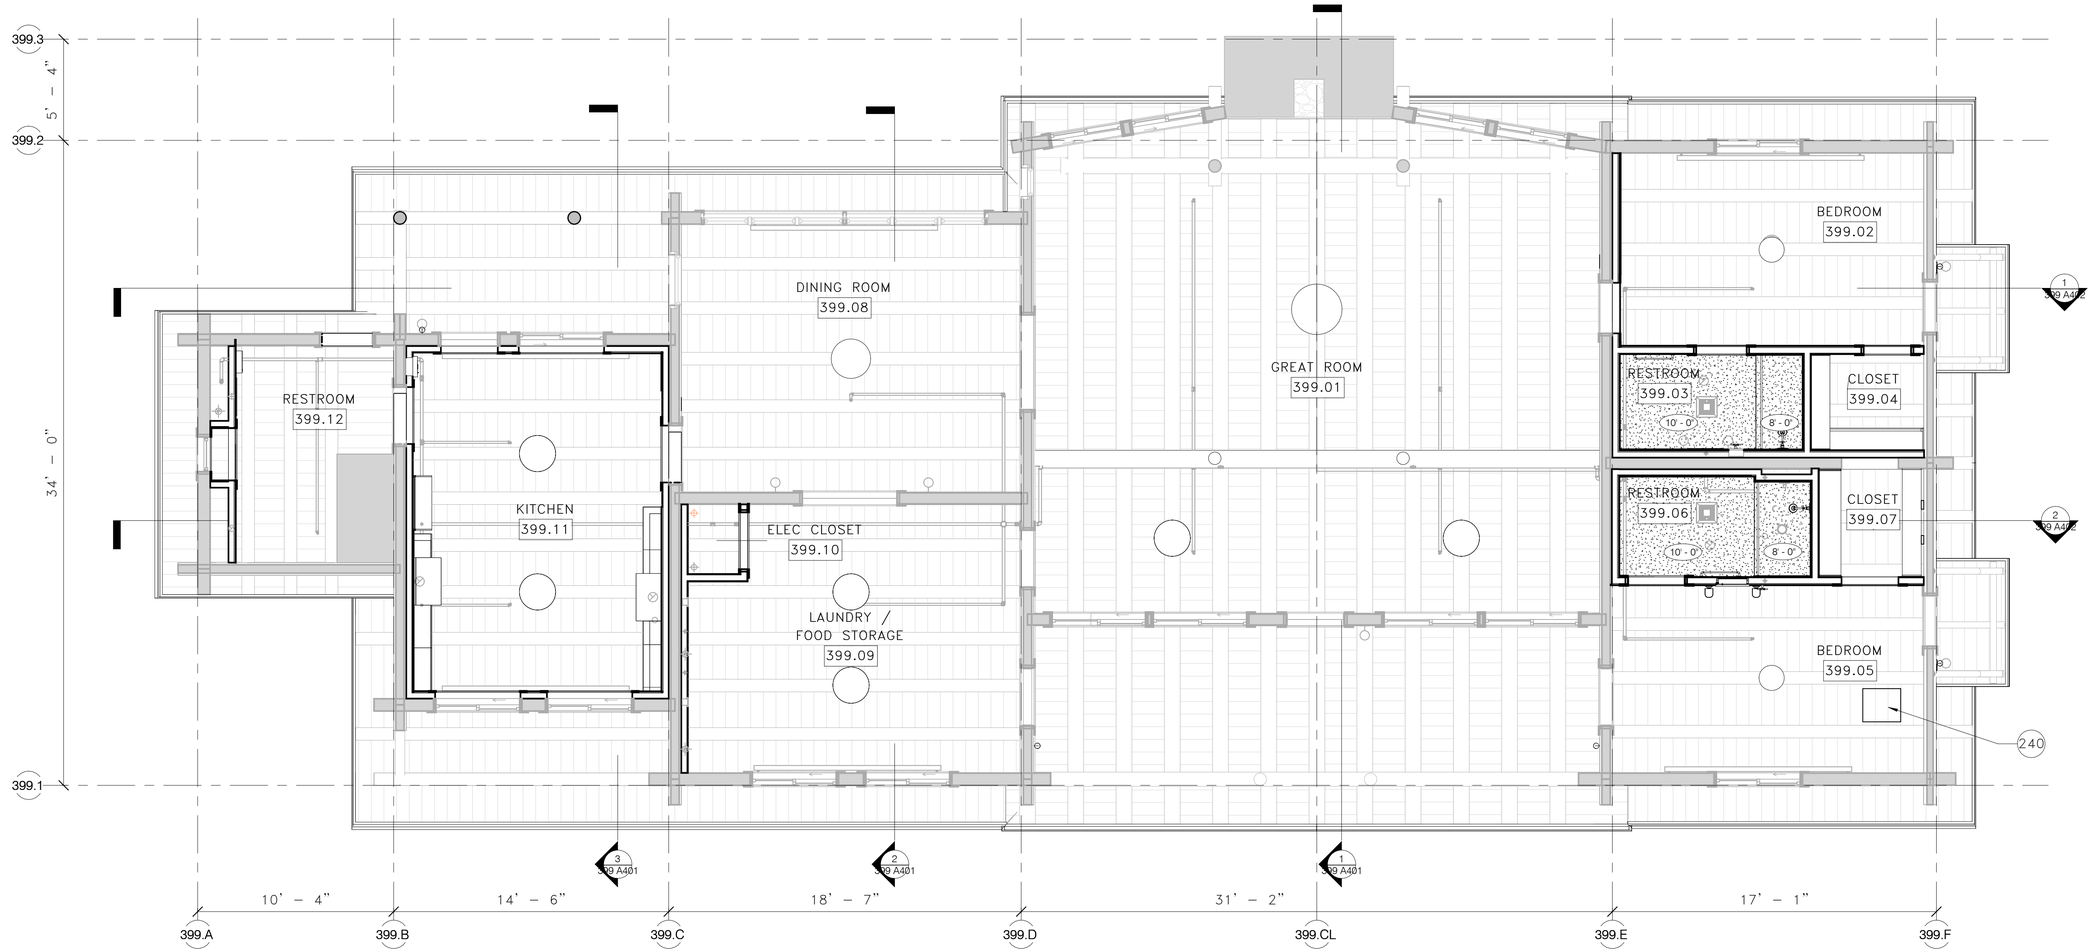

1 399 MAIN LODGE – FLOOR LEVEL

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- VARIES PER TYPE — CEILING LIGHT FIXTURE (PENDANT)
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL LIGHT FIXTURE (SCONCE)
- CEILING STRIP LIGHT FIXTURE (SUSPENDED ORSURFACE MOUNTED)
- VARIES — COVE HEATER

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KISS C-3538 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

399

A601

TITLE OF SHEET

MAIN LODGE –
REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	115 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

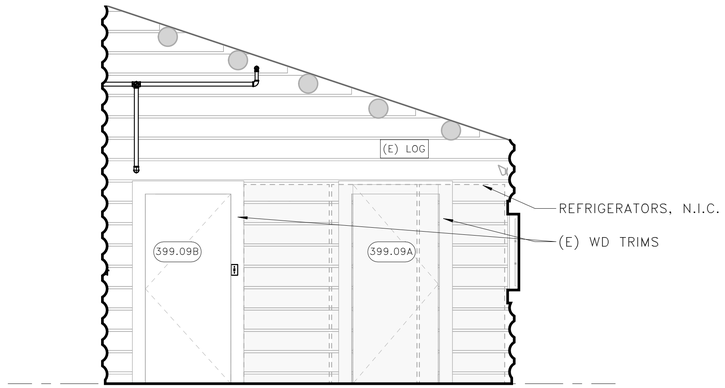

2 LAUNDRY / FOOD STORAGE 399.09 SOUTH

3/8" = 1'-0"

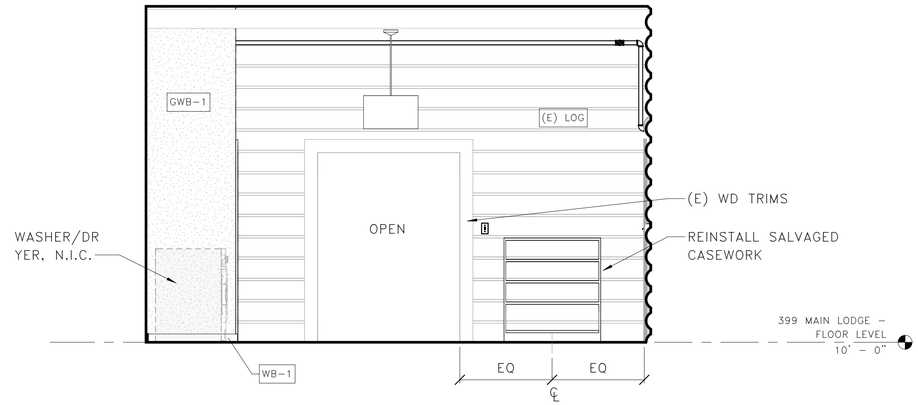

1 LAUNDRY / FOOD STORAGE 399.09 EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

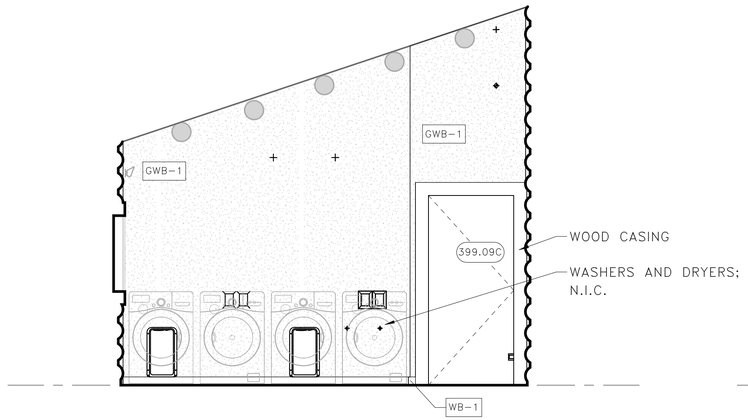

4 LAUNDRY / FOOD STORAGE 399.09 NORTH

3/8" = 1'-0"

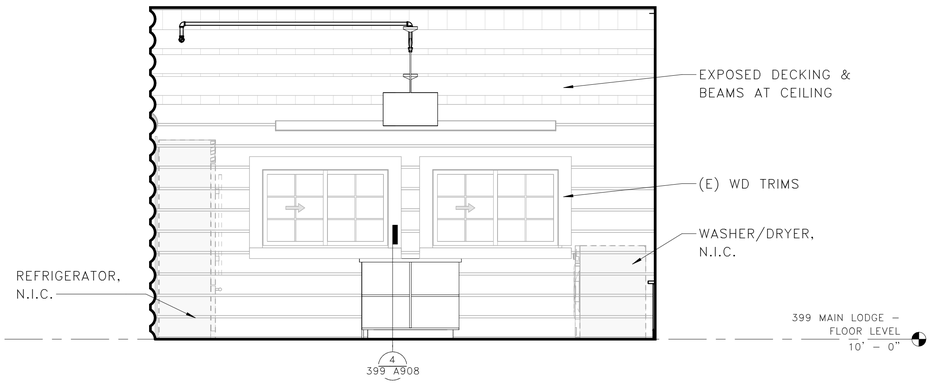

3 LAUNDRY / FOOD STORAGE 399.09 WEST

3/8" = 1'-0"

KEYNOTES

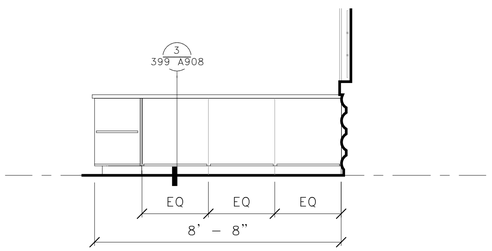

6 FOOD STORAGECASEWORK NORTH SIDE

3/8" = 1'-0"

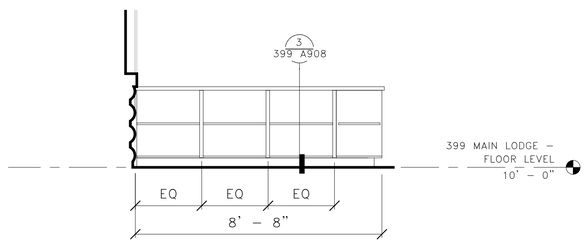

5 FOOD STORAGECASEWORK SOUTH SIDE

3/8" = 1'-0"

SCALE Ⓒ 2'-6" 0 2'-8" 5'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. ITEN C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

399

A701

TITLE OF SHEET

MAIN LODGE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	116 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

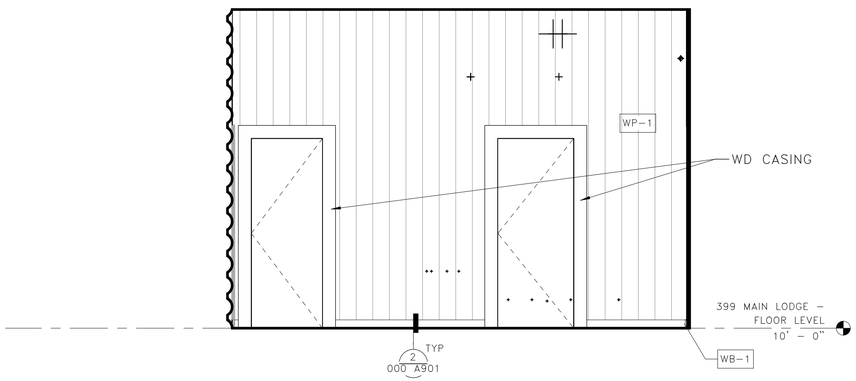

2 BEDROOM 399.02 WEST

3/8" = 1'-0"

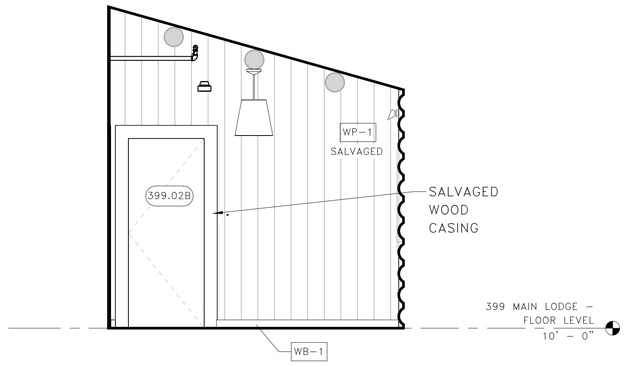

1 BEDROOM 399.02 NORTH

3/8" = 1'-0"

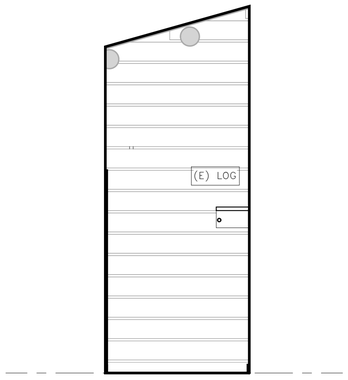

6 CLOSET 399.04 SOUTH

3/8" = 1'-0"

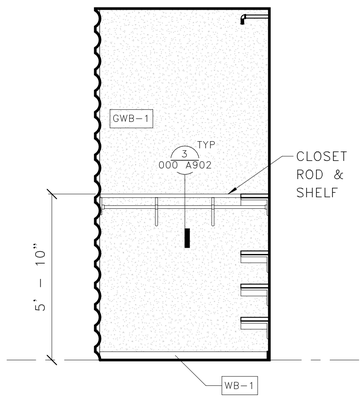

5 CLOSET 399.04 WEST

3/8" = 1'-0"

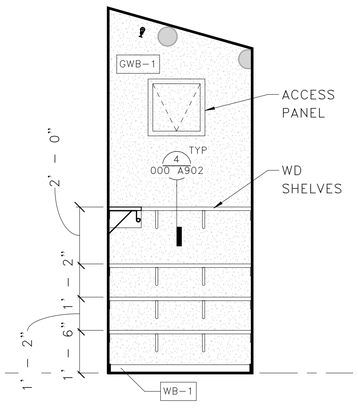

4 CLOSET 399.04 NORTH

3/8" = 1'-0"

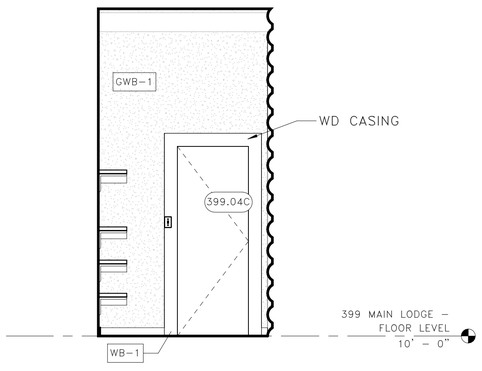

3 CLOSET 399.04 EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IRES STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A702

TITLE OF SHEET
MAIN LODGE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 117 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

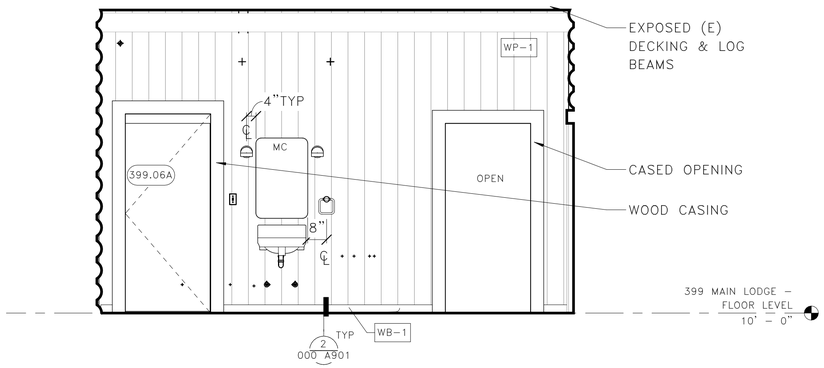

1 BEDROOM 399.05 EAST

3/8" = 1'-0"

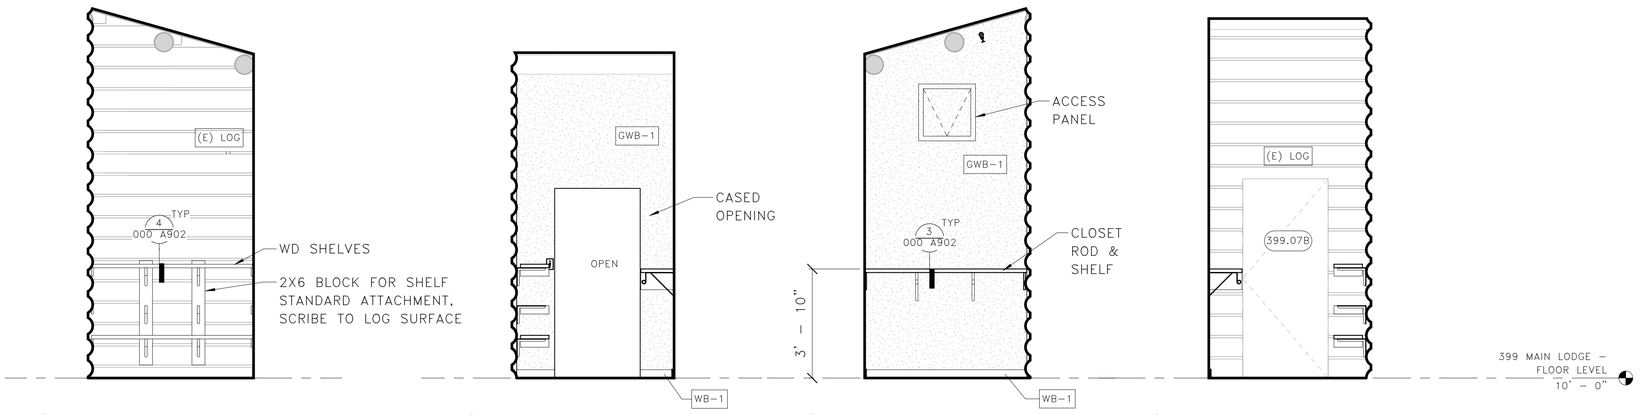

5 CLOSET 399.07 SOUTH

3/8" = 1'-0"

4 CLOSET 399.07 WEST

3/8" = 1'-0"

3 CLOSET 399.07 NORTH

3/8" = 1'-0"

2 CLOSET 399.07 EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVEY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A703

TITLE OF SHEET
MAIN LODGE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 118 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

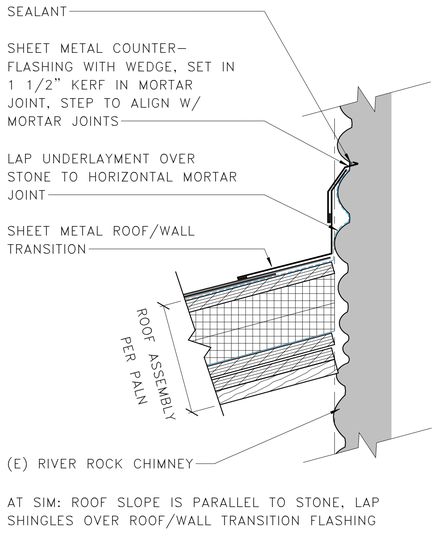

AT SIM: ROOF SLOPE IS PARALLEL TO STONE, LAP SHINGLES OVER ROOF/WALL TRANSITION FLASHING

3 399 MAIN LODGE – ROOF TO STONE CHIMNEY FLASHING

3" = 1'–0"

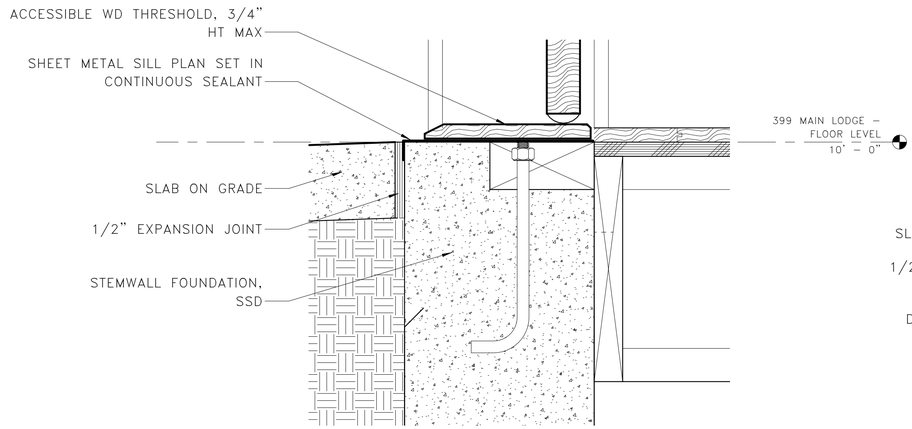

2 399 MAIN LODGE – ACCESSIBLE THRESHOLD

3" = 1'–0"

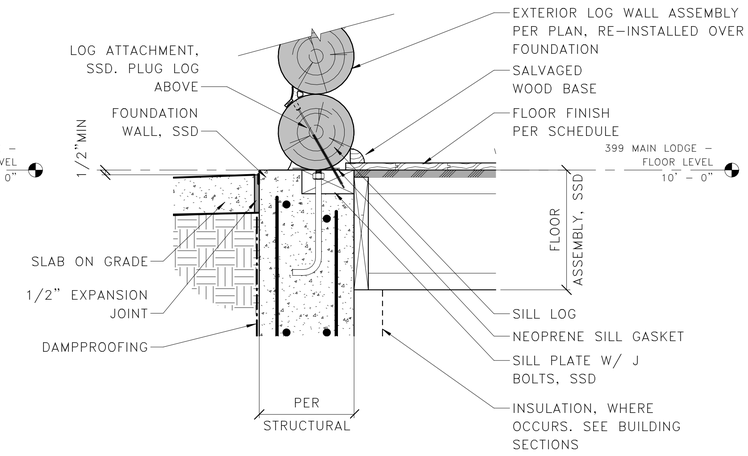

1 399 MAIN LODGE – BASE OF WALL AT CONCRETE SLAB

1 1/2" = 1'–0"

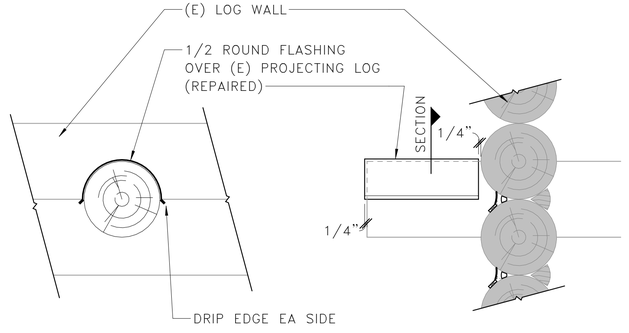

SECTION

4 399 MAIN LODGE – LOG END FLASHING

1 1/2" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'–4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A801

TITLE OF SHEET
MAIN LODGE – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 119 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

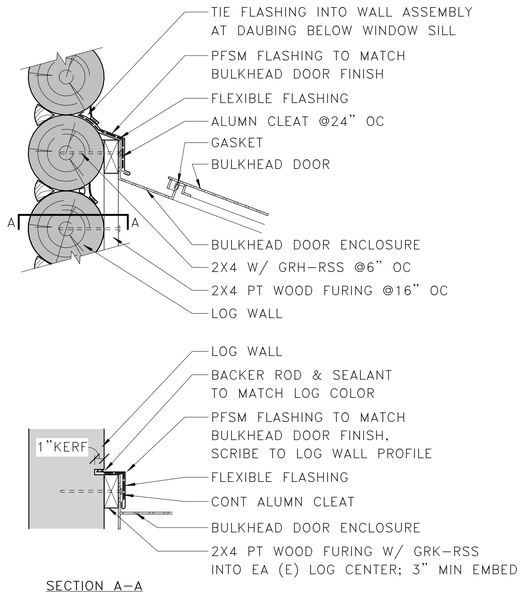

4 BULKHEAD DOOR HEADER DETAIL

1 1/2" = 1'-0"

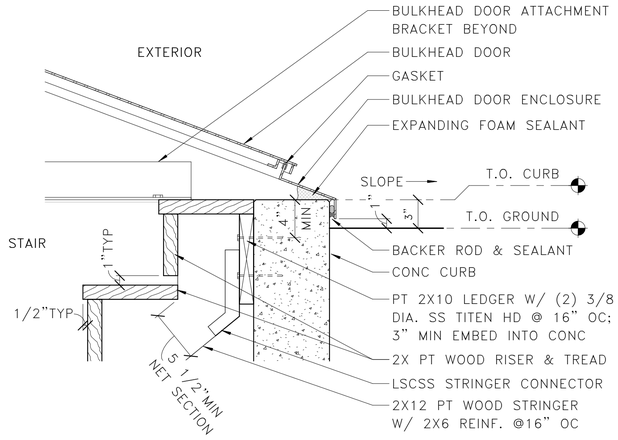

3 BULKHEAD DOOR THRESHOLD DETAIL

1 1/2" = 1'-0"

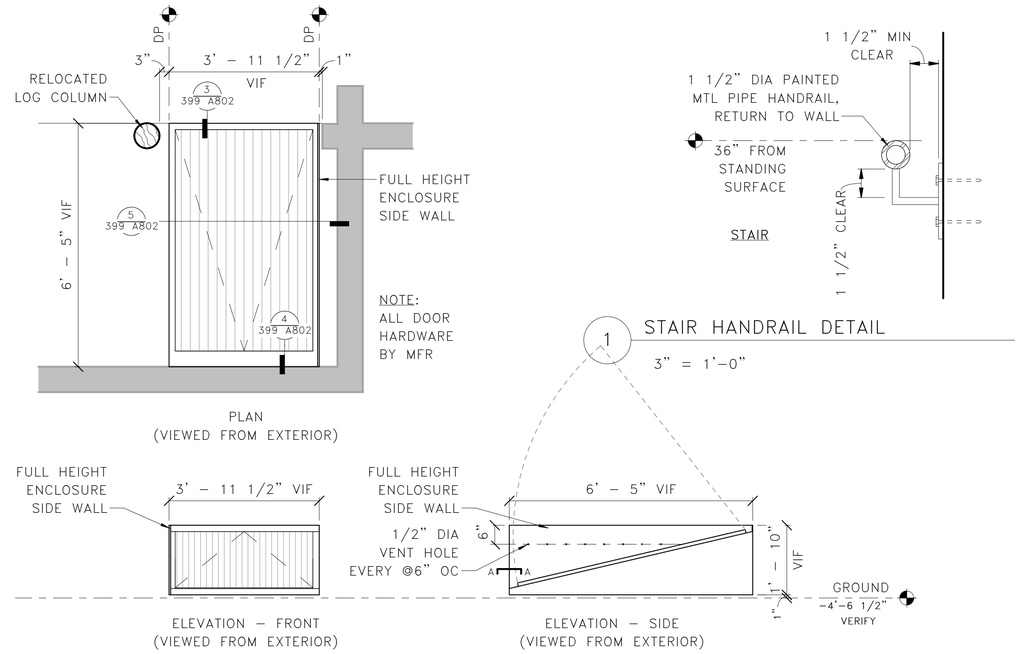

2 BULKHEAD DOOR PLAN AND ELEVATIONS DETAILS

1/2" = 1'-0"

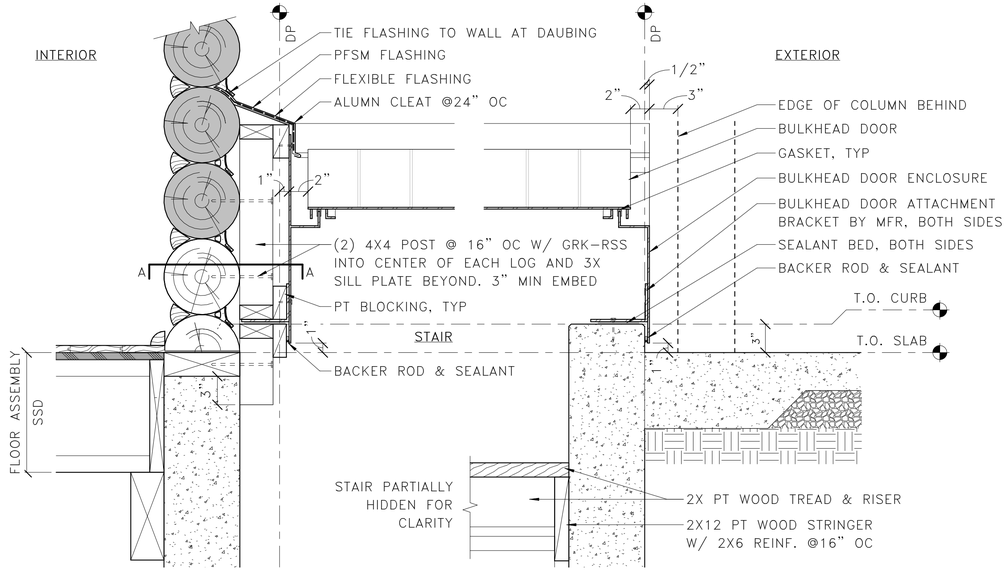

5 BULKHEAD DOOR AT SIDE WALL DETAIL

1 1/2" = 1'-0"

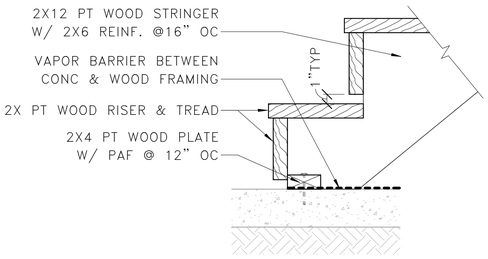

7 STAIR BASE CONNECTION DETAIL

1 1/2" = 1'-0"

SCALE (E) 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FOX C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A802

TITLE OF SHEET
MAIN LODGE - BULKHEAD DOOR & STAIR

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 120 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c7db3-4c18-8662-ac7f3386a545.rvt

399 MAIN LODGE – WINDOW SCHEDULE

WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	KEYNOTES
399.E1		2' – 10"	4' – 6"				
399.E2		4' – 2"	2' – 4"				
399.E3		4' – 2"	2' – 4"				
399.E4		2' – 10"	3' – 10"				
399.E5		2' – 10"	3' – 10"				
399.E6		2' – 10"	3' – 10"				
399.E7		2' – 10"	3' – 10"				
399.E8		2' – 10"	4' – 6"				
399.N1		2' – 0"	1' – 10"				M.
399.N2		4' – 2"	2' – 8"				
399.N3		4' – 2"	1' – 6"				
399.W1		2' – 10"	4' – 6"				
399.W2		2' – 10"	5' – 0"				
399.W3		2' – 10"	5' – 0"				
399.W4		2' – 10"	5' – 0"				
399.W5		2' – 10"	5' – 0"				
399.W6		2' – 10"	4' – 6"				
399.W7		2' – 10"	4' – 6"				
399.W8		2' – 10"	4' – 6"				
399.W9		2' – 10"	4' – 6"				

399 MAIN LODGE – DOOR SCHEDULE

DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	KEYNOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
399.00A	DR–10	3' – 0"	6' – 8"	MTL		DRF–4	MTL				
399.01A	(E) DR–3	3' – 0"	6' – 8"			(E)					D.
399.02A	(E) DR–3	2' – 8"	7' – 0"			(E)					F.
399.02B	(E) DR–1	2' – 8"	6' – 8"			(E)					B.
399.03A	DR–1	2' – 8"	6' – 8"			DRF–1					
399.04C	SALVAGED	2' – 6"	6' – 8"			(S)					
399.05A	(E) DR–3	2' – 8"	7' – 0"			(E)					F.
399.05B	(E) DR–3	3' – 0"	6' – 8"			(E)					D. F.
399.06A	DR–1	3' – 0"	7' – 0"			DRF–1					
399.07A	NONE	3' – 0"	6' – 8"			DRF–1					
399.07B	DR–1	3' – 0"	7' – 0"			(E)					E.
399.08A	NONE	5' – 0"	6' – 8"			(E)					
399.08B	NONE	5' – 0"	6' – 8"			(E)					
399.09A	(E) DR–3	3' – 0"	7' – 0"			(E)					E. F.
399.09B	(E) DR–1	3' – 0"	6' – 8"			(E)					
399.09C	DR–1	3' – 0"	6' – 8"			DRF–1					
399.11A	(E) DR–3	3' – 0"	6' – 8"			(E)				(E) SDR–1	B. D. G.
399.12A	DR–4	2' – 7 29/32"	6' – 8"			(E)					
399.12B	DR–1	3' – 0"	6' – 8"			(E)					A. B.
399.12C	DR–2	3' – 0"	6' – 8"			(E)					A. B. C.

399 MAIN LODGE – ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		KEYNOTES
		MATERIAL	FINISH	BASE MATERIAL	BASE FINISH	WALL MATERIAL	WALL FINISH	MATERIAL	FINISH	
399.00	BASEMENT	CONC–1				(E)CONC		EXP		
399.01	GREAT ROOM	(S)WD–1				(E)LOG		EXP		I.
399.02	BEDROOM	(S)WD–1		WB–1		(E)LOG/GWB–1		EXP		I.
399.03	RESTROOM	LIN–1	N/A	WB–1		GWB–1		GWB–1		I.
399.04	CLOSET	(S)WD–1								I.
399.05	BEDROOM	(S)WD–1		WB–1		(E)LOG/GWB–1		EXP		I.
399.06	RESTROOM	LIN–1	N/A	WB–1		GWB–1		GWB–1		I.
399.07	CLOSET	(S)WD–1								I.
399.08	DINING ROOM	(S)WD–1		WB–1		(E)LOG		EXP		I.
399.09	LAUNDRY / FOOD STORAGE	(S)WD–1		WB–1		(E)LOG/GWB–1		EXP		I.
399.10	ELEC CLOSET	LIN–1	N/A	WB–1		(E)LOG/GWB–1		EXP		I.
399.11	KITCHEN	LIN–2	N/A	WB–1		(E)LOG/GWB–1		EXP		I.
399.12	RESTROOM	LIN–1	N/A	WB–1		(E)LOG/GWB–1		EXP		I.

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. HENNEBERY C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A905

TITLE OF SHEET
MAIN LODGE – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 121 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

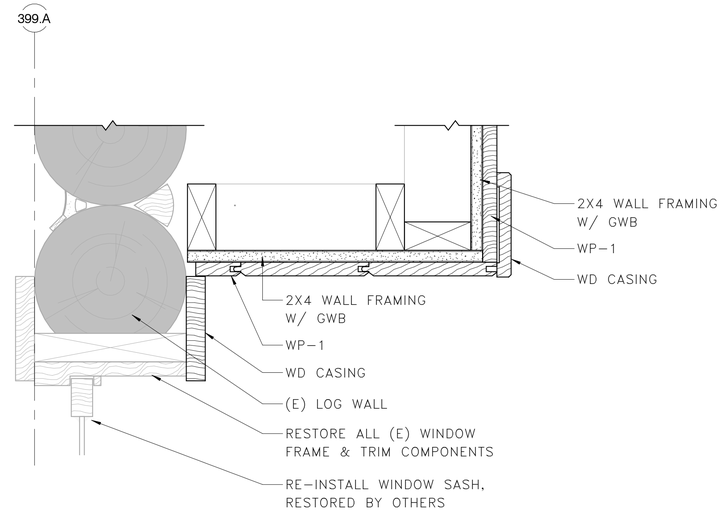

1 399 MAIN LODGE – HEAD/JAMB @ BATHROOM WINDOW

3" = 1'-0"

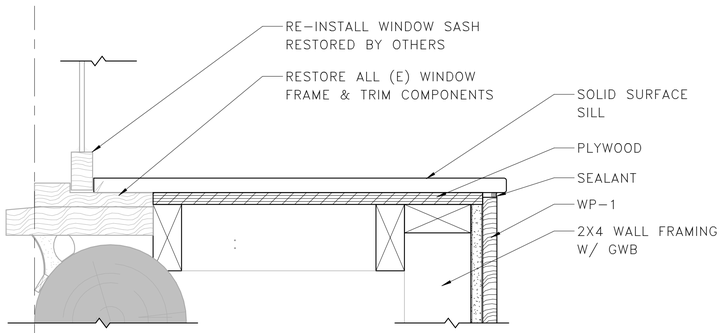

2 399 MAIN LODGE – SILL @ BATHROOM WINDOW

3" = 1'-0"

SCALE (F) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3535 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A906

TITLE OF SHEET
MAIN LODGE – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 122 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

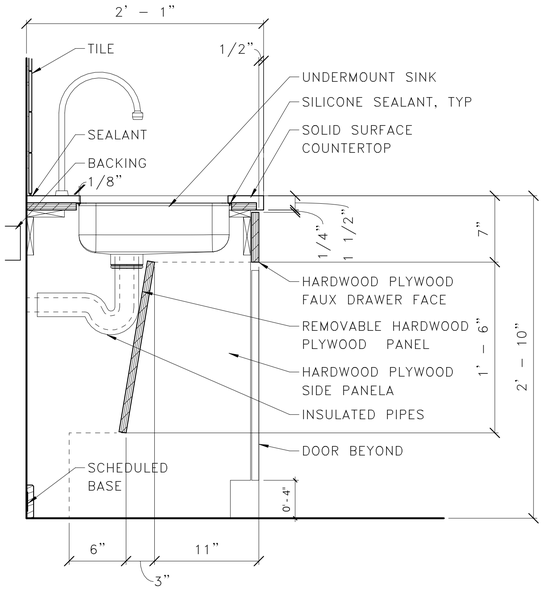

399 MAIN LODGE – BASE CABINET WITH SINK, ACCESIBLE

4

1 1/2" = 1'–0"

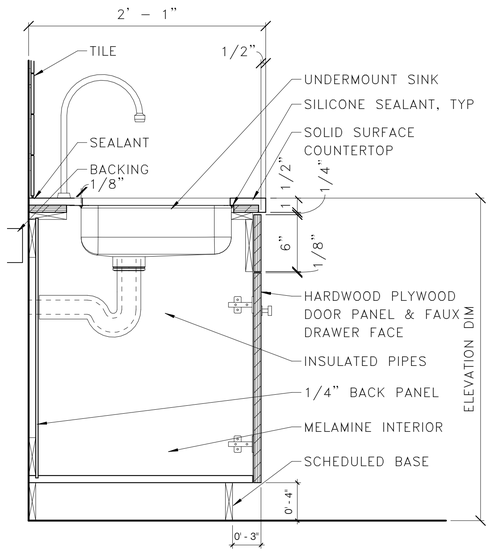

399 MAIN LODGE – BASE CABINET WITH SINK

3

1 1/2" = 1'–0"

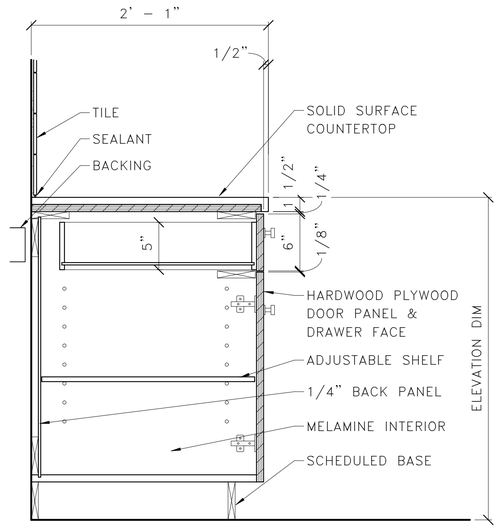

399 MAIN LODGE – BASE CABINET W/ DRAWER

2

1 1/2" = 1'–0"

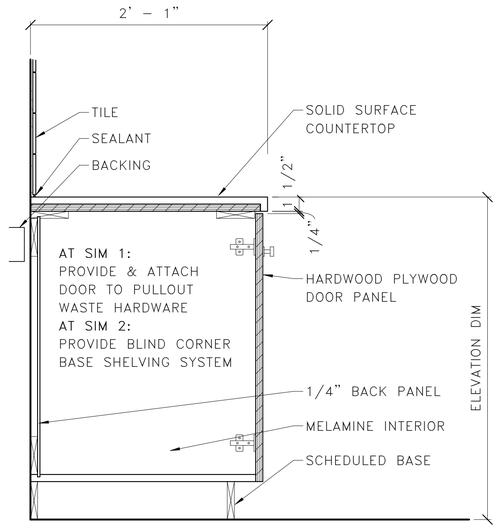

399 MAIN LODGE – BASE CABINET

1

1 1/2" = 1'–0"

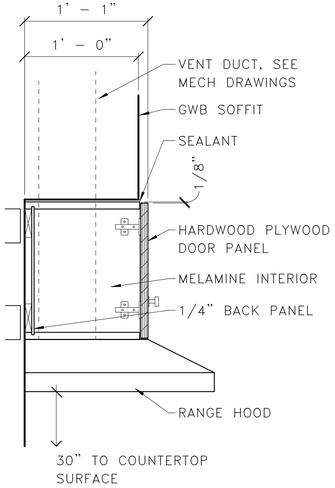

399 MAIN LODGE – WALL CABINET WITH VENT

8

1 1/2" = 1'–0"

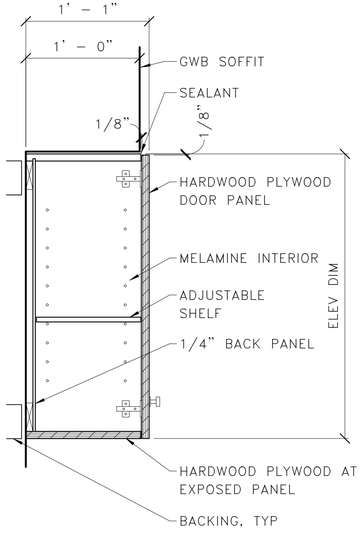

399 MAIN LODGE – WALL CABINET

7

1 1/2" = 1'–0"

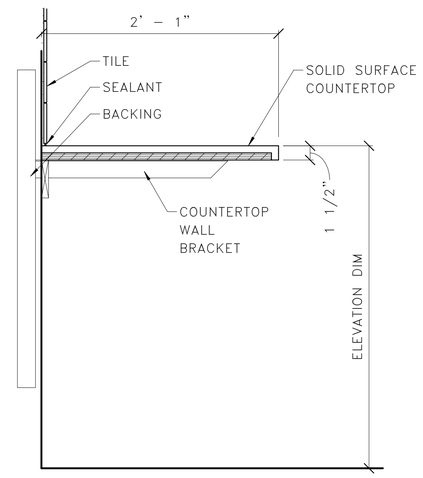

399 MAIN LODGE – COUTERTOP

6

1 1/2" = 1'–0"

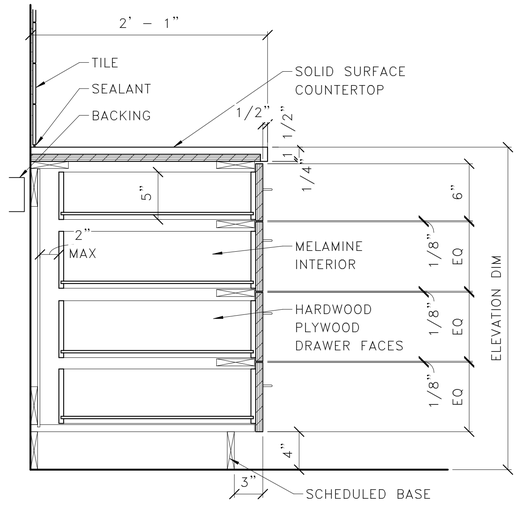

399 MAIN LODGE – DRAWER BASE

5

1 1/2" = 1'–0"

SCALE E 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FOX C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A907

TITLE OF SHEET
MAIN LODGE – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 123 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

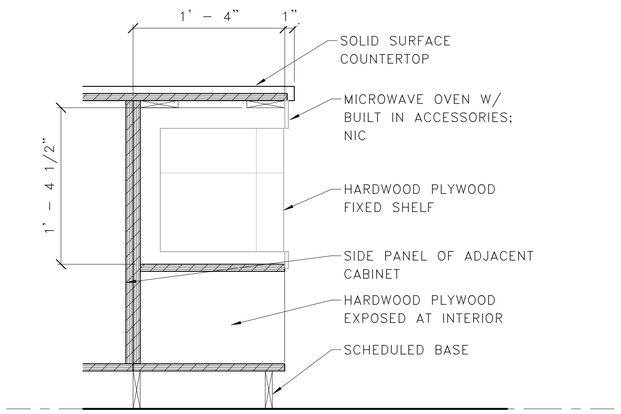

2 399 MAIN LODGE – KITCHEN ISLAND SECTION 'B'

1 1/2" = 1'–0"

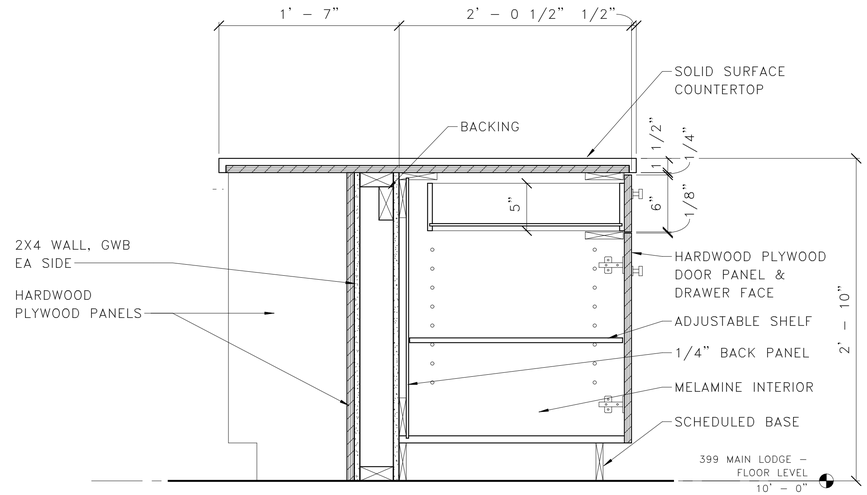

1 399 MAIN LODGE – KITCHEN ISLAND SECTION 'A'

1 1/2" = 1'–0"

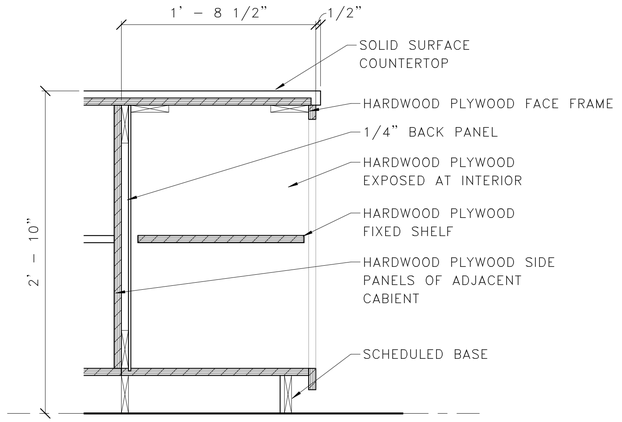

4 399 MAIN LODGE – LAUNDRY CASEWORK SECTION 'B'

1 1/2" = 1'–0"

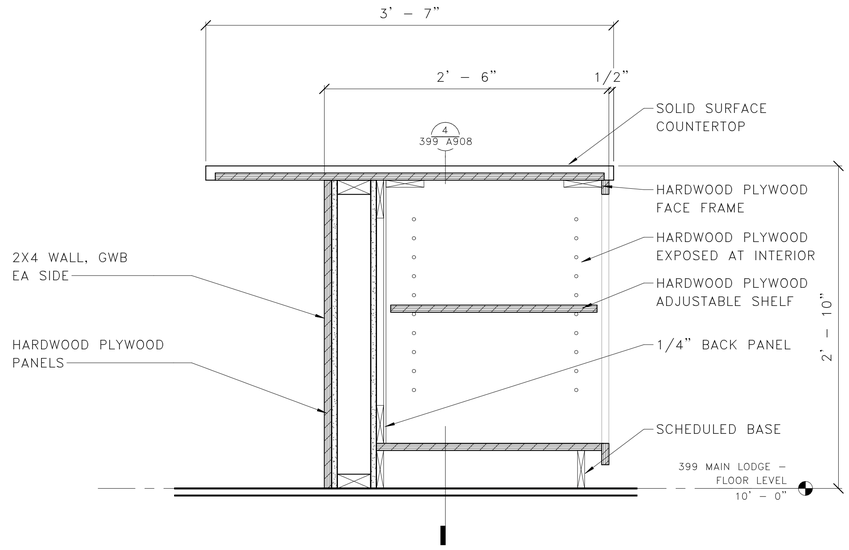

3 399 MAIN LODGE – LAUNDRY CASEWORK SECTION 'A'

1 1/2" = 1'–0"

SCALE (E) 8" 0 8" 1' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. ITTEL C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A908

TITLE OF SHEET
MAIN LODGE – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826

PMIS/PKG NO. 237343

SHEET 124 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

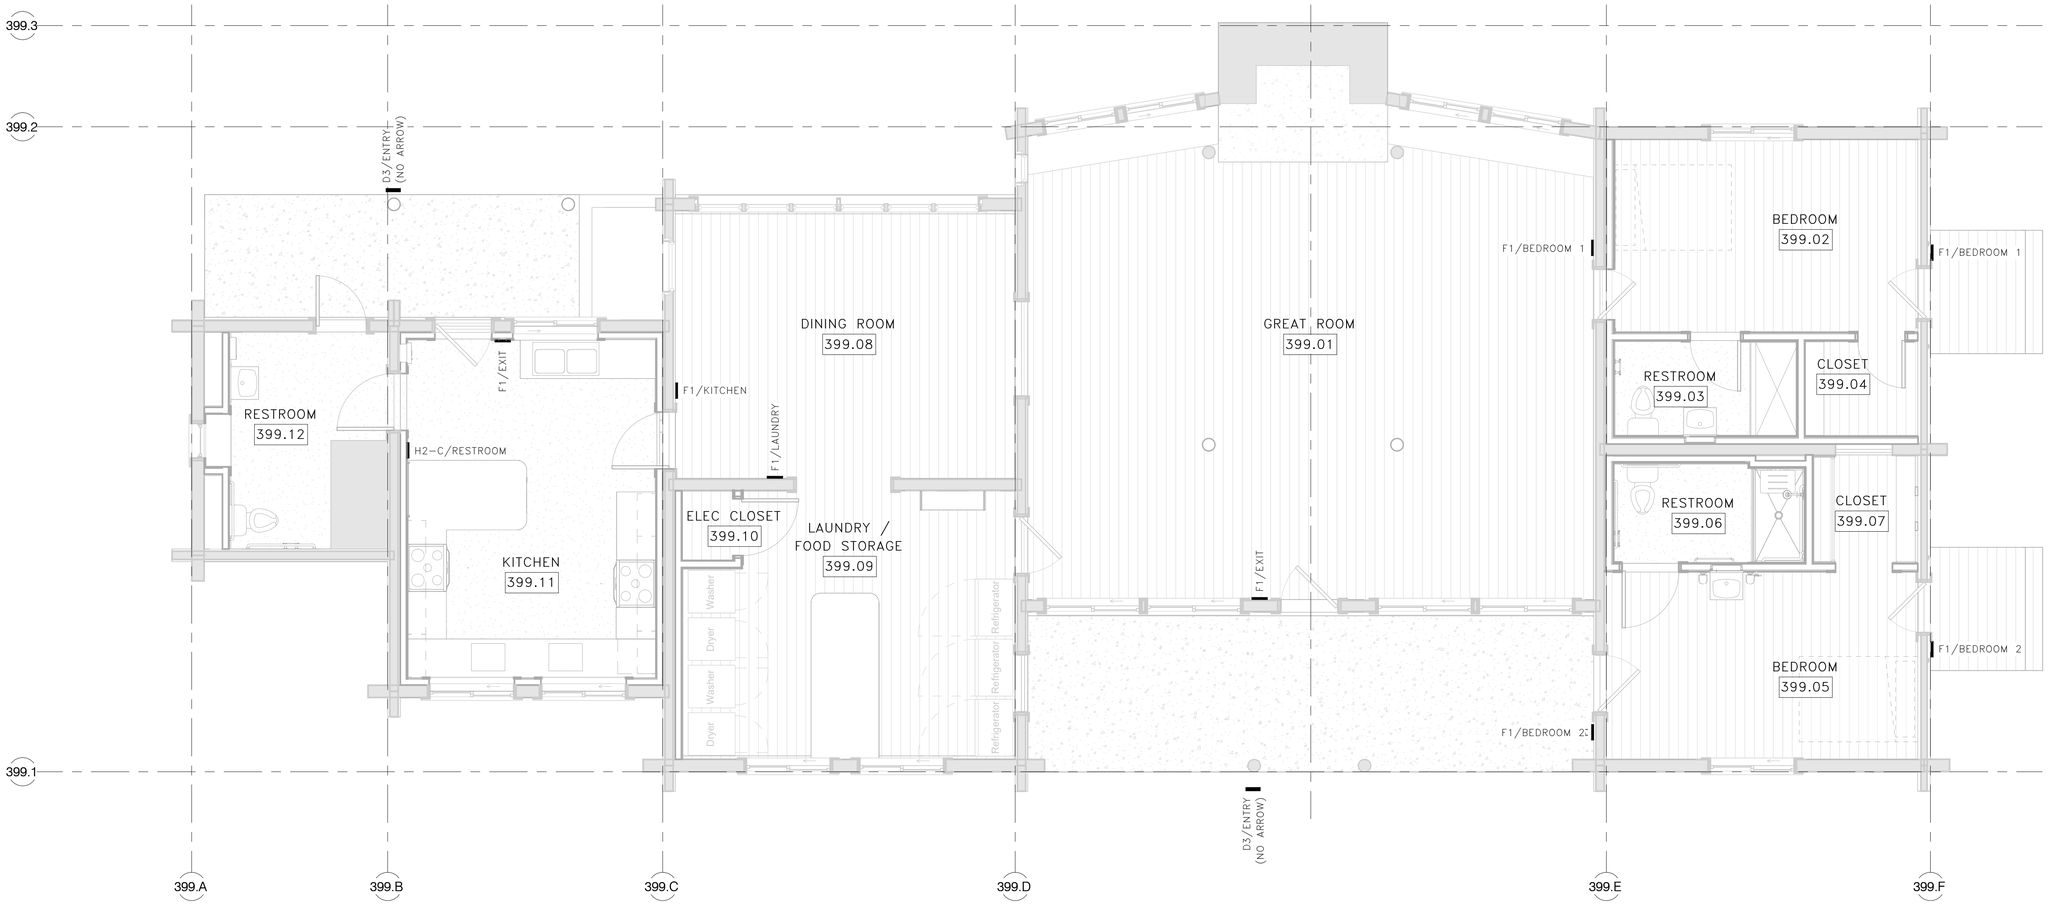

1 399 MAIN LODGE – SIGN PLAN

1/4" = 1'-0"

GENERAL NOTES

1. SEE 000 A904 FOR SIGNAGE TYPES.

SIGNAGE LEGEND

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. IVES
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
399
A909

TITLE OF SHEET
MAIN LODGE – SIGN PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 125 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

NORTH AND WEST ELEVATIONS, LOOKING SOUTHEAST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

EAST ELEVATION, LOOKING NORTH

SOUTH ELEVATION, LOOKING NORTH

EAST ELEVATION, LOOKING WEST

BASEMENT

TYPICAL LOG BIOGROWTH

TYPICAL EAVE

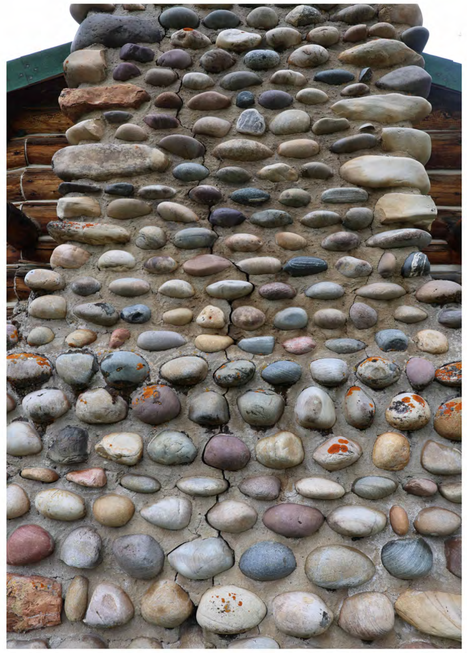

EAST CHIMNEY

NORTH CHIMNEY

TYPICAL LOG DETERIORATION

BASEMENT STAIRS

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A920

TITLE OF SHEET
MAIN LODGE – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 126 OF 371

LAUNDRY/FOOD STORAGE 399.09, LOOKING WEST

GREAT ROOM 399.01, LOOKING EAST

LAUNDRY/FOOD STORAGE 399.09, LOOKING SOUTH

TYPICAL LOG BEAM CEILING

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

BATHROOM, LOOKING NORTHEAST

ORIGINAL WALL SCONCE

ORIGINAL CEILING LIGHT FIXTURE

BEDROOM 399.02, LOOKING NORTH TOWARD BATHROOM

SCREEN DOOR AT DOOR 399.11A

EXTERIOR OF DOOR 399.02A

EXTERIOR OF DOOR 399.05A

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM M. IVES — C-3530 — STATE OF WYOMING — Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: Designer
DRAWN: Author
TECH REVIEW: Checker
DATE: 07/21/2026

SUB SHEET NO.
399
A921

TITLE OF SHEET
MAIN LODGE – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826

PMIS/PKG NO. 237343

SHEET 127 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

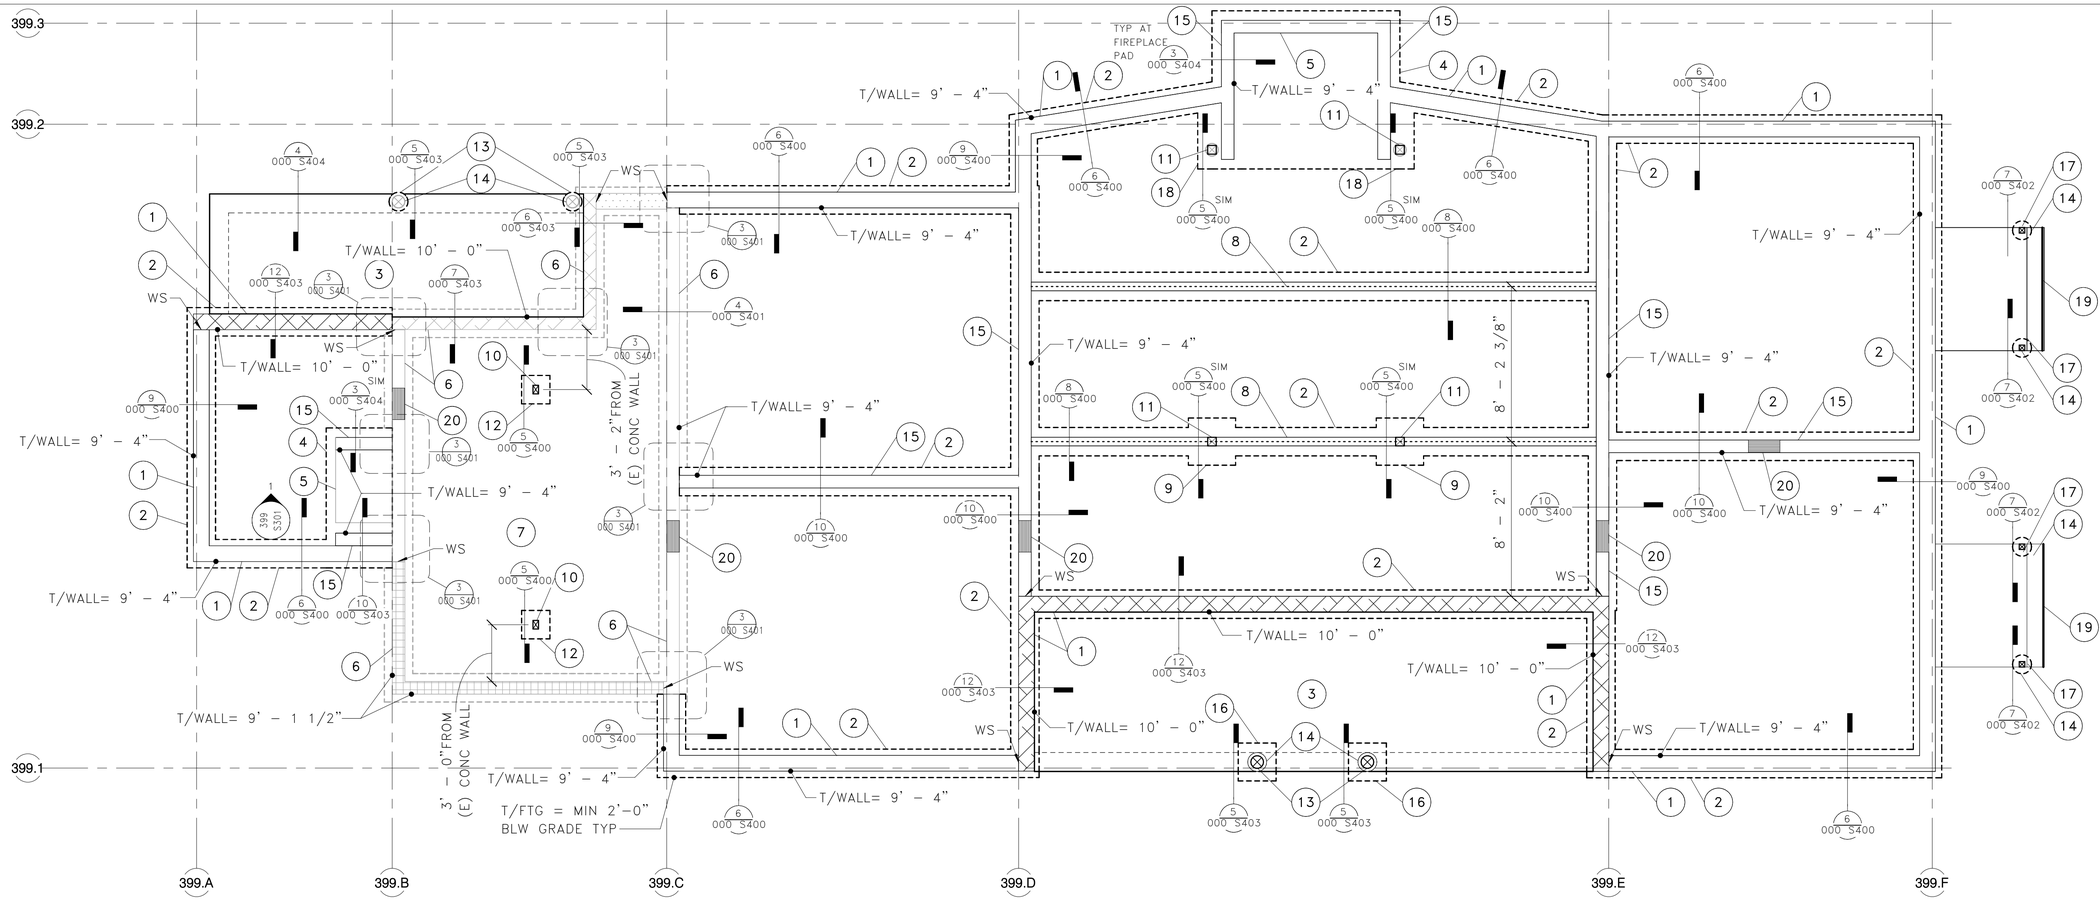

1 MAIN LODGE – FOUNDATION PLAN

1/4" = 1'–0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.
7. T/FINISHED FLOOR ASSUMED TO BE 10'–0", T/WALL ELEVATIONS SET RELATIVE TO FINISHED FLOOR. VERIFY WITH ARCHITECTURAL DRAWINGS.
8. CONCRETE WALLS WITHOUT HATCHES INDICATE T/WALL = 9'–4" & HAVE A MINIMUM 6" HEIGHT ABOVE THE SURROUNDING GRADE.

   HATCH INDICATES T/WALL = 10'–0" SEE RELATED DETAILS

   HATCH INIDCATES T/WALL = 9'–1 1/2", SEE RELATED DETAILS

   HATCH INDICATES (E) T/WALL ELEVATION TO REMAIN UNCHANGED
9. WS INDICATES STEP IN CONCRETE FOUNDATION WALL; T/WALL ELEVATIONS FOR PER HATCH DESIGNATIONS. VERIFY WITH ARCHITECTURAL DRAWINGS.

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT CTRD & #4 @ 12"OC HORIZ CTRD; T/WALL = MIN 6" ABOVE FINISHED GRADE UNO BY HATCH
2. 1'–6"Wx10"DP CONCRETE FOOTING W/ (2) #4 BARS CONT; #4 @ 18"OC TRANSVERSE WHERE NO HOOKED WALL BARS ARE IN FOOTING; B/FTG = MIN 2'–10" BLW EXTERIOR GRADE
3. 4" CONC SLAB ON GRADE W/ #4 BARS @ 18"OC EACH WAY & THICKENED SLAB EDGE PER 4/000 S404; T/SLAB = PER ARCH
4. 10" THICK PAD FOOTING W/ #5 @ 9"OC T&B EW FOR FIREPLACE; B/FTG = TO MATCH ADJACENT FOOTINGS
5. LOCATION OF STONE CHIMNEY ABOVE
6. (E) 8" CONCRETE BASEMENT WALLS TO REMAIN; EXISTING STRUCTURE TO BE LIFTED & FOUNDATION EXTENDED PER 7/000 S401 T/WALL = 9'–4" UNO BY HATCH
7. (E) BASEMENT SLAB ON GRADE
8. 2x6 @ 16"OC PONY WALL ABOVE
9. 2'–6"SQx10"DP CONCRETE FOOTING W/ (4) #4B EA WAY, B/INT FTG = B/EXT FTG
10. 4x6 POST
11. 6x6 POST
12. 1'–6"SQx10"DP CONCRETE FOOTING W/ (3) #4B EA WAY, B/INT FTG = B/EXT FTG, T/FTG = T/(E) SLAB
13. (E) 8"Ø LOG COLUMN ABOVE; REMOVED & REINSTALLED FOR POST BASE CONNECTION
14. 12"Ø REINF SONO–TUBE FOOTINGS W/ (8) # 4 VERT & #3 TIES @ 8"OC & (3) #3 TIES @ 3"OC AT TOP; T/PIER = PER ADJACENT DETAIL; B/PIER = 2'–10" BELOW GRADE
15. 8" CONCRETE INTERIOR FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = PER ARCH UNO BY HATCH
16. 2'–0"Wx10"DP CONCRETE FOOTING W/ (3) #4 BARS EA WAY, B/FTG = MIN 2'–10" BELOW EXTERIOR GRADE
17. PT4x4 POST
18. EXTEND SLAB FOOTINGS AS NEEDED TO CAPTURE COLUMNS ABOVE
19. FLAT PT4x6 FOR STEP CONNECTION
20. STEMWALL OPENING FOR CRAWLSPACE ACCESS, LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER 9/000 S403

SCALE OF FEET 4 0 4 8

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026 EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO. 399 S201

TITLE OF SHEET
MAIN LODGE – FOUNDATION PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 128 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

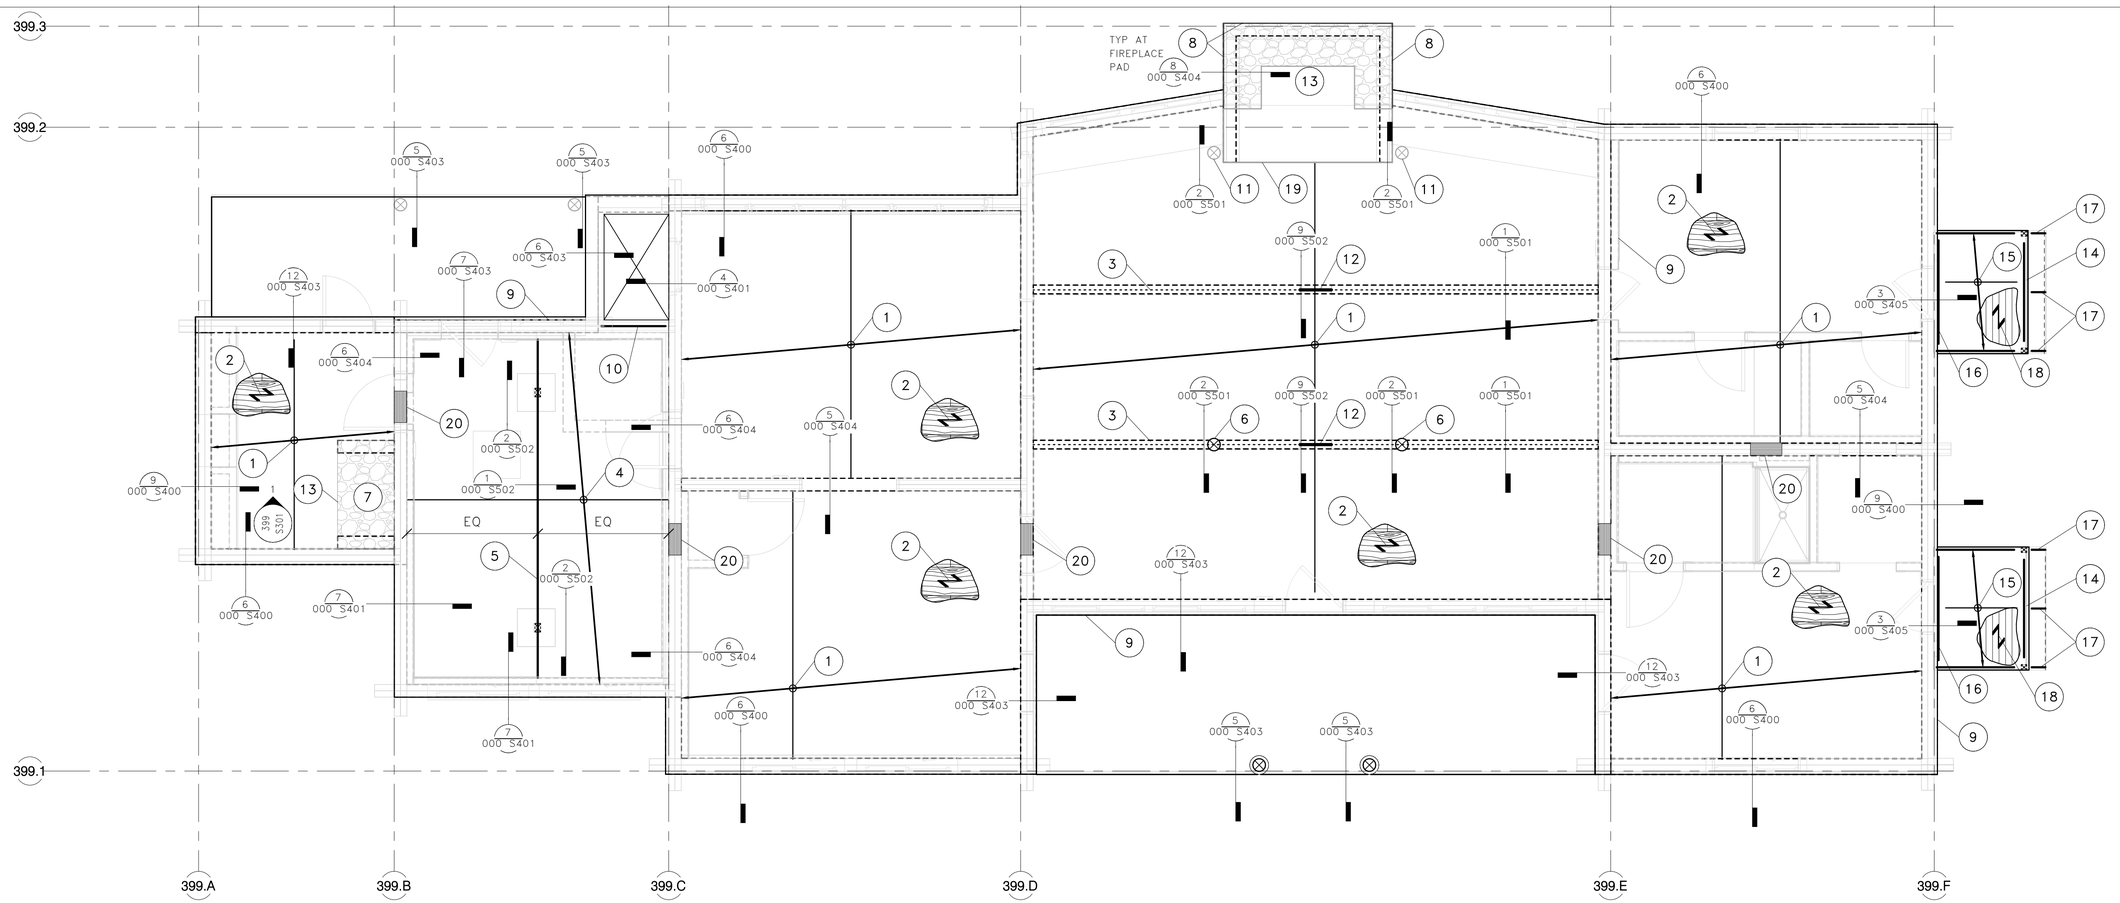

1 MAIN LODGE – FLOOR FRAMING PLAN

1/4" = 1'–0"

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.
4. T/FINISHED FLOOR ASSUMED TO BE 10'–0", VERIFY WITH ARCHITECTURAL DRAWINGS.

KEYNOTES:

1. 11 7/8" TJI 210 @ 16"OC
2. 3/4" FLOOR SHEATHING
3. 2x6 @ 16"OC PONY WALL BELOW
4. (E) 2x8 JOISTS @ 19"OC, INDEPENDENTLY DISCONNECTED FROM (E) CONC BASEMENT WALLS & RAISED TO MATCH T/FLOOR JOISTS
5. 6x10 DFL NO. 1 DROP BEAM, CANTILEVERED EACH END PER FOUNDATION PLAN
6. 8"Ø LOG COLUMN ABOVE
7. (E) SIDE ROOM FIREPLACE & CHIMNEY TO BE REPAIRED AND LIFTED WITH BUILDING; SHORE AS NEEDED FOR LIFT. REPAIRS TO OCCUR BEFORE & POTENTIALLY AFTER LIFT
8. (E) MAIN ROOM FIREPLACE & CHIMNEY TO BE REPAIRED PER10/000 S404 AND LIFTED WITH BUILDING; SHORE AS NEEDED FOR LIFT. REPAIRS TO OCCUR BEFORE & POTENTIALLY AFTER LIFT
9. (E) 8"Ø LOG WALL FRAMING ABOVE. TO BE LIFTED & SHORED IN PLACE AS REQUIRED TO CONSTRUCT NEW FOUNDATION ELEMENTS.
10. (2)2x8 BEAM AT RAISED FLOOR HEIGHT
11. (E) 8"Ø LOG COLUMN, TO REMAIN
12. (2)2x12 HEADER (MAX 4'–6" CLEAR SPAN) FOR CRAWLSPACE ACCESS, LOCATIONS PER ARCH; NOT TO OCCUR UNDER POSTS
13. 8" THICK ELEVATED CONCRETE SLAB W/ #5 BARS @ 9"OC EW, CENTERED. T/SLAB = 10'–0"
14. (2)2x6 W/ HUC26–2 EA END
15. 2x6 @ 16"OC W/ LUC26 EA END AT STEP END & PF26 AT LOG WALL END
16. PT 2x8 LEDGER W/ (2) 1/4" STAINLESS STEEL TITEN HD @ 16"OC
17. 2x10 STRINGER
18. 2x6 PLANKING ATOP PORCH FLOOR FRAMING
19. (E) FIREPLACE HEARTH, TO BE REMOVED & REPLACED PER ARCH
20. STEMWALL OPENING FOR CRAWLSPACE ACCESS, LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER 9/000 S403

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date: 07/21/2026 WYOMING
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
399
S202

TITLE OF SHEET
MAIN LODGE – FLOOR FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 129 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

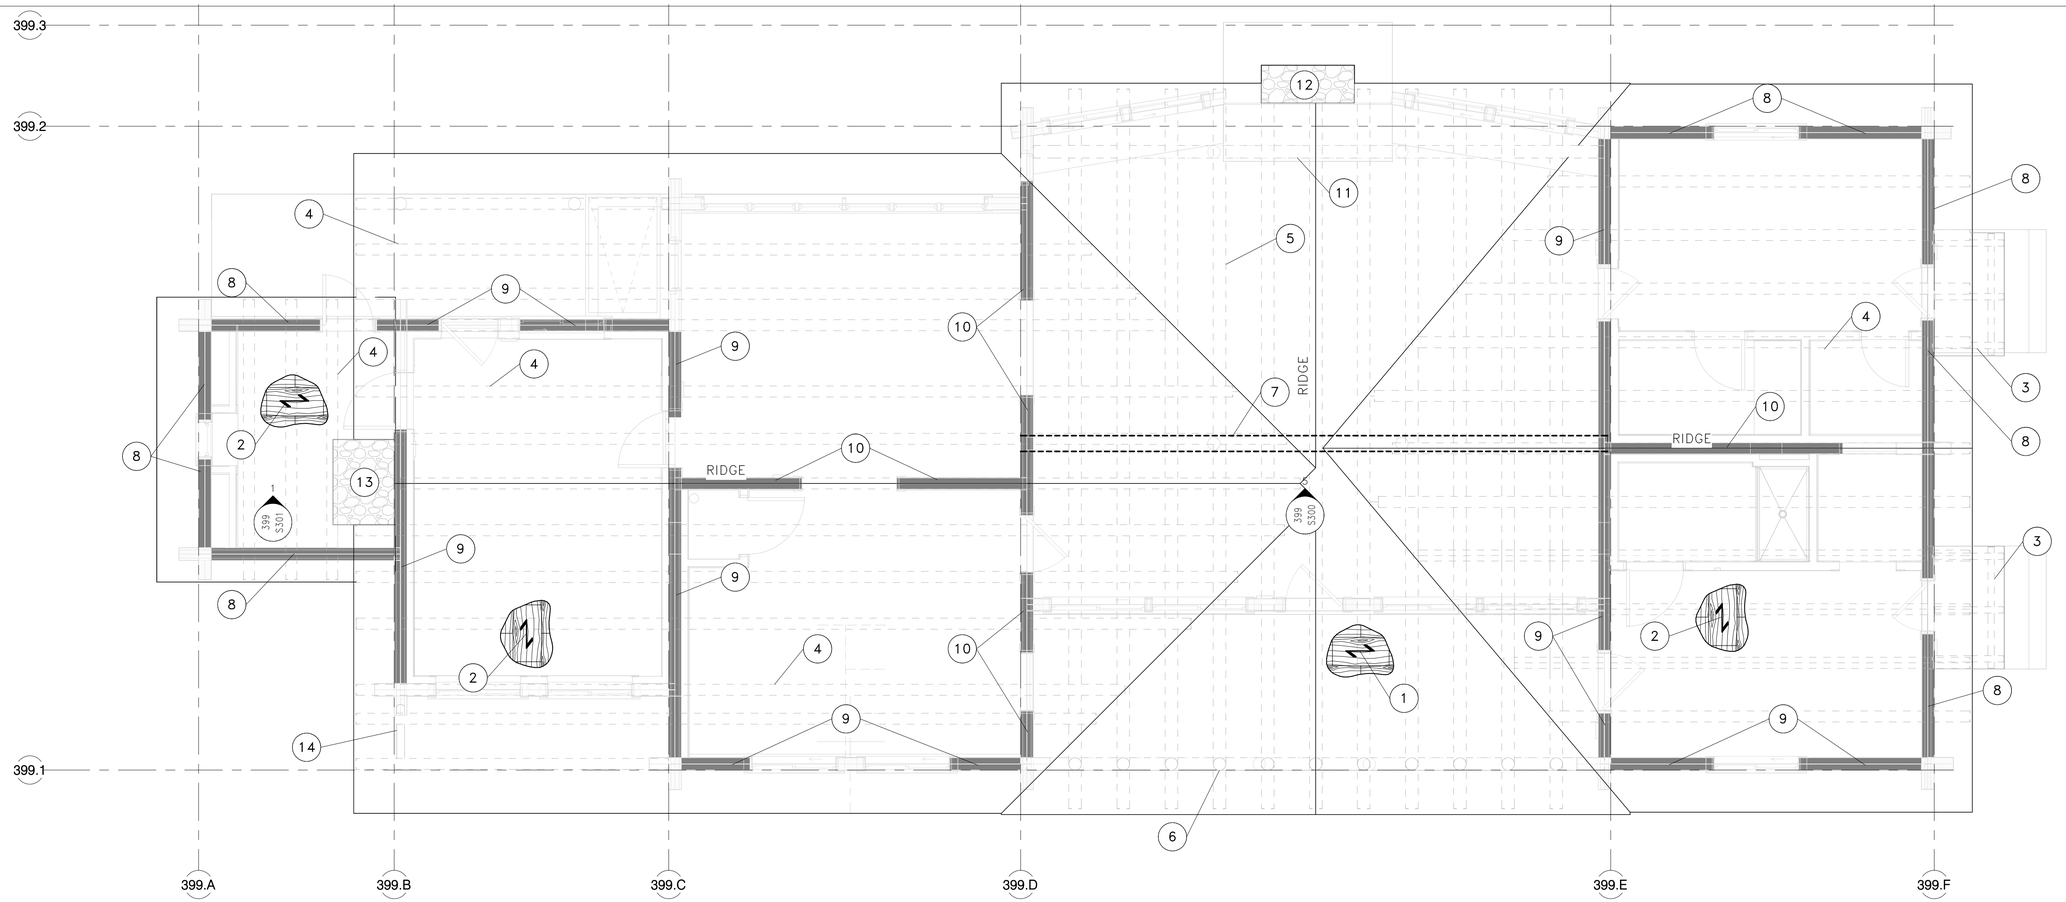

1 MAIN LODGE – ROOF FRAMING PLAN

1/4" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. 1/2" ROOF SHEATHING ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500; (E) 1/2" SHEATHING OF GOOD INTEGRITY PERMISSIBLE TO BE USED IN LIEU IF EXISTS. CONNECT TO (E) LOG PURLIN BELOW PER 3/000 S500.
2. 1" ROOF SHEATHING ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500; (E) 1/2" SHEATHING OF GOOD INTEGRITY PERMISSIBLE TO BE USED AS PART OF THE SHEATHING THICKNESS IF EXISTS. CONNECT TO (E) LOG PURLIN BELOW PER 3/000 S500
3. (E) 3 1/2"Ø (V) CANOPY & KNEE BRACE FRAMING, TO REMAIN
4. (E) 7"Ø LOG PURLIN, TYP UNO; CONNECT TO ROOF SHEATHING PER 3/000 S500
5. (E) 8"Ø GREAT ROOM LOG PURLIN, TYP. 11 PLACES; CONNECT TO ROOF SHEATHING PER 3/000 S500.
6. (E) TIMBER PORCH TRUSS W/ MIN 9"Ø TRUSS MEMBERS & MIN 7"Ø POSTS (V); UPGRADE (E) CONNECTIONS PER 6/000 S501.
7. INTERIOR TIMBER TRUSS TO SUPPORT (E) ROOF PER 5/399-S300.
8. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L1" PER 7/000 S501
9. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501
10. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L3" PER 7/000 S501
11. (E) 8"Ø INTERIOR LOG BEAM, TO REMAIN
12. (E) MAIN ROOM FIREPLACE & CHIMNEY TO BE REPAIRED PER 10/000 S404 & LIFTED WITH BUILDING; SHORE AS NEEDED FOR LIFT
13. (E) SIDE ROOM FIREPLACE & CHIMNEY TO BE REPAIRED & LIFTED WITH BUILDING; SHORE AS NEEDED FOR LIFT
14. (E) 5"Ø KNEE BRACE FRAMING TO REMAIN

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	DCI ENGINEERS BOZEMAN, MT
DESIGNED:	ACF
DRAWN:	JNH
TECH REVIEW:	LMB
DATE:	07/21/2026
SUB SHEET NO.	399 S203
TITLE OF SHEET	MAIN LODGE – ROOF FRAMING PLAN
	REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK
DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	130 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

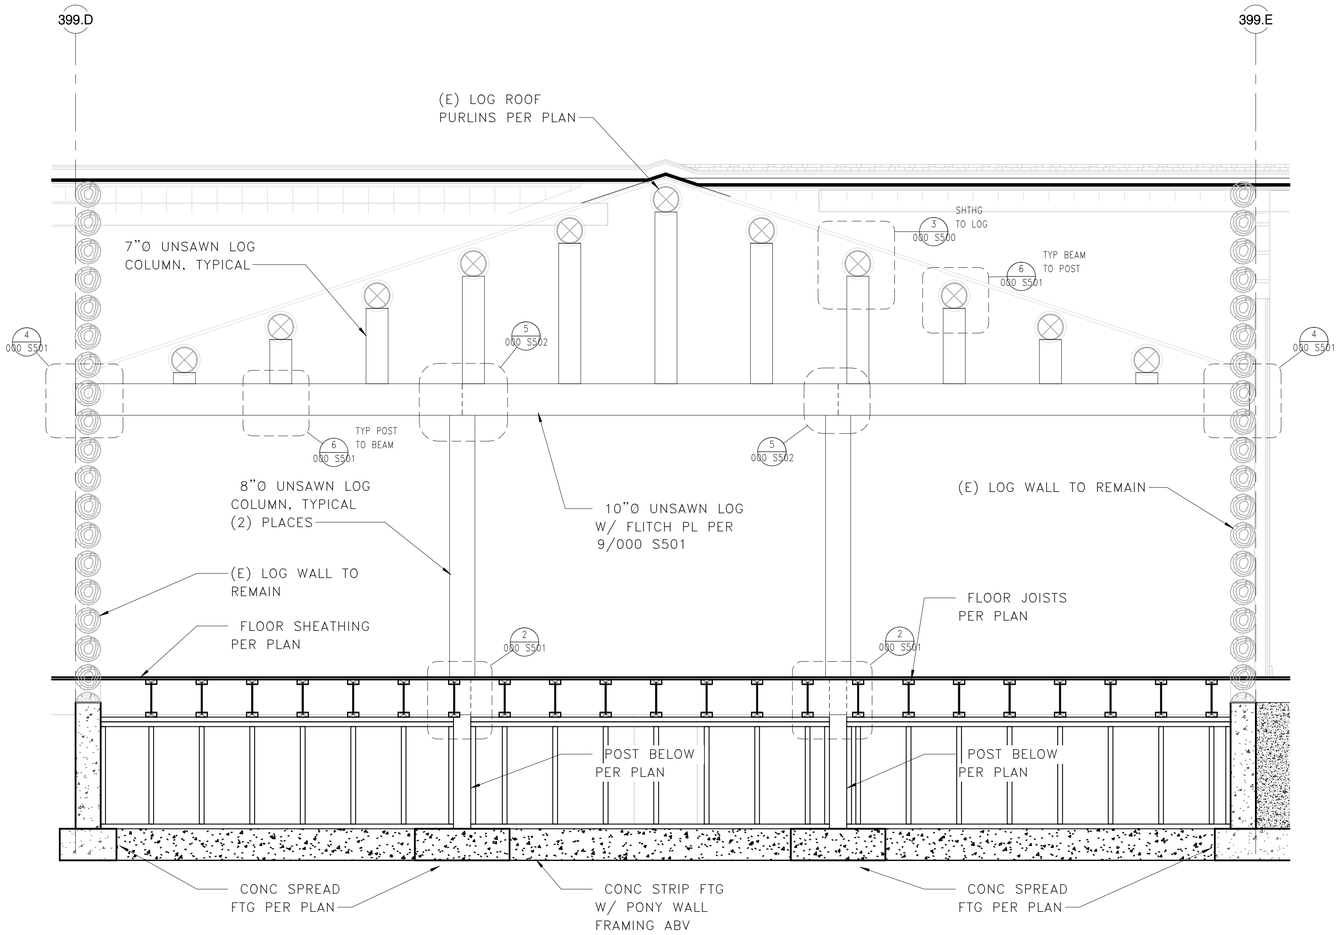

5 MAIN LODGE – INTERIOR FRAMING ELEVATION

1/2" = 1'–0"

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
399
S300

TITLE OF SHEET
MAIN LODGE – ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 131 OF 371

MEP COORDINATION SCHEDULE (HS-399)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE
HS	HUMIDISTAT

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-399-1	CRAWLSPACE FAN	18 W	-	120 - 1	HS	23 / 23		MSS	26 / 26	-	-	-	1	#12	3/4"
EF-399-2	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-399-3	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-399-4	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-1	WALL HEATER	1000 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-3	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-4	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-5	COVE HEATER	1200 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-6	COVE HEATER	1800 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-7	COVE HEATER	1200 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-8	COVE HEATER	1800 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-9	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-10	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-11	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-12	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-13	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
SP-399-1	SUMP PUMP	1/3 HP	-	120 - 1	INT	22 / 22		RCPT	26 / 26	-	-	-	1	#12	3/4"
WH-399-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-399)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
3. ROOF CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. CRAWLSPACE FAN SHALL BE CONTROLLED BY A HUMIDISTAT AND SHALL RUN ABOVE 60% RELATIVE HUMIDITY.
2. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL...

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	MOUNTING HEIGHT (IN)	CONTROL
EF-399-1	FANTECH	CSF4	60	0.5	- -	DIRECT	STRUCTURE	70	1
EF-399-2	PANASONIC	FV-0511VKL2	110	0.25	0.9	DIRECT	CEILING	- -	2
EF-399-3	PANASONIC	FV-0511VKL2	110	0.25	0.9	DIRECT	CEILING	- -	2
EF-399-4	PANASONIC	FV-0510VS1	100	0.25	1.3	DIRECT	WALL	66	2

ELECTRIC HEATER SCHEDULE (HS-399)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-399-1	Q MARK	CWH1101DSF	120 - 1	1000	12	RECESSED WALL	4	10-5/8	12
EH-399-2	Q MARK	RCC15024C	240 - 1	1500	108	WALL	4	118	4-3/16
EH-399-3	Q MARK	RCC15024C	240 - 1	1500	90	WALL	4	118	4-3/16
EH-399-4	Q MARK	RCC15024C	240 - 1	1500	90	WALL	4	118	4-3/16
EH-399-5	Q MARK	RCC12024C	240 - 1	1200	90	WALL	4	94	4-3/16
EH-399-6	Q MARK	RCC18024C	240 - 1	1800	90	WALL	4	132	4-3/16
EH-399-7	Q MARK	RCC12024C	240 - 1	1200	90	WALL	4	94	4-3/16
EH-399-8	Q MARK	RCC18024C	240 - 1	1800	90	WALL	4	132	4-3/16
EH-399-9	Q MARK	RCC15024C	240 - 1	1500	90	WALL	4	118	4-3/16
EH-399-10	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-399-11	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-399-12	Q MARK	RCC15024C	240 - 1	1500	90	WALL	4	118	4-3/16
EH-399-13	Q MARK	RCC15024C	240 - 1	1500	108	WALL	4	118	4-3/16

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEEKS
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
M001

TITLE OF SHEET
MAIN LODGE –
MECHANICAL SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 132 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

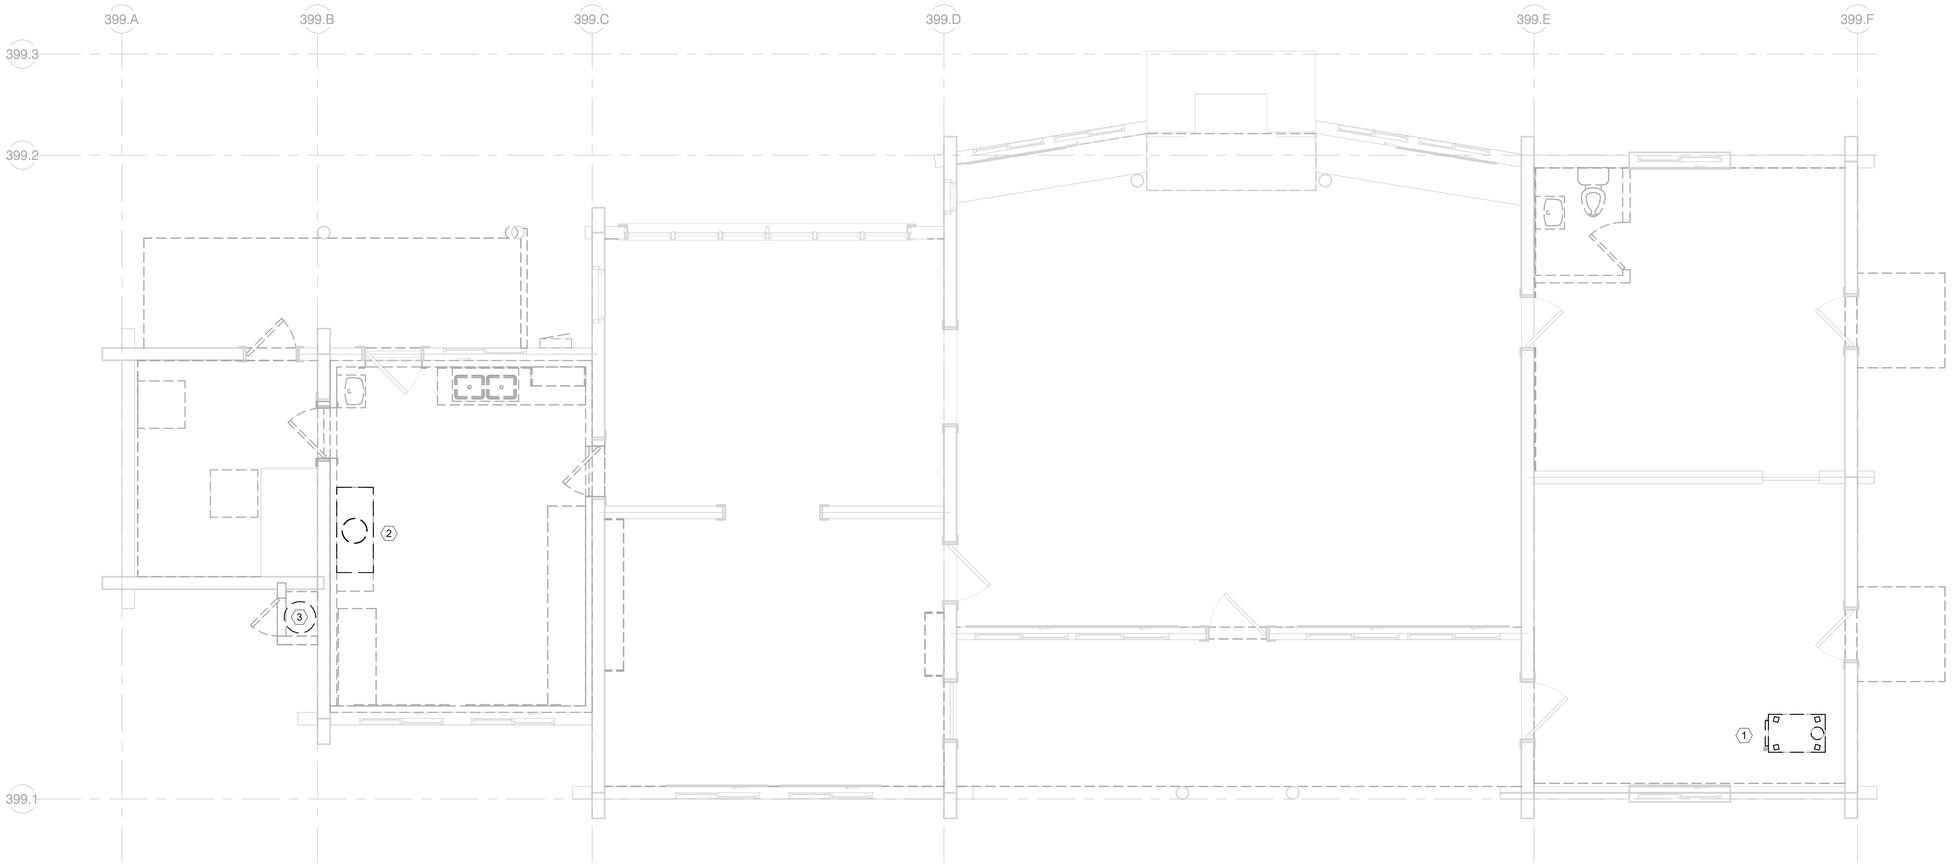

1 MAIN LODGE (HS-399) MECHANICAL DEMOLITION PLAN

1/4" = 1'-0"

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

(#) KEY NOTES:

1. REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
2. REMOVE RANGE HOOD, VENT PIPING, AND EXHAUST FAN LOCATED ON ROOF. COORDINATE EXTENTS OF ROOF AND CURB REMOVAL WITH ARCHITECT.
3. REMOVE VENT SERVING EXISTING WATER HEATER.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MYERS
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
M101

TITLE OF SHEET
MAIN LODGE – MECHANICAL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 133 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

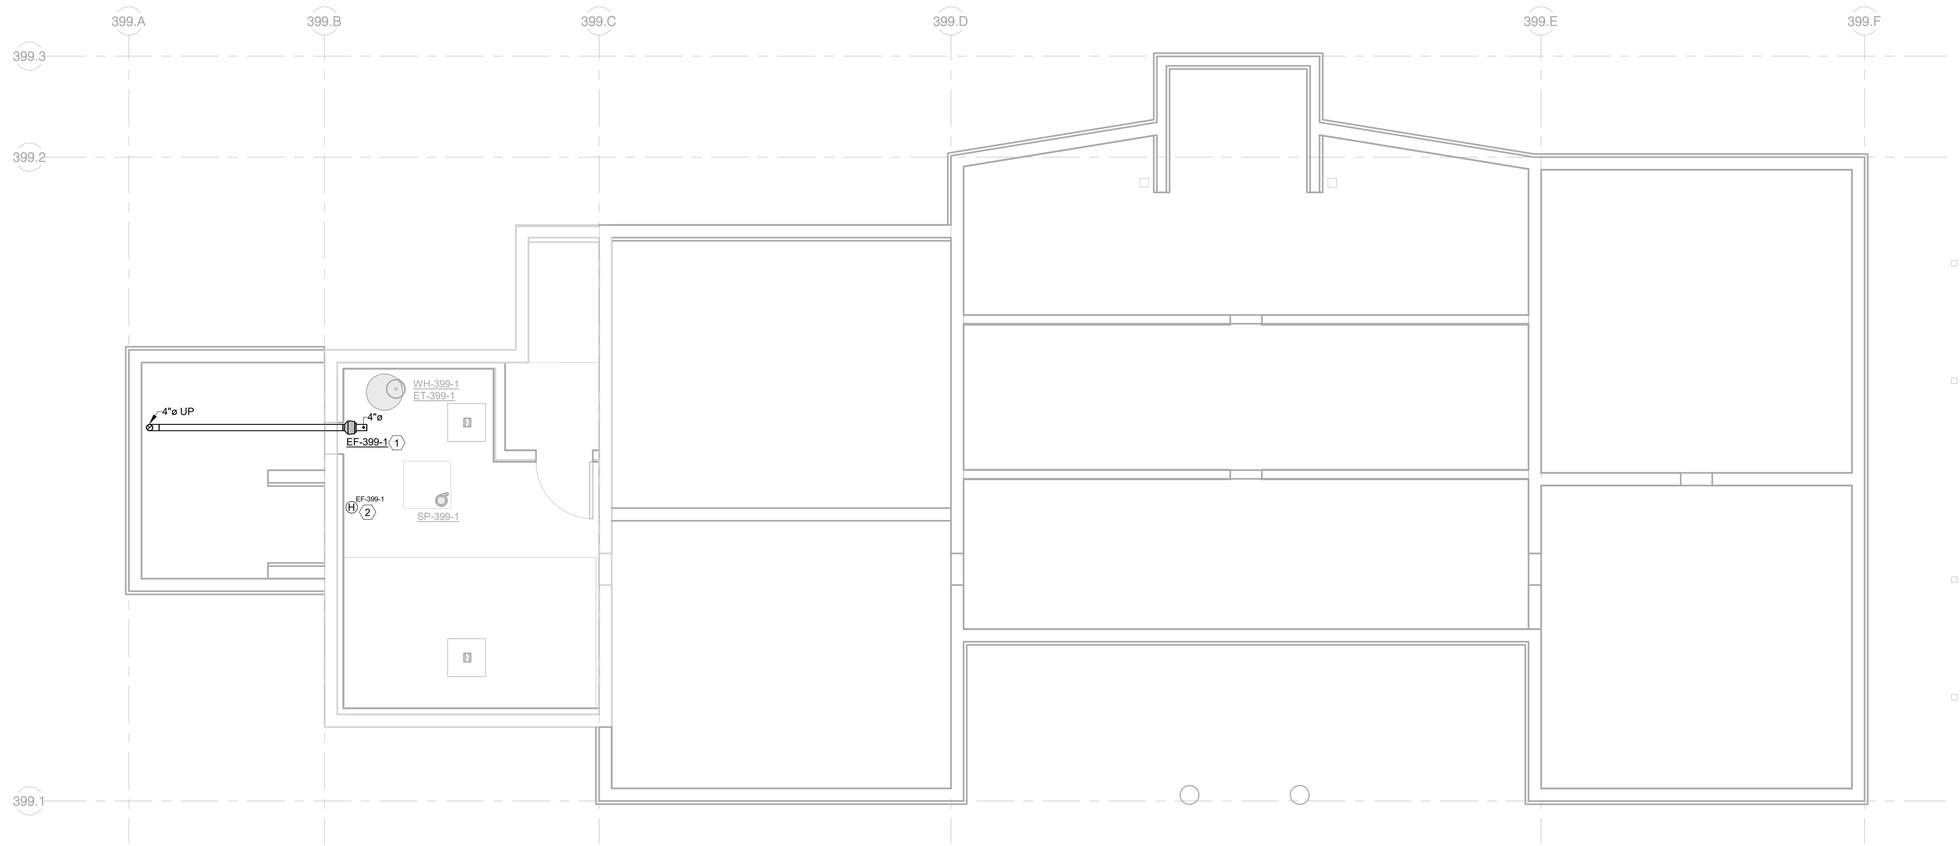

1 MAIN LODGE (HS-399) – MECHANICAL CRAWLSPACE PLAN

1/4" = 1'-0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

KEY NOTES:

1. COVER OPENING OF DUCT WITH 1/2" GALVANIZED WIRE MESH.
2. HUMIDISTAT SHALL ENABLE EF-399-1 ABOVE 60% RELATIVE HUMIDITY.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — Joseph R. Morris — 16596 — 07/21/2026 — Wyoming

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
M200

TITLE OF SHEET
MAIN LODGE – UNDERFLOOR MECHANICAL PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 237343
SHEET 134 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

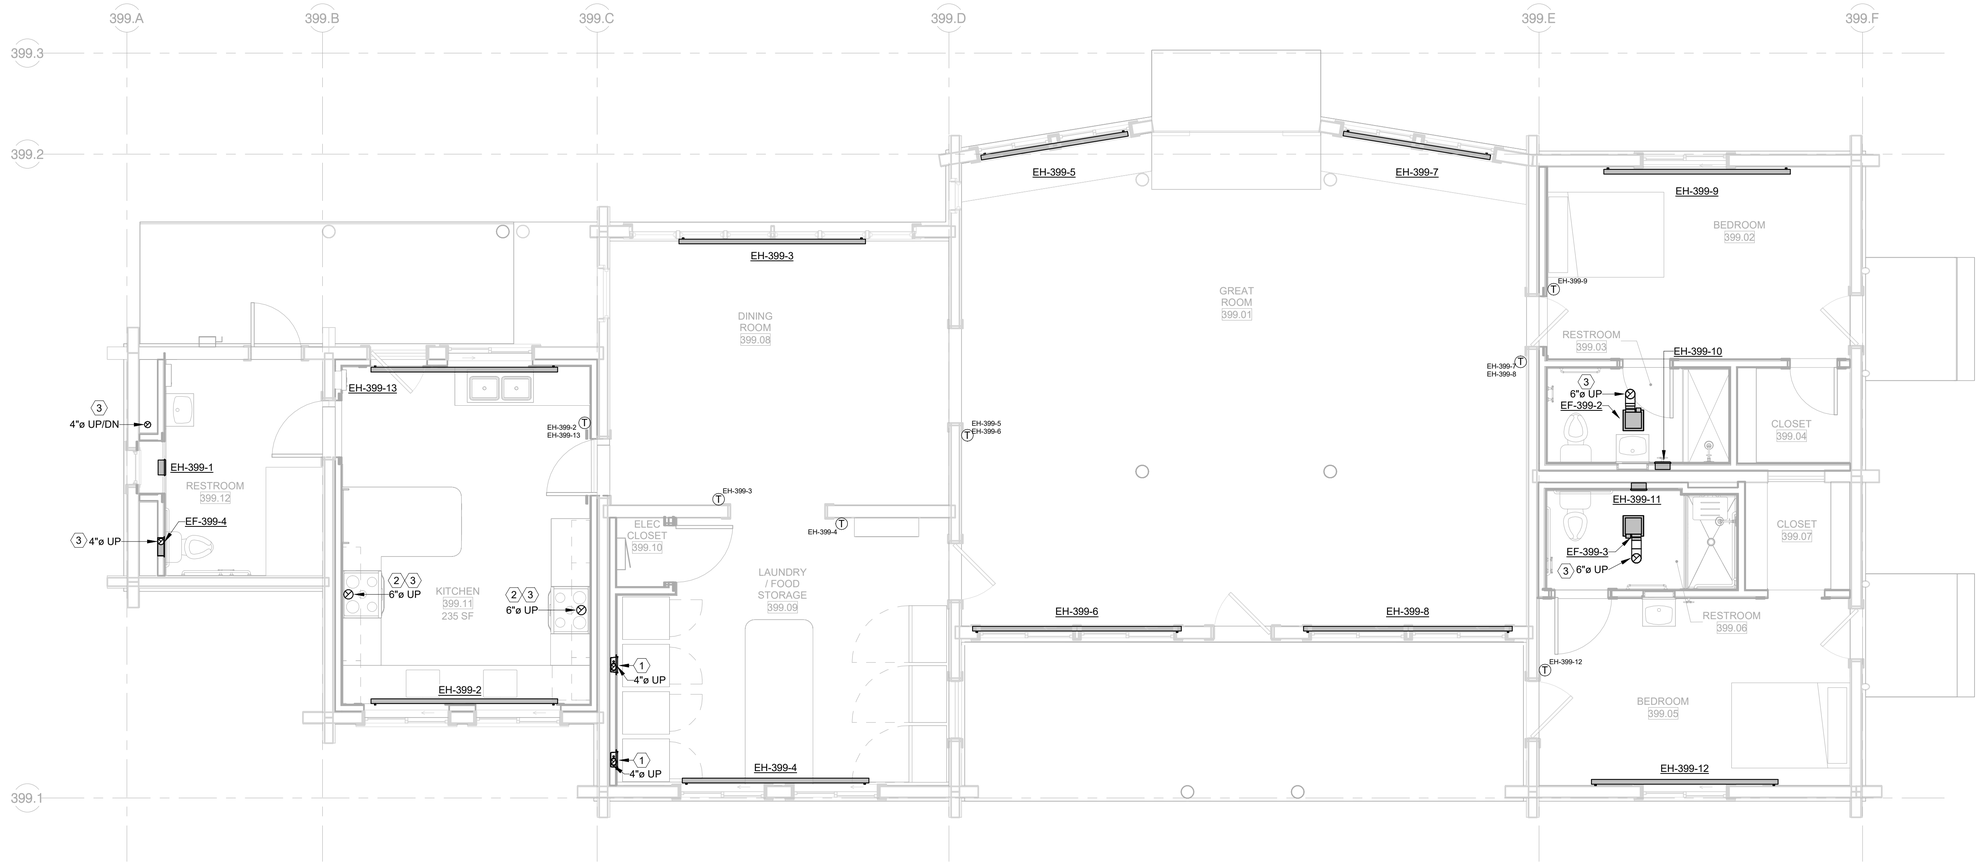

1 MAIN LODGE (HS–399) – MECHANICAL PLAN

1/4" = 1'–0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

KEY NOTES:

1. DRYERBOX 350 OR APPROVED EQUAL. 4" EXHAUST UP THRU ROOF. SEE DRYER VENT ROOF TERMINATION DETAIL.
2. 6" EXHAUST DOWN TO KITCHEN HOOD. SEE ARCHITECTURAL FOR HOOD DETAILS.
3. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — JOSEPH R. HUGHES — 16596 — 07/21/2026 — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
M201

TITLE OF SHEET
MAIN LODGE – MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 135 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
A2	LED	42 W	4280	3000	DECORATIVE PENDANT, 23" DRUM	LUMETTA	P52314-BLACK-F10-DL19 STATIC IVORY-L412-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
A3	LED	21 W	2140	3000	DECORATIVE PENDANT, 25" TAPER	LUMETTA	PT2521-BLACK-F10-D65 MT BLUE-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
A4	LED	42 W	4280	3000	DECORATIVE PENDANT, 32" TAPER	LUMETTA	PT3225-BLACK-F10-D65 MT BLUE-L412-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
C1	LED	13 W	700	3000	4" ROUND LOW PROFILE SURFACE MOUNT DOWNLIGHT	COOPER	HLS4-07-930-1E-WH	SURFACE	120 V	1
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2
U1	LED	27 W	2000	5000	VAPOR PROOF FROSTED GLASS GLOBE	RAB	VXLED26	SURFACE	120 V	1

399 MAIN LODGE

SERVICE CALCULATION, PANEL 399

LOAD DESCRIPTION							
Lighting & Receptacle loads:						---Sub---	
Occupied areas:	2200.0	Square Feet					
Lighting load		1.5	VA/SQ-FT	3,300	VA	3.3	KVA
Receptacles		1.5	VA/SQ-FT	3,300	VA	3.3	KVA
Washer	3.0	KVA				3.0	KVA
Dryer	10.0	KVA				10.0	KVA
Oven	19.2	KVA				19.2	KVA
Small Appliance	3.0	KVA				3.0	KVA
Fridge/Freezer	3.0	KVA				3.0	KVA
Water Heater	4.5	KVA				4.5	KVA
Subtotal						49.3	KVA
Demand per 220.82 (B)		(first 10 KVA @100%)				10.0	KVA
		(Remaining KVA @ 40%)				15.7	KVA
General Load Subtotal						25.7	KVA
MECHANICAL LOADS							
Electric Heaters	18.8	KVA				18.8	KVA
Demand per 220.82 (C)		(KVA @ 40%)				7.5	KVA
Lift Station	4.8	KVA				4.8	KVA
Sub-total mechanical						12.3	KVA
TOTAL CONNECTED LOAD:						38	KVA
AMPACITY @	240.0	Volts		1	Ph	159	Amps
SERVICE SIZE						**200**	**AMPS**

Branch Panel: P399

Location: ELEC CLOSET 399.10 | **Volts:** 120/240 Single | **A.F.C.:** 3,509
Supply From: NORTH SERVICE | **Phases:** 1 | **Mains Type:** MLO
Mounting: Surface | **Wires:** 3 | **Mains Rating:** 225 A
Enclosure: 1

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

CKT	Circuit Description	Circuit Notes	Trip	Poles	A	Poles	Trip	Circuit Notes	Circuit Description	CKT
1	SPD		--	2		2	30 A	P	RCPT - DRYER	2
3										4
5	RCPT - WASHER	P	20 A	1		1	20 A	P	RCPT - WASHER	6
7	RCPT - DRYER	P	30 A	2		1	20 A		RCPT - LAUNDRY	8
9						1	20 A	P	RCPT - MICROWAVE	10
11	RCPT - KITCHEN COUNTERTOP		20 A	1		1	20 A		RCPT - KITCHEN COUNTERTOP	12
13	RCPT - KITCHEN COUNTERTOP		20 A	1		1	20 A	P	RCPT - FRIDGE	14
15	RCPT - RANGE	P	50 A	2		1	20 A	P	RCPT - FRIDGE	16
17						1	20 A	P	RCPT - FRIDGE	18
19	RCPT - RANGE	P	50 A	2		1	20 A		RCPT - RESTROOM	20
21						1	20 A		RCPT - DINING ROOM	22
23	EH-399-1		20 A	1		2	20 A		EH-399-3	24
25	EH-399-2		20 A	2						26
27						2	20 A		EH-399-4	28
29	EH-399-5		20 A	2						30
31						2	20 A		EH-399-6	32
33	EH-399-7		20 A	2						34
35						2	20 A		EH-399-8	36
37	EH-399-9		20 A	2						38
39						1	20 A		EH-399-10	40
41	EH-399-12		20 A	2		1	20 A		EH-399-11	42
43						1	20 A		EF-399-1	44
45	WH-399-1		30 A	2		1	20 A		RCPT - SP-399-1	46
47						1	20 A		RCPT - BASEMENT	48
49	RCPT - RESTROOMS		20 A	1		1	20 A		RCPT - BEDROOM	50
51	RCPT - GREAT ROOM		20 A	1		1	20 A		RCPT - BEDROOM	52
53	LTG		30 A	1		1	20 A		RCPT - EXTERIOR	54
55	PANEL PLS		100 A	2		1	20 A	L	FACP	56
57						1	20 A		FIBER PANEL	58
59	SPARE		20 A	1		2	20 A		EH-399-13	60
61	SPARE		20 A	1						62
63	SPARE		20 A	1		1	20 A		SPARE	64
65	SPARE		20 A	1		1	20 A		SPARE	66
67	SPARE		20 A	1		1	20 A		SPARE	68
69	SPACE		--	2		2	--		SPACE	70
71										72

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

MEP COORDINATION SCHEDULE (HS-399)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE
HS	HUMIDISTAT

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-399-1	CRAWLSPACE FAN	18 W	-	120 - 1	HS	23 / 23		MSS	26 / 26	-	-	-	1	#12	3/4"
EF-399-2	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-399-3	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-399-4	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-1	WALL HEATER	1000 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-3	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-4	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-5	COVE HEATER	1200 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-6	COVE HEATER	1800 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-7	COVE HEATER	1200 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-8	COVE HEATER	1800 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-9	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-10	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-11	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-399-12	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-399-13	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
SP-399-1	SUMP PUMP	1/3 HP	-	120 - 1	INT	22 / 22		RCPT	26 / 26	-	-	-	1	#12	3/4"
WH-399-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
399
E001

TITLE OF SHEET
MAIN LODGE – ELECTRICAL SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 136 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

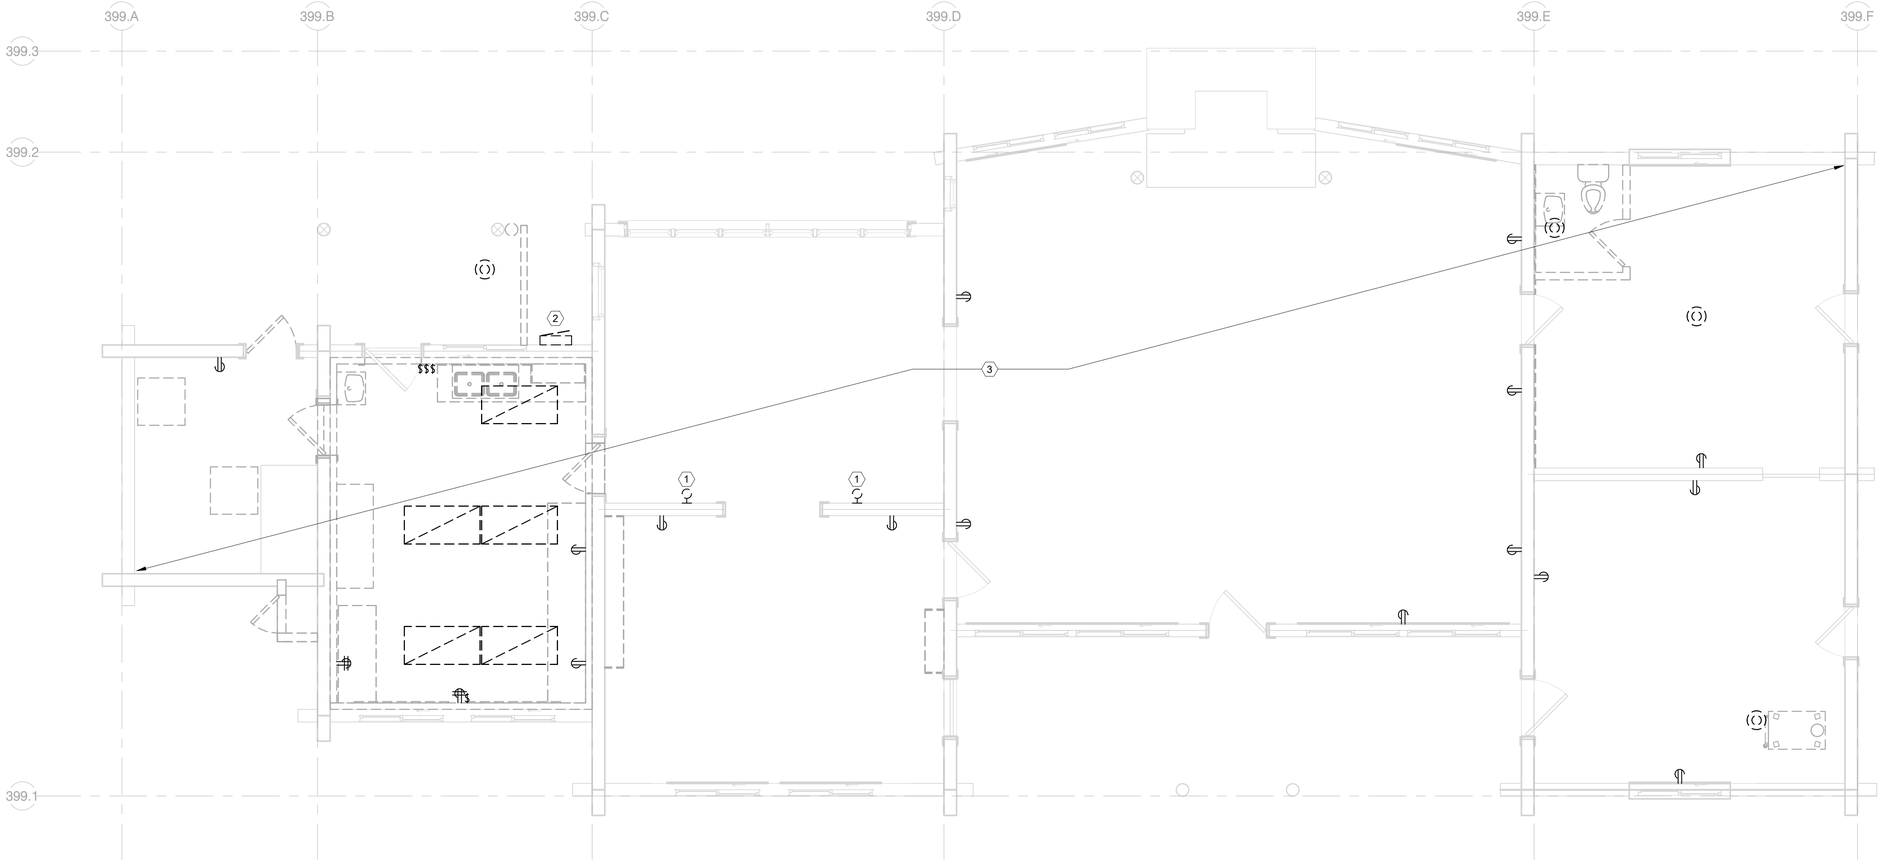

1 MAIN LODGE (HS-399) ELECTRICAL DEMO PLAN

1/4" = 1'-0"

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. SALVAGE FIXTURES FOR RESTORATION AND RE-USE AT SAME LOCATION.
2. REMOVE EXISTING ELECTRICAL PANEL AND ASSOCIATED CONDUITS/WIRING IN ENTIRETY.
3. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT MAIN LODGE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 Date 07/21/2026 WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
399
E100

TITLE OF SHEET
MAIN LODGE - ELECTRICAL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 137 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

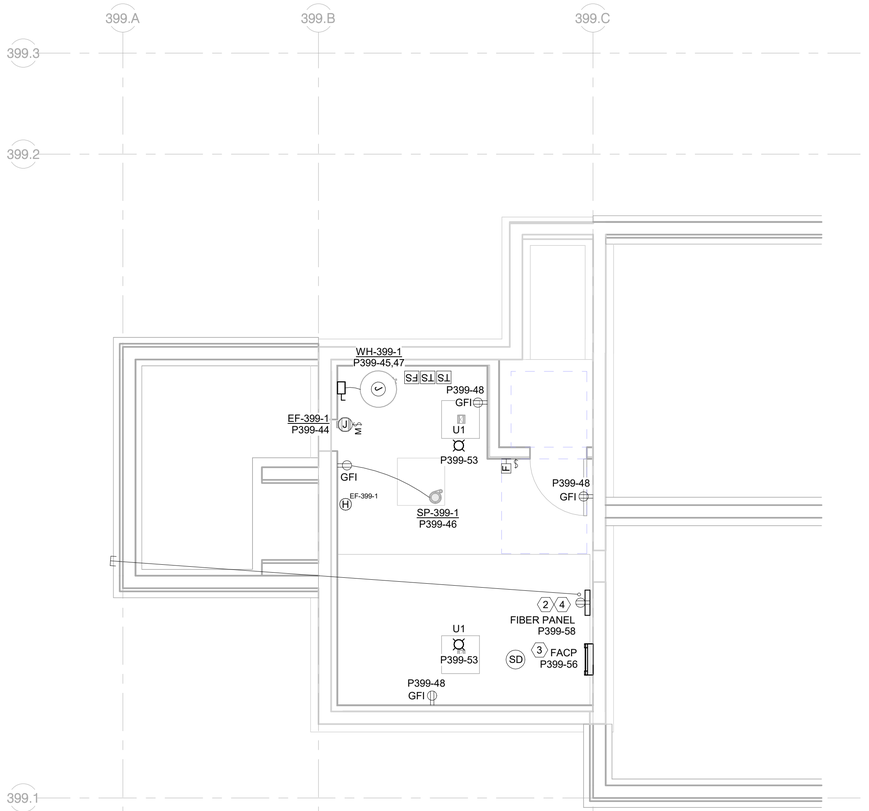

2 MAIN LODGE – ELECTRICAL BASEMENT RENOVATION PLAN

1/4" = 1'–0"

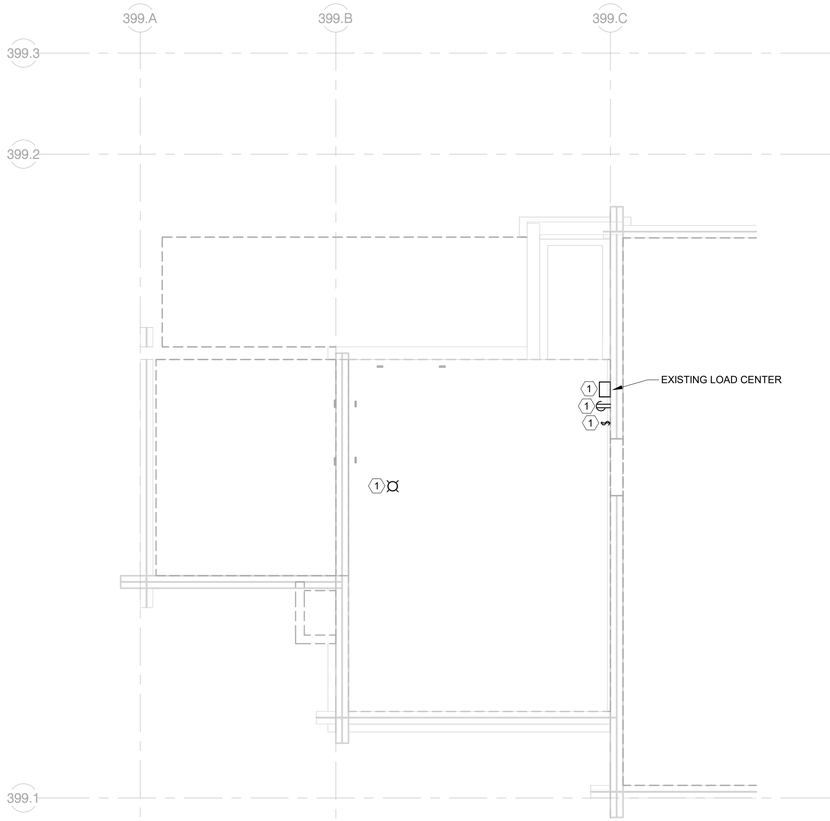

1 MAIN LODGE – ELECTRICAL BASEMENT DEMO PLAN

1/4" = 1'–0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. EXISTING EQUIPMENT AND ASSOCIATED CONDUIT/WIRING TO BE REMOVED.
2. LOCATION RESERVED FOR 16"X16" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
3. ALL FIRE ALARM DEVICES IN ALL CABINS SHALL TIE-IN TO FIRE ALARM CONTROL PANEL. SEE FIRE ALARM RISER ON SHEET E003 FOR DETAILS.
4. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT WITH FIBER CONDUIT STUB-IN FROM SITE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
399
E101

TITLE OF SHEET
MAIN LODGE – BASEMENT ELECTRICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 138 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

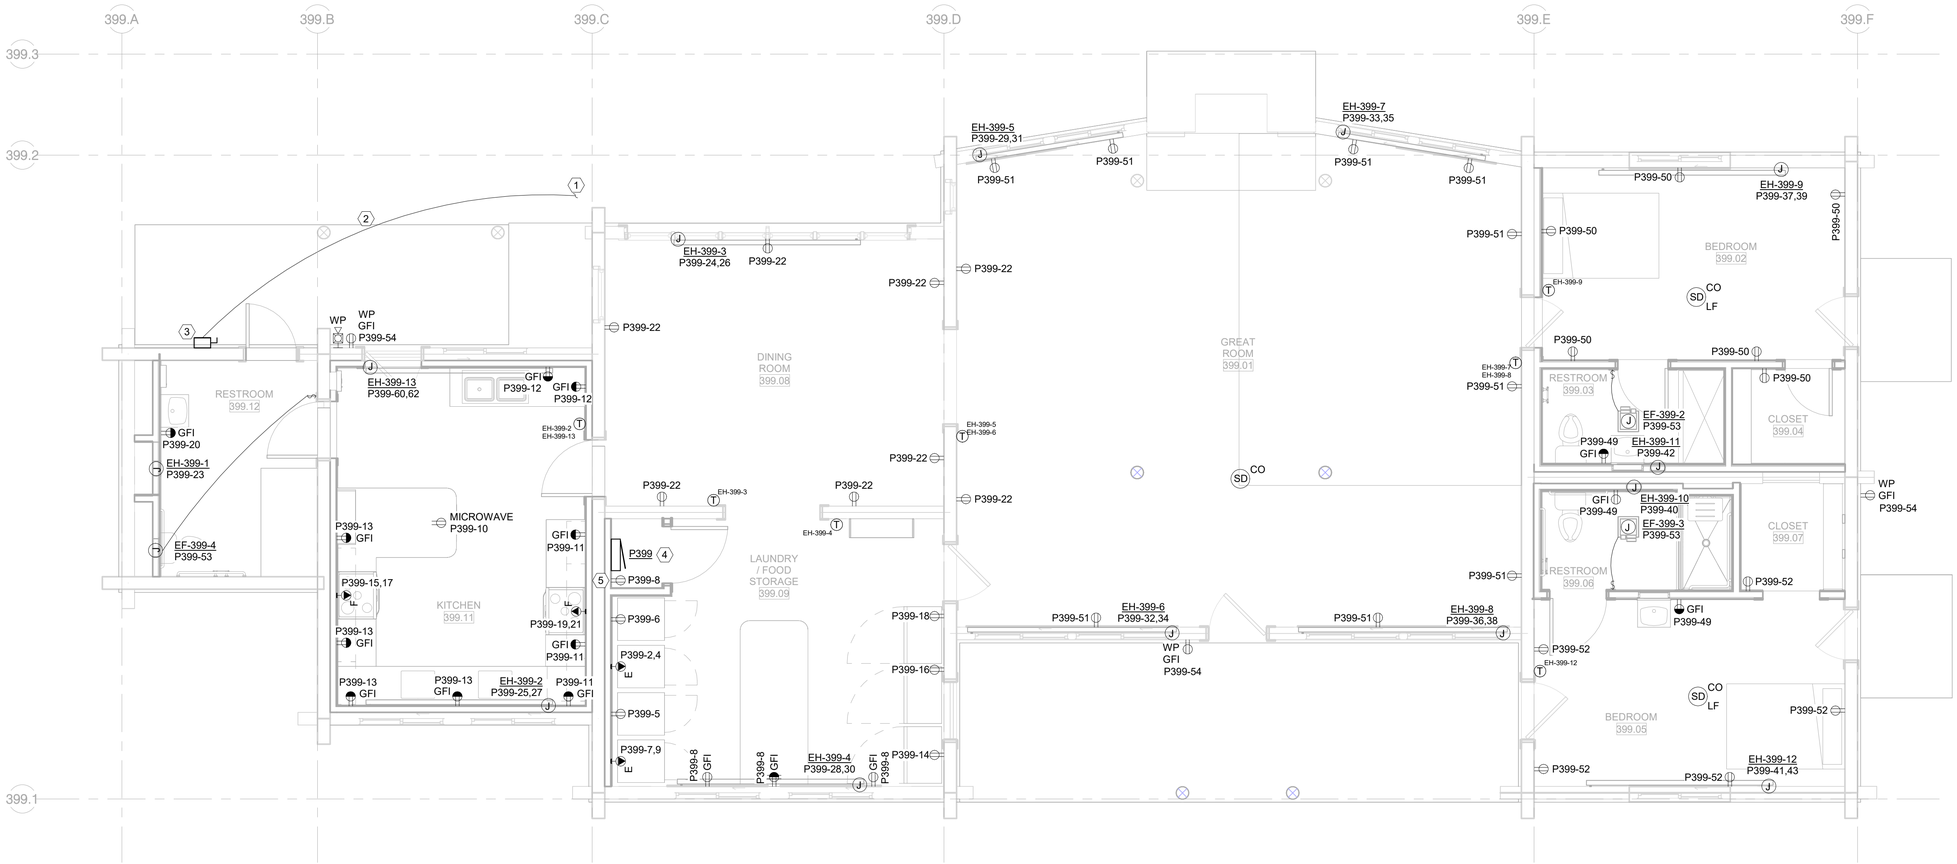

1 MAIN LODGE (HS–399) – POWER AND SIGNAL PLAN

1/4" = 1'–0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

(#) KEY NOTES:

1. EXISTING EMPTY 2" UNDERGROUND CONDUIT IS IN PLACE FROM EXTERIOR OF MAIN LODGE BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW CONDUCTORS AND RUN WITHIN CONDUIT PATHWAY FROM EXISTING 200A SERVICE DISCONNECT TO NEW MAIN LODGE DISCONNECT. PROVIDE (2) #250AL, #4/0AL NEUTRAL, & # 2AL GROUND.
2. PROVIDE NEW 2" SCH 80 PVC CONDUIT AND EXTEND FROM EXISTING 2" BURIED CONDUIT OVER AND UP TO NEW 200A DISCONNECT SWITCH.
3. PROVIDE 200A, 240V, 2-POLE, NEMA 3R DISCONNECT SWITCH. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
4. PROVIDE 200A FEEDER BETWEEN DISCONNECT AND PANEL P399: (2) #250AL, #4/0AL NEUTRAL, & #2AL GROUND IN 2"C.
5. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: CDC DRAWN: CDC TECH REVIEW: RPM DATE: 07/21/2026	SUB SHEET NO. 399 E201	TITLE OF SHEET MAIN LODGE – POWER AND SIGNAL PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 139 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

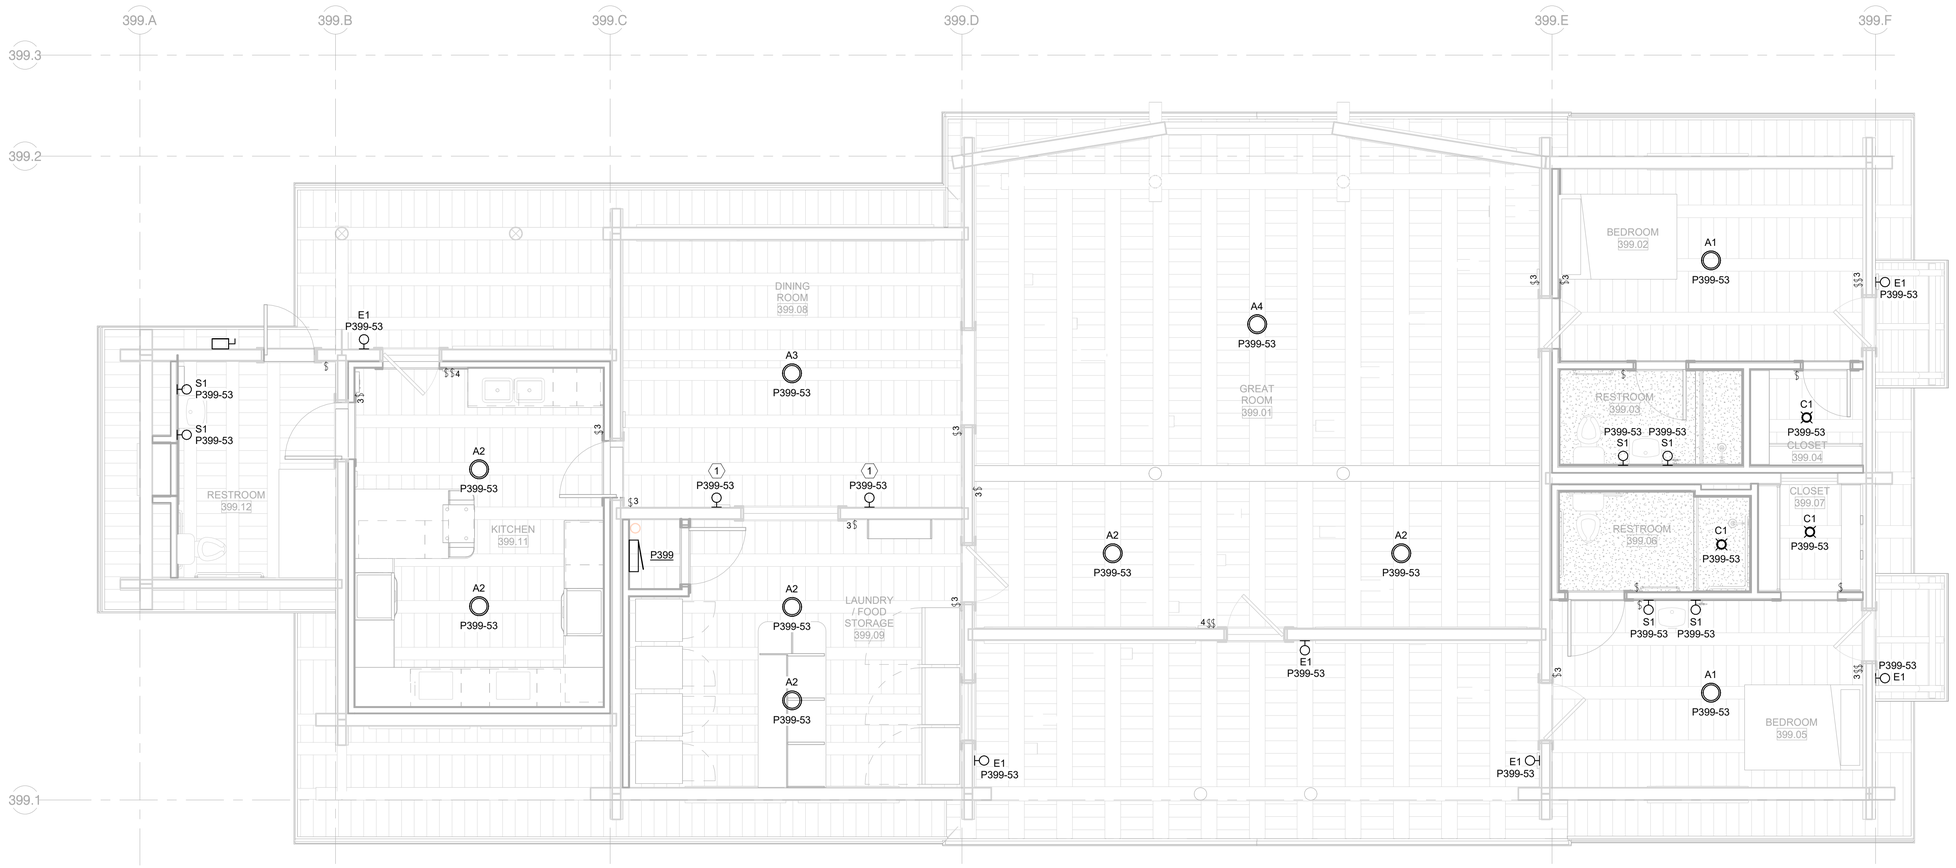

1 MAIN LODGE (HS-399) – LIGHTING PLAN

1/4" = 1'-0"

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

(#) KEY NOTES:

1. INSTALL RESTORED FIXTURES BACK TO EXISTING LOCATION.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: MORRISON MAIERLE BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO. 399 E301

TITLE OF SHEET
MAIN LODGE – LIGHTING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 140 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - MAIN LODGE (HS-399)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
L-399-1	LAVATORY - WALL MOUNTED	YES	KOHLER	K-2868	VITREOUS CHINA	WALL / ABA HEIGHT	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE JR SMITH #700 SERIES CARRIER, WATER STOPS.
S-399-1	DOUBLE BOWL KITCHEN SINK - ABA	YES	KOHLER	K-25940	STAINLESS STEEL	COUNTER	FAUCET	KOHLER	K-28356	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE WITH QUARTER TURN STOP VALVES, ASSE 1050 AIR ADMITTANCE VALVE, STRAINER AND CLEANOUT DOWNSTREAM OF TRAP.
S-399-2	SINGLE BOWL KITCHEN SINK - ABA	YES	KOHLER	K-3894	STAINLESS STEEL	COUNTER	FAUCET	KOHLER	K-28356	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE WITH QUARTER TURN STOP VALVES, ASSE 1050 AIR ADMITTANCE VALVE, STRAINER AND CLEANOUT DOWNSTREAM OF TRAP.
S-399-3	SINGLE BOWL KITCHEN SINK - DEEP	NO	ELKAY	K-3822	STAINLESS STEEL	COUNTER	FAUCET	KOHLER	K-28356	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE WITH QUARTER TURN STOP VALVES, ASSE 1050 AIR ADMITTANCE VALVE, STRAINER AND CLEANOUT DOWNSTREAM OF TRAP.
SH-399-1	SHOWER	NO	KOHLER	K-8639	ACRYLIC	FLOOR	SHOWER TRIM	KOHLER	K-TS97077-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS AND GRID DRAIN.
SH-399-2	ACCESSIBLE SHOWER	YES	AQUATIC	F6034DPAN	ACRYLIC	FLOOR	SHOWER TRIM	KOHLER	K-TS74042-4 / K-99898-G	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE COMPLETE WITH GRAB BARS, FOLD UP SEAT, HAND-HELD SHOWER ASSEMBLY WITH SLIDE BAR, KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS, GRID DRAIN, AND ACCESSORIES FOR COMPLETE ABA INSTALLATION.
WB-399-1	WASHING MACHINE BOX	- -	SIOUX CHIEF	696-G2313	BOX - HIGH IMPACT PLASTIC	WALL / 48" A.F.F.	- -	- -	- -	- -	2"	1-1/2"	1/2"	1/2"	PROVIDE WITH ARRESTERS, QUARTER TURN STOP VALVES, AND ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION
WC-399-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-399)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
6. FIVE YEAR LIMITED TANK WARRANTY
7. ZERO INCH CLEARANCE
8. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-399-1	RHEEM	XE50M06ST45U1	ELECTRIC TANK	50	120	4.5	0.93	61	21	48	23	132

PLUMBING EXPANSION TANK SCHEDULE (HS-399)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-399-1	TACO	PAX10-150	WH-399-1	BLADDER	2.6	1.7	150	3/4	12	12	40

SUMP PUMP SCHEDULE (HS-399)

REMARKS: PROVIDE WITH AUTOMATIC INTEGRAL WIDE-ANGLE SWITCH, AND 35' CORD.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	MOTOR RPM	FLOW (GPM)	HEAD (FT)	FLUID	SERVES
SP-399-1	LIBERTY	231	3450	20	15	WATER	(E) SUMP PIT

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-399)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	2	3.6	7.2
KITCHEN SINK	3	1.4	4.2
LAVATORY	1	0.7	0.7
WASHING MACHINE (8 LB)	2	1.4	2.8
WATER CLOSET, FLUSH TANK	1	2.2	2.2
			17.1
MAX. LENGTH (FT)	135		
TOTAL PEAK FLOW (GPM)	19		
WATER MAIN SIZE (BY CIVIL)	2"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-399)

FIXTURE	QTY.	DFU	TOTAL DFU
AUTOMATIC CLOTHES WASHERS, RESIDENTIAL	2	2.0	4.0
BATHROOM GROUP (1.6 GPF WATER CLOSET)	2	5.0	10.0
KITCHEN SINK, DOMESTIC	3	2.0	6.0
LAVATORY	1	1.0	1.0
WATER CLOSET, PRIVATE (1.6 GPF)	1	3.0	3.0
			24
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — JOSEPH R. HAGAN — 16596 — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
P001

TITLE OF SHEET
MAIN LODGE – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 141 OF 371

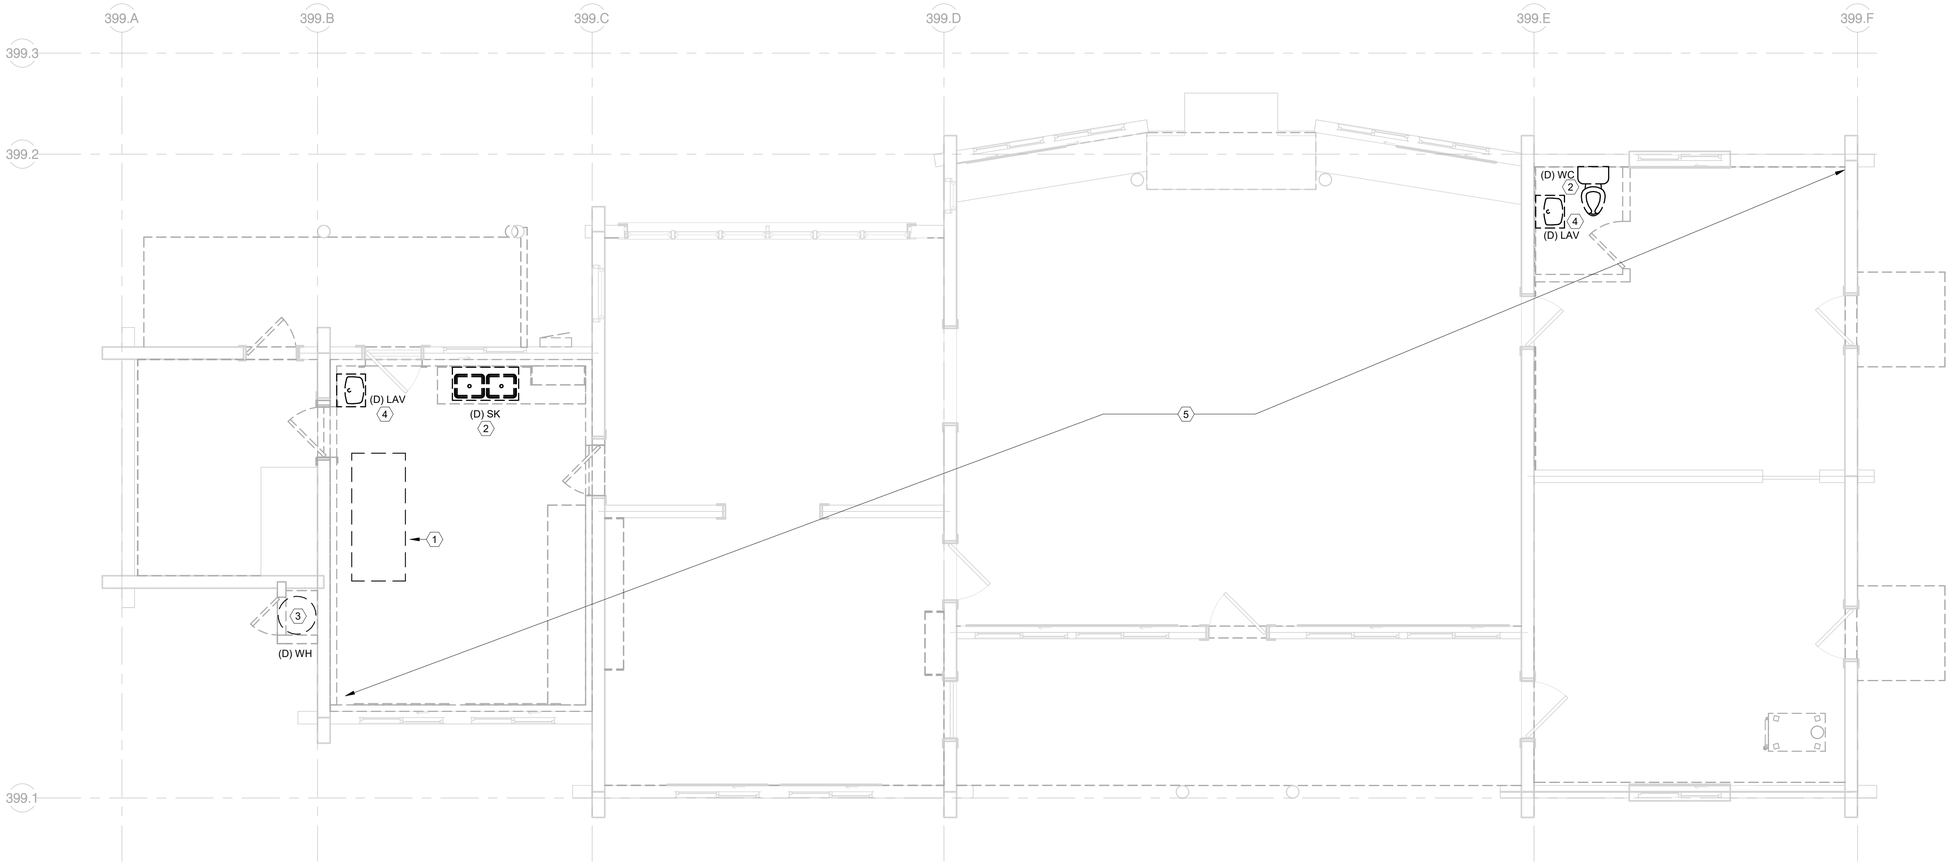

1 MAIN LODGE (HS-399) PLUMBING DEMOLITION PLAN

1/4" = 1'-0"

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

KEY NOTES:

1. REMOVE EXISTING WATER TANK LOCATED IN BASEMENT.
2. REMOVE EXISTING FIXTURE AND CONNECTED PIPING.
3. REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
4. REMOVE LAVATORY, FAUCET AND ASSOCIATED PIPING.
5. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HAWES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
P101

TITLE OF SHEET
MAIN LODGE – MAIN LEVEL DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 142 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

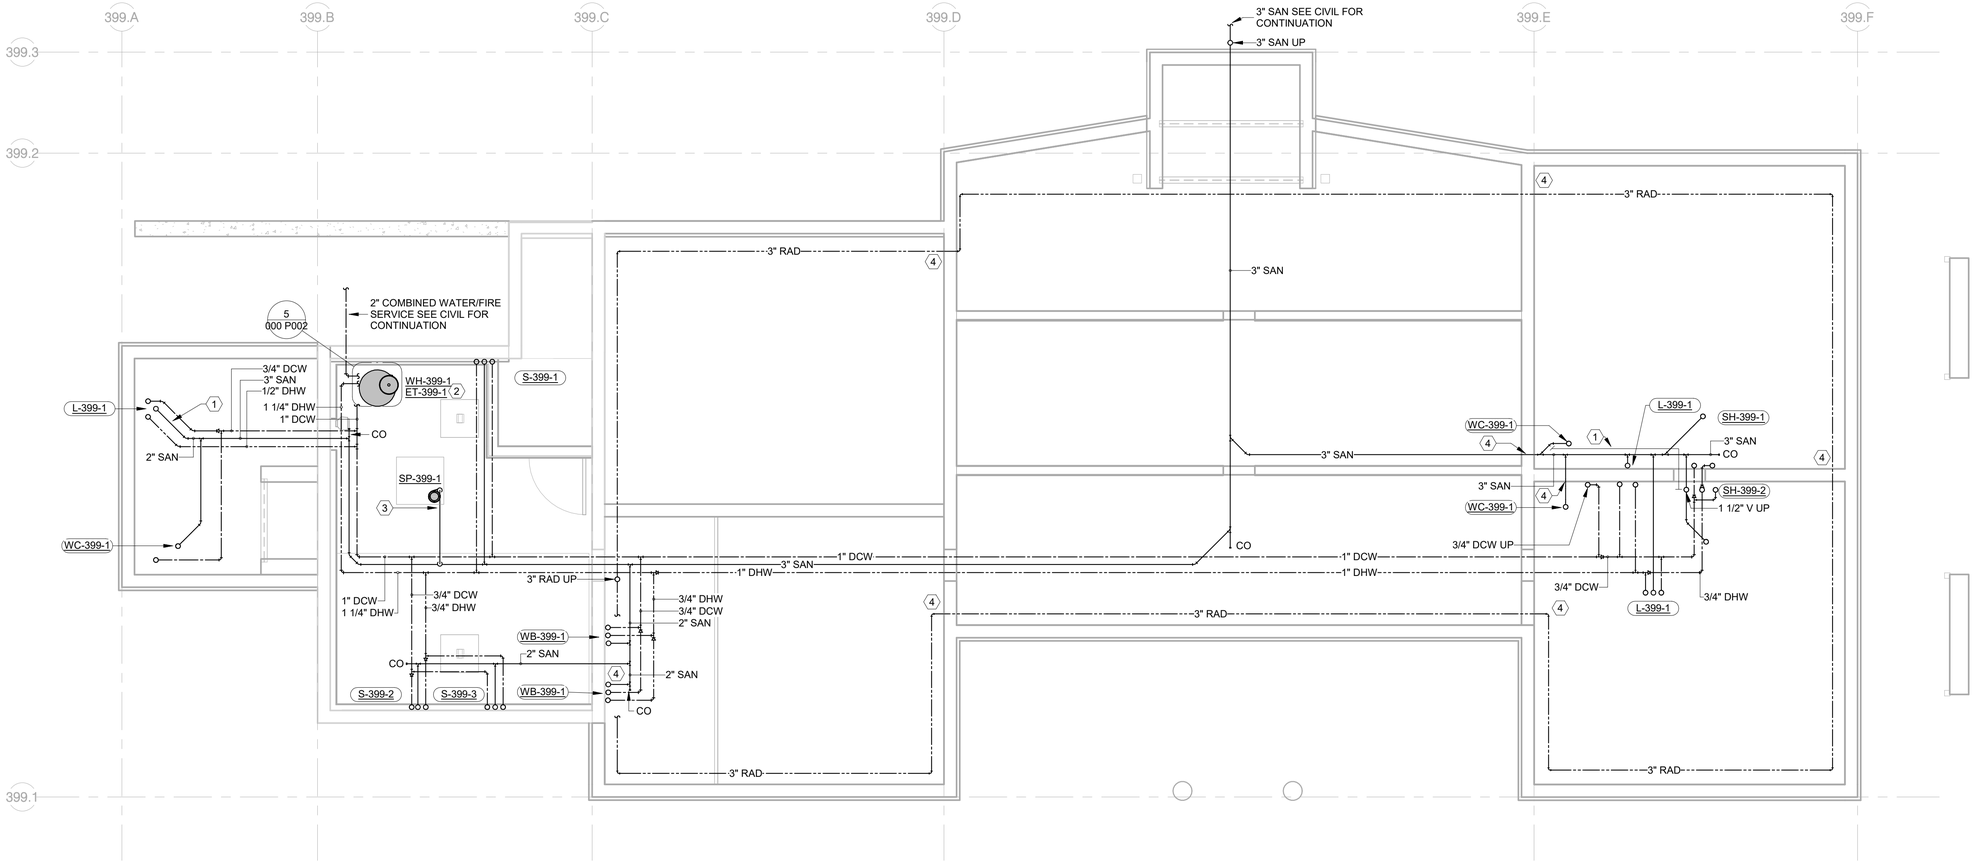

1 MAIN LODGE (HS–399) – PLUMBING UNDERFLOOR PLAN

1/4" = 1'–0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

KEY NOTES:

1. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
2. PROVIDE 12" TALL STAND FOR WATER HEATER.
3. SP-1 LOCATED IN EXISTING PIT. 2" FORCED MAIN TO DISCHARGE INTO TOP OF 3" SAN MAIN.
4. PROVIDE SLEEVE FOR PIPING THROUGH FOUNDATION.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HOMES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
P200

TITLE OF SHEET
MAIN LODGE – UNDERFLOOR PLUMBING PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 143 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

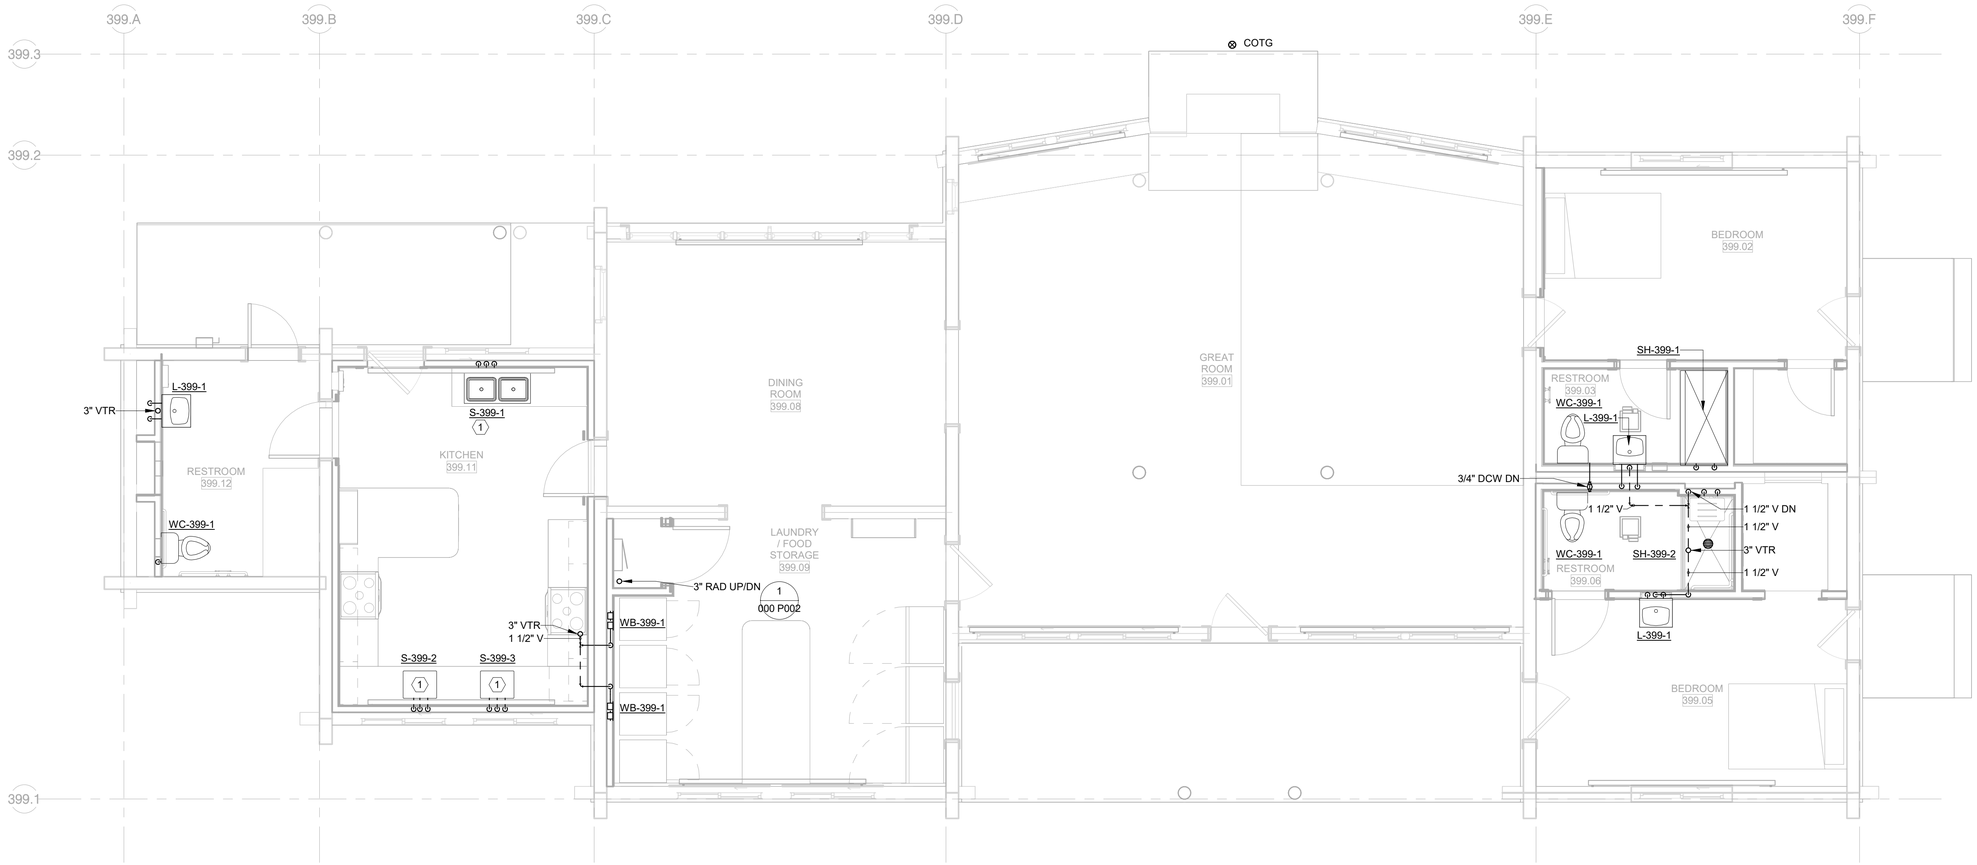

1 MAIN LODGE (HS-399) – PLUMBING PLAN

1/4" = 1'-0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

KEY NOTES:

1. PROVIDE 1-1/2" ASSE 1050 CERTIFIED AIR ADMITTANCE VALVE (AAV) FOR SINK VENT. INSTALL AAV 4" MINIMUM ABOVE FIXTURE DRAIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer JOSEPH R. LOPES 16596 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
399
P201

TITLE OF SHEET
MAIN LODGE – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 144 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

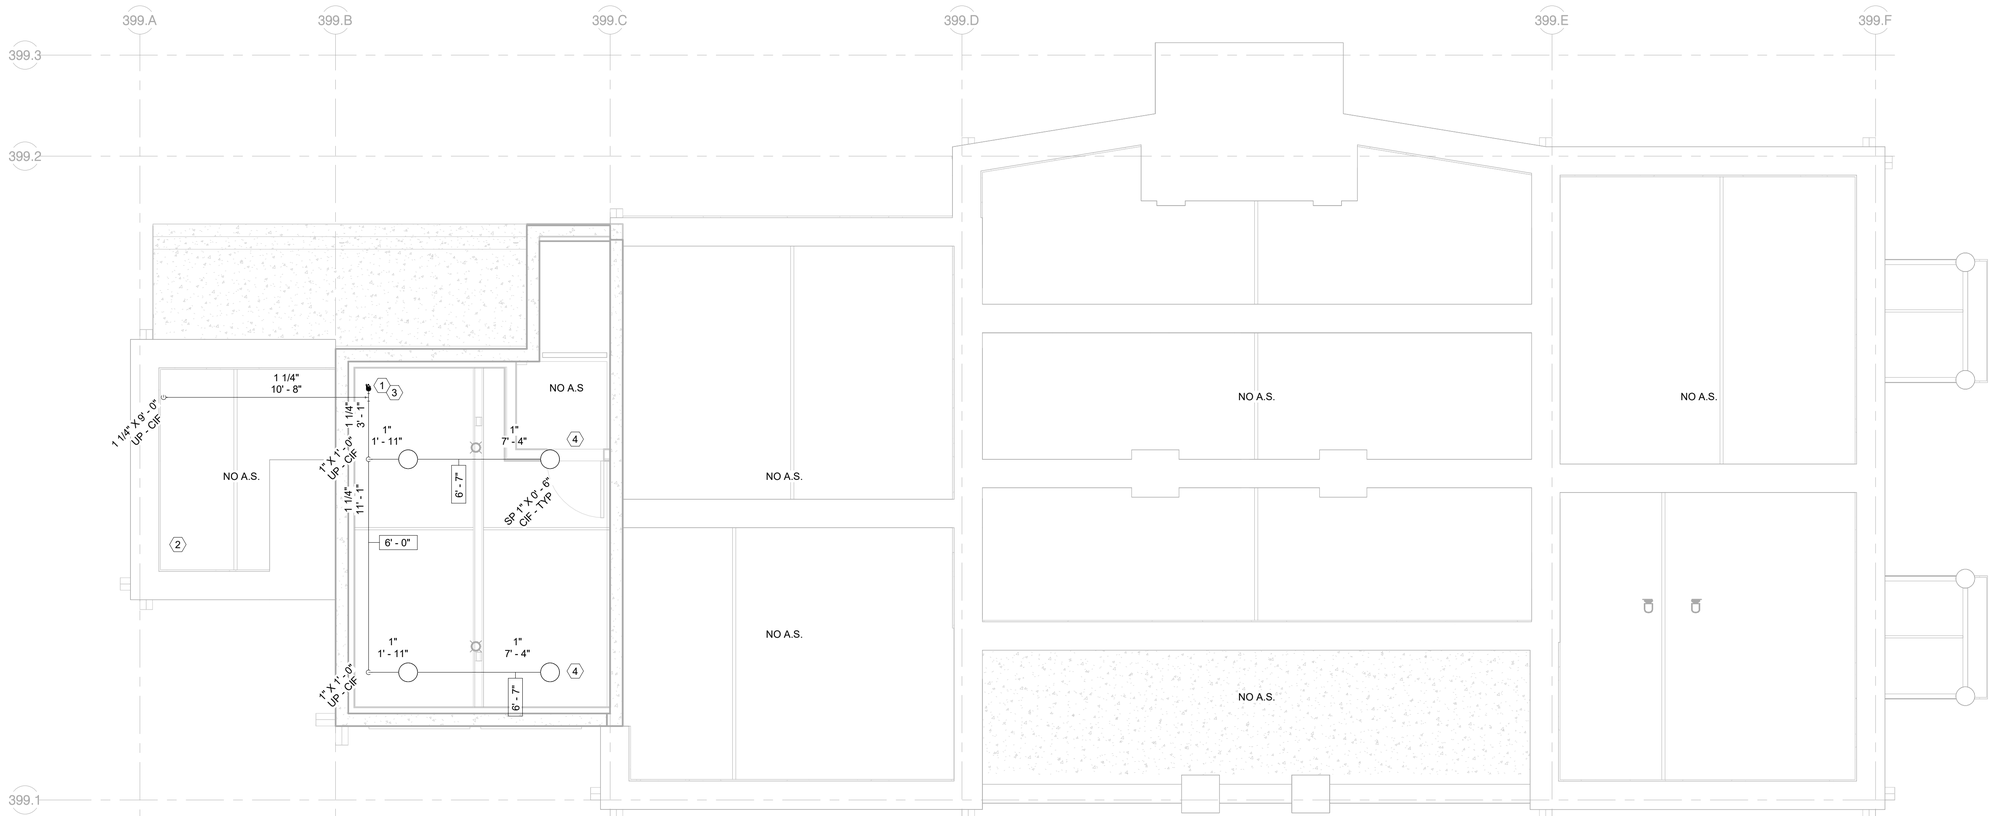

MAIN LODGE (HS–399) – FIRE SUPPRESSION CRAWLSPACE PLAN

1

1/4" = 1'–0"

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISE UP TO MAIN LEVEL IN THIS LOCATION.
3. RISER DRAIN TO BE ROUTED TO SUMP PUMP. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
4. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
○	Viking	Freedom Res.	VK467	4.9	Quick	Upright	1/2"	175 °F	N/A	Brass	Residential Upright	4

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED 4

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
TRENT J. PEARSON
20707
Date
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
399
F100

TITLE OF SHEET
MAIN LODGE – UNDERFLOOR PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 145 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

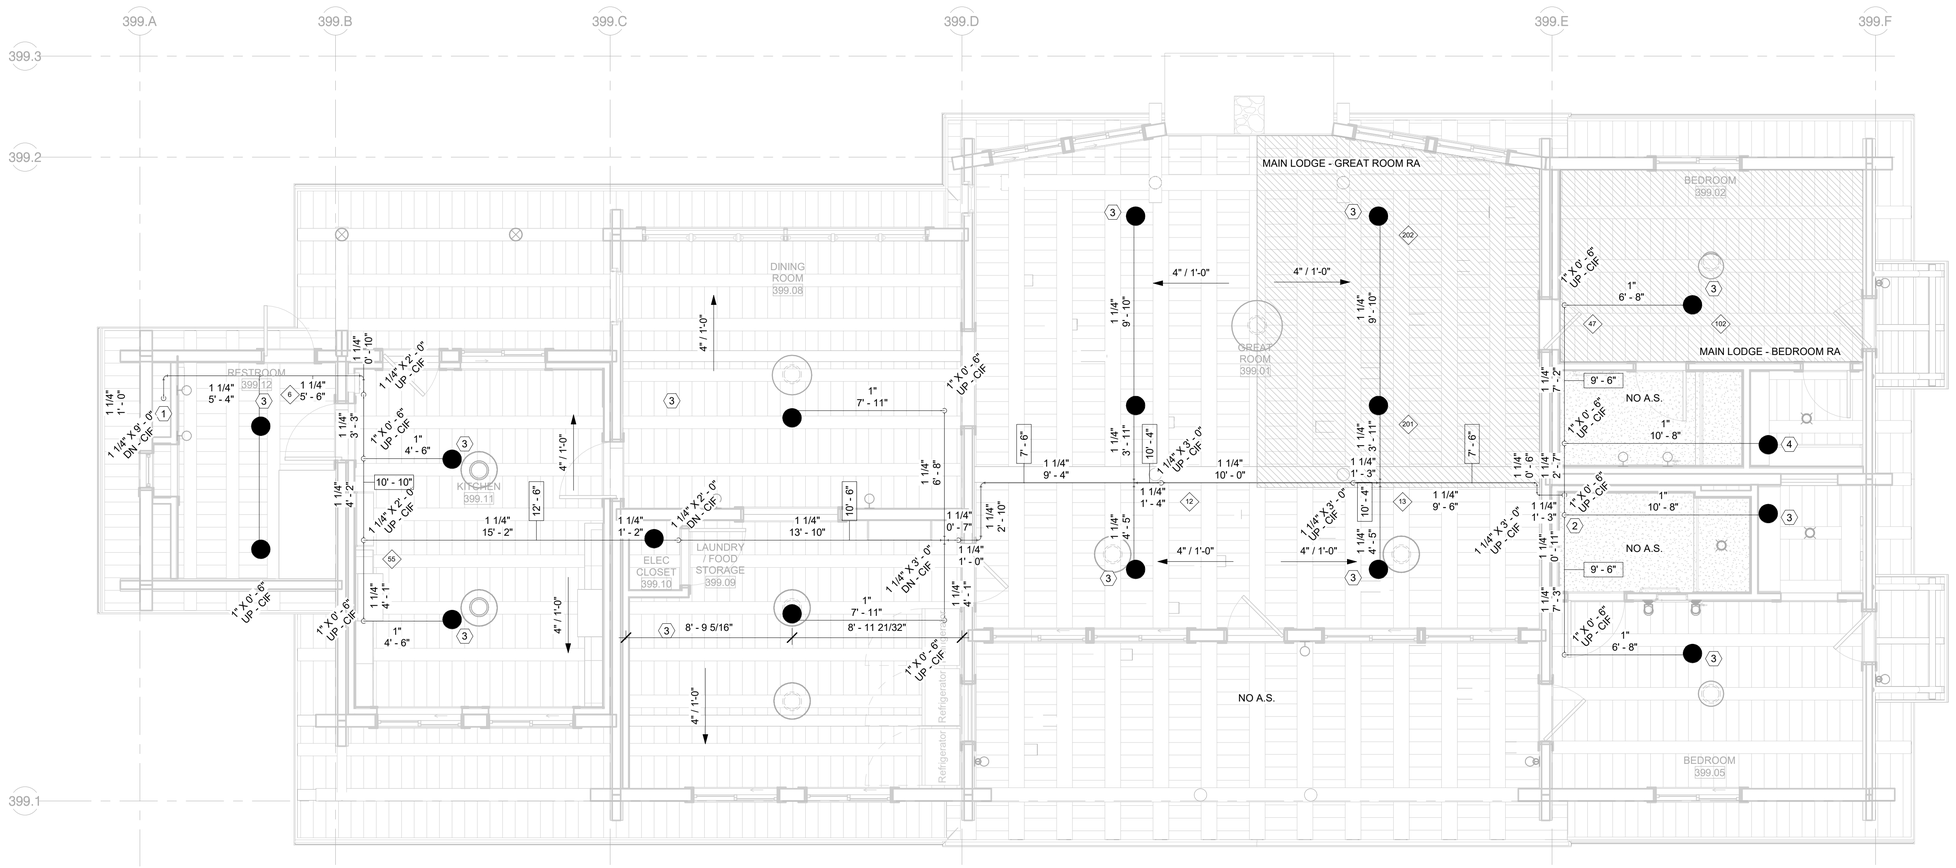

2 MAIN LODGE (HS–399) – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

Hydraulic Information	
Remote Area Name	Main Lodge - Bedroom RA
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	162 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.9
Base of Riser	22.02 GPM
Base of Riser	41.72 psi
Safety Margin	+30.87 (42.33%)

Hydraulic Information	
Remote Area Name	Main Level - Great Room
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	268 SF
Total Hose Streams	0.00 GPM
Flowing Heads	2
K-Factor	4.9
Base of Riser	38.15 GPM
Base of Riser	48.36 psi
Safety Margin	+23.49 (32.27%)

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. RISE UP FROM CRAWLSPACE IN THIS LOCATION.
2. PROVIDE LOW POINT DRAIN IN THIS LOCATION. COORDINATE ACCESS PANEL WITH ARCHITECT WITH FINAL LOCATION.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	17

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED

17

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TERRY J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
399
F101

TITLE OF SHEET
MAIN LODGE – MAIN LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 146 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING SOUTHWEST TOWARDS 400 RIVER CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

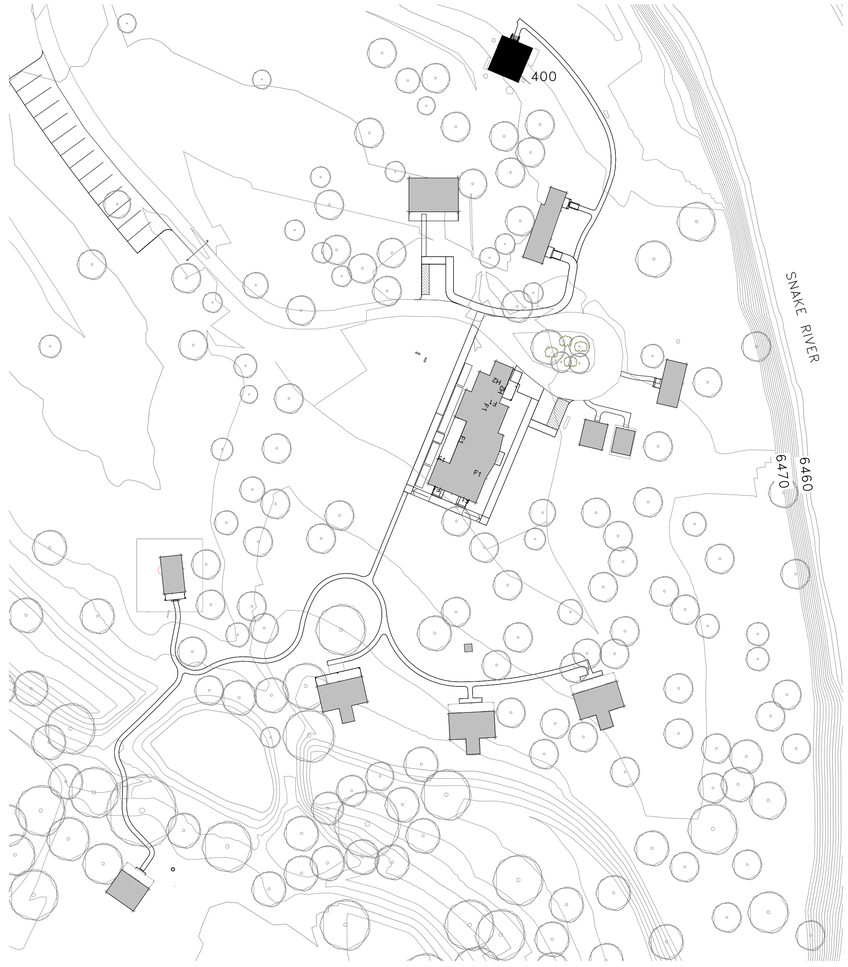

1 KEY PLAN – 400 RIVER CABIN

1" = 50'-0"

50 0 50 100
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. IVES
C-3538
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
G000

TITLE OF SHEET
RIVER CABIN – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 147 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

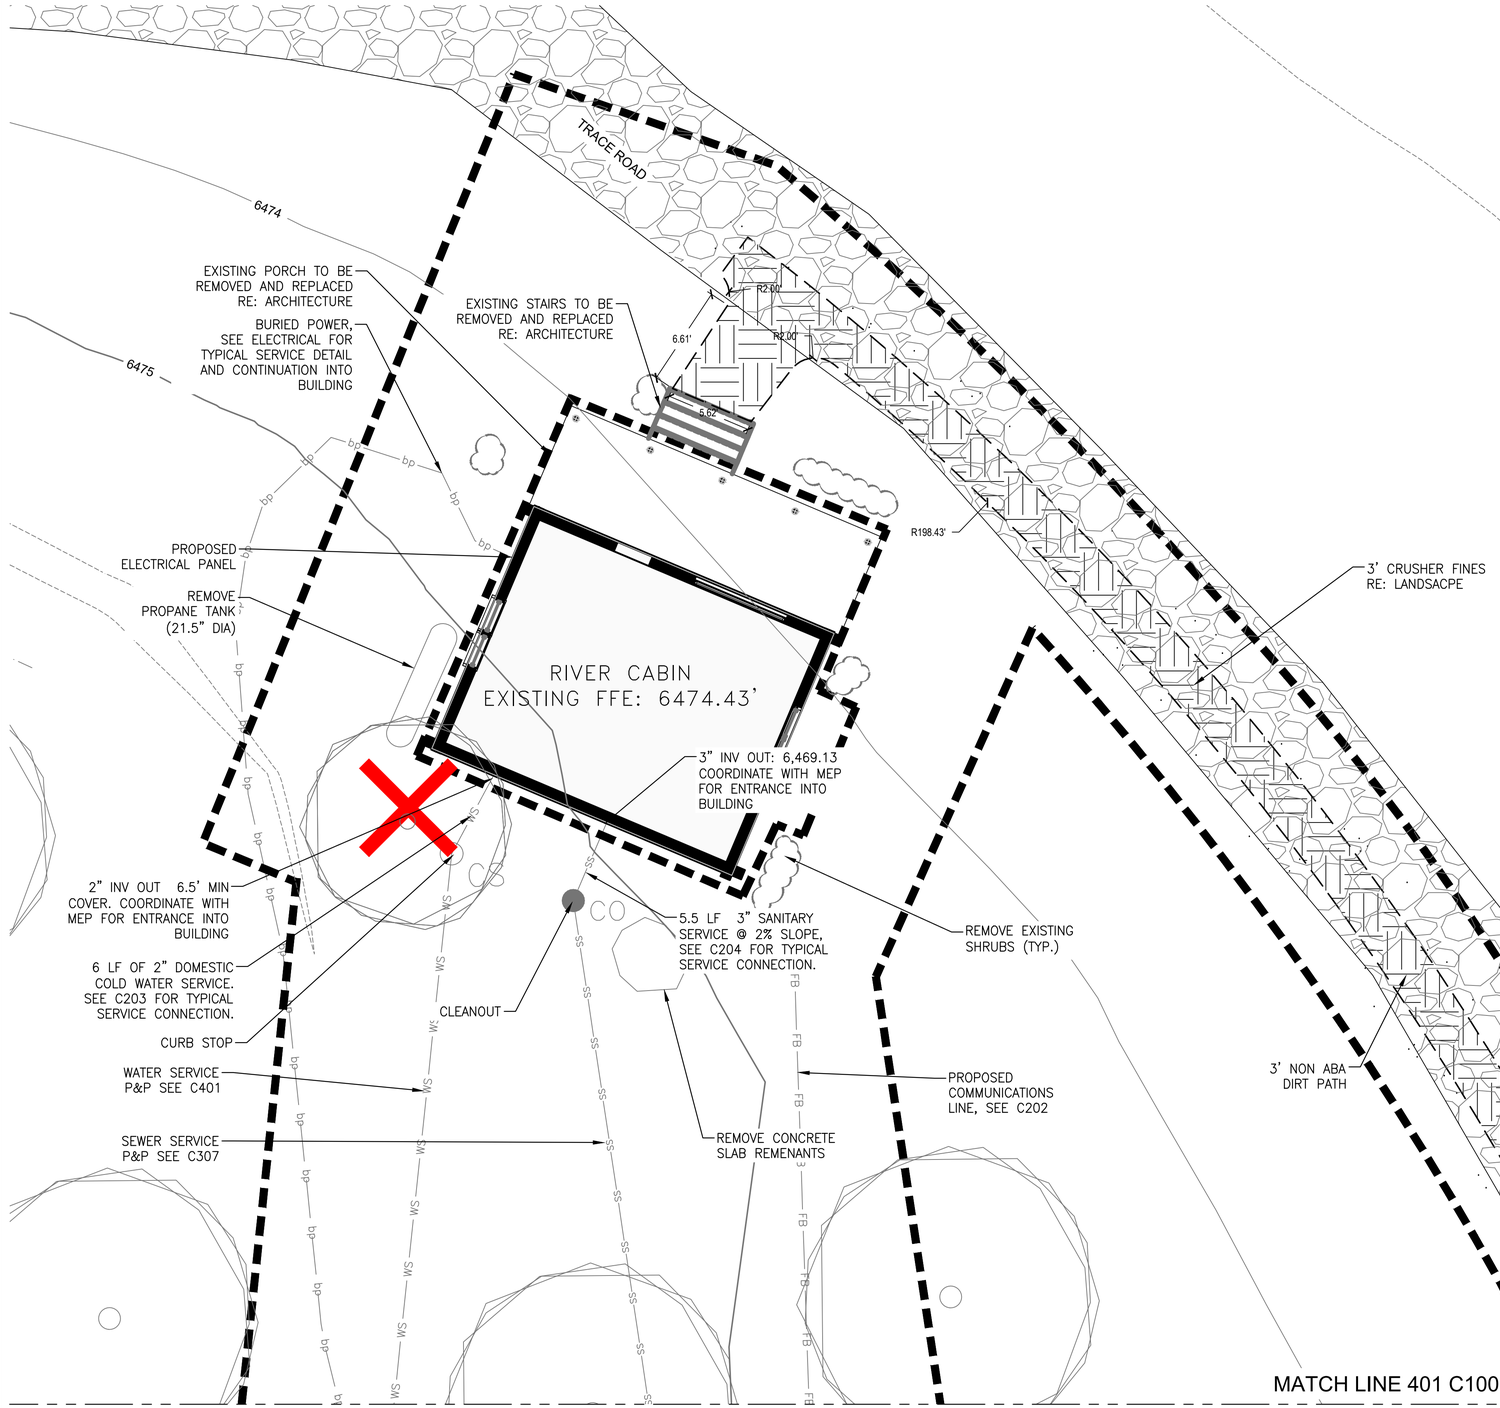

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE MARIE SAUCIER 22125 WYOMING Date: 07/21/2026

A/E FIRM	DESIGNED: MMI
PRIME: HENNEBERY EDDY PORTLAND, OR	DRAWN: CMS
SUB: MORRISON MAIERLE BOZEMAN, MT	TECH REVIEW: CMS
	DATE: 07/21/2026

SUB SHEET NO. 400 C100

TITLE OF SHEET
RIVER CABIN – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 148 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

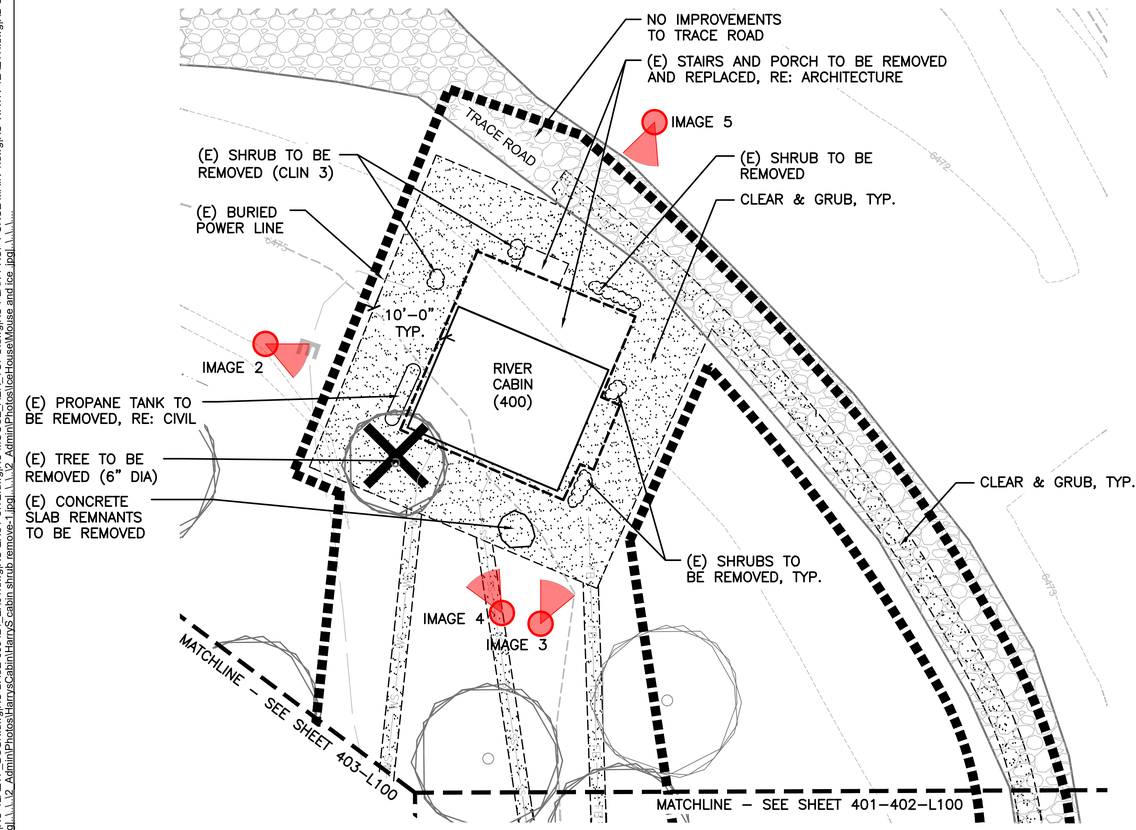

(E) CONCRETE SLAB REMNANTS TO BE REMOVED

IMAGE 1: (E) CONCRETE SLAB REMNANTS TO BE REMOVED.

IMAGE 2: (E) PROPANE TANK (21.5" DIA) TO BE REMOVED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION

IMAGE 3: (E) SHRUBS TO BE REMOVED.

TREE TO BE REMOVED

IMAGE 4: (E) TREE TO BE REMOVED.

IMAGE 5: (E) SHRUBS TO BE REMOVED.

KEY MAP

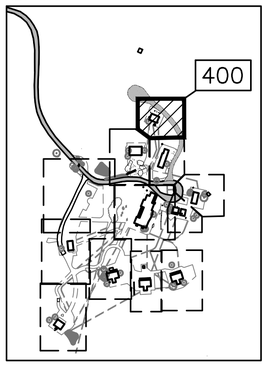

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C STATE OF WYOMING Date: 07/21/26

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 400 L100	TITLE OF SHEET RIVER CABIN – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 149 OF 371

File Path
T:\Projects\193826_GRTE_4LazyF_Cabins\Design\CAD\Sheets\XC-SHEETS.dwg
XREFs: 0184SSDS_0308_APS_GRTE4LazyF_ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_TitleBlock 22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_DEMO.DWG
IMAGES: ..\..\2_Admin\Photos\Garages\Debri-1.jpg|Debri-2.jpg|Debri-3.jpg|Debri-4.jpg|Debri.jpg|..\..\2_Admin\Photos\Gate\Gate-1.jpg|Gate.jpg|..\..\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg|..\..\2_Admin\Photos\IceHouse\Mouse and Ice .jpg|..\..\...

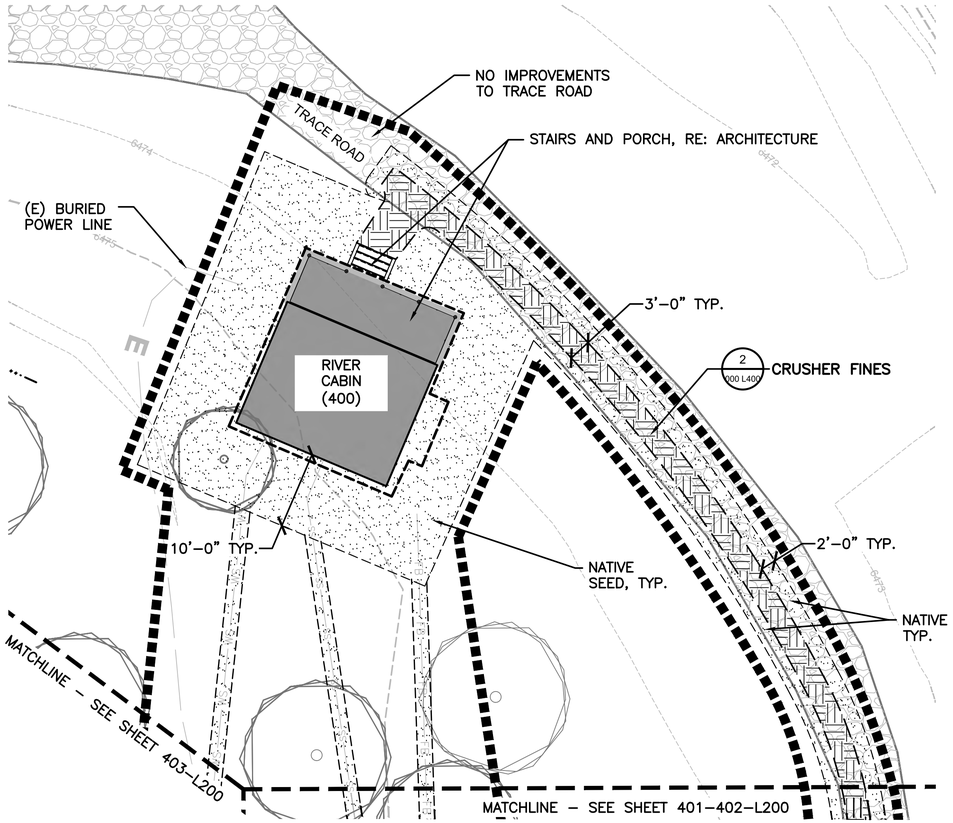

IMAGE 1: CRUSHER FINES TRAIL

IMAGE 2: CRUSHER FINES TRAIL

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION

KEY MAP

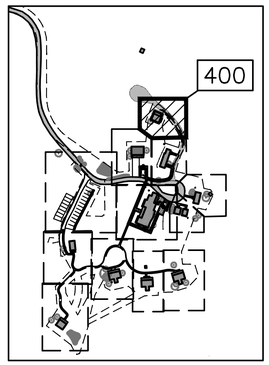

10 0 10 20
SCALE OF FEET

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 03.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 400 L200	TITLE OF SHEET RIVER CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 150 OF 371

File Path
Z:\Projects\SKERSTIENS_R25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\ALI-1.0_GRTE-L4_LAYOUT.DWG
XREFS: 08434_SESS26_0808_NPS GRTE 4 LAZY F ARCH-PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE 4 LAZY F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXIST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.DWG
IMAGES: ...\\...\2_Admin\Photos\Main Lodge\IMG_3706.JPG|...\\...\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|...\\...\2_Admin\Photos\ParkingLot\Parking lot-5.jpg|...\\...\2_Admin\Photos\ParkingLot\Parking lot-4.jpg|...\\...\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...

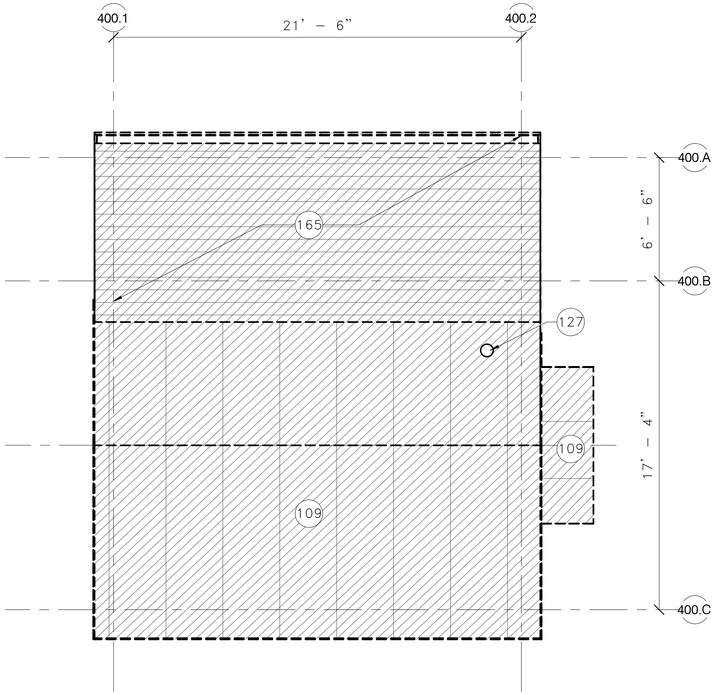

2 400 RIVER CABIN – ROOF LEVEL DEMO PLAN

1/4" = 1'–0"

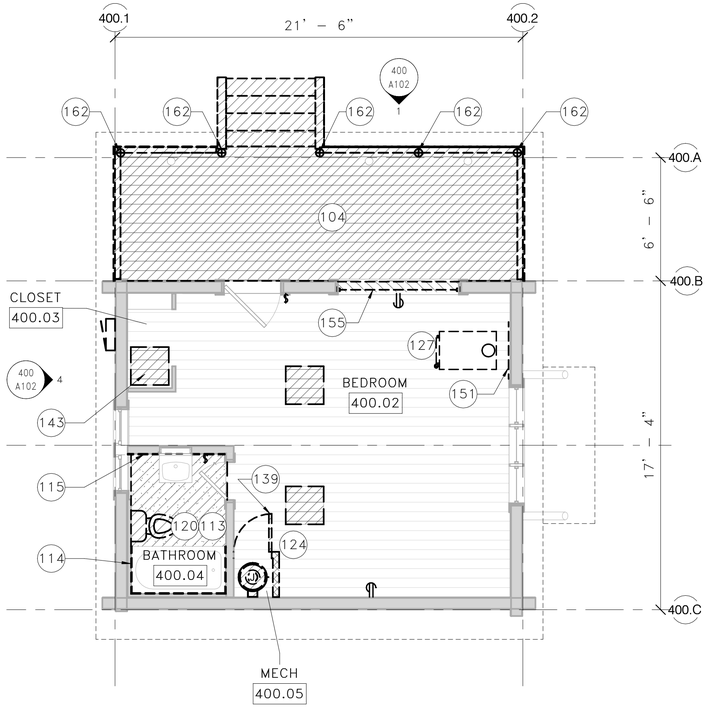

1 400 RIVER CABIN – FIRST LEVEL DEMO PLAN

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
113 REMOVE (E) FLOOR ASSEMBLY AND ALL ACCESSORIES. SALVAGE FOR REUSE (E) UNDAMAGED WOOD FLOORING
114 REMOVE (E) TILE AND ALL ACCESSORIES
115 REMOVE (E) GREEN PLASTIC TILE AND ALL ACCESSORIES. (E) WHITE TILE TO REMAIN
120 REMOVE (E) TOILET FIXTURE, SEE PLUMBING DRAWINGS
124 SALVAGE FOR REINSTALLATION OF (E) WOOD PANELING AND REMOVE (E) WATER HEATER ENCLOSURE
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
139 SALVAGE (E) DOOR FOR REINSTALLATION. CASING & FRAME TO REMAIN UNO.
143 REMOVE PORTION OF FLOOR TO ACCOMMODATE CRAWLSPACE ACCESS HATCH
151 REMOVE WALL PROTECTION PANEL AT WOOD BURNING STOVE LOCATION. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
155 REMOVE (E) WINDOW. (E) FRAME, SILL, AND CASING TO REMAIN FOR REUSE WITH NEW WINDOW.
162 SALVAGE FOR REINSTALLATION (E) WOOD COLUMN, SEE STRUCTURAL DRAWINGS
165 REMOVE (E) PORCH STRUCTURE ENTIRELY. SALVAGE FOR REUSE (E) COLUMNS AND ROOF PLANK SHEATHING.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KYES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A101

TITLE OF SHEET
RIVER CABIN – DEMO FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 151 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

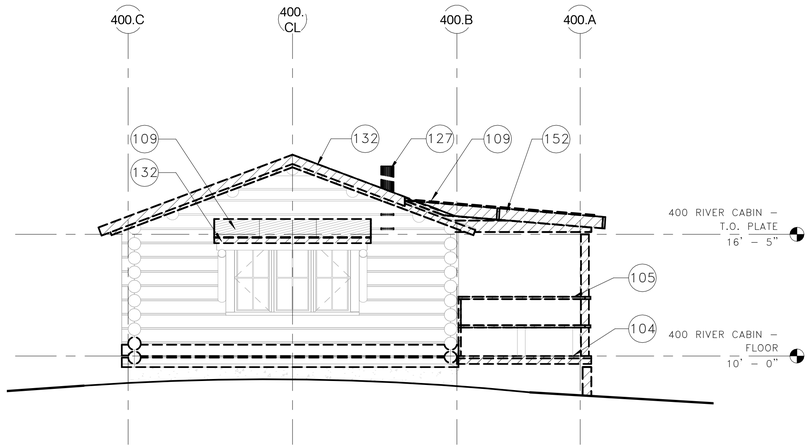

2 400 RIVER CABIN – EAST DEMO ELEVATION

1/4" = 1'–0"

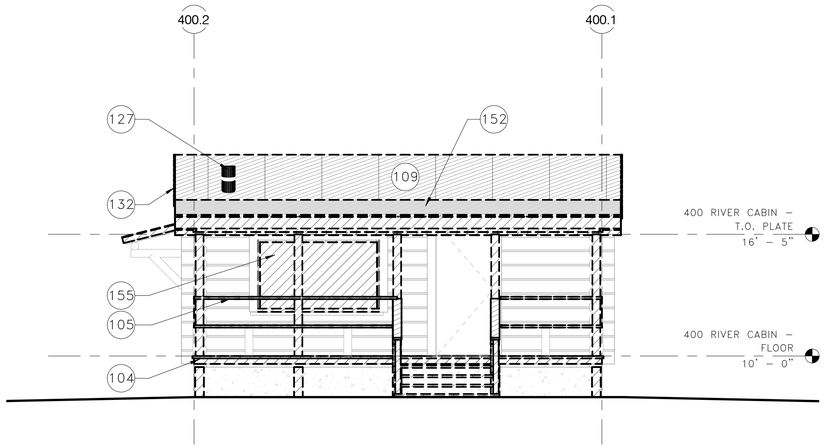

1 400 RIVER CABIN – NORTH DEMO ELEVATION

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

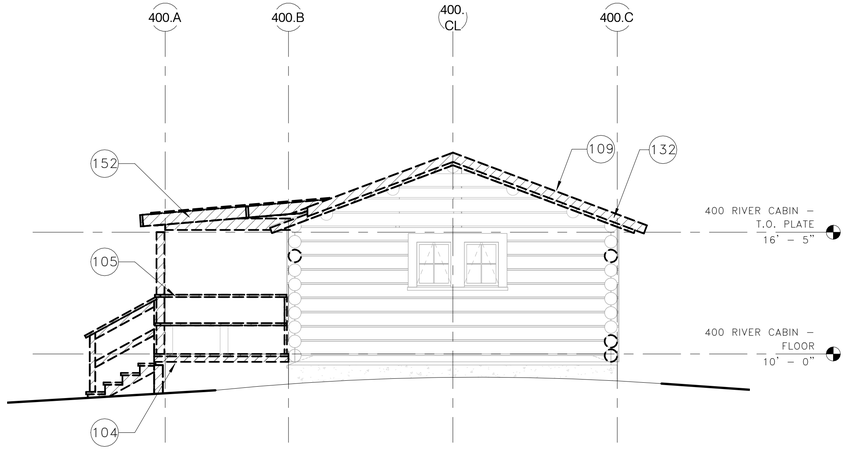

4 400 RIVER CABIN – WEST DEMO ELEVATION

1/4" = 1'–0"

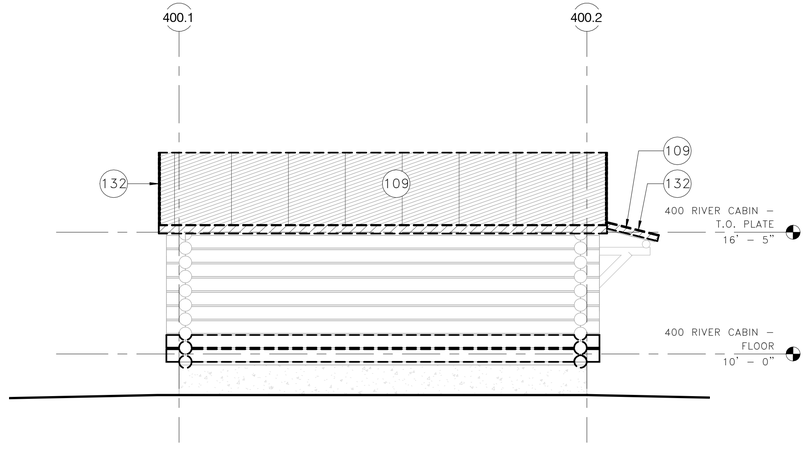

3 400 RIVER CABIN – SOUTH DEMO ELEVATION

1/4" = 1'–0"

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
105 REMOVE ALL 2X COMPONENTS OF WOOD PORCH RAILING, SALVAGE LOG RAILING POSTS FOR REINSTALLATION
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
132 REMOVE (E) FASCIA
152 REMOVE (E) PORCH STRUCTURE ENTIRELY.
155 REMOVE (E) WINDOW. (E) FRAME, SILL, AND CASING TO REMAIN FOR REUSE WITH NEW WINDOW.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. REED
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A102

TITLE OF SHEET
RIVER CABIN – DEMO ELEVATIONS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 152 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

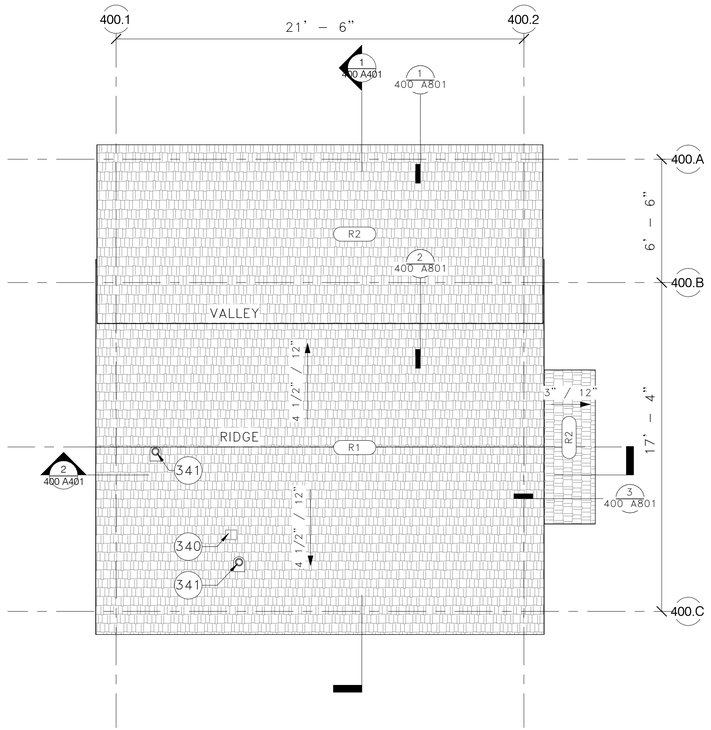

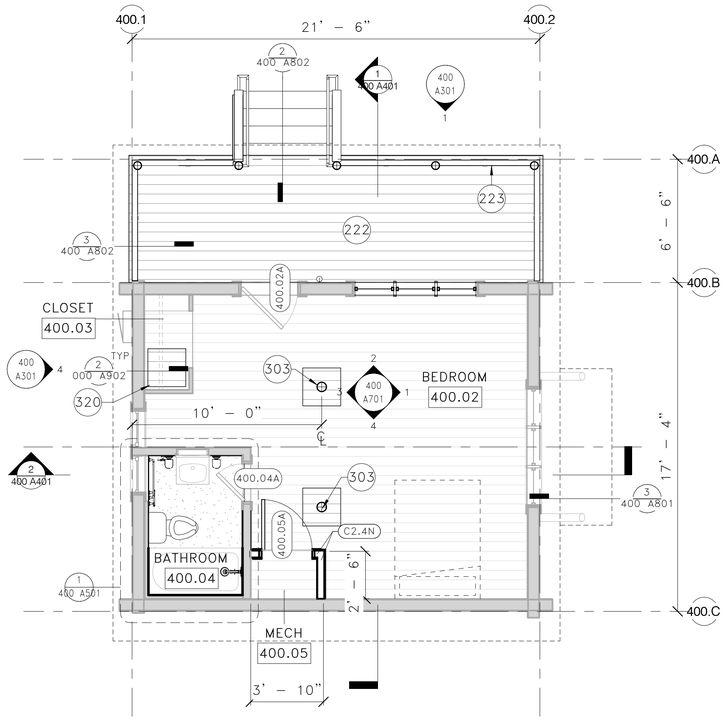

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)

223 PROVIDE WOOD RAILING TO MATCH (E) WITH SALVAGED WOOD POSTS

303 PROVIDE LOG COLUMN AND BEAM ASSEMBLY PER STRUCTURAL

320 PROVIDE CRAWL SPACE ACCESS

340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS

341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

2 400 RIVER CABIN – ROOF LEVEL PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

ROOFING

(E) RIVER ROCK CHIMNEY

R# ROOF TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

1 400 RIVER CABIN – FIRST LEVEL PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

(E) WOOD FRAMED, CONCRETE, OR LOG WALL

WALL PER WALL TYPE

DOOR PER SCHEDULE

(E) OR (S) DOOR PER SCHEDULE

(E) WINDOW PER SCHEDULE

###.## DOOR TAG

EXT–XX WALL TAG

EDGE OF ROOF ABOVE

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

SCALE B 0" 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A201

TITLE OF SHEET
RIVER CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 153 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

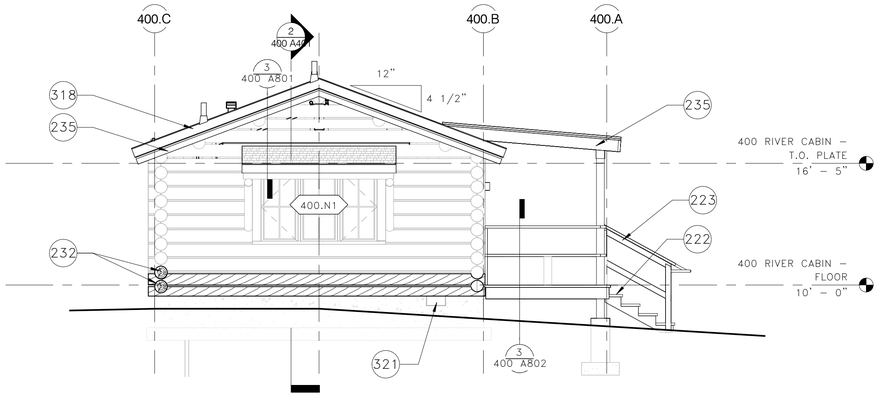

2 400 RIVER CABIN – EAST ELEVATION

1/4" = 1'–0"

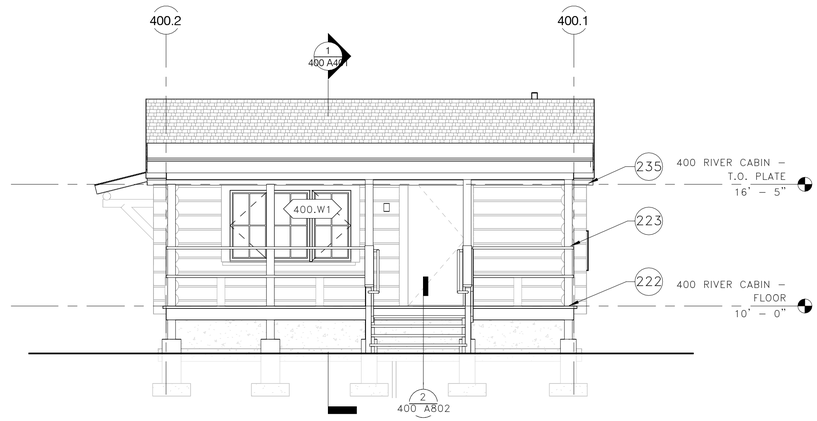

1 400 RIVER CABIN – NORTH ELEVATION

1/4" = 1'–0"

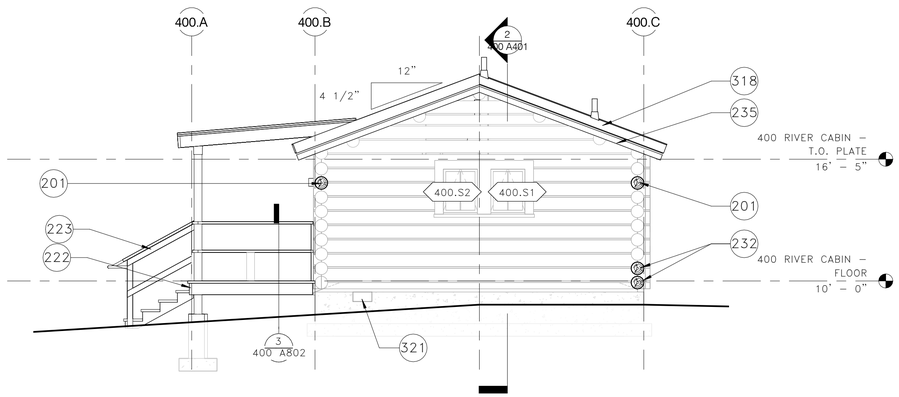

4 400 RIVER CABIN – WEST ELEVATION

1/4" = 1'–0"

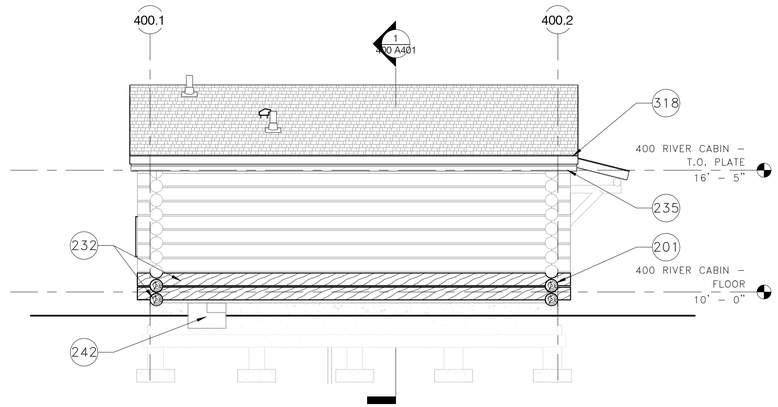

3 400 RIVER CABIN – SOUTH ELEVATION

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS. VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###.XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

201 LOG DUTCHMAN REPAIR
222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
223 PROVIDE WOOD RAILING TO MATCH (E) WITH SALVAGED WOOD POSTS
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
242 INFILL (E) CRAWLSPACE ACCESS W/ CONCRETE, MATCH ADJACENT FINISH, PROVIDE CRAWLSPACE VENT
318 PROVIDE SECONDARY WOOD FASCIA
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. CARTER C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL/SD/AG
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A301

TITLE OF SHEET
RIVER CABIN – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 154 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

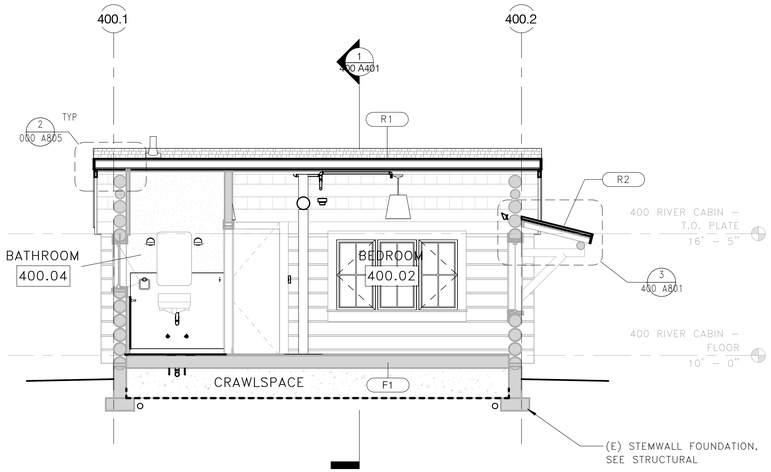

2 400 RIVER CABIN – BUILDING SECTION 'B'

1/4" = 1'–0"

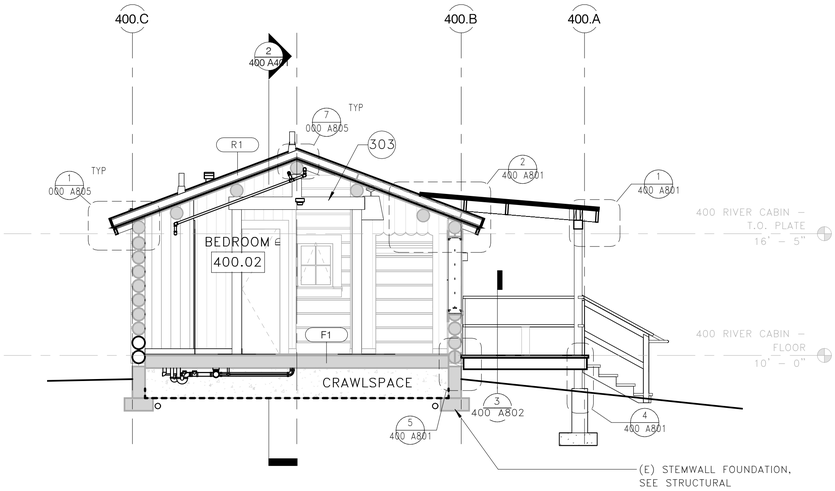

1 400 RIVER CABIN – BUILDING SECTION 'A'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- CRAWLSPACE VAPOR BARRIER
- CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS
- CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

303 PROVIDE LOG COLUMN AND BEAM ASSEMBLY PER STRUCTURAL

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KIES C-3535 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A401

TITLE OF SHEET
RIVER CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 155 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

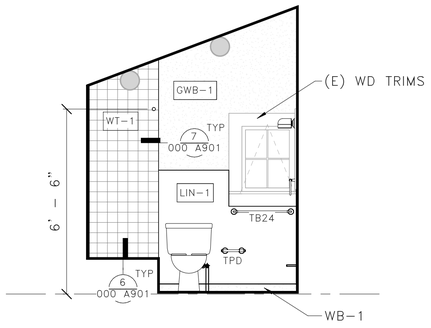

3 BATHROOM 400.04 – WEST

3/8" = 1'-0"

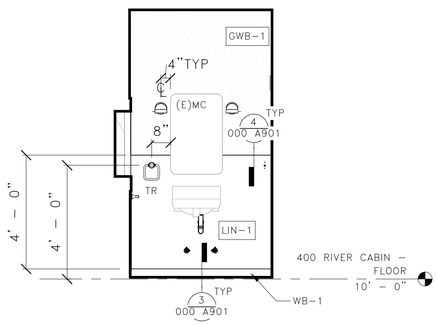

2 BATHROOM 400.04 – NORTH

3/8" = 1'-0"

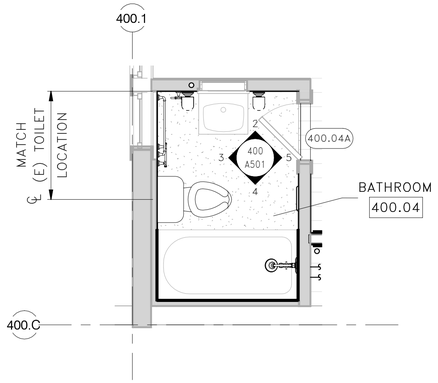

1 400 RIVER CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'-0"

5 BATHROOM 400.04 – EAST

3/8" = 1'-0"



4 BATHROOM 400.04 – SOUTH

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- (EXT-XX) WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

SCALE © 2" 0" 2'-8" 5'-4"
SCALE OF FEET
NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYRES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A501

TITLE OF SHEET
RIVER CABIN – ENLARGED BATHROOM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 156 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

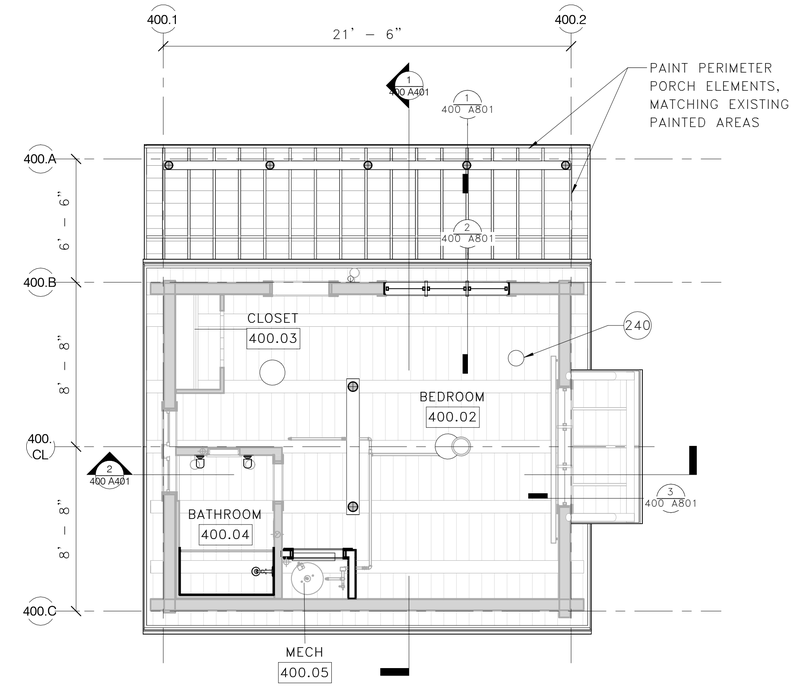

1 400 RIVER CABIN – FIRST LEVEL RCP

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KISS C-3538 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A601

TITLE OF SHEET
RIVER CABIN – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 157 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

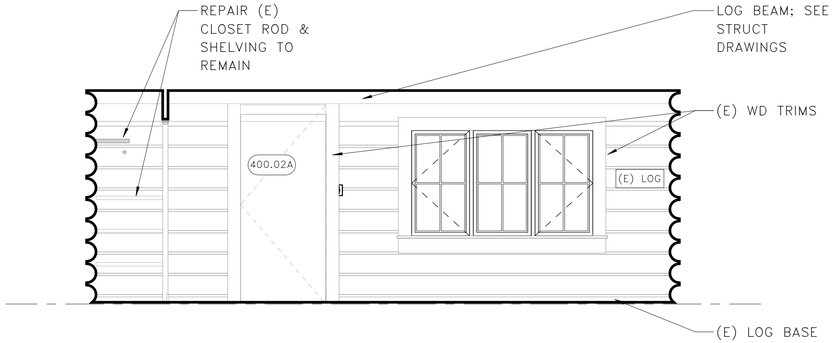

2 BEDROOM 400.02 – NORTH

3/8" = 1'–0"

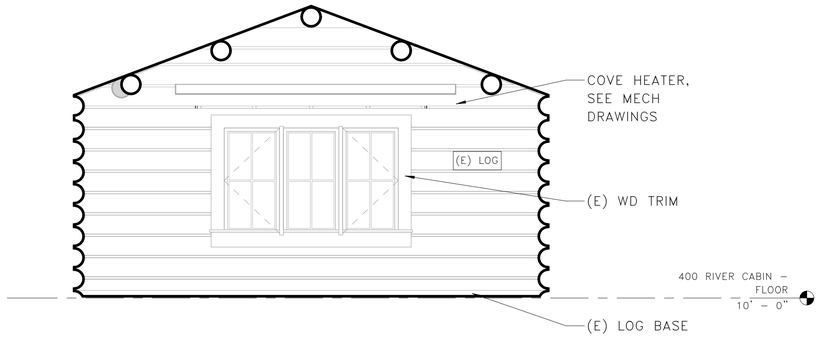

1 BEDROOM 400.02 – EAST

3/8" = 1'–0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

4 BEDROOM 400.02 – SOUTH

3/8" = 1'–0"

3 BEDROOM 400.02 – WEST

3/8" = 1'–0"

SCALE Ⓒ 2' 8" 0 2' 8" 5' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A701

TITLE OF SHEET
RIVER CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 158 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

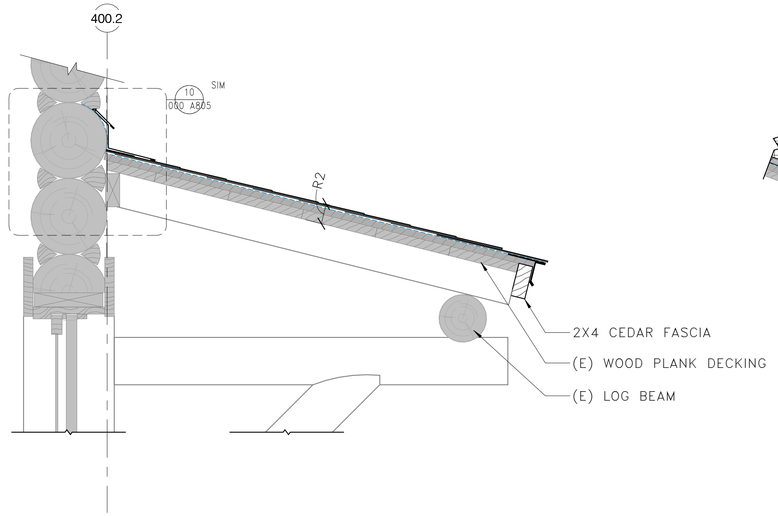

3 400 RIVER CABIN – AWNING DETAIL

1 1/2" = 1'–0"

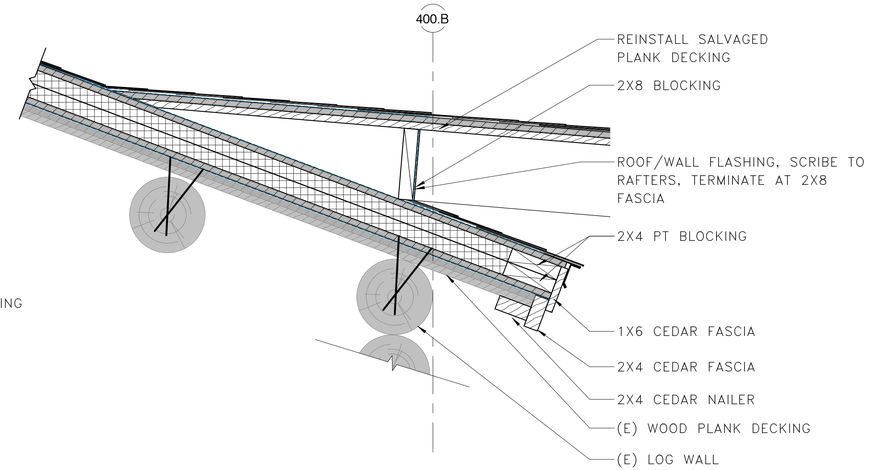

2 400 RIVER CABIN – PORCH ROOF DETAIL

1 1/2" = 1'–0"

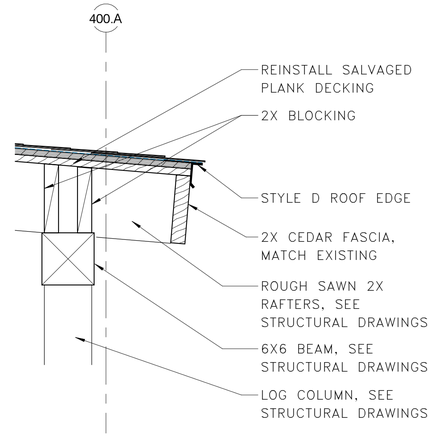

1 400 RIVER CABIN – PORCH EAVE DETAIL

1 1/2" = 1'–0"

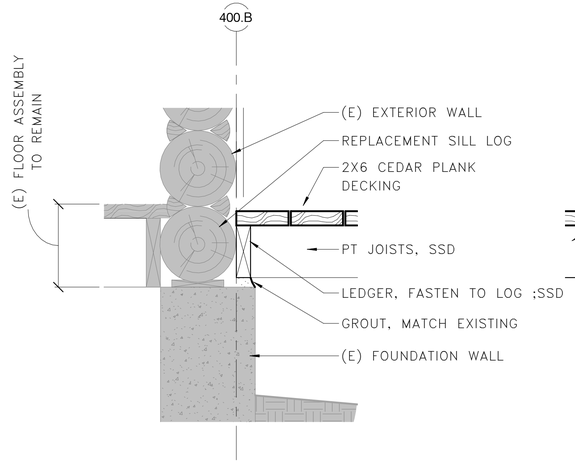

5 400 RIVER CABIN – PORCH LEDGER

1 1/2" = 1'–0"

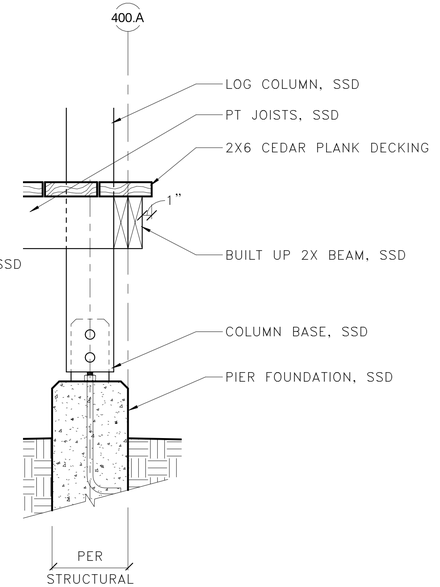

4 400 RIVER CABIN – PORCH DETAIL

1 1/2" = 1'–0"

SCALE (E) 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3535 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A801

TITLE OF SHEET
RIVER CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 159 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

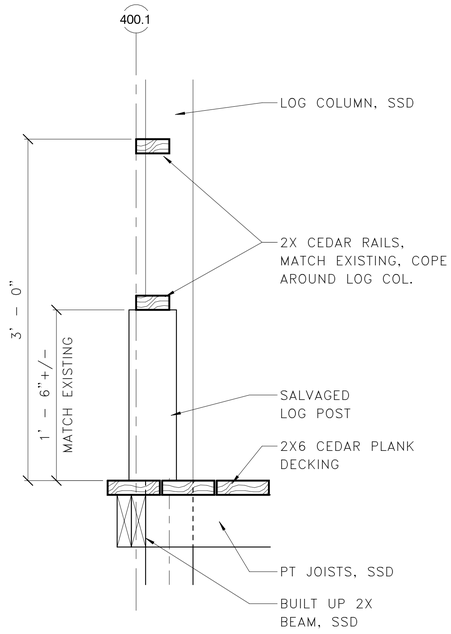

3 400 RIVER CABIN – RAILING DETAIL

1 1/2" = 1'-0"

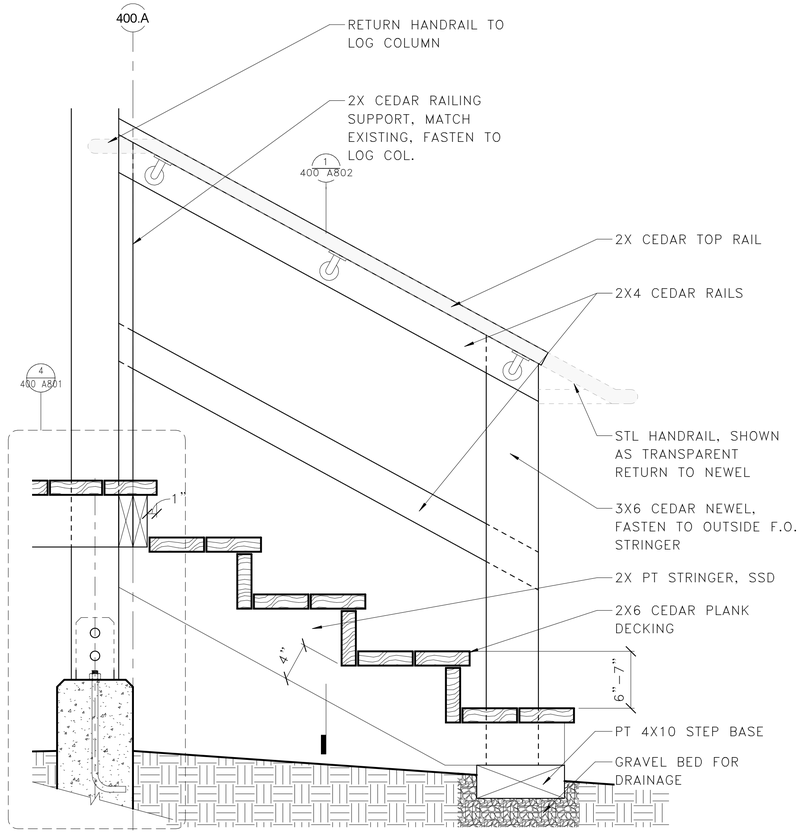

2 400 RIVER CABIN – PORCH STAIR

1 1/2" = 1'-0"

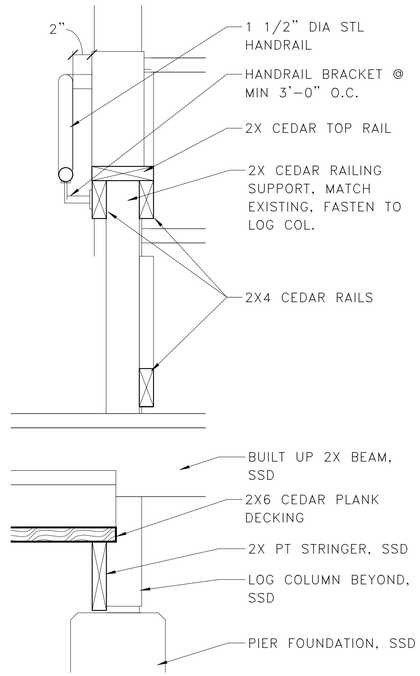

1 400 RIVER CABIN – STAIR RAILING

1 1/2" = 1'-0"

SCALE (E) 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYER C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO.

400

A802

TITLE OF SHEET

RIVER CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 160 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

400 RIVER CABIN – WINDOW SCHEDULE							
WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	KEYNOTES
400.N1		3' – 10"	2' – 1"				M.
400.S1		2' – 6"	2' – 0"				M.
400.S2		2' – 6"	2' – 0"				M.
400.W1		3' – 10"	2' – 2"				I. M.

4010 RIVER CABIN – DOOR SCHEDULE											
DOOR NO.	DOOR					FRAME					
	TYPE	SIZE		MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HARDWARE SET	SCREEN DOOR TYPE	KEYNOTES
		WIDTH	HEIGHT								
400.02A	(E) DR–4	3' – 0"	7' – 0"			(E)				(E) SDR–1	
400.04A	(E) DR–4	2' – 0"	7' – 0"			(E)					
400.05A	DR–4	2' – 8"	6' – 8"			DRF–1					

400 RIVER CABIN – ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		KEYNOTES
				BASE		WALL				
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	
400.02	BEDROOM	(E)WD–1		(E)LB–1/(E)WB–1/WB–1		(E)LOG/(E)WP–1/WP–1		EXP		
400.03	CLOSET	(E)WD–1		(E)LB–1/(E)WB–1		(E)LOG/(E)WP–1		EXP		
400.04	BATHROOM	LIN–1	N/A	WB–1		(E)GWB–1/LIN–1/WT–1		EXP		
400.05	MECH	LIN–1	N/A	(E)LB–1/WB–1		(E)LOG/GWB–1		EXP		

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A905

TITLE OF SHEET
RIVER CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 161 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

NORTH ELEVATION, LOOKING SOUTHEAST

MAIN ROOF TO PORCH ROOF TRANSITION

TYPICAL LOG DETERIORATION

TYPICAL LOG DETERIORATION

CONCRETE STEM WALL

FRONT PORCH, LOOKING SOUTHEAST

BEDROOM 400.02, LOOKING NORTH

BEDROOM 400.02, LOOKING SOUTH

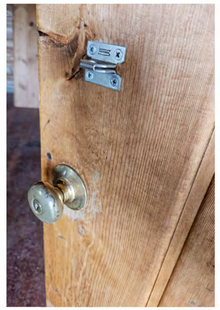

DOOR 400.02A

SCREEN DOOR AT DOOR 400.02A

CLOSET 400.03

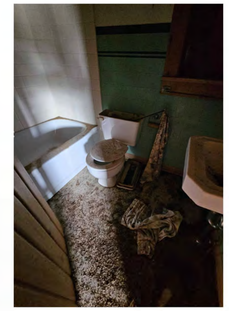

PHOTO CAPTION

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
400
A920

TITLE OF SHEET
RIVER CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 162 OF 371

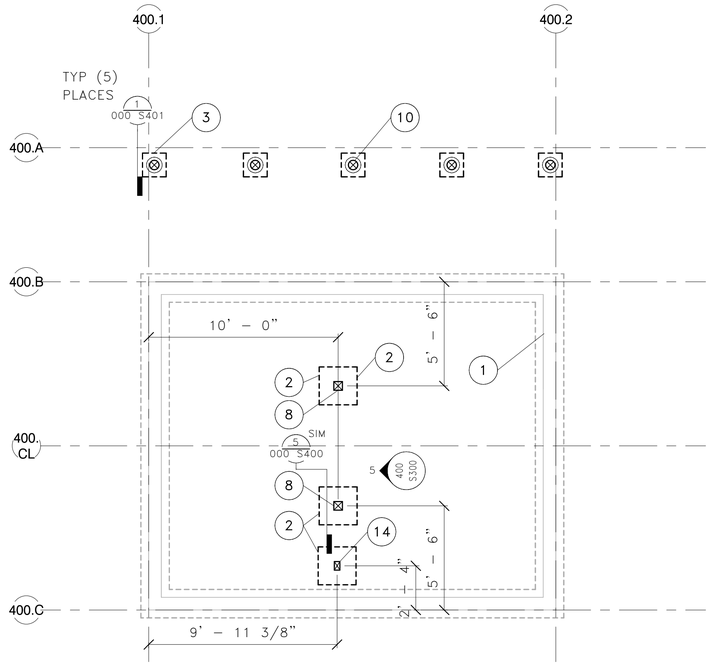

1 RIVER CABIN – FOUNDATION PLAN

1/4" = 1'–0"

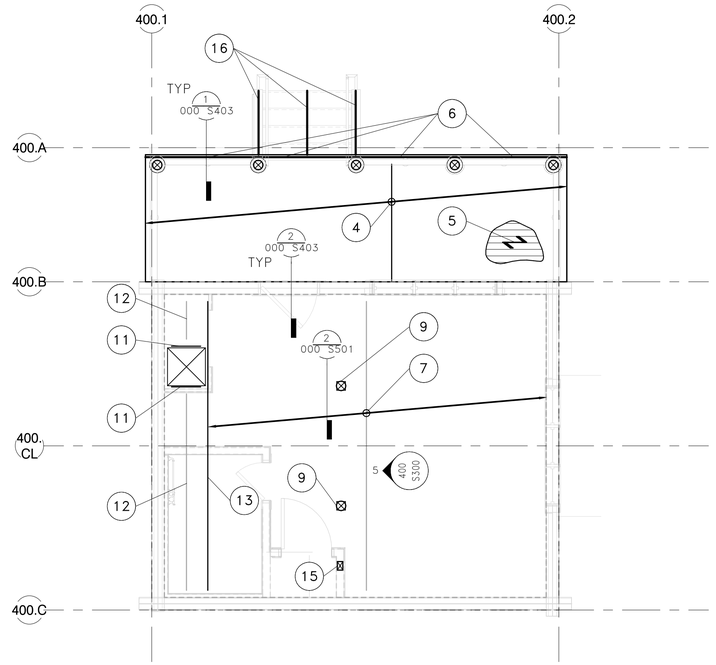

2 RIVER CABIN – FLOOR FRAMING PLAN

1/4" = 1'–0"

KEYNOTES:

1. (E) CONCRETE FOUNDATION WALL W/ SHALLOW CONCRETE FOOTING TO REMAIN
2. 2'–0"SQx10"DP CONCRETE FOOTING W/ (3) #4B EA WAY; B/FTG = 10" BELOW GRADE IN CRAWLSPACE; LOCATED TO ALIGN W/ LOG POST ABOVE
3. 10"Ø CONCRETE PIER W/ (4) #5 VERT. #3 TIES @ 10"OC & (3) #3 TIES AT TOP. T/PIER = 6" MIN ABOVE GRADE; 1'–3"SQx10"DP CONCRETE SPREAD FOOTING BELOW W/ (2) #4 BARS EA WAY; TYPICAL 5 PLACES
4. REPLACE (E) DECK & PORCH W/ 2x8 JOISTS @ 16"OC
5. 2x6 PLANKING ATOP PORCH FLOOR FRAMING
6. (2) 2x8 FLUSH BEAM TO T/DECKING PER ARCH
7. (E) FLOOR FRAMING TO REMAIN, MIN 2x12 @ 16"OC OR EQUIVALENT (V)
8. PT 6x6 POST IN CRAWLSPACE
9. 6"Ø LOG POST ABOVE
10. 6"Ø MIN LOG POST ABOVE, TYPICAL 5 PLACES, MATCH (E) POST SIZE WHERE POSSIBLE
11. (2)2x(E) JOIST DEPTH W/ LUS28–2 EA END
12. (E) FLOOR FRAMING CUT FOR HATCH ACCESS & RECONNECTED TO ACCESS BEAM W/ LUS28. CONTRACTOR TO SHORE AS REQUIRED.
13. (2)2x12 OR EQUIVALENT
14. 4x6 POST IN CRAWLSPACE
15. 4x6 POST ABOVE
16. PT 2x12 STRINGER W/ LRU212Z HGR

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
4. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/ FINISHED FLOOR ASSUMED TO BE 10'–0", VERIFY WITH ARCHITECTURAL DRAWINGS.
4. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 Date: 07/21/2026 WYOMING
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
400
S201

TITLE OF SHEET
RIVER CABIN – FDN & FLOOR FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 163 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

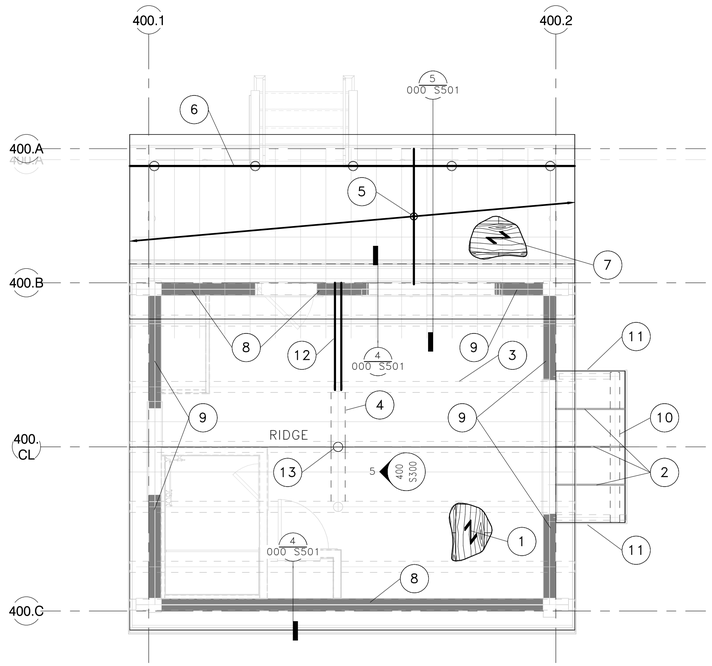

1 RIVER CABIN – ROOF FRAMING PLAN

1/4" = 1'-0"

KEYNOTES:

1. 1/2" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
2. (E) 2x4 @ 24"OC CANOPY RAFTER TO REMAIN, VERIFY IN FIELD
3. (E) 7"Ø LOG PURLIN, TYP. 5 PLACES; CONNECT TO ROOF SHEATHING TO ALL PURLINS PER 3/000 S500
4. LOG HEADER BEAM TO SUPPORT (E) ROOF PER 5/400 S300
5. 2x8 RAFTERS @ 16"OC MIN. TO REMAIN. VERIFY STRUCTURAL INTEGRITY IN FIELD
6. 6x6 OR (2)2x8 PORCH DROP BEAM
7. 5/8" ROOF SHEATHING & PLANK SHEATHING PER 7/000 S500 TO BE NAILED TO ROOF FRAMING PER 4/000 S503
8. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L1" PER 7/000 S501
9. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501
10. (E) 4"Ø CANOPY LOG BEAM TO BE REPLACED W/ 6"Ø CANOPY LOG BEAM
11. (E) 3 1/2"Ø CANOPY KNEE BRACES TO REMAIN, VERIFY IN FIELD
12. (2) W4x13 BEAMS OVER ROOF PLANKS & SHEATHING W/ HANGING SUPPORT PER (E) PURLIN BELOW
13. 6"Ø POST TO HEADER

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026 EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
400
S202

TITLE OF SHEET
RIVER CABIN – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 164 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

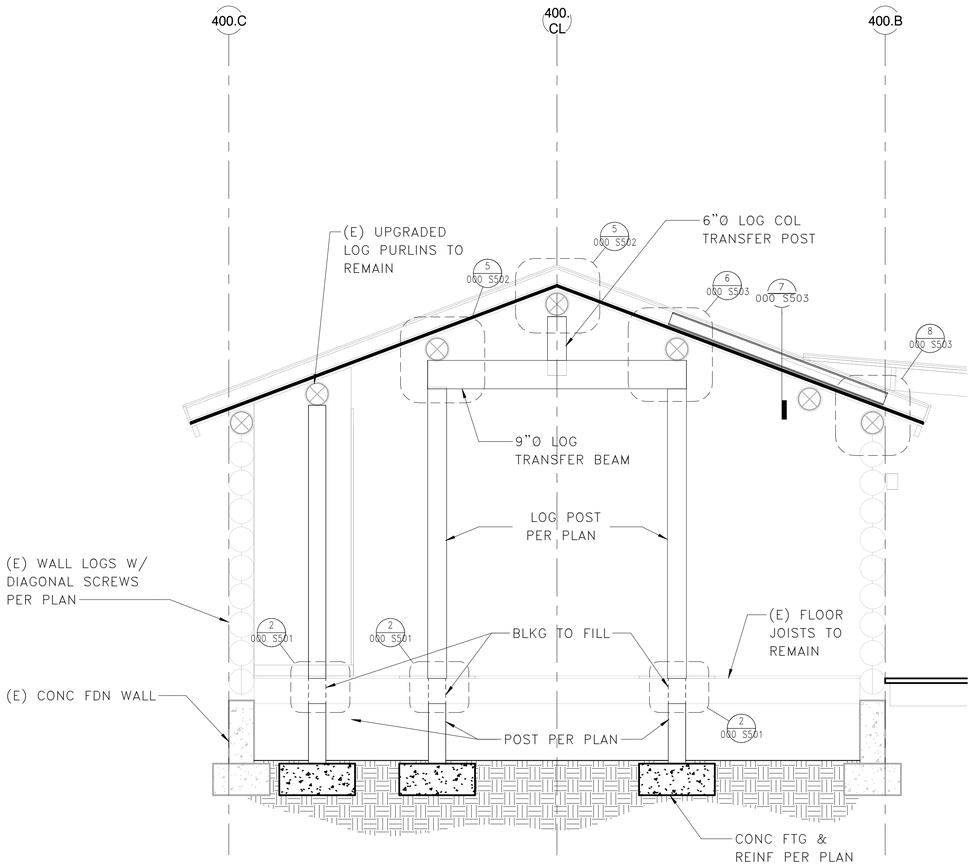

5 RIVER CABIN – INTERIOR FRAMING ELEVATION

1/2" = 1'-0"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026 EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
400
S300

TITLE OF SHEET
RIVER CABIN – ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 165 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-400)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-400-1	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-400-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-400-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-400-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-400)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
5. ROOF CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	MOUNTING HEIGHT (IN)	CONTROL
EF-400-1	PANASONIC	FV-0510VS1	100	0.25	1.3	DIRECT	WALL	72	1

ELECTRIC HEATER SCHEDULE (HS-400)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-400-1	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-400-2	Q MARK	RCC15024C	240 - 1	1500	88	WALL	4	118	4-3/16

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HEINES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
400
M001

TITLE OF SHEET
RIVER CABIN – MECHANICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
PMIS/PKG NO. 237343
SHEET 166 OF 371

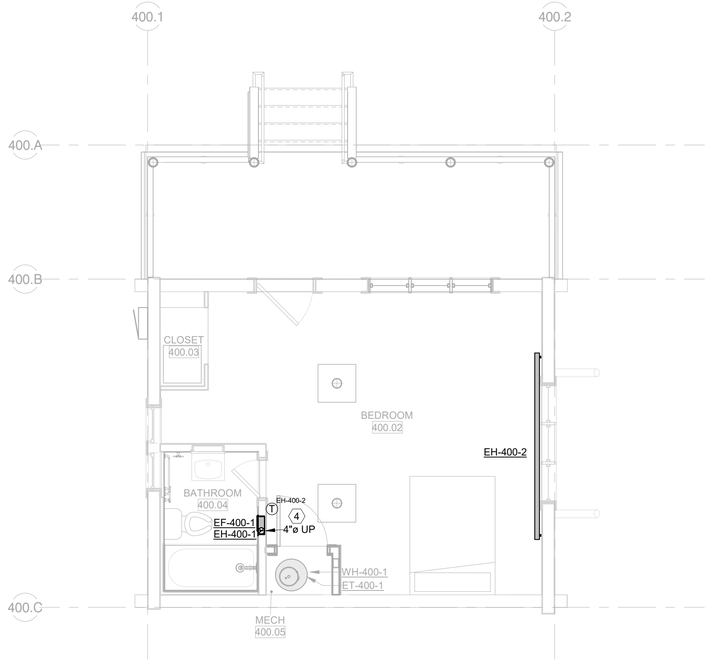

2 RIVER CABIN (HS–400) –MECHANICAL PLAN

1/4" = 1'–0"

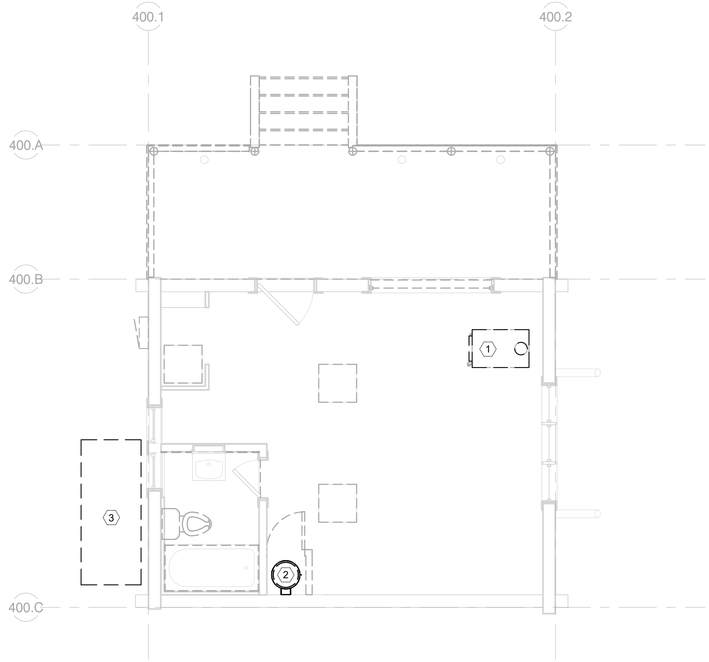

1 RIVER CABIN (HS–400) – MECHANICAL DEMOLITION PLAN

1/4" = 1'–0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

KEY NOTES:

1. REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
2. REMOVE EXISTING VENT AND PROPANE PIPING SERVING WATER HEATER.
3. REMOVE EXISTING PROPANE TANK AND ASSOCIATED PIPING.
4. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENEBERY
16596
WYOMING
07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
400
M101

TITLE OF SHEET
RIVER CABIN – MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 167 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2

Branch Panel: P400

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 399 RIVER CABIN
Supply From: NORTH SERVICE
Mounting: Surface
Enclosure: 3R
Volts: 120/240 Single
Phases: 1
Wires: 3
A.F.C.: 1,513
Mains Type: MCB
Mains Rating: 100 A
MCB Rating: 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	180			1	20 A	Receptacle		RCPT - EXTERIOR	2
3								--	180	1	20 A	Receptacle		RCPT - BATHROOM	4
5	EH-400-1		Heating	20 A	1	500	1440			1	20 A	Receptacle		RCPT - LIVING ROOM	6
7	EH-400-2		Heating	20 A	2			750	2250	2	30 A	Heating		WH-400-1	8
9						750	2250								10
11	LTG		Lighting; Power	20 A	1			397	180	1	20 A	Receptacle		RCPT - FIBER PANEL	12
13	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	14
15	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	16
17	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	18
					Total Load:	5120 VA		3757 VA							
					Total Amps:	43 A		31 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Heating	6500 VA	100.00%	6500 VA		
Lighting	247 VA	125.00%	309 VA	**Total Conn. Load:**	8877 VA
Power	150 VA	100.00%	150 VA	**Total Est. Demand:**	8939 VA
Receptacle	1980 VA	100.00%	1980 VA	**Total Conn.:**	37 A
				Total Est. Demand:	37 A

MEP COORDINATION SCHEDULE (HS-400)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-400-1	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-400-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	1	#12	3/4"
EH-400-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-400-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
400
E001

TITLE OF SHEET
RIVER CABIN – ELECTRICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 168 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

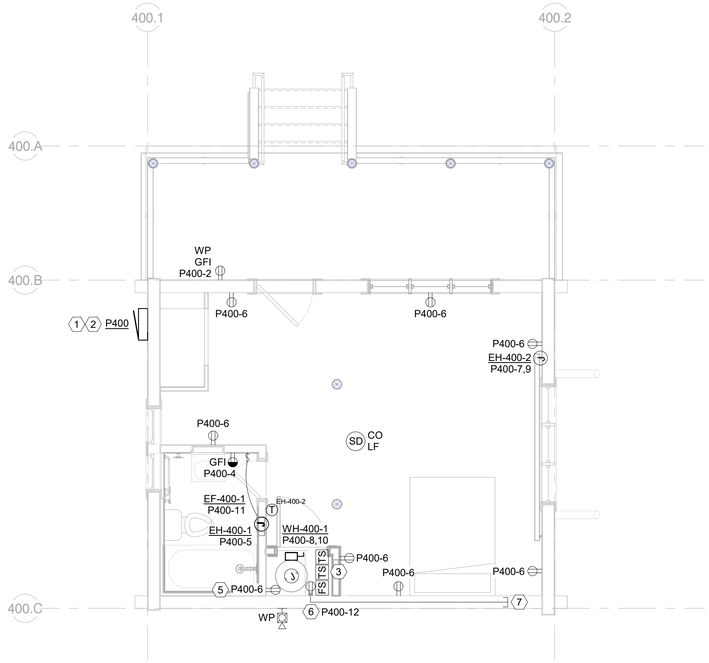

2 RIVER CABIN – POWER AND SIGNAL RENOVATION PLAN

1/4" = 1'-0"

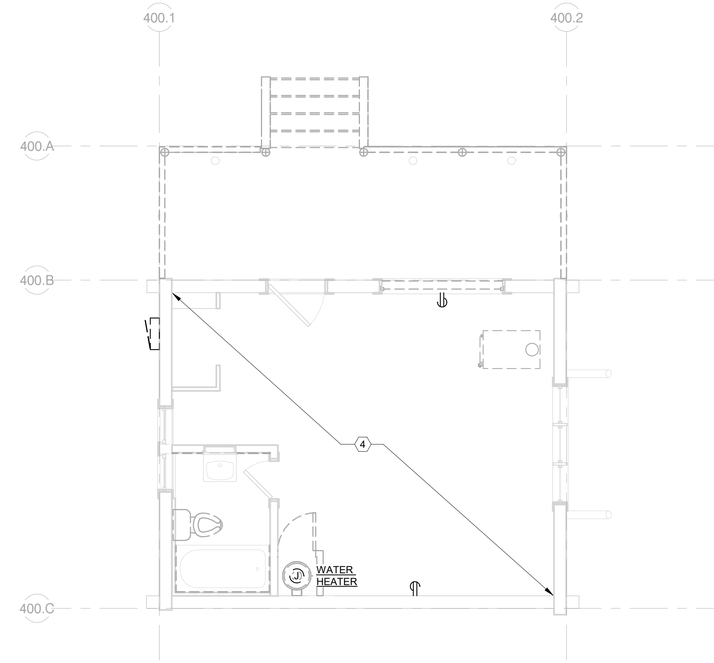

1 RIVER CABIN – POWER AND SIGNAL DEMO PLAN

1/4" = 1'-0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.
5. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
6. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
7. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
400
E101

TITLE OF SHEET
RIVER CABIN – POWER AND SIGNAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 169 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

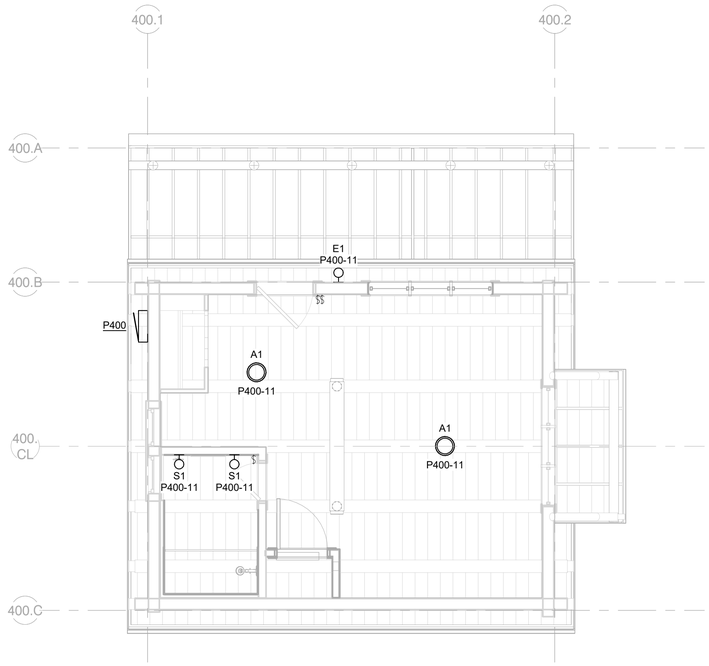

2 RIVER CABIN (HS-400) – LIGHTING RENOVATION PLAN

1/4" = 1'-0"

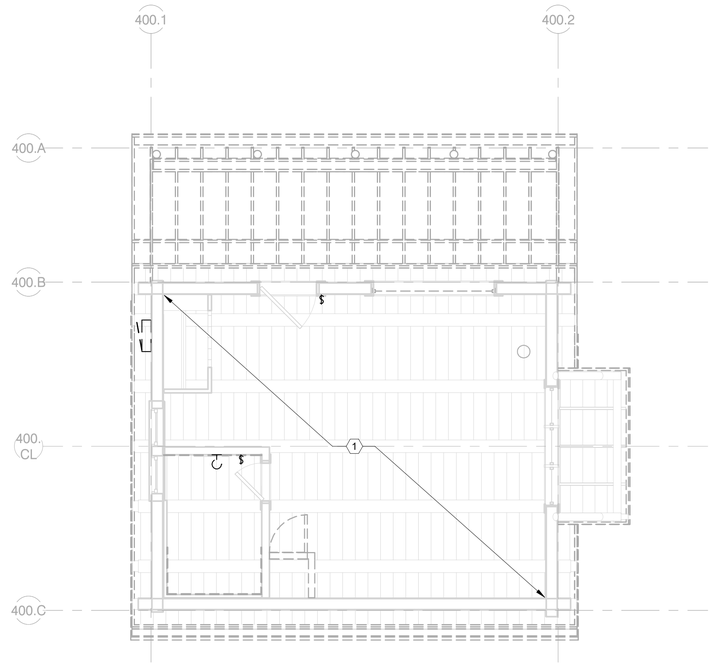

1 RIVER CABIN (HS-400) – LIGHTING DEMO PLAN

1/4" = 1'-0"

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
400
E201

TITLE OF SHEET
RIVER CABIN – LIGHTING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 170 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - RIVER CABIN (HS-400)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
BS-400-1	SALVAGED BATH TUB	- -	- -	- -	- -	- -	SHOWER / TUB TRIM	KOHLER	K-TS97074-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	RESTORE EXISTING BATH TUB. PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS, BATHTUB DRAIN ASSEMBLY AND REQUIRED ACCESSORIES FOR COMPLETE INSTALLATION
FD-400-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-400-1	SALVAGED LAVATORY	- -	- -	- -	- -	- -	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	RESTORE EXISTING LAVATORY. PROVIDE WITH WATER STOPS, OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
WC-400-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-400)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
6. FIVE YEAR LIMITED TANK WARRANTY
8. ZERO INCH CLEARANCE
9. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-400-1	RHEEM	XE40M06ST45U1	ELECTRIC TANK	40	120	4.5	0.93	53	21	48-1/4	20-1/4	106

PLUMBING EXPANSION TANK SCHEDULE (HS-400)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-400-1	TACO	PAX10-150	WH-400-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-400)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	1	3.6	3.6
			3.6
MAX. LENGTH (FT)	30		
TOTAL PEAK FLOW (GPM)	8		
WATER MAIN SIZE (BY UTILITY)	1"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-400)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	1	5.0	5.0
EMERGENCY FLOOR DRAIN	1	0.0	0.0
			5.0
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEYER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
400
P001

TITLE OF SHEET
RIVER CABIN – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
237343
SHEET 171 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

KEY NOTES:

1. REMOVE EXISTING WATER CLOSET AND ASSOCIATED PIPING.
2. REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
3. RETAIN BATH TUB FOR REUSE. BATH TUB MAY REMAIN IN PLACE. REMOVE ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
4. RETAIN LAVATORY FOR REUSE. LAVATORY MAY REMAIN IN PLACE. REMOVE ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
5. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

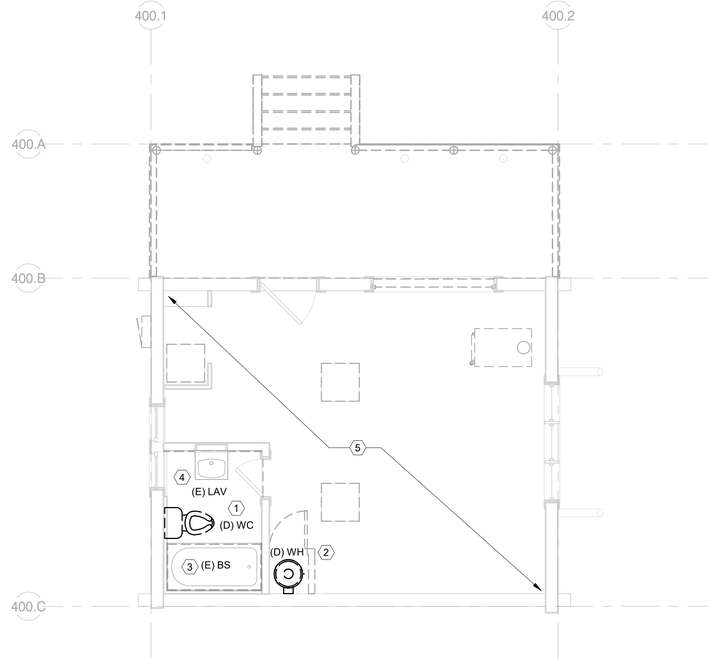

1 RIVER CABIN (HS-400) – PLUMBING DEMOLITION PLAN

1/4" = 1'-0"

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HOKES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
400
P101

TITLE OF SHEET
RIVER CABIN – PLUMBING DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 172 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

(#) KEY NOTES:

1. RESTORE EXISTING BATH TUB. INSTALL NEW TRIM AND ACCESSORIES.
2. RESTORE EXISTING LAVATORY. INSTALL NEW TRIM AND ACCESSORIES.
3. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
4. 1/2" DCW, 1/2" DHW TO BS-400-1, 3/4" DCW DOWN, 1/2" DHW DOWN.

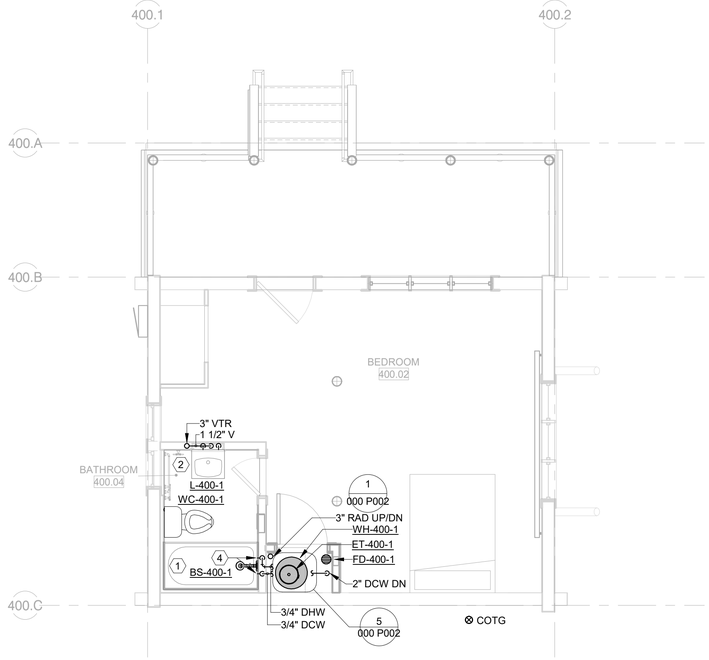

2 RIVER CABIN (HS-400) – PLUMBING PLAN

1/4" = 1'-0"

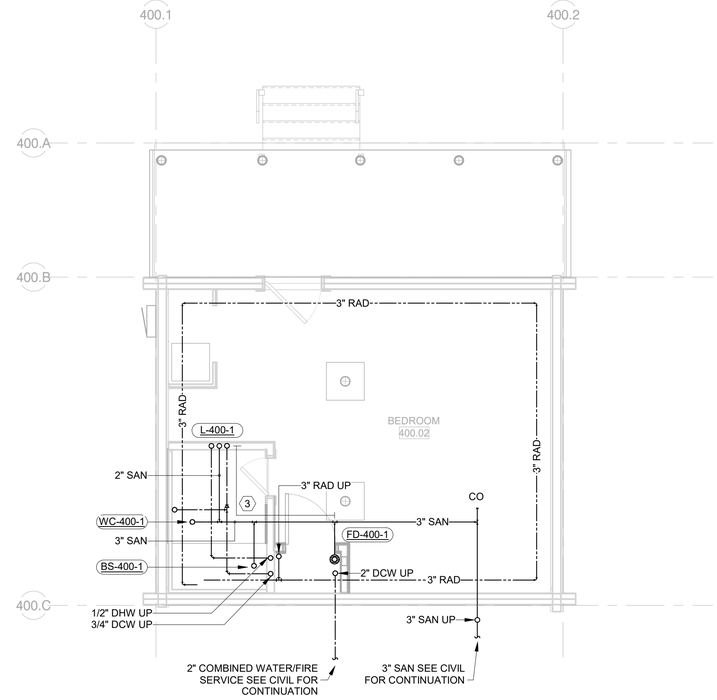

1 RIVER CABIN (HS-400) – PLUMBING UNDERFLOOR PLAN

1/4" = 1'-0"

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENNEBERY
16596
WYOMING
07/21/2026

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
400
P201

TITLE OF SHEET
RIVER CABIN – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 173 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

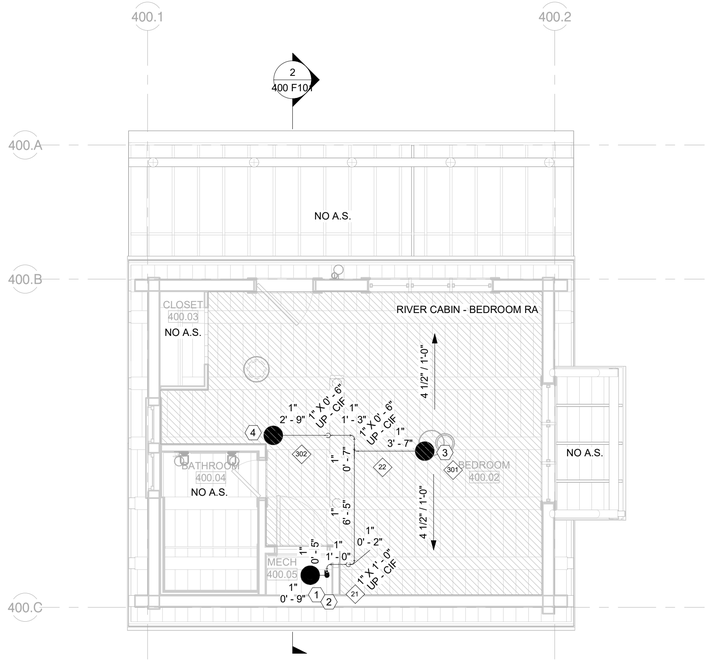

1 RIVER CABIN (HS–400) – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

Hydraulic Information	
Remote Area Name	River Cabin - Bedroom RA
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	255 SF
Total Hose Streams	0.00 GPM
Flowing Heads	2
K-Factor	4.9
Base of Riser	38.02 GPM
Base of Riser	35.26 psi
Safety Margin	+31.52 (43.29%)

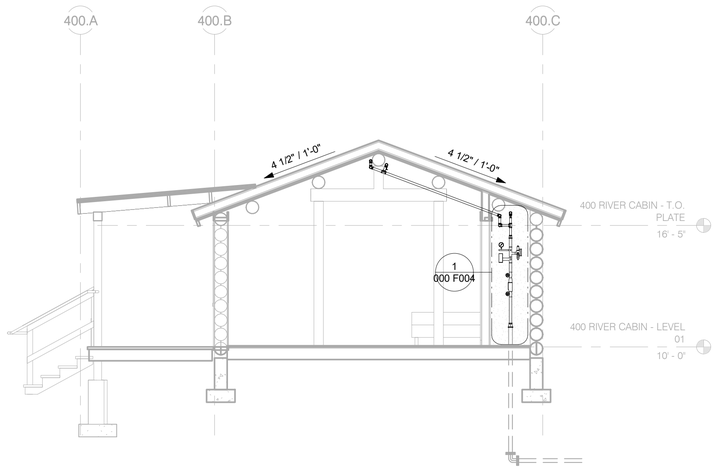

2 RIVER CABIN (HS–400) – FIRE SUPPRESSION SECTION

1/4" = 1'–0"

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	3

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED 3

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
400
F101

TITLE OF SHEET
RIVER CABIN – MAIN LEVEL PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 174 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING SOUTHWEST TOWARDS 401 NURSES CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

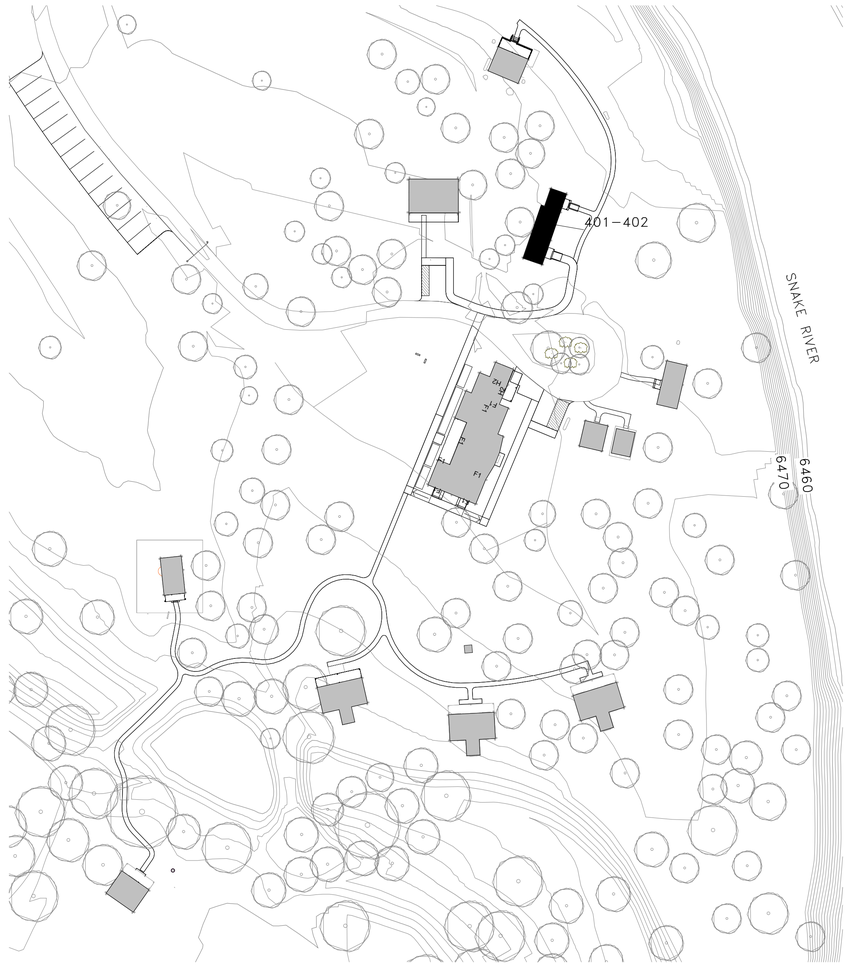

1 KEY PLAN – 401 NURSES CABIN

1" = 50'-0"

50 0 50 100
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. IVES
C-3535
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
G000

TITLE OF SHEET
NURSE'S CABIN – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 175 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

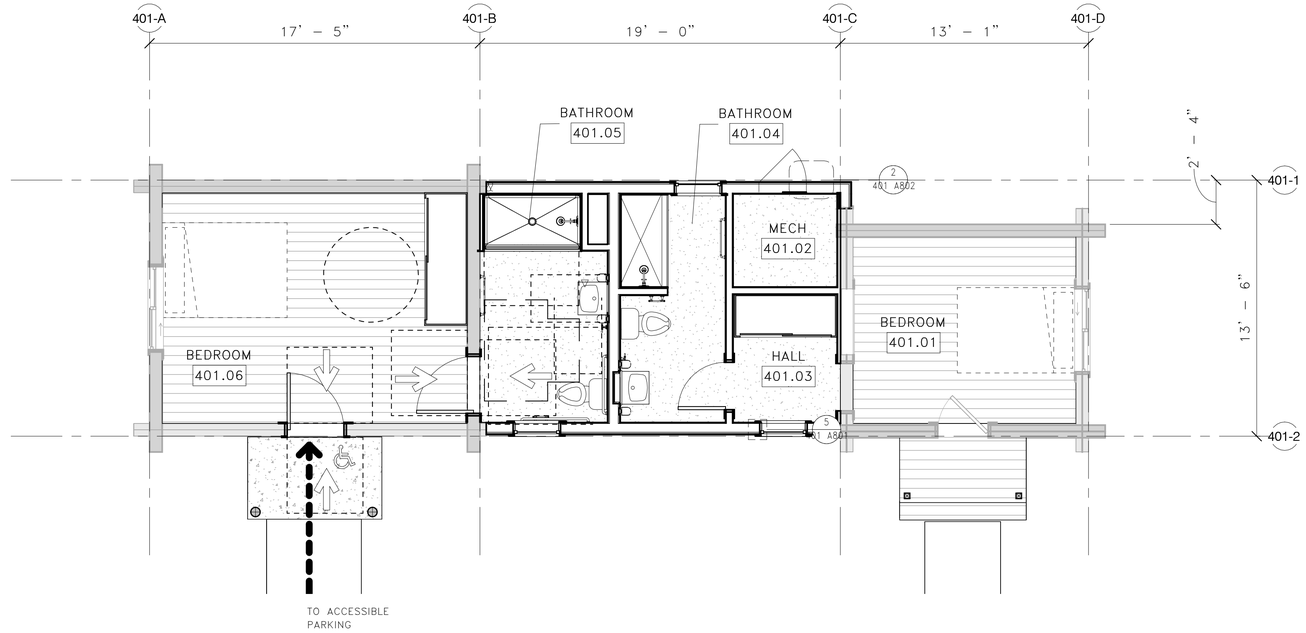

1 401 NURSES CABIN – ACCESSIBILITY PLAN

1/4" = 1'–0"

ACCESSIBILITY LEGEND

- ACCESSIBLE ENTRANCE
- ABBAS ROUTE NOT TO EXCEED A 5% SLOPE (MEETS DSC DESIGN REQUIREMENTS)
- ABAAS ENTRANCE (MEETS DSC DESIGN REQUIREMENTS)
- X — ACCESSIBLE SIGN
- 60 INCH DIAMETER TURNING RADIUS ALLOWED AT EXISTING BUILDINGS
- 67 INCH DIAMETER TURNING RADIUS REQUIRED FOR NEW CONSTRUCTION
- T–SHAPED TURNING SPACE FOR NEW CONSTRUCTION (OPTION 3)
- MANEUVERING CLEAR FLOOR SPACE AT DOORS – ARROW INDICATES APPROACH DIRECTION

ACCESSIBILITY CODE PLAN NOTES

1. COORDINATE ACCESSIBILITY IMPROVEMENTS WITH SPECIFICATION SECTION 014000 QUALITY REQUIREMENTS.
2. NOT ALL ACCESSIBLE BARRIERS WITHIN THE REHABILITATION PROJECT ARE IDENTIFIED ON ACCESSIBILITY PLANS. REVIEW PROJECT SCOPE IN DRAWING SHEETS FOR ACCESSIBILITY IMPROVEMENTS.
3. SEE SIGN PLAN FOR SIGNAGE REQUIREMENTS.

SCALE (B) 4" 0" 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
G002

TITLE OF SHEET
NURSE'S CABIN – ACCESSIBILITY PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 176 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

MATCH LINE 400 C100

EXISTING COMMUNICATIONS LINE C202

PROPOSED SWALE TO PROVIDE POSITIVE DRAINAGE AWAY FROM BUILDING

5' DEEP EXISTING WELL LINE WITH DROP CLOTH AND FILL WITH COMMON BORROW IN LIFTS & COMPACT

CUT 6"

BURIED POWER LINE SEE E100

SEWER SERVICE P&P SEE C308

CLEANOUT

CURB STOP

6 LF 3" SANITARY SERVICE @ 2% SLOPE, C204 FOR TYPICAL SERVICE CONNECTION.

3" INV OUT: 6,468.02 COORDINATE WITH MEP FOR ENTRANCE INTO BUILDING

2" INV OUT 6.5' MIN COVER. COORDINATE WITH MEP FOR ENTRANCE INTO BUILDING

8 LF OF 2" DOMESTIC COLD WATER SERVICE. SEE C203 FOR TYPICAL SERVICE CONNECTION.

BURIED POWER, SEE ELECTRICAL FOR TYPICAL SERVICE DETAIL AND CONTINUATION INTO BUILDING

ELECTRICAL PANEL

WATER SERVICE P&P SEE C401

NURSE'S CABIN
EXISTING FFE: 6474.89
PROPOSED FFE: 6475.56

CUT 6"

CONCRETE PORCH

10.79'

R2.50'

16.59'

6474

R115.28'

R2.00'

14.26'

R2.00'

6474

R68.11'

3' CRUSHER FINES RE: LANDSACPE

CONSTRUCTION LIMITS

5' RAP TRAIL
RE: LA
MAX CROSS SLOPE 2%
MAX RUNNING SLOPE 5%

R12.49'

R85.37'

10 0 5 10

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

P:\6204-NEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22345 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
401
C100

TITLE OF SHEET
NURSE'S CABIN – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 177 OF 371

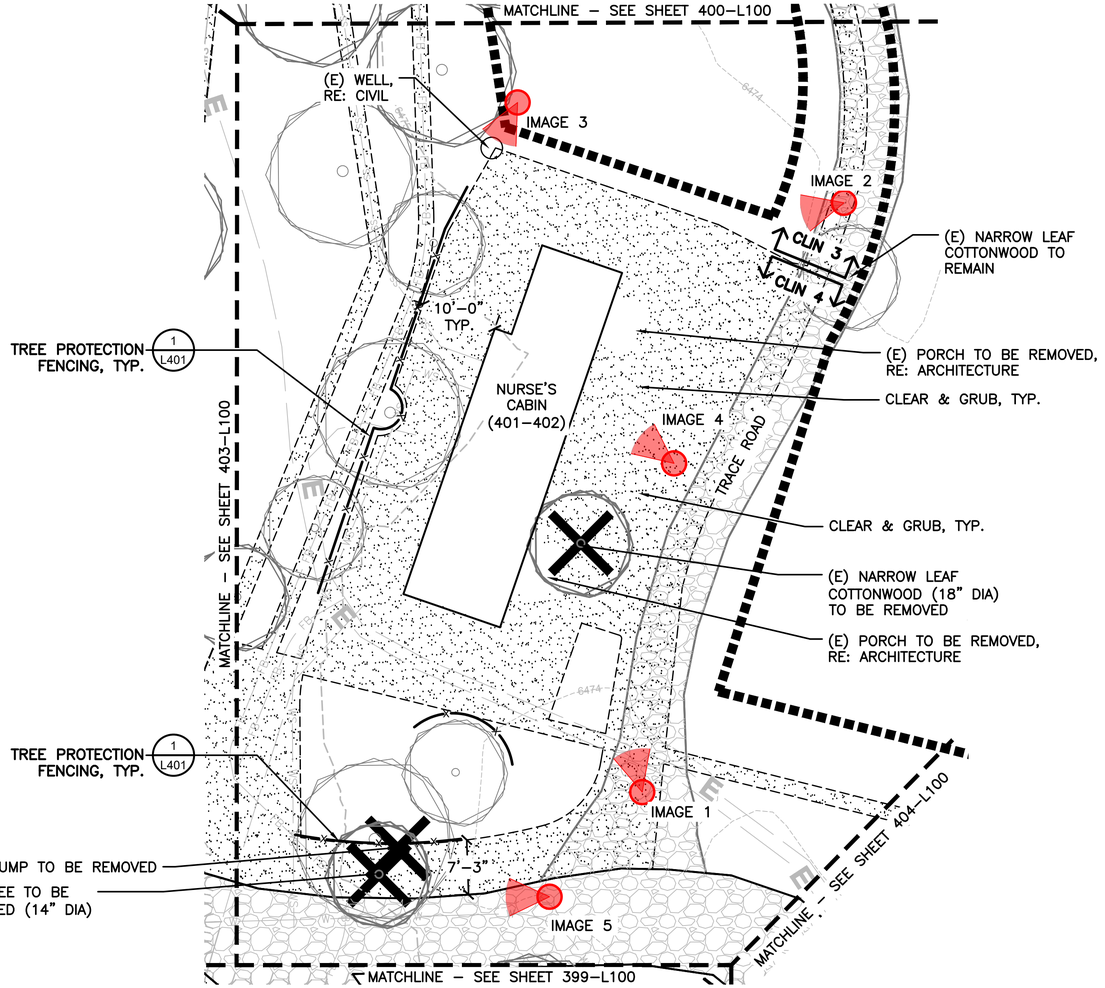

IMAGE 1: (E) TREE TO BE REMOVED.

IMAGE 2: (E) SOIL BUILD UP TO BE REMOVED.

IMAGE 3: (E) EXISTING WELL, RE: CIVIL

IMAGE 4: (E) DEBRIS TO BE REMOVED

(E) TREE TO BE REMOVED
(E) STUMP TO BE REMOVED

IMAGE 5: (E) TREE AND STUMP TO BE REMOVED

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

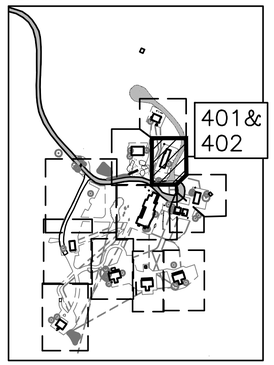

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 401–402 L100	TITLE OF SHEET NURSE'S CABIN – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 178 OF 371

File Path
Z:\PROJECTS\KERSTIENS_R25 P:\DEN\ERIN\PS GRTE 4LAZY F RANCH - 199539\ FINAL CD\CAD\LAU1-0_GRTE-I-4_DEMO.DWG
XREFS: BASE26_0808_NPS GRTE 4 Lazy F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg\NPS Titleblock 22x34 + GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_DEMO.DWG
IMAGES: ...\..\2_Admin\Photos\Garage\Debris-1.jpg|...\..\2_Admin\Photos\Debris-2.jpg|Debris-3.jpg|Debri-4.jpg|Debri.jpg|...\..\2_Admin\Photos\Gate\Gate-1.jpg|Gate.jpg|...\..\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg|...\..\2_Admin\Photos\Moose and Ice .jpg|...\..\...

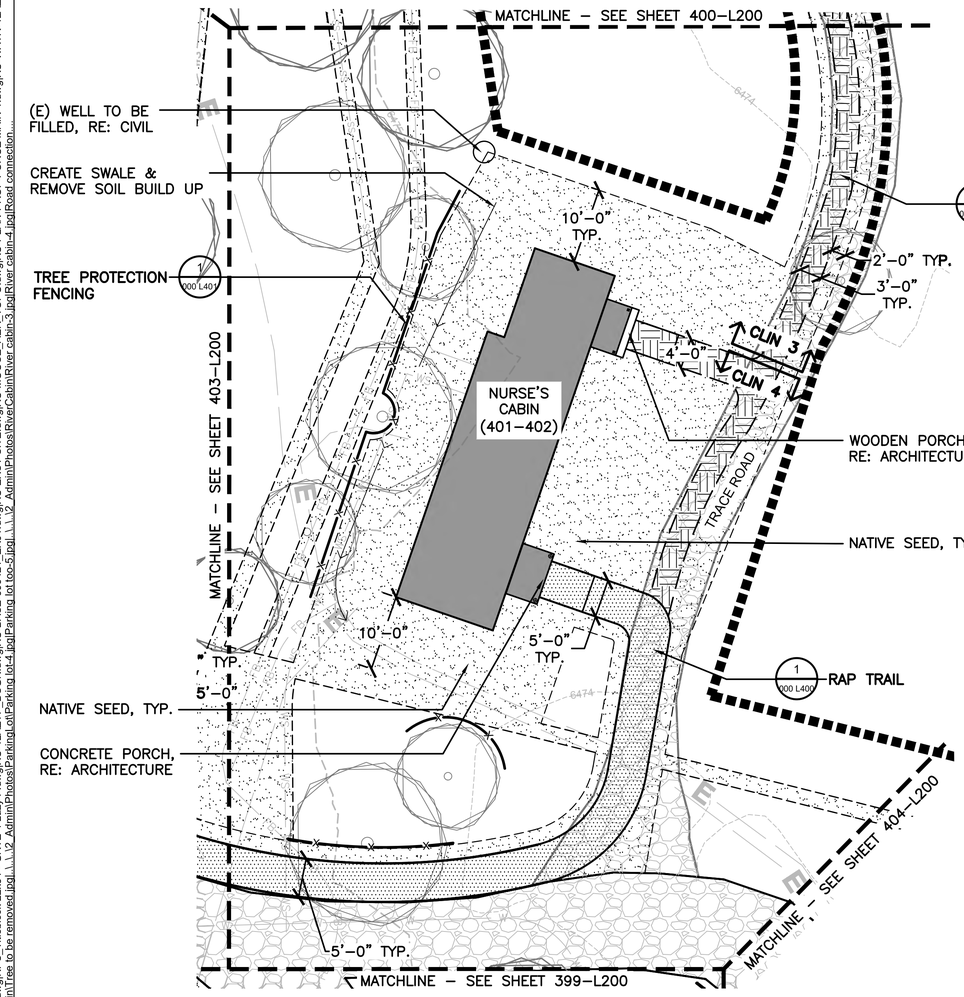

IMAGE 1: ACCESSIBLE RAP TRAIL TO NURSES CABIN.

IMAGE 2: ACCESSIBLE ROUTE TO ACCESSIBLE PARKING STALL AT 3 BAY GARAGE

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- RAP TRAIL
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

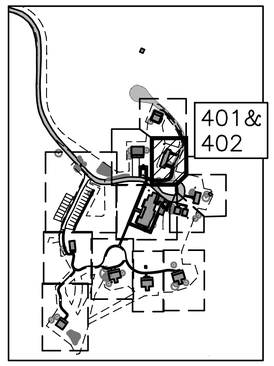

10 0 10 20
SCALE OF FEET

NOTES:

1. ACCESSIBLE WALKWAY TO BE 5' WIDE, RECYCLED ASPHALT.
2. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
3. ACCESSIBLE WALKWAY SHALL HAVE A MAXIMUM RUNNING SLOPE 5% AND A MAXIMUM CROSS SLOPE IS 2%.
4. SIDE SLOPES FROM PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
5. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
6. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
7. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 04.
8. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT · EILEEN M. KEMP · LA-0212C · Date: 07/21/24 · STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 401–402 L200	TITLE OF SHEET NURSE'S CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 179 OF 371

File Path
Z:\Projects\SKERSTIENS_R25 P\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\ALI-1.0_GRTE-L4_LAYOUT.DWG
XREFS: 08-43-SESS26_0808_NPS GRTE 4 LAZY F ARCH-PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE 4 LAZY F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXIST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_AERIAL

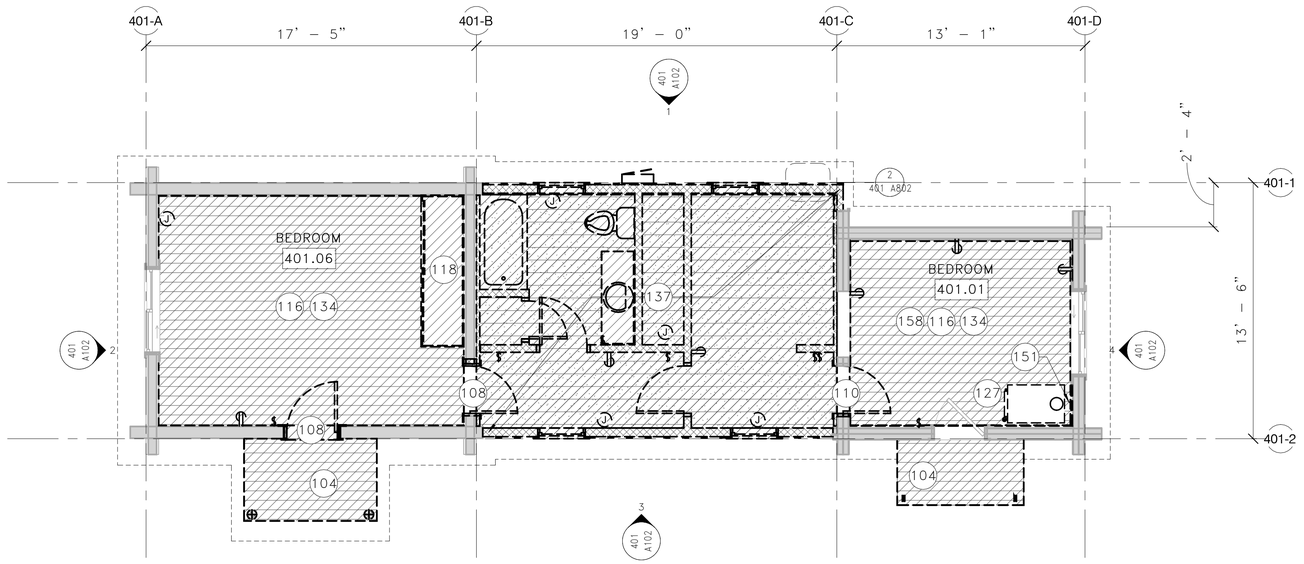

1 401 NURSES CABIN – FIRST LEVEL DEMO PLAN

1/4" = 1'-0"

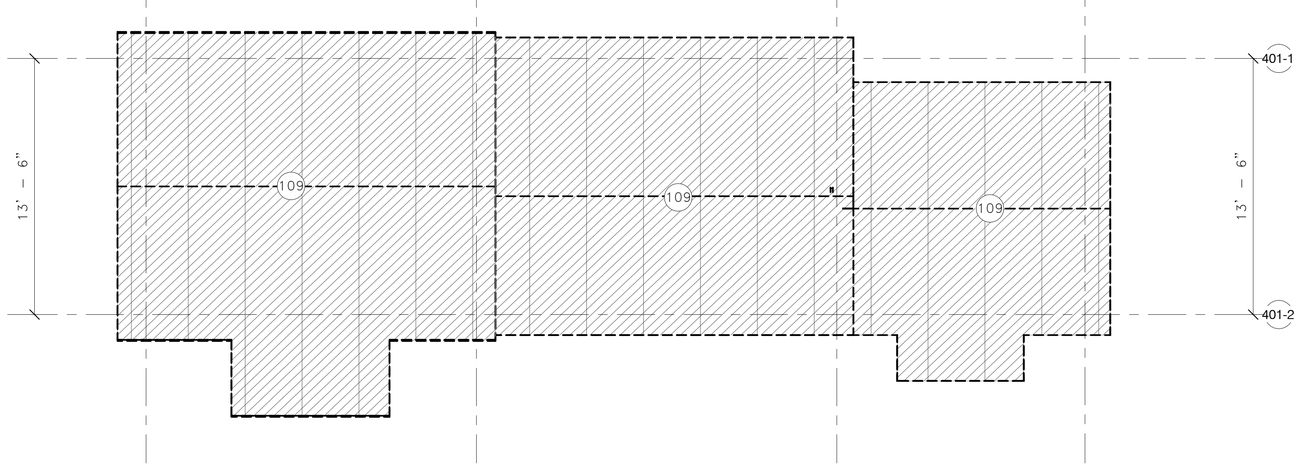

2 401 NURSES CABIN – ROOF LEVEL DEMO PLAN

1/4" = 1'-0"

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES

108 SALVAGE (E) DOOR, MODIFY (E) FRAME, AND REMOVE PORTION OF WALL TO ACCOMMODATE WIDER DOOR

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

110 REMOVE (E) DOOR. CASING & FRAME TO REMAIN

116 REMOVE CEILING. CLEAN, PATCH, REPAIR, AND REFINISH EXPOSED STRUCTURE TO REMAIN

118 SALVAGE FOR REINSTALLATION OF (E) CASEWORK

127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE

134 SALVAGE FOR REINSTALLATION (E) WOOD PLANK FLOORING

137 REMOVE ENTIRE (E) WOOD FRAMED PORTION OF BUILDING. SALVAGE FOR REINSTALLATION (E) EXTERIOR SIDING, INCLUDING TRIMS. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

151 REMOVE WALL PROTECTION PANEL AT WOOD BURNING STOVE LOCATION. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

158 REMOVE WOOD WALL PANELING AND WALL BASE IN ROOM. WINDOW AND DOOR TRIMS TO REMAIN.

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.

2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.

3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.

4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.

5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.

6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.

7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)

(E) WOOD FRAMED WALL OR LOG WALL TO REMAIN

(E) COLUMN TO REMAIN

(E) DOOR TO REMAIN

SALVAGE (E) DOOR

(E) WINDOW TO REMAIN

(E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A101

TITLE OF SHEET
NURSE'S CABIN – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 180 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

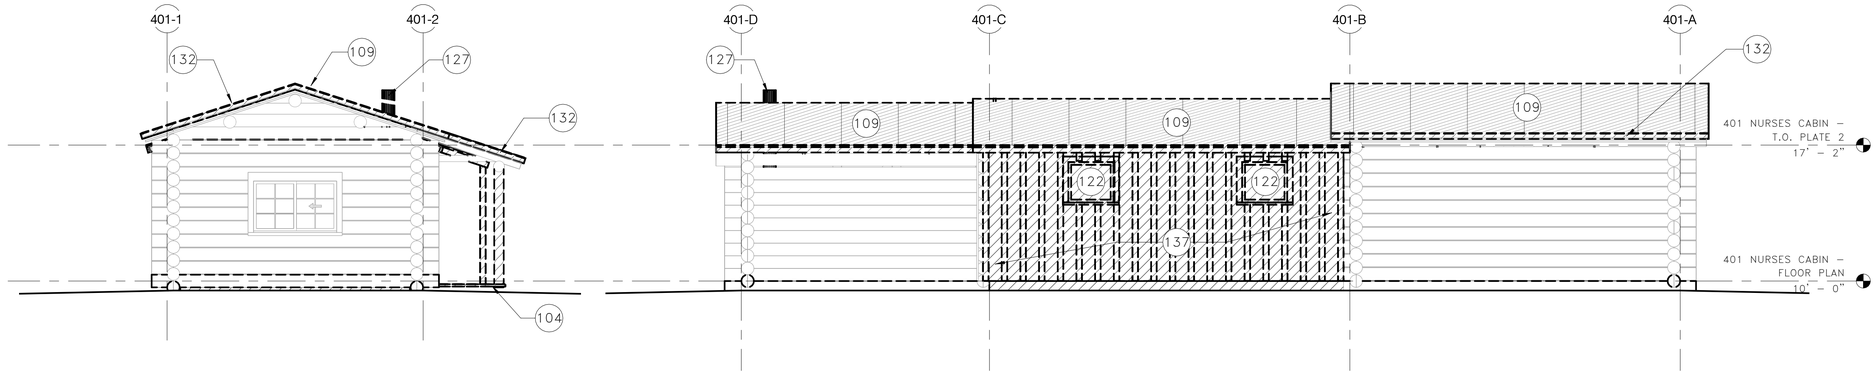

2 401 NURSE'S CABIN – SOUTH DEMO ELEVATION

1/4" = 1'–0"

1 401 NURSE'S CABIN – WEST DEMO ELEVATION

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

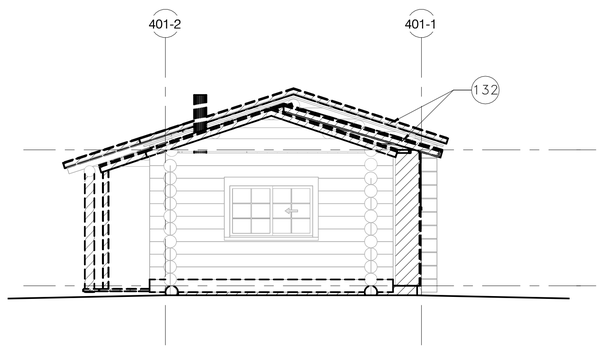

4 401 NURSE'S CABIN – NORTH DEMO ELEVATION

1/4" = 1'–0"

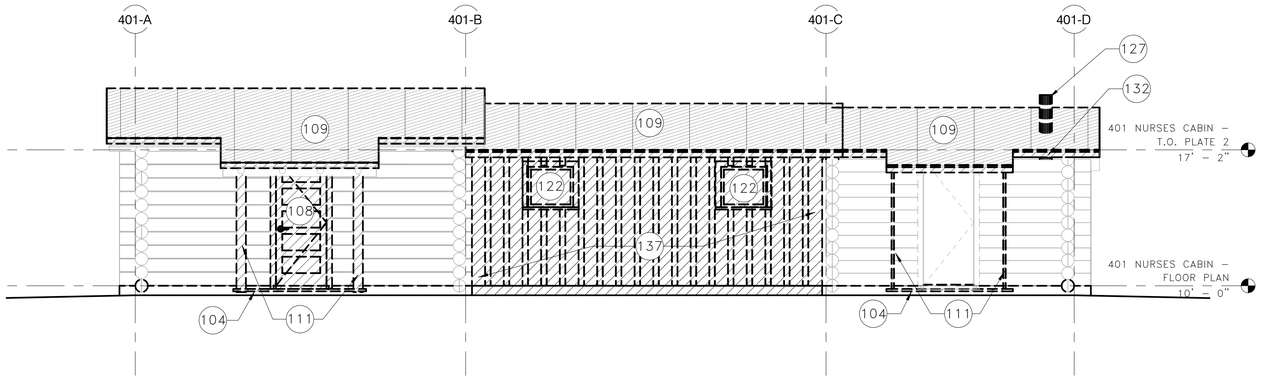

3 401 NURSE'S CABIN – EAST DEMO ELEVATION

1/4" = 1'–0"

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
108 SALVAGE (E) DOOR, MODIFY (E) FRAME, AND REMOVE PORTION OF WALL TO ACCOMMODATE WIDER DOOR
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
122 SALVAGE (E) TRIMS AT WINDOW FRAME FOR REINSTALLATION. WINDOW SASH SALVAGE BE OTHERS.
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
132 REMOVE (E) FASCIA
137 REMOVE ENTIRE (E) WOOD FRAMED PORTION OF BUILDING. SALVAGE FOR REINSTALLATION (E) EXTERIOR SIDING, INCLUDING TRIMS. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A102

TITLE OF SHEET
NURSE'S CABIN – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 181 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691d7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

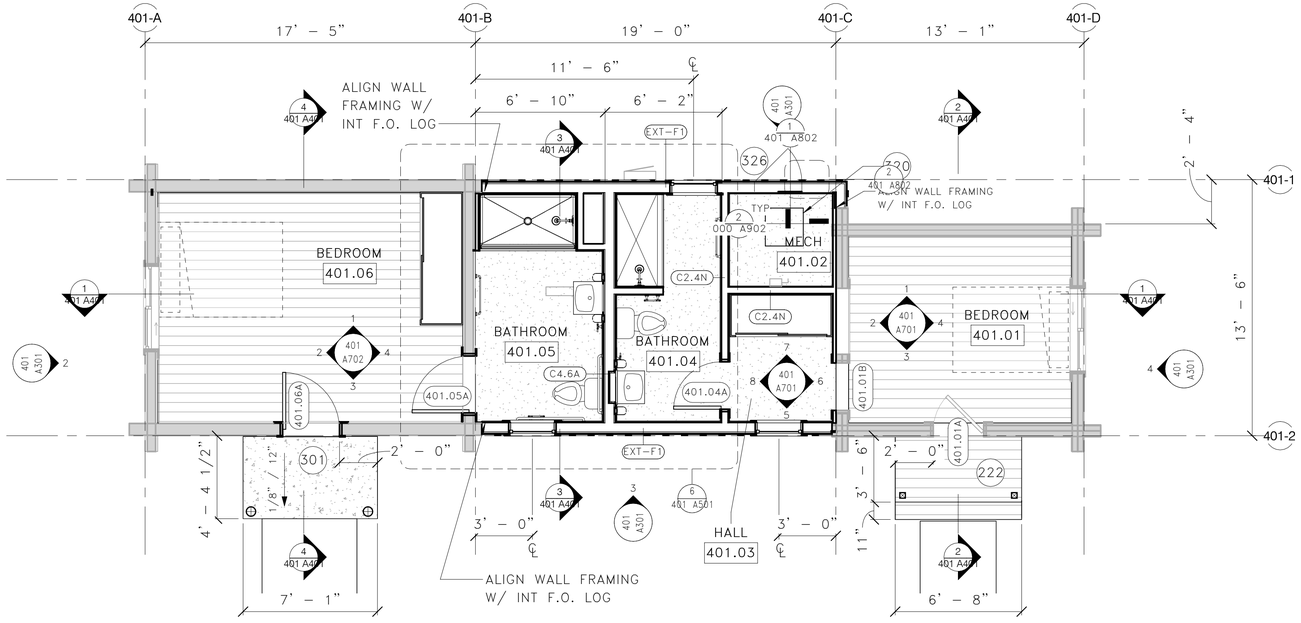

1 401 NURSES CABIN – FIRST LEVEL PLAN

1/4" = 1'–0"

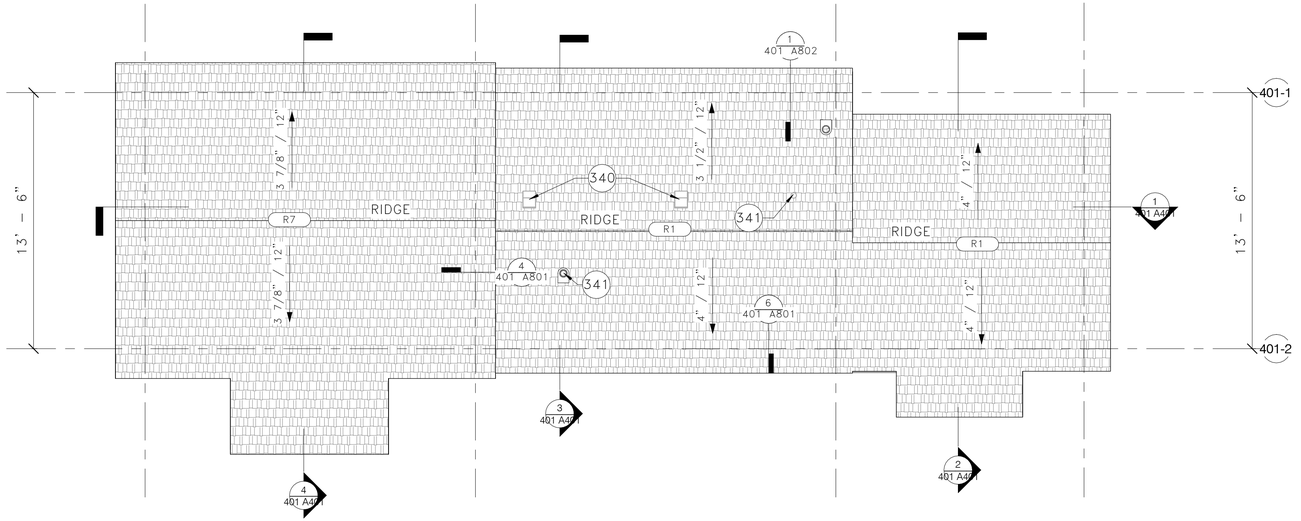

2 401 NURSES CABIN – ROOF LEVEL PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
301 PROVIDE CONCRETE SLAB ON GRADE
320 PROVIDE CRAWL SPACE ACCESS
326 PROVIDE ACCESS HATCH
340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS
341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

SCALE (B) 4" 0" 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A201

TITLE OF SHEET
NURSE'S CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 182 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

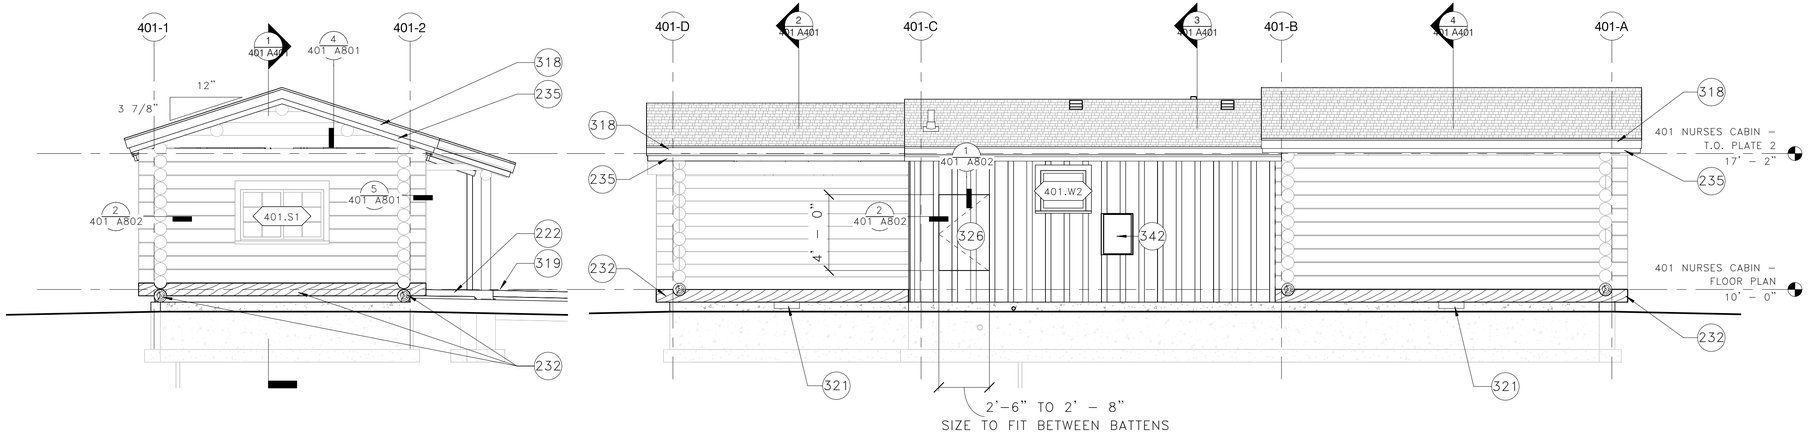

2 401 NURSE'S CABIN – SOUTH ELEVATION

1/4" = 1'–0"

1 401 NURSE'S CABIN – WEST ELEVATION

1/4" = 1'–0"

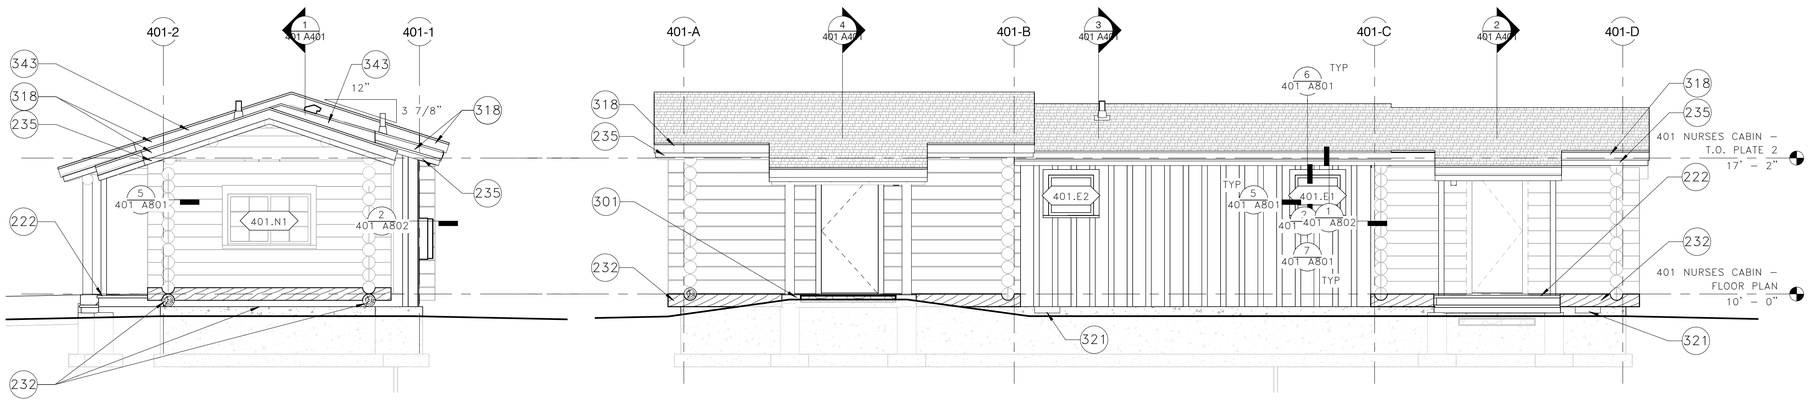

4 401 NURSE'S CABIN – NORTH ELEVATION

1/4" = 1'–0"

3 401 NURSE'S CABIN – EAST ELEVATION

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###.XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
301 PROVIDE CONCRETE SLAB ON GRADE
318 PROVIDE SECONDARY WOOD FASCIA
319 PROVIDE ACCESSIBLE PATHWAY; SEE LANDSCAPE DRAWINGS
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS
326 PROVIDE ACCESS HATCH
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS
343 SM FLASHING; SEE BUILDING SECTIONS AND DETAILS

SCALE (B) 1" 0 1" 5"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KYTE C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A301

TITLE OF SHEET
NURSE'S CABIN – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 183 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

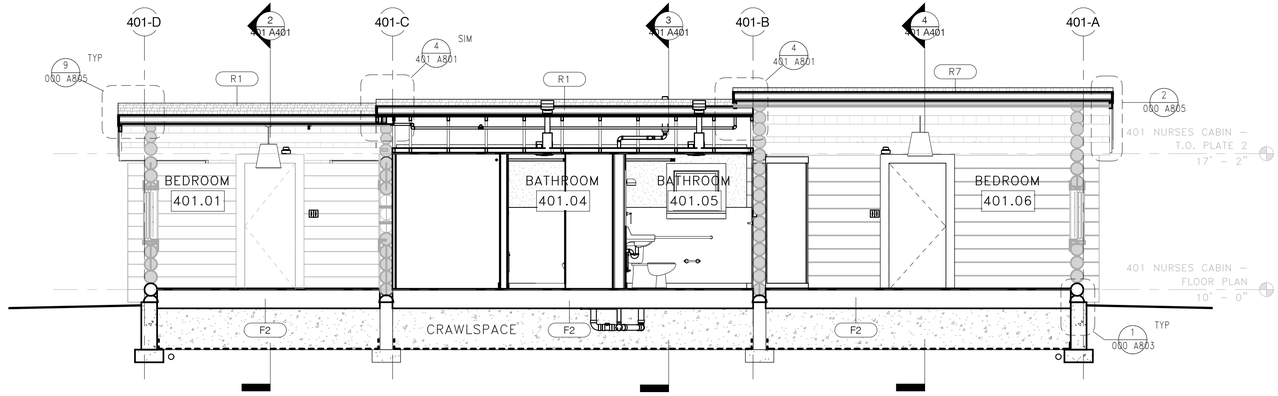

1 401 NURSE'S CABIN – SECTION 'D'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS

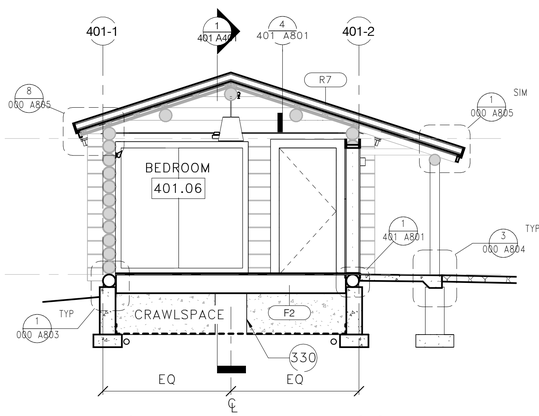

4 401 NURSE'S CABIN – SECTION 'A'

1/4" = 1'–0"

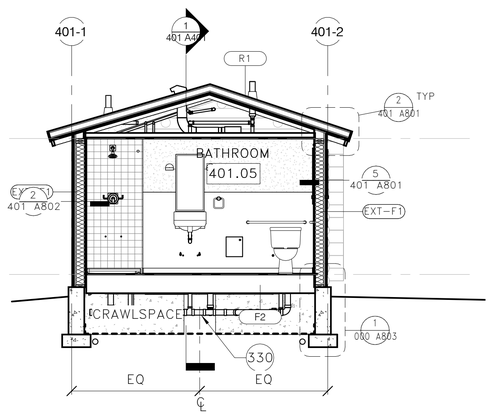

3 401 NURSE'S CABIN – SECTION 'B'

1/4" = 1'–0"

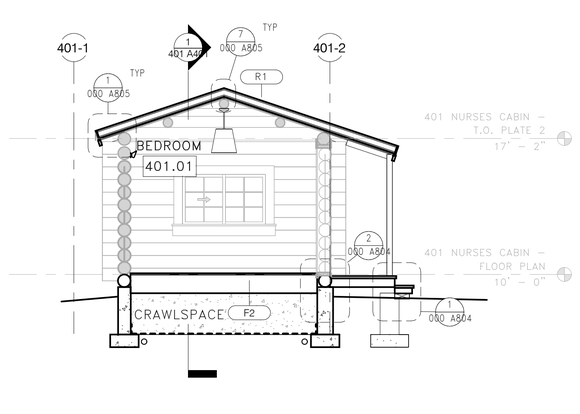

2 401 NURSE'S CABIN – SECTION 'C'

1/4" = 1'–0"

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KEES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A401

TITLE OF SHEET
NURSE'S CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 184 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

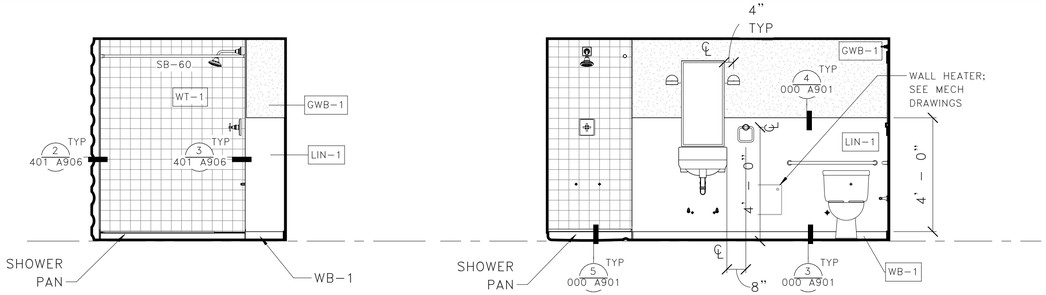

3 BATHROOM 401.05 – WEST 'B'

3/8" = 1'-0"

2 BATHROOM 401.05 – NORTH

3/8" = 1'-0"

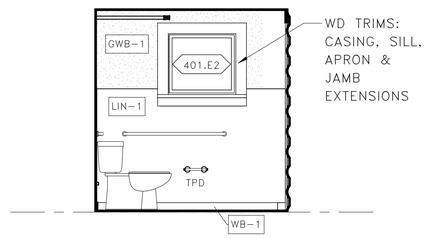

5 BATHROOM 401.05 – EAST

3/8" = 1'-0"

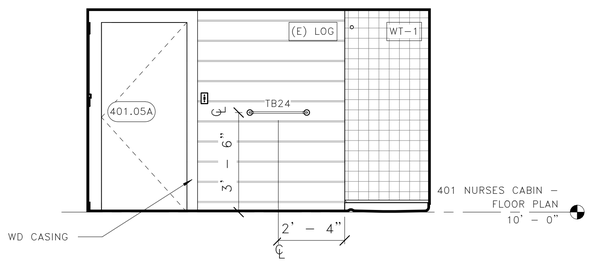

4 BATHROOM 401.05 – SOUTH

3/8" = 1'-0"

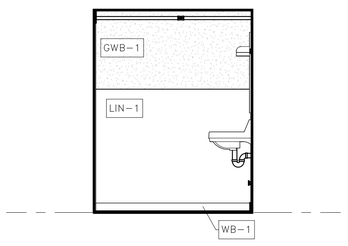

8 BATHROOM 401.04 – EAST

3/8" = 1'-0"

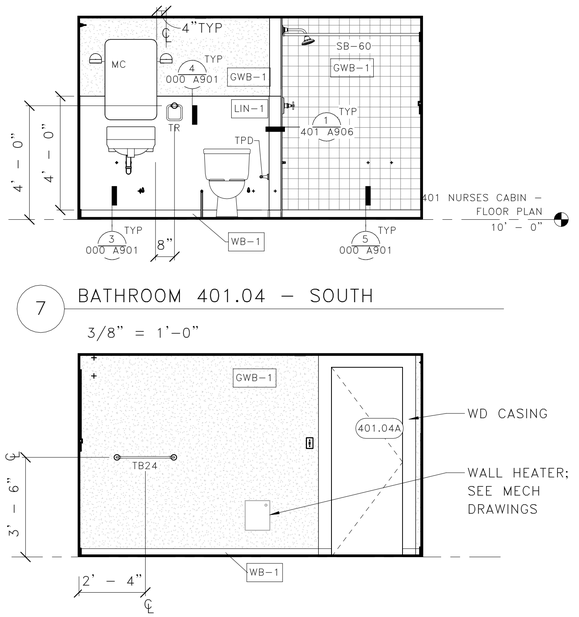

7 BATHROOM 401.04 – SOUTH

3/8" = 1'-0"

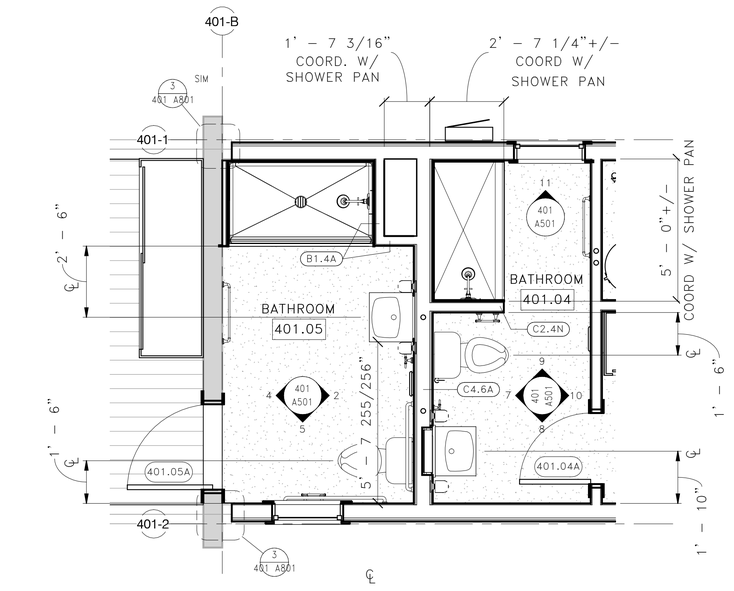

6 401 NURSES CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'-0"

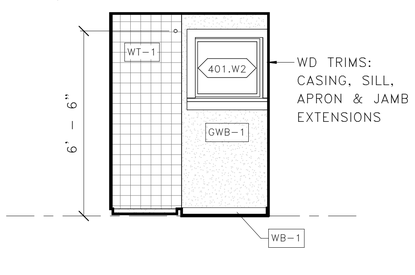

11 BATHROOM 401.04 – WEST 'B'

3/8" = 1'-0"

10 BATHROOM 401.04 – NORTH

3/8" = 1'-0"

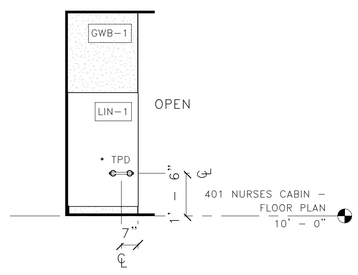

9 BATHROOM 401.04 – WEST 'A'

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

KEYNOTES

SCALE Ⓒ 2" – 0" 1" 2' – 8" 5' – 4"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TAGG C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A501

TITLE OF SHEET
NURSE'S CABIN – ENLARGED BATHROOM

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 185 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66844993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

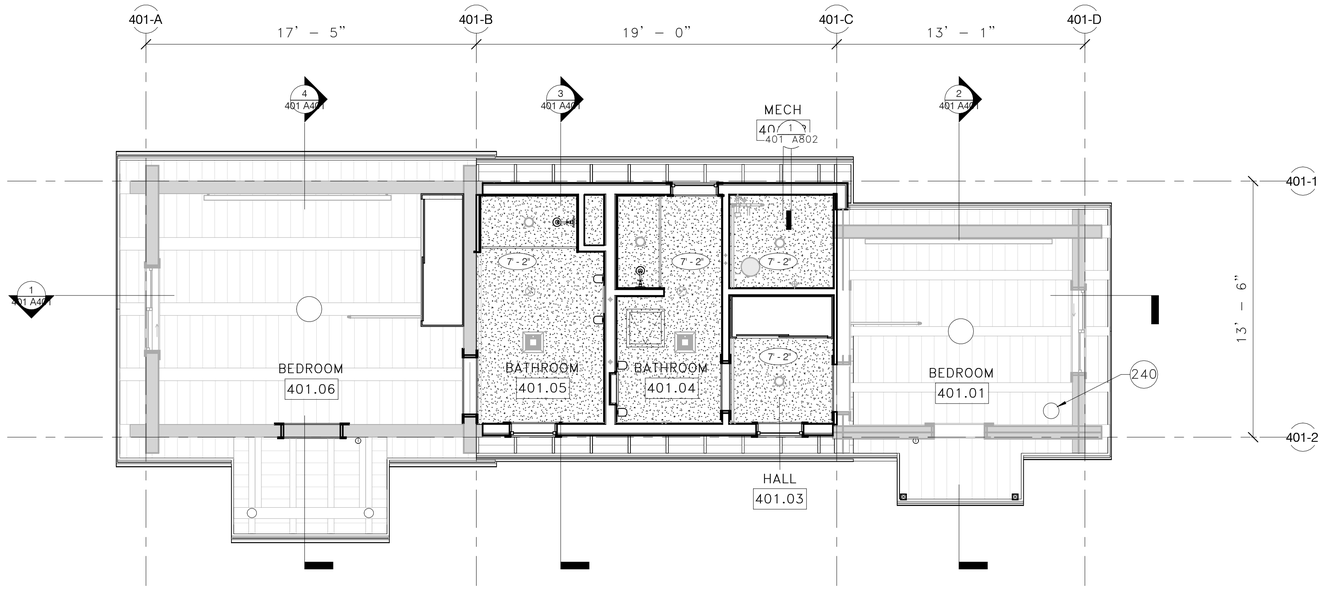

1 401 NURSES CABIN – FIRST LEVEL RCP

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A601

TITLE OF SHEET
NURSE'S CABIN – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 186 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

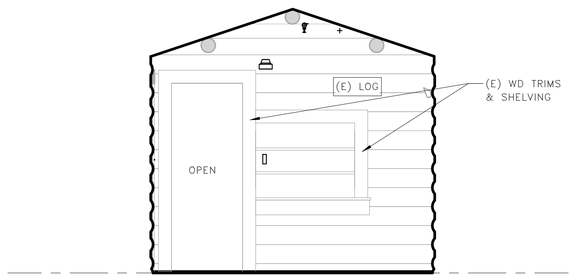

2 BEDROOM 401.01 – SOUTH

3/8" = 1'-0"

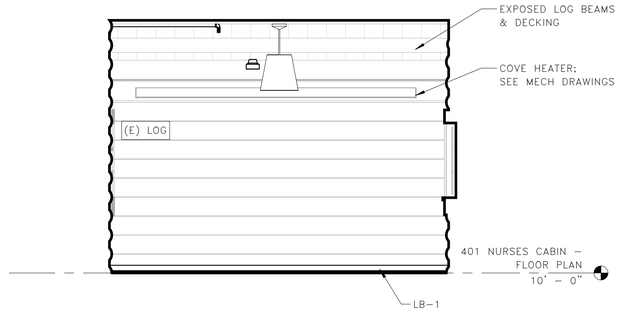

1 BEDROOM 401.01 – WEST

3/8" = 1'-0"

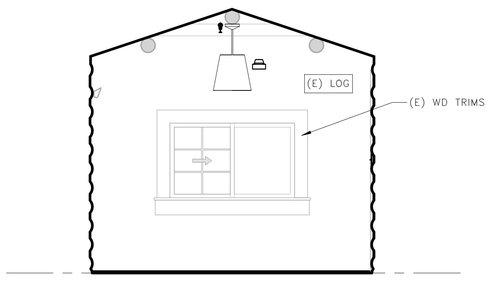

4 BEDROOM 401.01 – NORTH

3/8" = 1'-0"

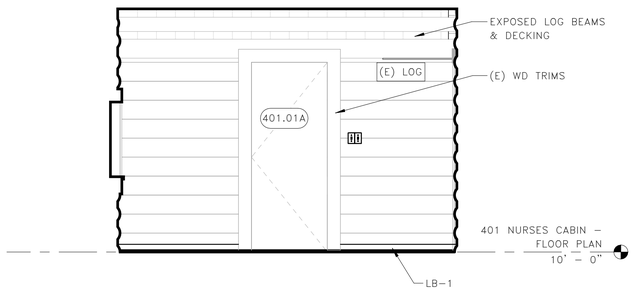

3 BEDROOM 401.01 – EAST

3/8" = 1'-0"

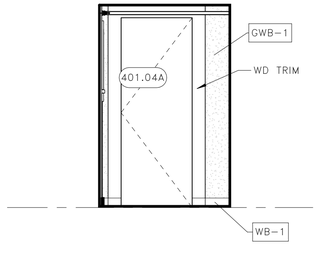

8 HALL 401.03 – SOUTH

3/8" = 1'-0"

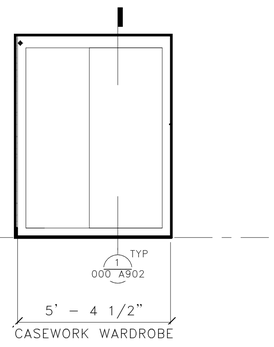

7 HALL 401.03 – WEST

3/8" = 1'-0"

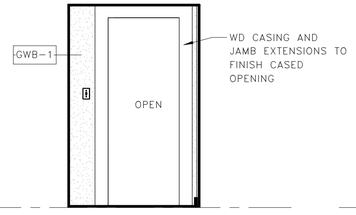

6 HALL 401.03 – NORTH

3/8" = 1'-0"

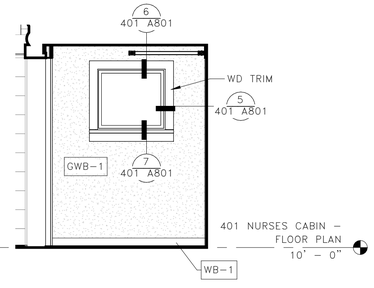

5 HALL 401.03 – EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2" 5" 0 2' 5" 5' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A701

TITLE OF SHEET
NURSE'S CABIN –
INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 187 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

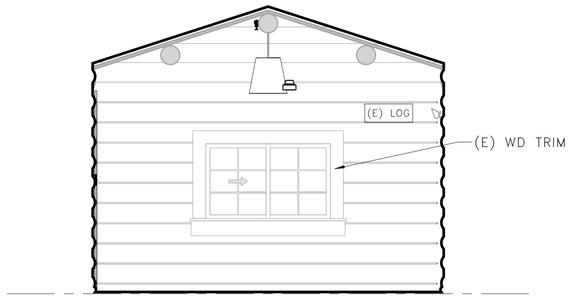

2 BEDROOM 401.06 – SOUTH

3/8" = 1'–0"

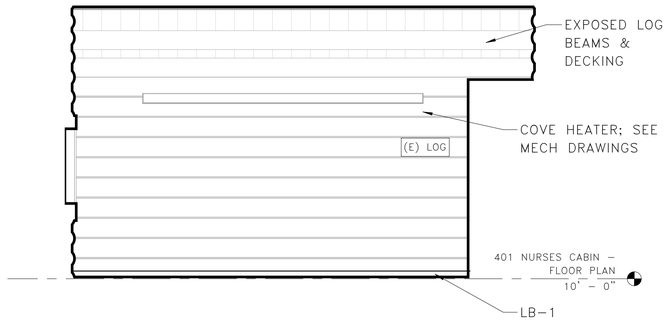

1 BEDROOM 401.06 – WEST

3/8" = 1'–0"

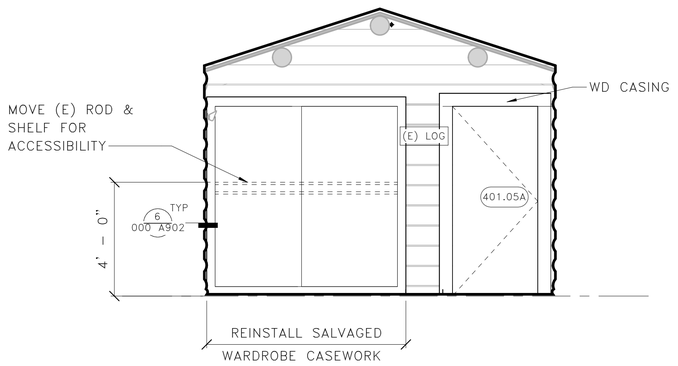

4 BEDROOM 401.06 – NORTH

3/8" = 1'–0"

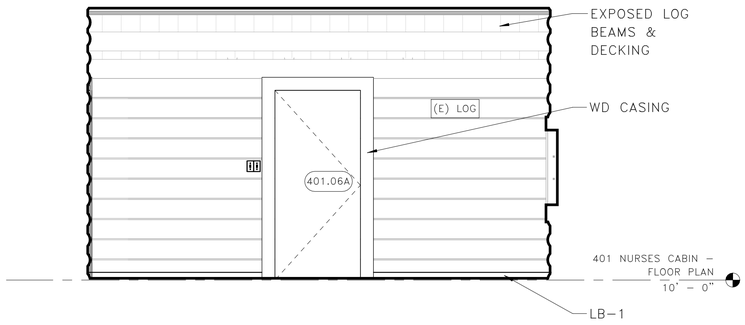

3 BEDROOM 401.06 – EAST

3/8" = 1'–0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE © 2'–8" 0 2'–8" 5'–4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A702

TITLE OF SHEET
NURSE'S CABIN – INTERIOR ELEVATIONS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 188 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

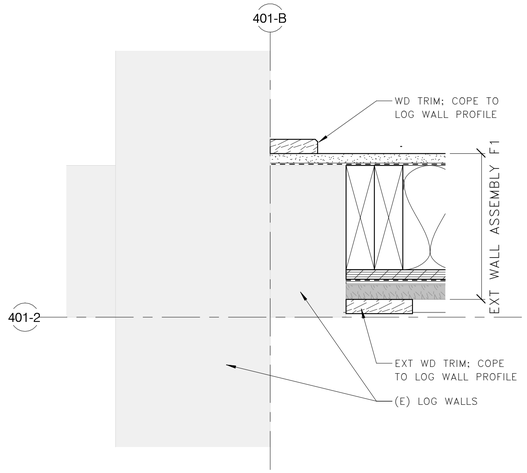

3 401 NURSES CABIN – TRANSITION AT NEW WALL

3" = 1'–0"

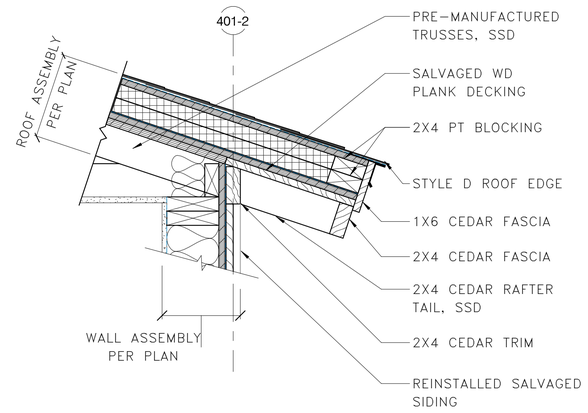

2 401 NURSES CABIN – EAVE DETAIL

1 1/2" = 1'–0"

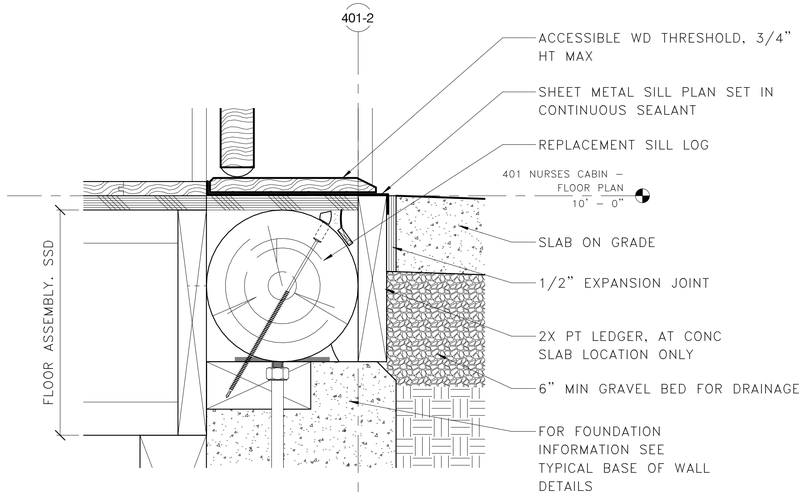

1 401 NURSES CABIN – PORCH TRANSITION DETAIL

3" = 1'–0"

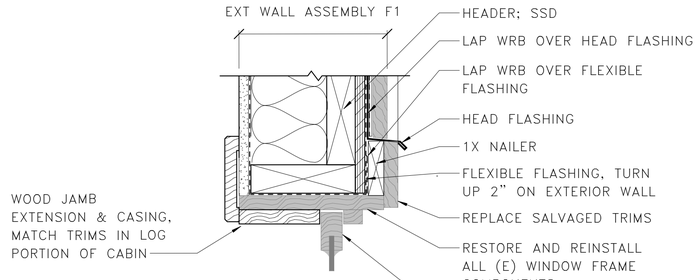

6 401 NURSES CABIN – WINDOW HEAD

3" = 1'–0"

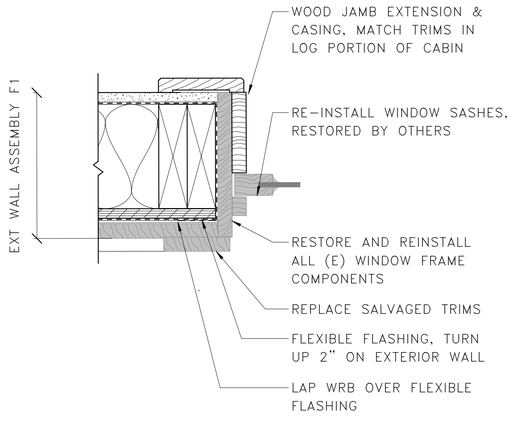

5 401 NURSES CABIN – WINDOW JAMB

3" = 1'–0"

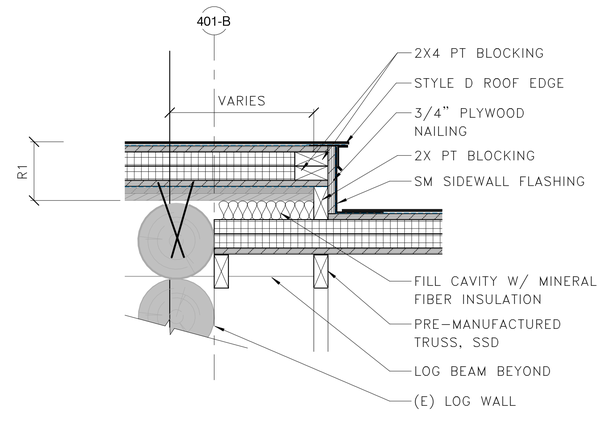

4 401 NURSES CABIN – ROOF DETAIL

1 1/2" = 1'–0"

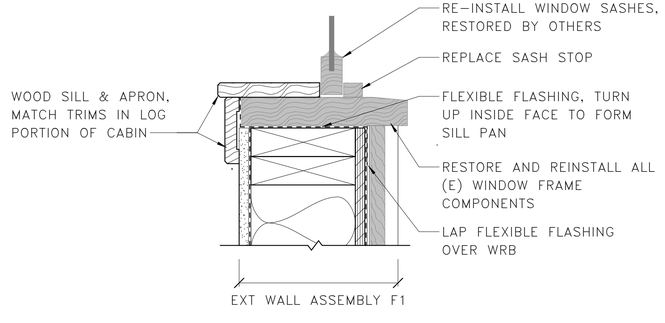

7 401 NURSES CABIN – WINDOW SILL

3" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1' 4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A801

TITLE OF SHEET
NURSE'S CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 189 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

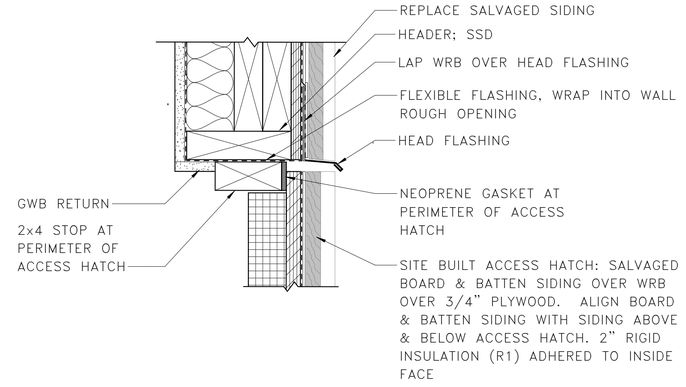

1 401 NURSES CABIN – HEAD @ ACCESS HATCH

3" = 1'-0"

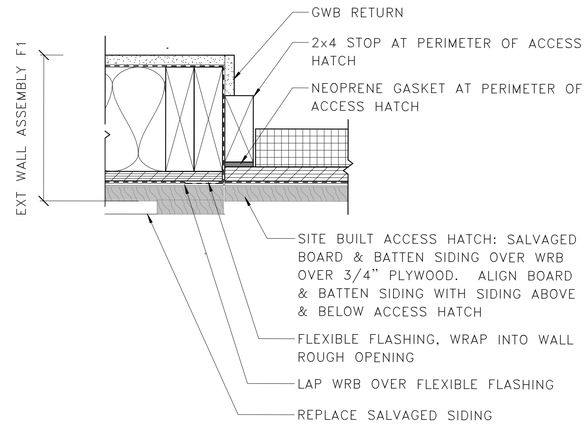

2 401 NURSES CABIN – JAMB @ ACCESS HATCH

3" = 1'-0"

SCALE (E) 8" 0 8" 1'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM H. REED C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A802

TITLE OF SHEET
NURSE'S CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 190 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

401 NURSES CABIN – WINDOW SCHEDULE

WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	NOTES
401.E1		2' – 3"	2' – 6"	6/401 A801	7/401 A801	6/401 A801	H. M.
401.E2		2' – 3"	2' – 6"	6/401 A801	7/401 A801	6/401 A801	H. M.
401.N1		2' – 10"	4' – 6"				
401.S1		2' – 10"	4' – 6"				
401.W2		2' – 3"	2' – 6"	6/401 A801	7/401 A801	6/401 A801	H. M.

401 NURSES CABIN – DOOR SCHEDULE

DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
401.01A	(E) DR–1	2' – 8"	6' – 8"			(E)				(E) SDR–3	
401.01B	NONE	2' – 8"	6' – 8"			(E)					
401.04A	DR–1	2' – 6"	6' – 8"			DRF–1					
401.05A	DR–1	3' – 0"	6' – 8"			DRF–1					
401.06A	DR–1	3' – 0"	6' – 8"			DRF–1				SDR–3	

401 NURSES CABIN – ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
		MATERIAL	FINISH	BASE MATERIAL	BASE FINISH	WALL MATERIAL	WALL FINISH	MATERIAL	FINISH	
401.01	BEDROOM	(S)WD–1		LB–1		(E)LOG		EXP		
401.02	MECH	LIN–1	N/A	RB–1		(E)LOG/GWB–1		GWB–1		
401.03	HALL	WD–1		WB–1		(E)LOG/GWB–1		GWB–1		
401.04	BATHROOM	LIN–1	N/A	WB–1		GWB–1/LIN–1/WT–1		GWB–1		
401.05	BATHROOM	LIN–1	N/A	WB–1		(E)LOG/GWB–1/LIN–1/WT–1		GWB–1		
401.06	BEDROOM	(S)WD–1		(S)LB–1		(E)LOG		EXP		

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TODD C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A905

TITLE OF SHEET
NURSE'S CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 191 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

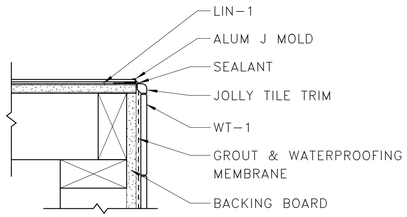

3 401 NURSES CABIN – OUTSIDE CORNER AT WT–1/ LIN–1

3" = 1'–0"

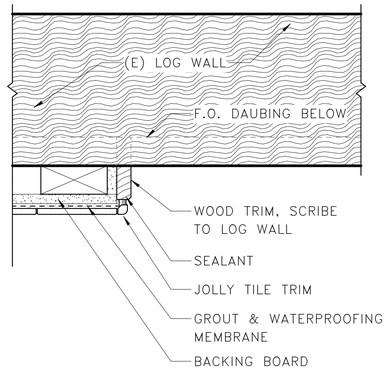

2 401 NURSES CABIN – TRANSITION AT WT–1 / (E) LOG

3" = 1'–0"

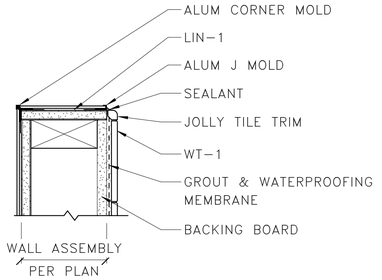

1 401 NURSES CABIN – WALL END AT WT–1/ LIN–1

3" = 1'–0"

SCALE F 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3535 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO.

401

A906

TITLE OF SHEET

NURSE'S CABIN – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 192 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

NORTH AND WEST ELEVATIONS, LOOKING NORTHEAST

EAST ELEVATION

TRANSITION BETWEEN ROOF PLANES

PORCH ROOF STRUCTURE

TYPICAL LOG CONDITION

BEDROOM 401.06, LOOKING NORTH

BEDROOM 401.06, LOOKING SOUTH

SCREEN DOOR AT DOOR 401.06A

EXTERIOR OF DOOR 401.06A

SALVAGED WINDOWS AND INSECT SCREENS

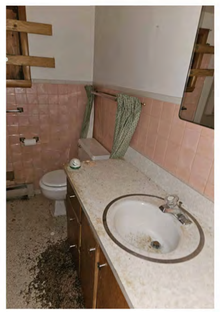

BATHROOM, LOOKING NORTHWEST

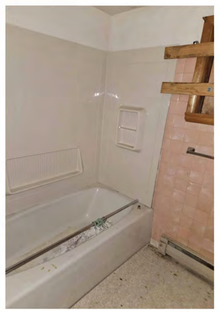

BATHROOM, LOOKING SOUTHEAST

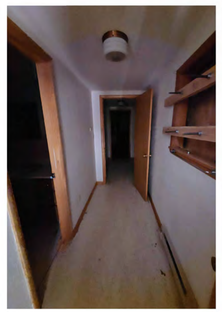

HALLWAY, LOOKING NORTH

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. AVES C-3536 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
401
A920

TITLE OF SHEET
NURSE'S CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 193 OF 371

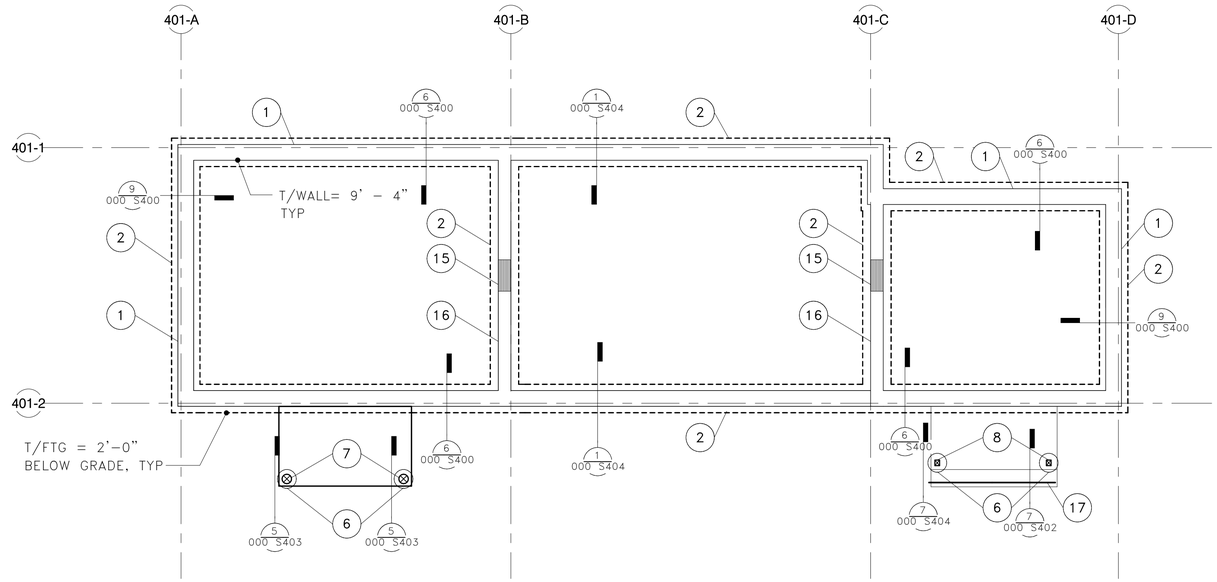

1 NURSE'S CABIN – FOUNDATION PLAN

1/4" = 1'-0"

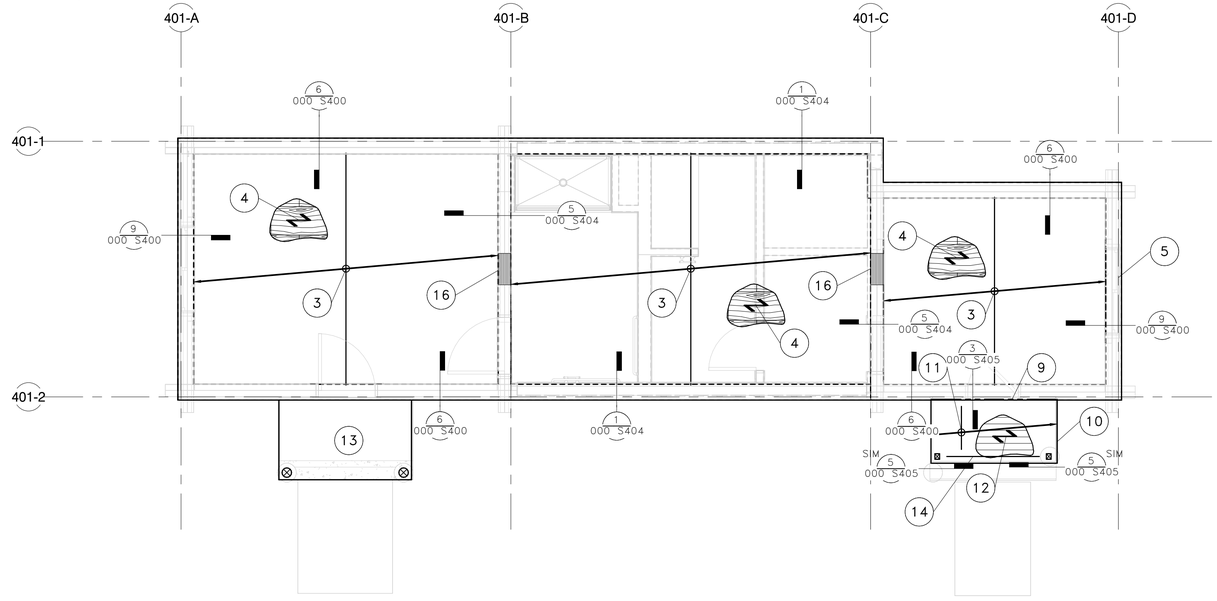

2 NURSE'S CABIN – FLOOR FRAMING PLAN

1/4" = 1'-0"

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ EF; T/WALL = MIN 6" ABOVE FINISHED GRADE
2. 1'-6"Wx10"DP CONCRETE FOOTING W/ (2) #4 BARS CONT; B/FTG = 2'-10" BELOW GRADE MIN
3. 11 7/8" TJI 210 @ 16"OC
4. 3/4" FLOOR SHEATHING
5. (E) 8"Ø LOG WALL FRAMING ABOVE TO BE LIFTED & TEMPORARILY RE-LOCATED AS REQUIRED TO CONSTRUCT FOUNDATION ELEMENTS
6. 12"Ø SONO-TUBE FOOTING W/ (8) #4 VERT & # 3 TIES @ 8"OC & (3) #3 TIES @ 3"OC AT TOP; B/FTG = 2'-10" BELOW GRADE
7. 6"Ø LOG POST TO MATCH (E) LOG POST
8. (2)2x4 POST TO MATCH (E) POST
9. PT 2x6 LEDGER
10. PT 2x6 BEAM, TYPICAL AT PERIMETER OF DECK
11. PT 2x6 @ 16"OC W/ LUC26 AT STEP END & PF26 AT LOG WALL END
12. DECKING PER ARCH
13. 4" CONCRETE SLAB ON GRADE WITH THICKENED SLAB EDGE AT PERIMETER
14. (2) 2x6 FLUSH BEAM
15. STEMWALL OPENING FOR CRAWLSPACE ACCESS. LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER .
16. 8" CONCRETE FOUNDATION WALL W/ #4 @18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = MIN 6" ABOVE FINISHED GRADE
17. FLAT PT4x6 FOR STEP CONNECTION

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/FINISHED FLOOR ASSUMED TO BE 10'-0", VERIFY WITH ARCHITECTURAL DRAWINGS.
4. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026 EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO. 401 S201

TITLE OF SHEET
NURSES CABIN – FDN & FLOOR FRAMING PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 194 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

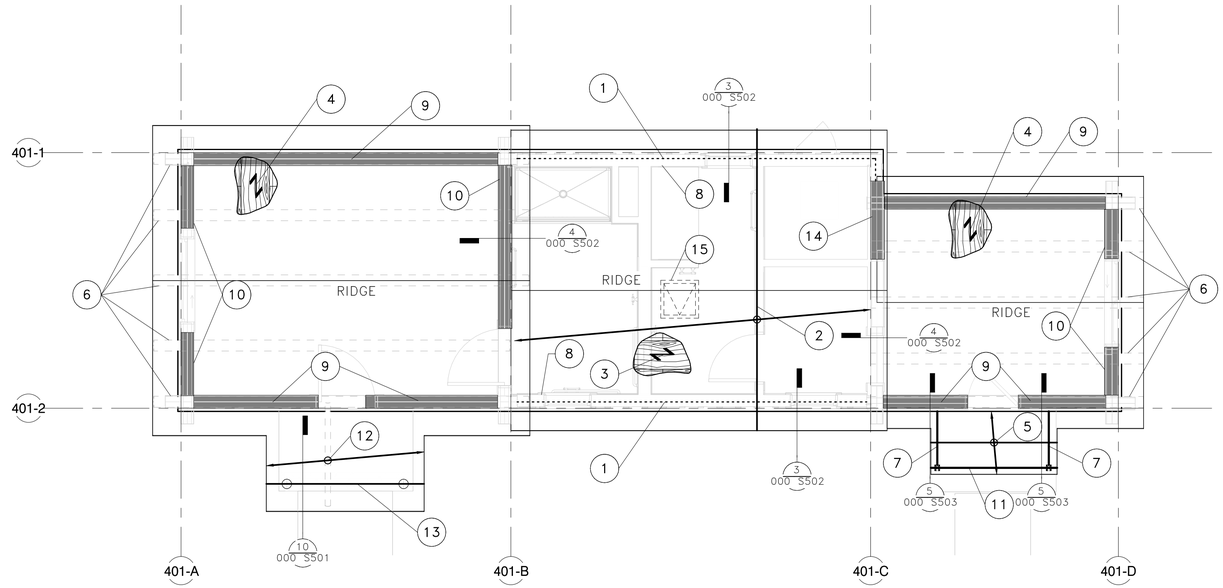

1 NURSES CABIN – ROOF FRAMING PLAN

1/4" = 1'–0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.
4. CENTER SECTION OF THIS BUILDING ONLY WILL BE RE–BUILT & COVERED IN HISTORIC FINISHES.

KEYNOTES:

1. 2x6 @ 16"OC W/ 1/2" SHTHG; RE–INSTALL HISTORIC EXTERIOR FINISHES
2. PRE–FABRICATED WOOD TRUSSES @ 24"OC W/ 2x4 RAFTER TAILS TO MATCH (E)
3. 5/8" ROOF SHTHG TO BE NAILED TO ROOF FRAMING PER 4/000 S503
4. 1" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
5. (2)2x4 PORCH BEAM W/ LUS24–2 EA END
6. (E) 7"Ø LOG PURLIN; CONNECT TO ROOF SHEATHING TO ALL PURLINS PER3/000 S500
7. (2)2x4 PORCH SIDE BEAMS W/ LUS24–2 TO ADJACENT BEAM
8. 1/2" WALL SHEATHING W/ 0.131"DIA x 2 1/2" NAILS @ 6"OC AT ALL PANEL EDGES PER5/000 S510
9. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L1" PER7/000 S501
10. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501
11. (2)2x6 PORCH BEAM SPANNING OVER POSTS BELOW
12. (E) MIN 3"Ø LOG CANOPY FRAMING TO REMAIN
13. (E) MIN 6"Ø LOG TO REMAIN
14. RETROFIT (E) 8"Ø LOG WALL BELOW W/ PINNING AS SHOWN FOR WALL TYPE "L3" PER 7/000 S501
15. ATTIC HATCH PER ARCH

4 0 4 8
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
401
S202

TITLE OF SHEET
NURSES CABIN – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 195 OF 371

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-401)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-401-1	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-401-2	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-401-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-401-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-401-3	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-401-4	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-401-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-401)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
3. ROOF CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	CONTROL
EF-401-1	PANASONIC	FV-0511VKL2	110	0.25	0.9	DIRECT	CEILING	1
EF-401-2	PANASONIC	FV-0511VKL2	110	0.25	0.9	DIRECT	CEILING	1

ELECTRIC HEATER SCHEDULE (HS-401)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-401-1	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-401-2	Q MARK	RCC15024C	240 - 1	1500	72	WALL	4	118	4-3/16
EH-401-3	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-401-4	Q MARK	RCC15024C	240 - 1	1500	72	WALL	4	118	4-3/16

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HUGHES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
401
M001

TITLE OF SHEET
NURSES CABIN – MECHANICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 196 OF 371

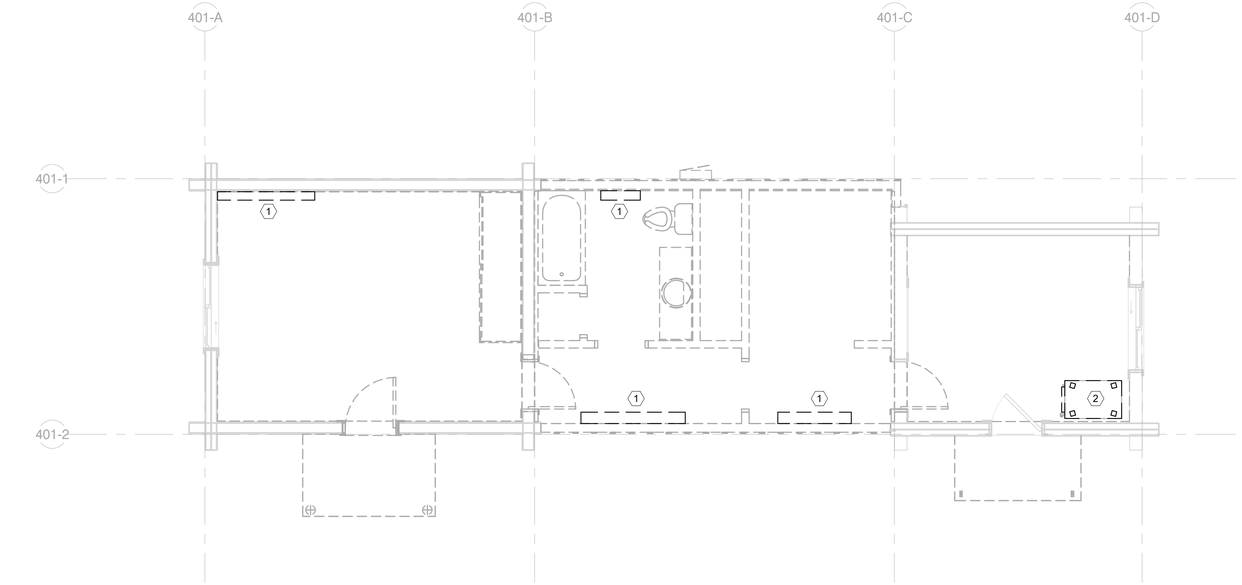

1 NURSES CABIN – MECHANICAL DEMO PLAN

1/4" = 1'-0"

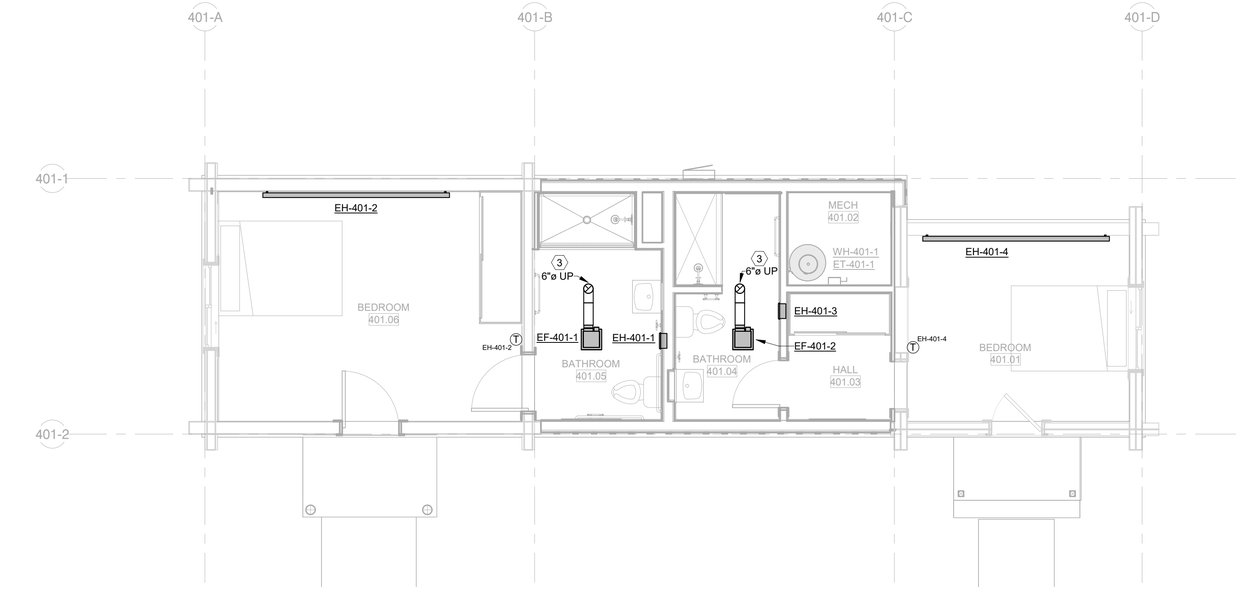

2 NURSES CABIN – MECHANICAL PLAN

1/4" = 1'-0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

(#) KEY NOTES:

1. REMOVE EXISTING BASEBOARD HEATER.
2. REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
3. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — JOSEPH R. HUGHES — 16596 — WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
401
M101

TITLE OF SHEET
NURSES CABIN – MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 197 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
C1	LED	13 W	700	3000	4" ROUND LOW PROFILE SURFACE MOUNT DOWNLIGHT	COOPER	HLS4-07-930-1E-WH	SURFACE	120 V	1
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2
U1	LED	27 W	2000	5000	VAPOR PROOF FROSTED GLASS GLOBE	RAB	VXLED26	SURFACE	120 V	1

Branch Panel: P401

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 401 NURSES CABIN
Supply From: NORTH SERVICE
Mounting: Surface
Enclosure: 3R
Volts: 120/240 Single
Phases: 1
Wires: 3
A.F.C.: 2,100
Mains Type: MCB
Mains Rating: 100 A
MCB Rating: 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	150			1	20 A	Heating		EH-401-1	2
3								--	750						4
5	RCPT - BATHROOMS		Receptacle	20 A	1	360	750			2	20 A	Heating		EH-401-2	6
7	RCPT - BEDROOM		Receptacle	20 A	1			1260	150	1	20 A	Heating		EH-401-3	8
9	RCPT - BEDROOM		Receptacle	20 A	1	1080	750			2	20 A	Heating		EH-401-4	10
11	WH-401-1		Heating	30 A	2			2250	750						12
13						2250	180			1	20 A	Receptacle		RCPT - EXTERIOR	14
15	LTG		HVAC; Lighting	20 A	1			1018	180	1	20 A	Receptacle		RCPT - FIBER PANEL	16
17	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	18
19	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	20
21	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	22
23	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	24
					Total Load:	5520 VA		6358 VA							
					Total Amps:	46 A		53 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
HVAC	500 VA	100.00%	500 VA		
Heating	7800 VA	100.00%	7800 VA	**Total Conn. Load:**	11878 VA
Lighting	518 VA	125.00%	648 VA	**Total Est. Demand:**	12008 VA
Receptacle	3060 VA	100.00%	3060 VA	**Total Conn.:**	49 A
				Total Est. Demand:	50 A

MEP COORDINATION SCHEDULE (HS-401)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-401-1	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EF-401-2	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-401-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-401-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-401-3	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-401-4	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-401-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
401
E001

TITLE OF SHEET
NURSES CABIN – ELECTRICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 198 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

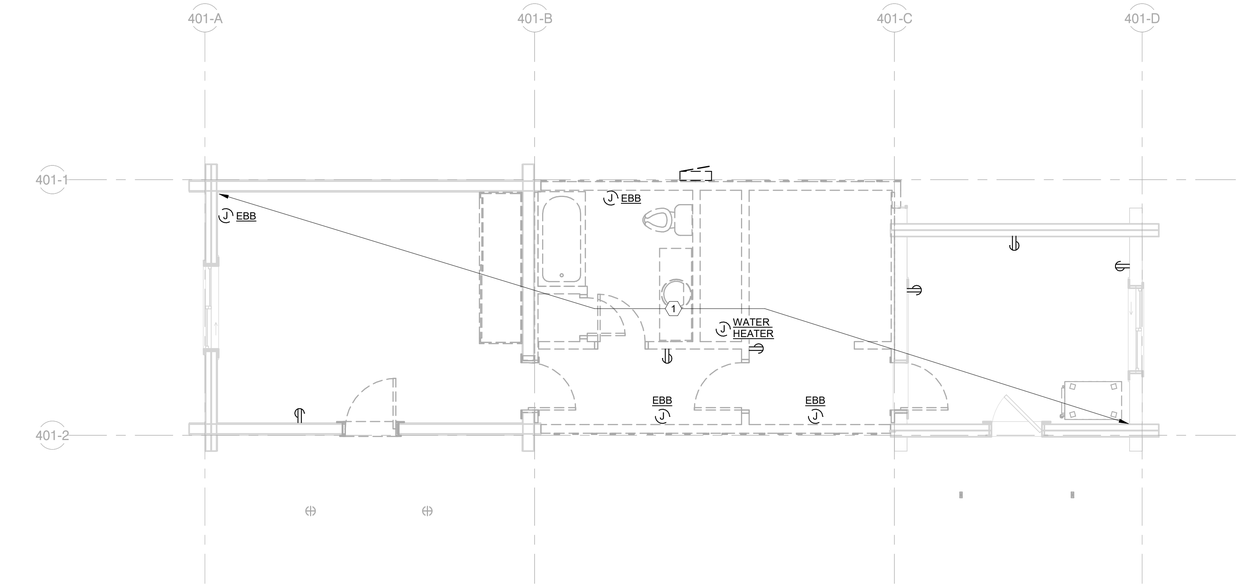

1 NURSES CABIN – POWER DEMO PLAN

1/4" = 1'-0"

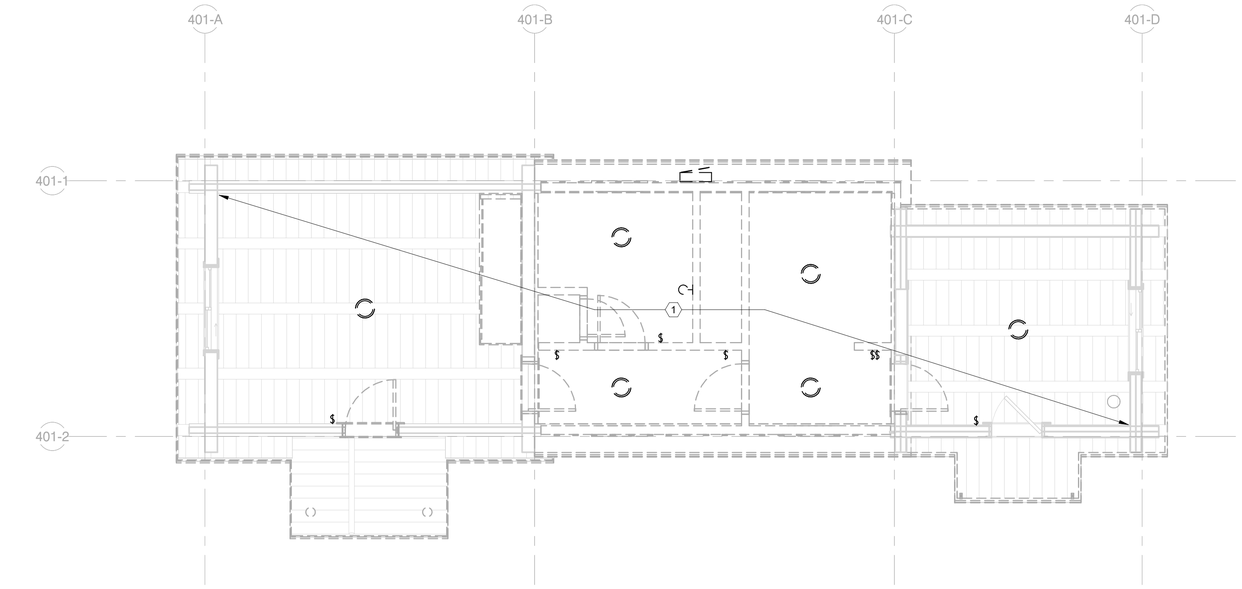

2 NURSES CABIN – LIGHTING DEMO PLAN

1/4" = 1'-0"

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
State
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
401
E100

TITLE OF SHEET
NURSES CABIN – ELECTRICAL DEMO PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 199 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

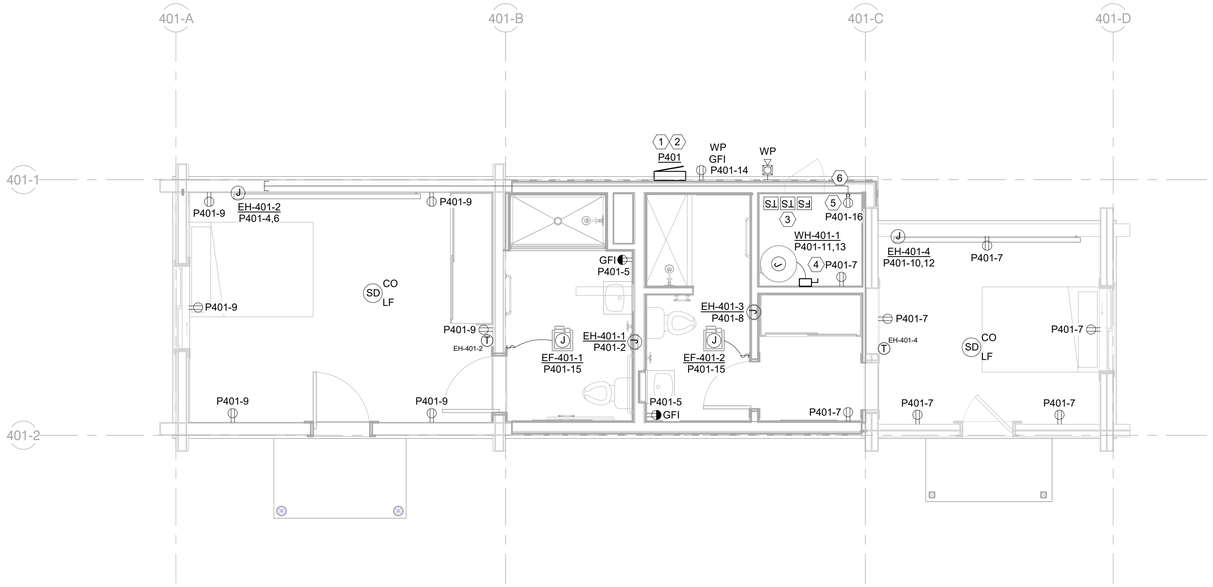

1 NURSES CABIN – POWER AND SIGNAL PLAN

1/4" = 1'-0"

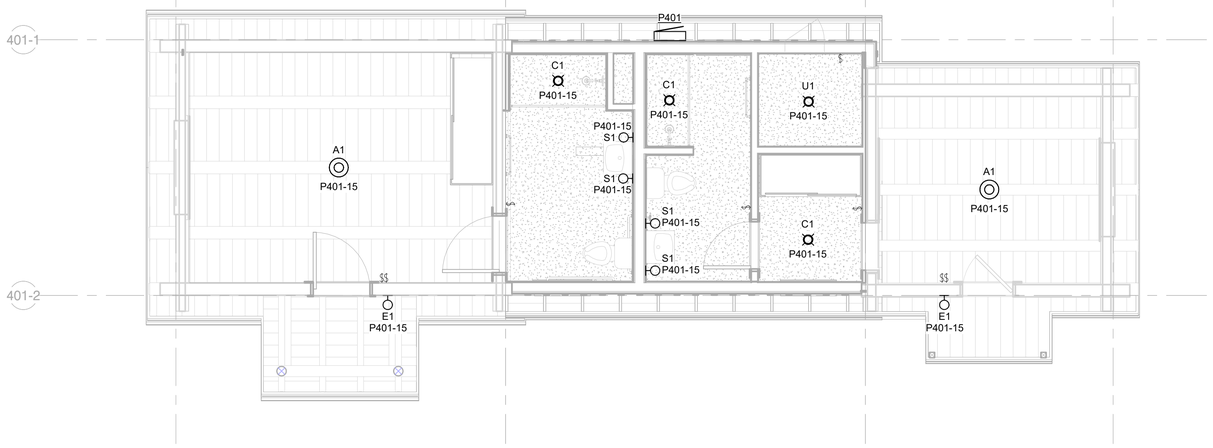

2 NURSES CABIN – LIGHTING PLAN

1/4" = 1'-0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
5. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
6. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
401
E101

TITLE OF SHEET
NURSES CABIN – ELECTRICAL RENOVATION PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 200 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - NURSES CABIN (HS-401)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
FD-401-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-401-1	LAVATORY - WALL MOUNTED	YES	KOHLER	K-2868	VITREOUS CHINA	WALL / ABA HEIGHT	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE WITH WATER STOPS, OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
SH-401-1	SHOWER	NO	KOHLER	K-8639	ACRYLIC	FLOOR	SHOWER TRIM	KOHLER	K-TS97077-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS AND GRID DRAIN.
SH-401-2	ACCESSIBLE SHOWER	YES	AQUATIC	F6034DPAN	ACRYLIC	FLOOR	ABA SHOWER TRIM	KOHLER	K-TS74042-4 / K-99898-G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	PROVIDE COMPLETE WITH GRAB BARS, FOLD UP SEAT, HAND-HELD SHOWER ASSEMBLY WITH SLIDE BAR, KOHLE RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS, GRID DRAIN, AND ACCESSORIES FOR COMPLETE ABA INSTALLATION.
WC-401-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-401)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
6. FIVE YEAR LIMITED TANK WARRANTY
7. ZERO INCH CLEARANCE
8. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-401-1	RHEEM	XE50M06ST45U1	ELECTRIC TANK	50	120	4.5	0.93	61	21	48	23	132

PLUMBING EXPANSION TANK SCHEDULE (HS-401)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-401-1	TACO	PAX10-150	WH-401-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-401)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	2	3.6	7.2
			7.2
MAX. LENGTH (FT)	40		
TOTAL PEAK FLOW (GPM)	13		
WATER METER SIZE (BY UTILITY)	3"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-401)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	2	5.0	10
EMERGENCY FLOOR DRAIN	1	0.0	0.0
			10
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HERRES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
401
P001

TITLE OF SHEET
NURSES CABIN – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 201 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

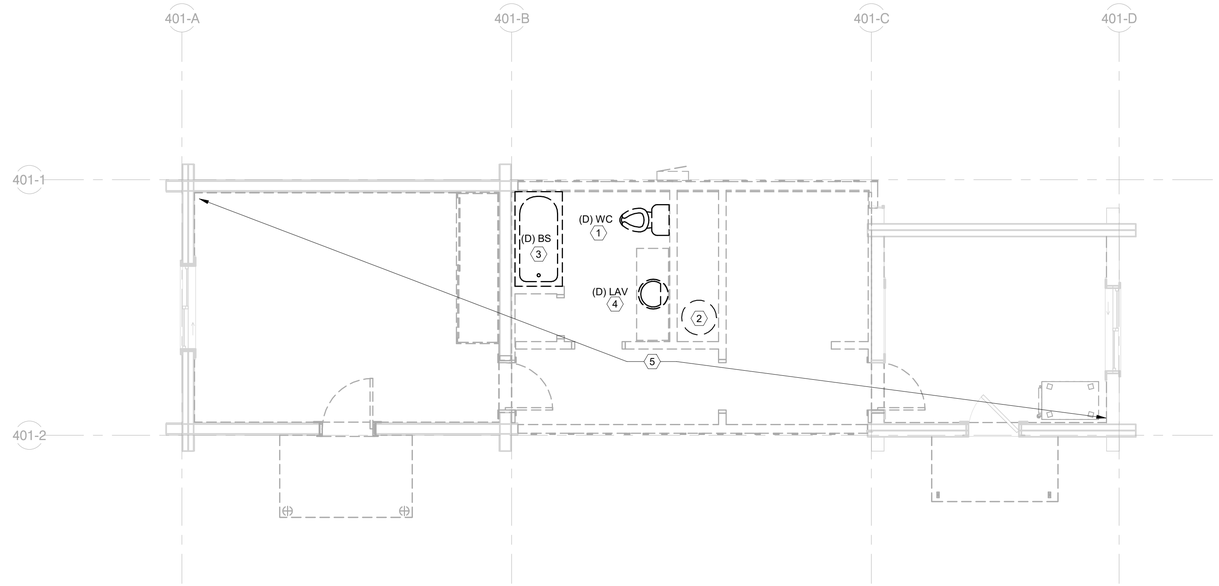

1 NURSES CABIN – PLUMBING DEMO PLAN

1/4" = 1'-0"

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

(#) KEY NOTES:

1. REMOVE EXISTING WATER CLOSET AND ASSOCIATED PIPING.
2. REMOVE EXISTING WATER HEATER AND ASSOCIATED PIPING.
3. REMOVE EXISTING BATH TUB, ASSOCIATED PIPING AND FAUCET.
4. REMOVE EXISTING LAVATORY, ASSOCIATED PIPING AND FAUCET.
5. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
Joseph R. Hughes
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
401
P101

TITLE OF SHEET
NURSES CABIN – DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
PMIS/PKG NO. 237343
SHEET 202 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

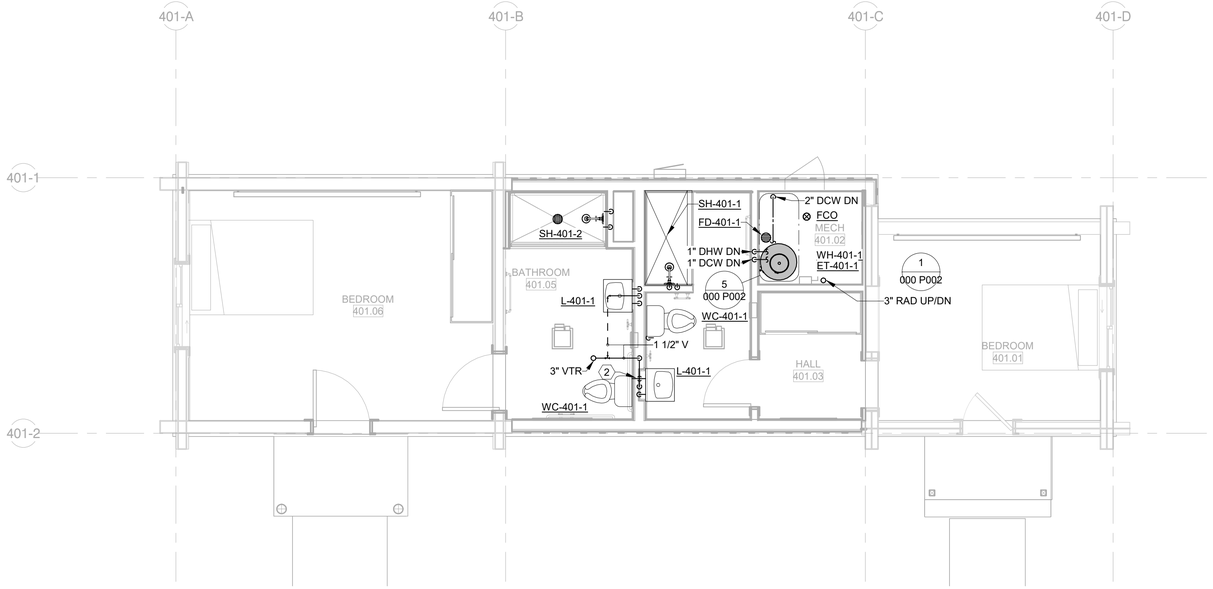

1 NURSES CABIN – PLUMBING PLAN

1/4" = 1'-0"

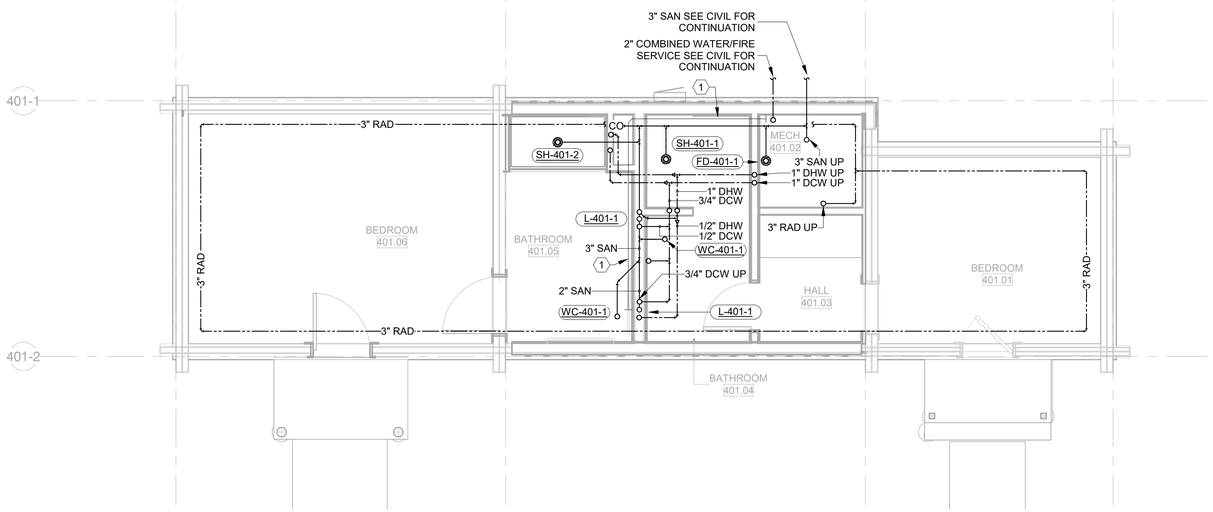

2 NURSES CABIN – PLUMBING UNDERFLOOR PLAN

1/4" = 1'-0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

KEY NOTES:

1. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
2. 3/4" DCW DOWN. 1/2" DCW TO WC-401-1, 1/2" DCW TO L-401-1.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer JOSEPH R. THOMAS 16596 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
401
P201

TITLE OF SHEET
NURSES CABIN – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 203 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

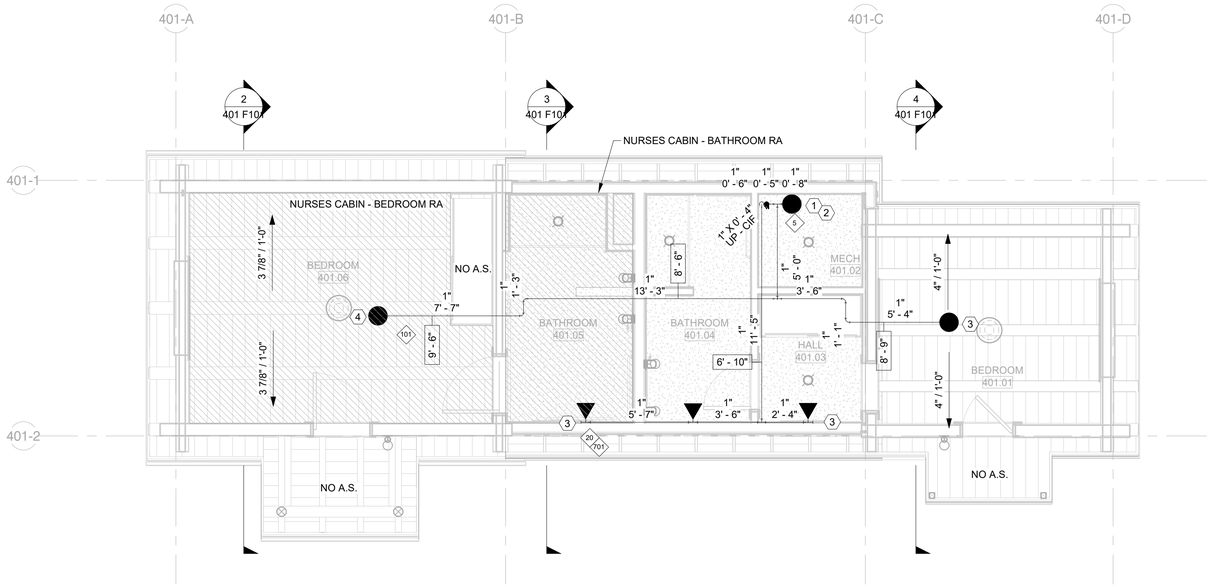

1 NURSES CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

Hydraulic Information	
Remote Area Name	Nurses Cabin - Bedroom
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	179 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.9
Base of Riser	22.02 GPM
Base of Riser	36.00 psi
Safety Margin	+33.11 (45.41%)

Hydraulic Information	
Remote Area Name	Nurses Cabin - Bathroom
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	80 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.4
Base of Riser	16.05 GPM
Base of Riser	27.15 psi
Safety Margin	+42.3 (57.97%)

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

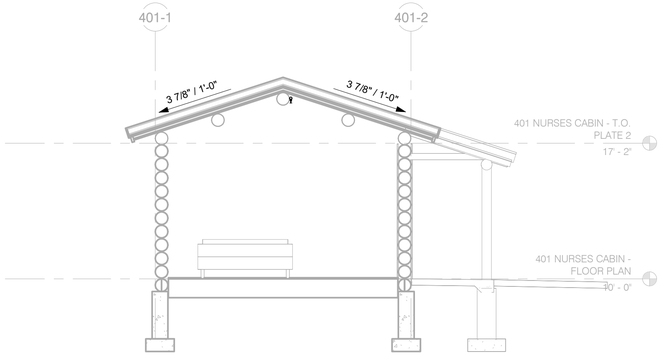

2 NURSES CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

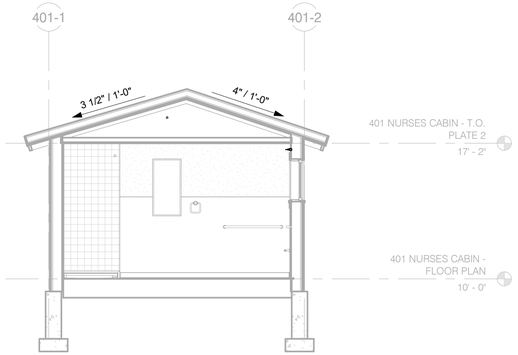

3 NURSES CABIN – FIRE SUPPRESSION PLAN1

1/4" = 1'–0"

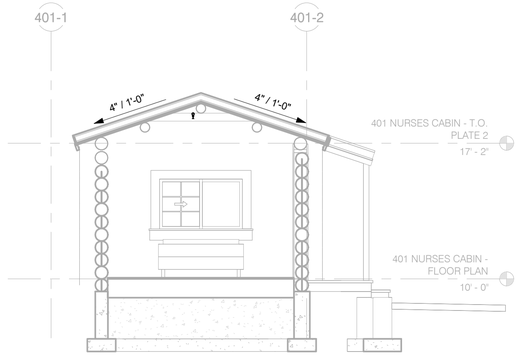

4 NURSES CABIN – FIRE SUPPRESSION PLAN2

1/4" = 1'–0"

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	3
◀	Reliable	F1Res44	R3531	4.4	Quick	Horizontal Sidewall	1/2"	175 °F	Model F2	White	Residential Sidewall	3
												6

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer GRANT J. PEARCE 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
401
F101

TITLE OF SHEET
NURSES CABIN – MAIN LEVEL PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 204 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING NORTHEAST TOWARDS 403 3–BAY GARAGE

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

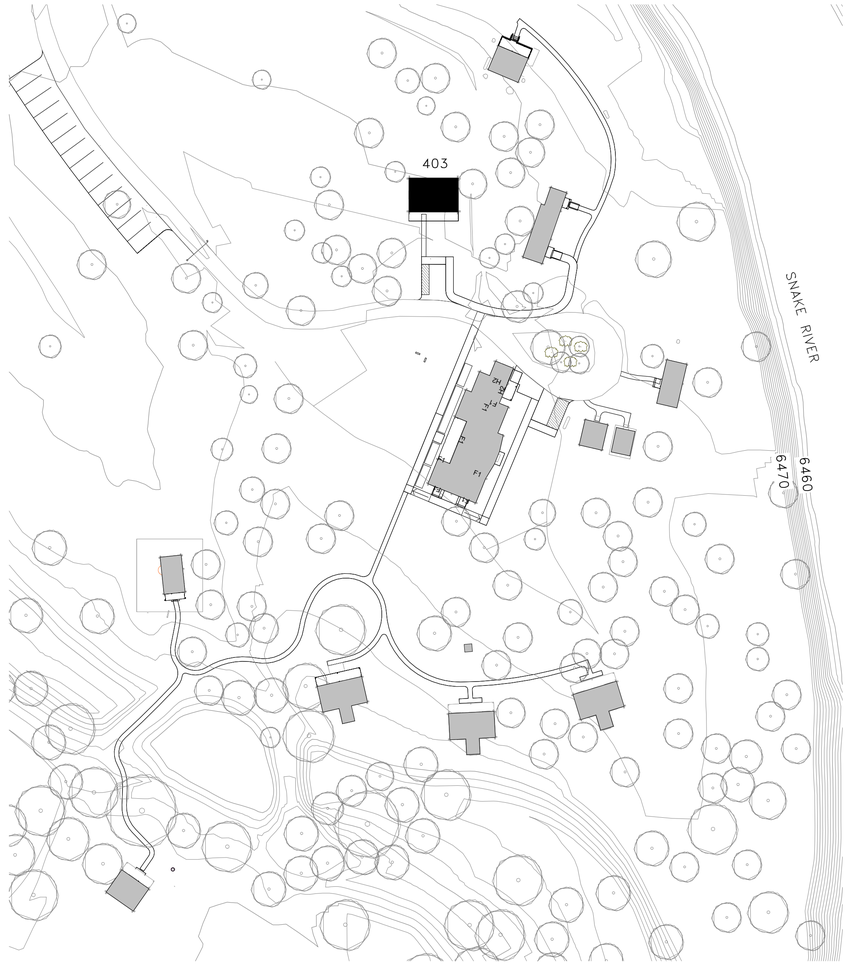

1 KEY PLAN – 403 3–BAY GARAGE

1" = 50'–0"

50 0 50 100

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. IVES
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
G000

TITLE OF SHEET
3–BAY GARAGE – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 205 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

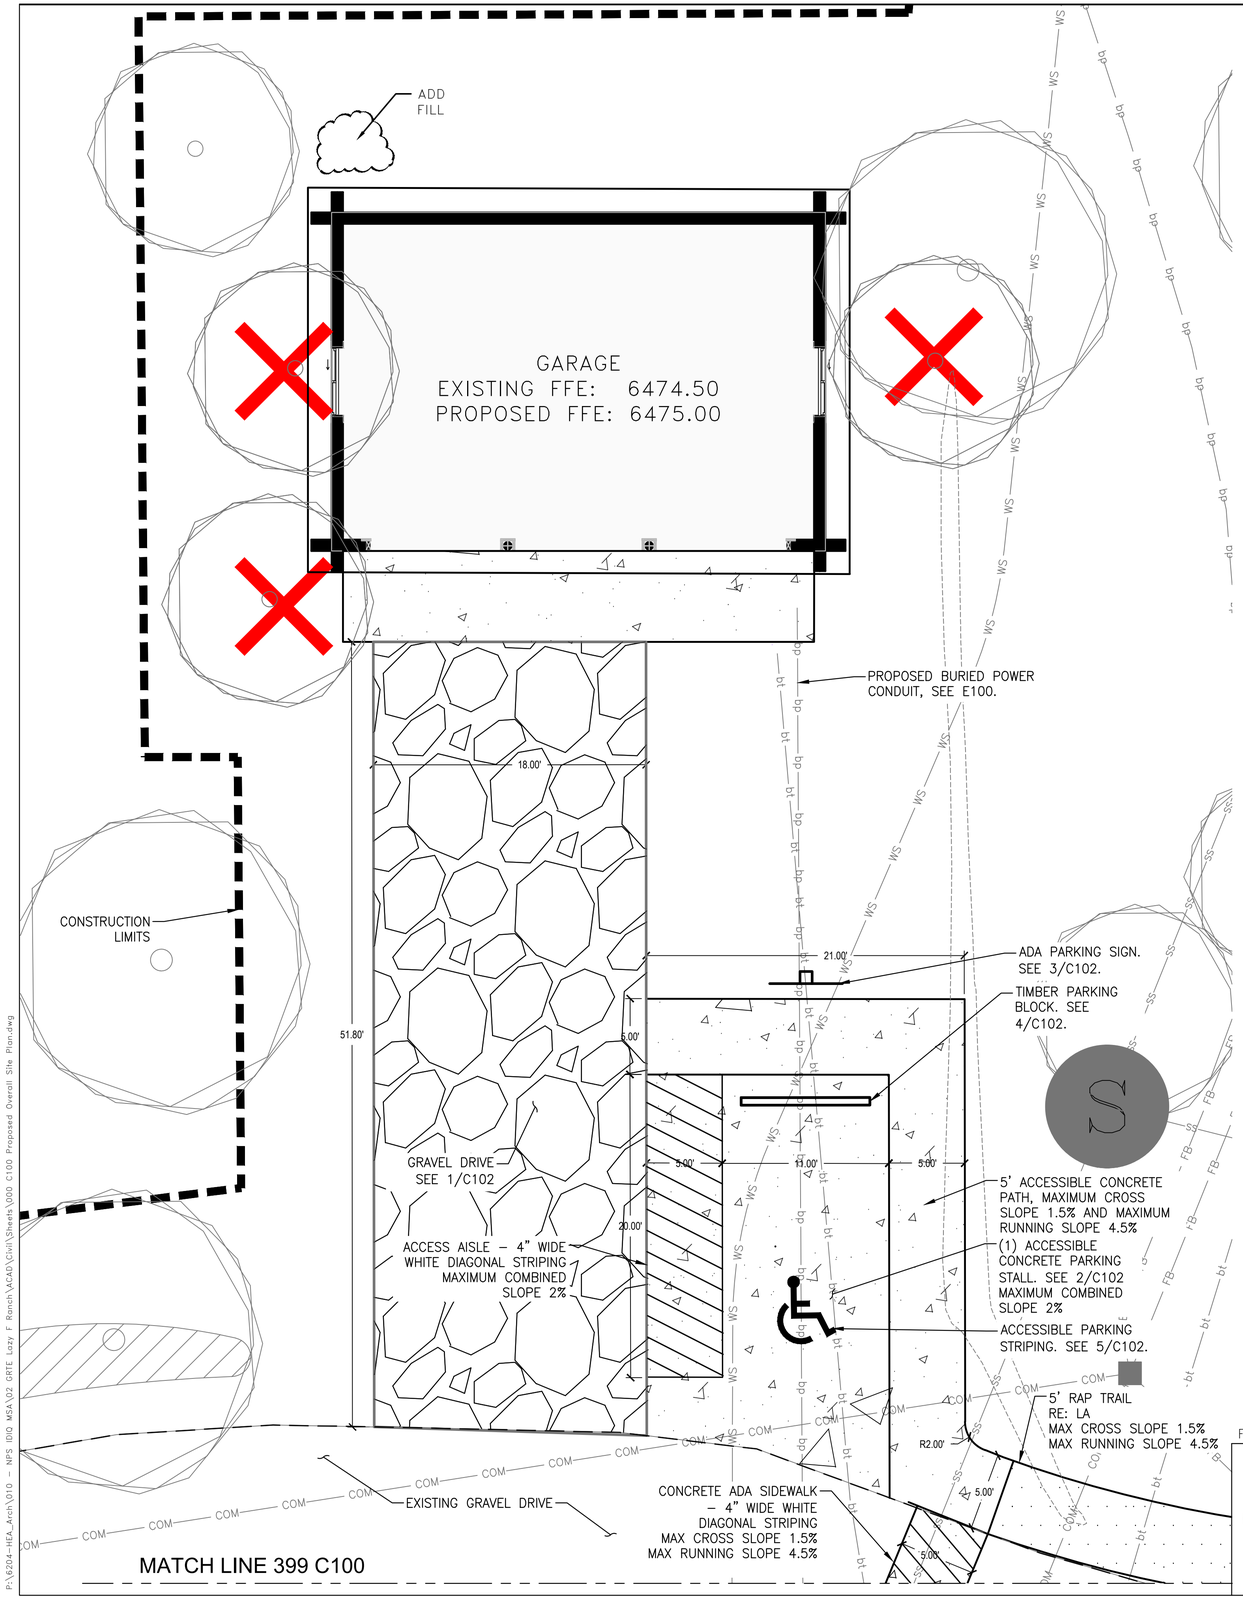

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW–OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

10 0 5 10

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE NO. 22345 Date: 07/21/2026 WYOMING

A/E FIRM	
PRIME: HENNEBERY EDDY PORTLAND, OR	DESIGNED: MMI
SUB: MORRISON MAIERLE BOZEMAN, MT	DRAWN: CMS
	TECH REVIEW: CMS
	DATE: 07/21/2026

SUB SHEET NO. 403 C100

TITLE OF SHEET
GARAGE – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	206 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

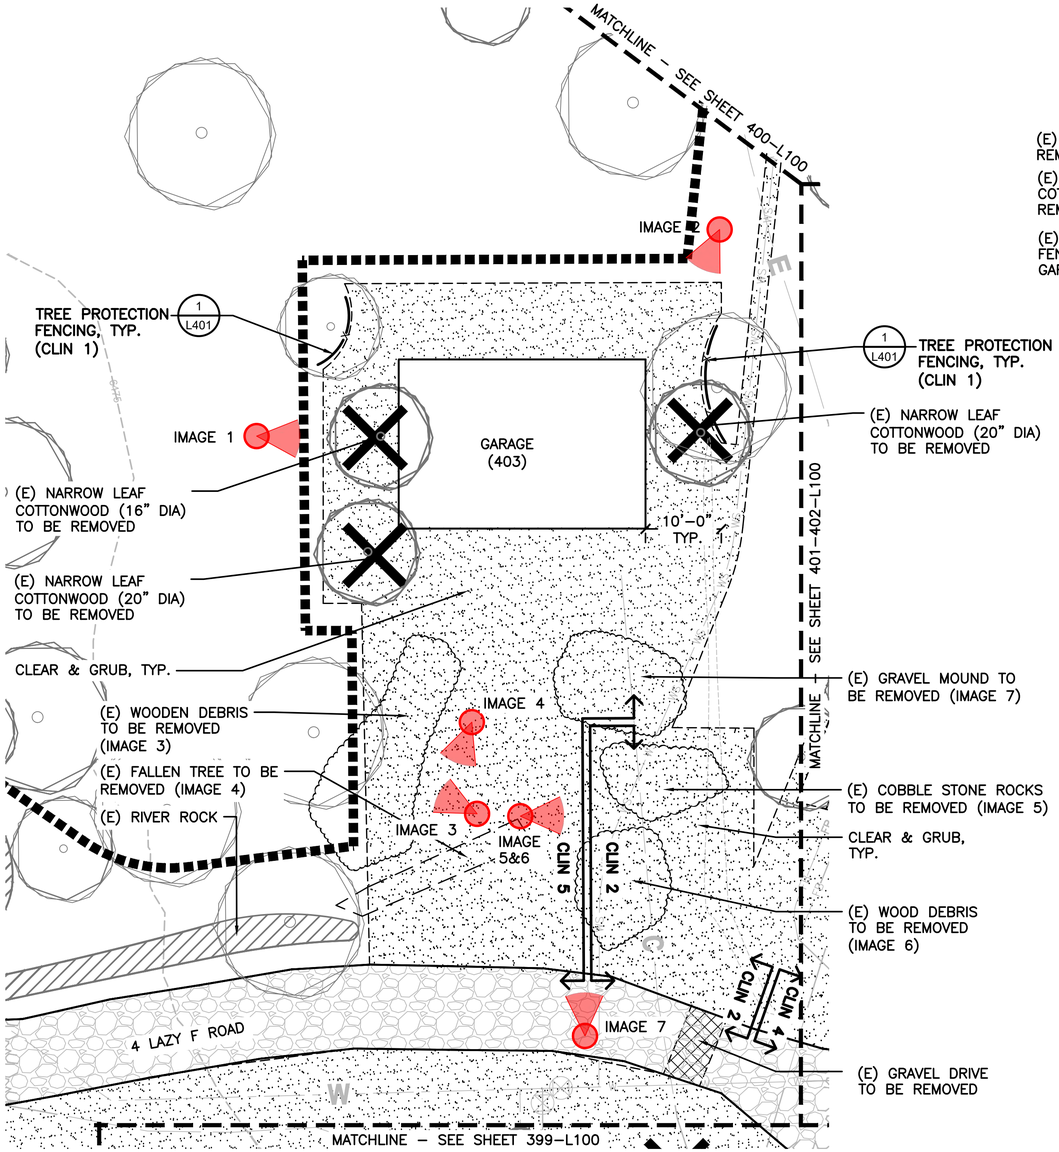

(E) UTILITIES TO BE REMOVED, RE: CIVIL

(E) NARROW LEAF COTTONWOODS TO BE REMOVED

(E) ORANGE PROTECTION FENCING AROUND GARAGE TO BE REMOVED

IMAGE 1: (E) TREES TO BE REMOVED.

IMAGE 2: (E) TREE TO BE REMOVED.

IMAGE 3: (E) WOOD DEBRIS TO BE REMOVED.

IMAGE 4: (E) FALL TREE TO BE REMOVED.

IMAGE 5: (E) COBBLE STONES TO BE REMOVED.

IMAGE 6: (E) WOOD DEBRIS TO BE REMOVED.

IMAGE 7: (E) GRAVEL MOUND TO BE REMOVED.

(E) ORANGE PROTECTION FENCING AROUND GARAGE TO BE REMOVED

(E) GRAVEL TO BE REMOVED

(E) COBBLE STONE TO BE REMOVED

(E) WOOD DEBRIS TO BE REMOVED

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- WS (E) WATER SERVICE LINE
- FB (E) FIBER OPTIC LINE
- E (E) BURIED POWER LINE
- C (E) BURIED TELEPHONE LINE
- W (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) RIVER ROCK
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- (E) GRAVEL TO BE REMOVED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

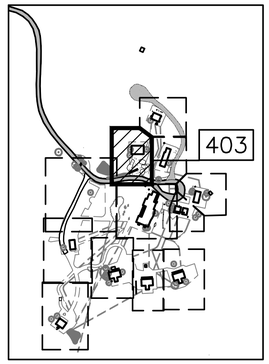

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/24 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 403 L100	TITLE OF SHEET GARAGE – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 207 OF 371

File Path
Z:\GIS\SKEPSTIENS_R05 P\DENVER\NPS GRTE 4LAZY F RANCH - 199539_FINAL CD\CAD\ALL\1.0_GRTE-L4_DEMO.DWG
XREFS: 08A_SESS06_0508_NPS GRTE 4 LAZY F ARCH PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_DEMO.DWG
IMAGES: ..\..\2_Admin\Photos\Garage\Debris1.jpg|Debris2.jpg|Debris3.jpg|Debris4.jpg|Debri.jpg|\..\..\2_Admin\Photos\Cabin\HarrysCabin\shrub removes-1.jpg|..\..\2_Admin\Photos\GateGate\Gate-1.jpg|Gate.jpg|..\..\2_Admin\Photos\IceHouse\Mouse and Ice .jpg|..\..\...

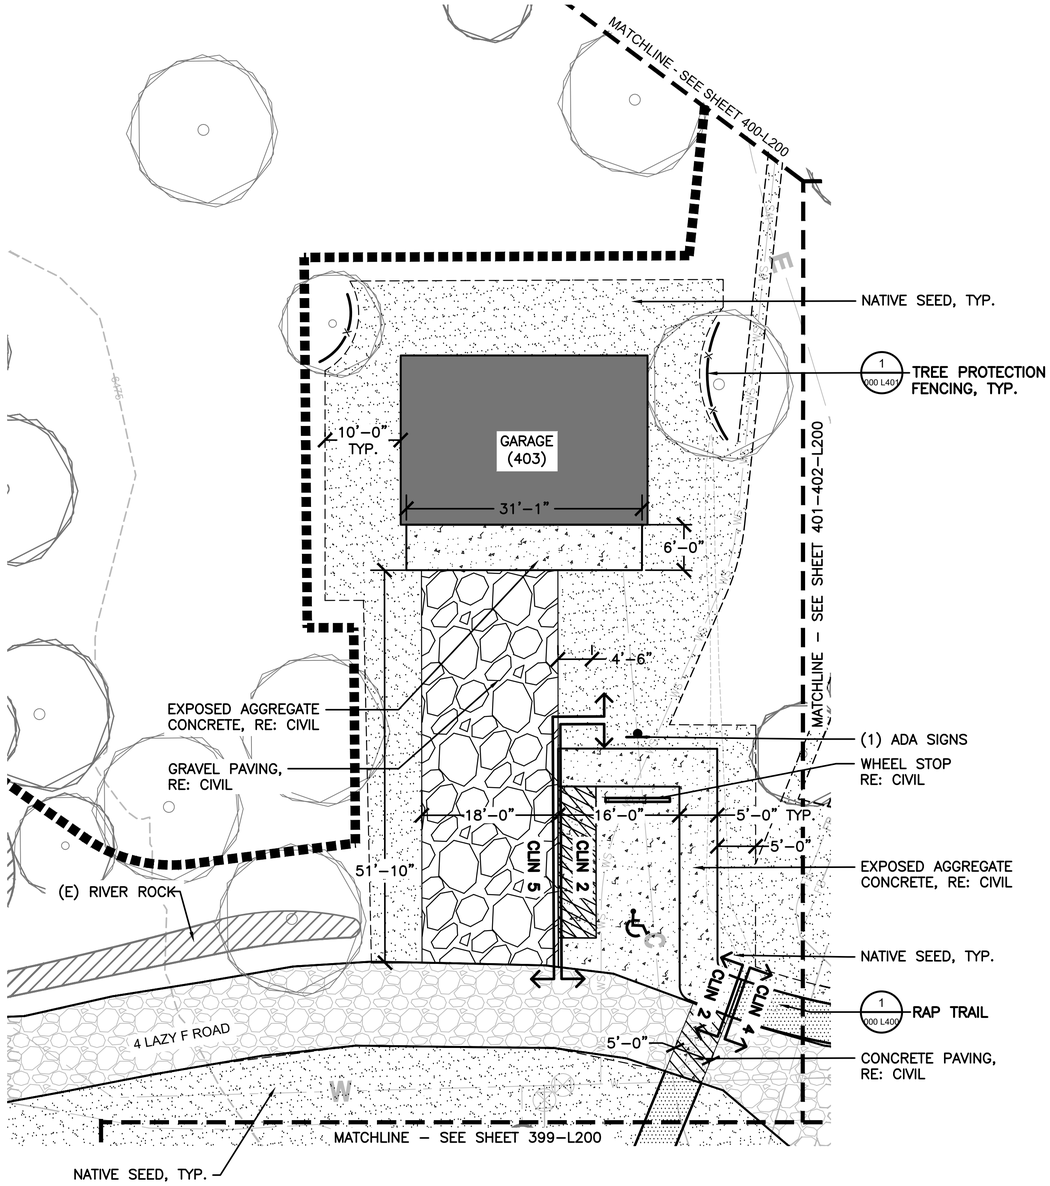

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) BURIED POWER LINE
- (E) BURIED TELEPHONE LINE
- (E) WATER MAINLINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) RIVER ROCK
- RAP TRAIL
- CONCRETE, RE: CIVIL
- GRAVEL, RE: CIVIL
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

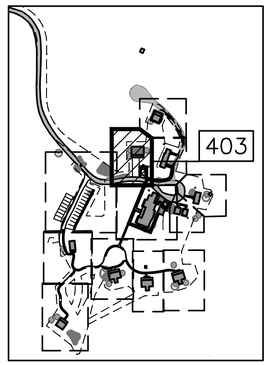

10 0 10 20
SCALE OF FEET

NOTES:

1. ACCESSIBLE WALKWAY TO BE 5' WIDE, RECYCLED ASPHALT.
2. ACCESSIBLE PARKING STALLS AND ACCESS AISLE TO BE EXPOSED AGGREGATE CONCRETE.
3. ACCESSIBLE WALKWAY SHALL HAVE A MAXIMUM RUNNING SLOPE 5% AND A MAXIMUM CROSS SLOPE IS 2%.
4. SIDE SLOPES FROM PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
5. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
6. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
7. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 05.
8. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

A/E FIRM	DESIGNED:	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
PRIME: HENNEBERY EDDY PORLTAND, OR	DHM	403 L200	GARAGE – SITE PLAN	136 / 193826
SUBCONTRACTOR: DHM DESIGN DENVER, CO	DRAWN: DHM		REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	PMIS/PKG NO. 237343
	TECH REVIEW: DHM			SHEET 208 OF 371
	DATE: 07/21/2026			

File Path
X:\PROJECTS\0843\SS\26_0308_NPS GRTE 4 LAZY F ARCH-PROJECT OVERVIEW SITE PLAN.dwg\NPS_TitleHoc_22x34 - GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.DWG
IMAGES: ..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG\..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg\..\..\2_Admin\Photos\ParkingLot\Parking lot4.jpg\Parking lot too-5.jpg\..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg\River cabin-4.jpg\Road connection...

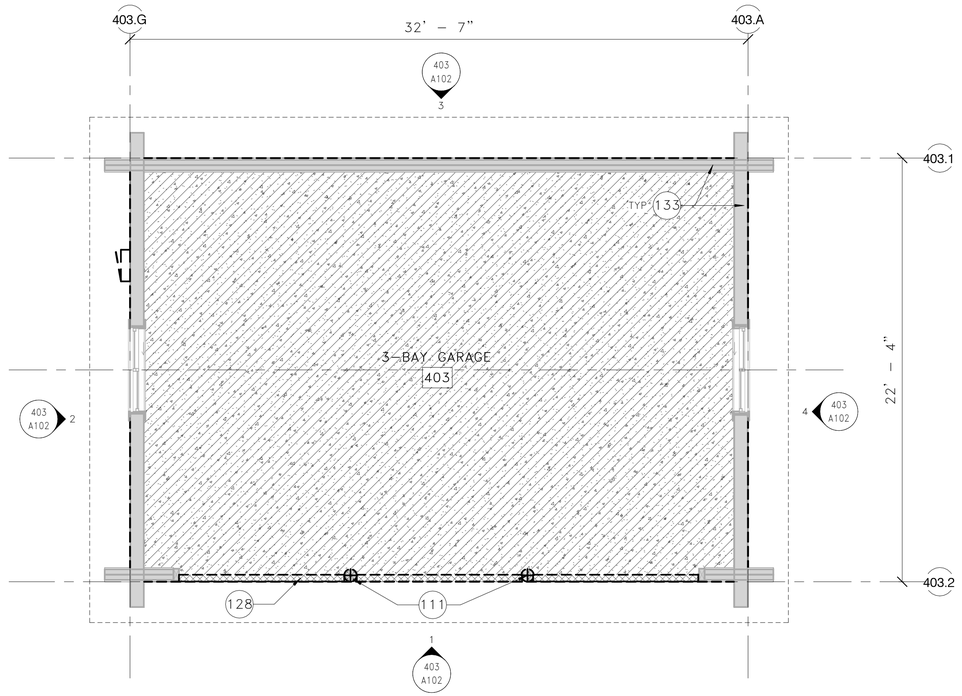

1 403 3–BAY GARAGE – FIRST LEVEL DEMO PLAN

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

KEYNOTES

111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
128 REMOVE (E) PLYWOOD INFILLS
133 CATALOGUE LOG CONFIGURATION, TAG EVERY ELEMENT, CAREFULLY DECONSTRUCT ENTIRE STRUCTURE, AND PREP FOR RECONSTRUCTION IN THE SAME CONFIGURATION ON NEW FOUNDATION

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVES Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A101

TITLE OF SHEET
3–BAY GARAGE – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 209 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-781e-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

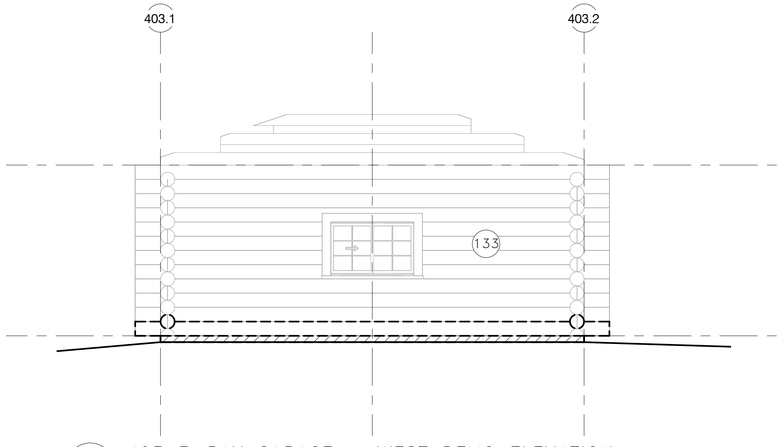

2 403 3–BAY GARAGE – WEST DEMO ELEVATION

1/4" = 1'–0"

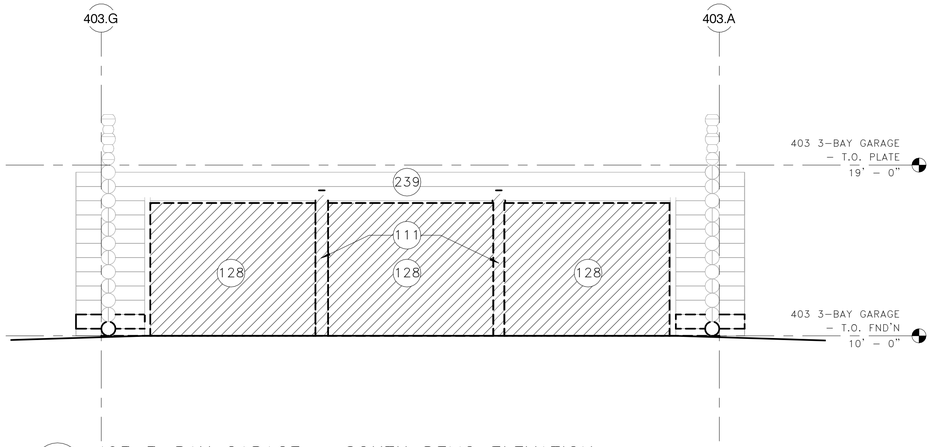

1 403 3–BAY GARAGE – SOUTH DEMO ELEVATION

1/4" = 1'–0"

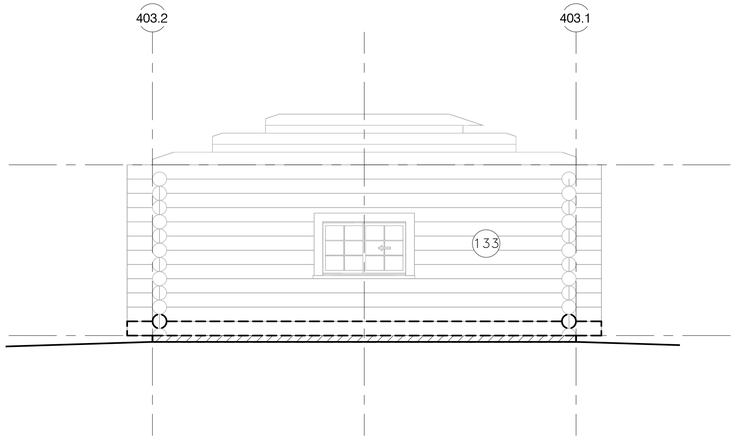

4 403 3–BAY GARAGE – EAST DEMO ELEVATION

1/4" = 1'–0"

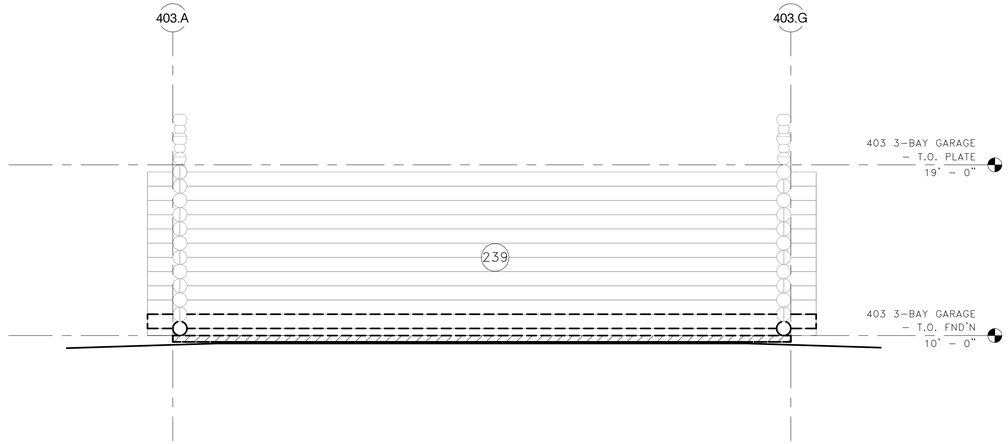

3 403 3–BAY GARAGE – NORTH DEMO ELEVATION

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
128 REMOVE (E) PLYWOOD INFILLS
133 CATALOGUE LOG CONFIGURATION, TAG EVERY ELEMENT, CAREFULLY DECONSTRUCT ENTIRE STRUCTURE, AND PREP FOR RECONSTRUCTION IN THE SAME CONFIGURATION ON NEW FOUNDATION
239 RECONSTRUCT ENTIRE STRUCTURE WITH SALVAGED COMPONENTS IN EXACT SAME CONFIGURATION. ASSUME 20% OF LOG REPLACEMENT

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL/SD/AG
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A102

TITLE OF SHEET
3–BAY GARAGE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 210 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

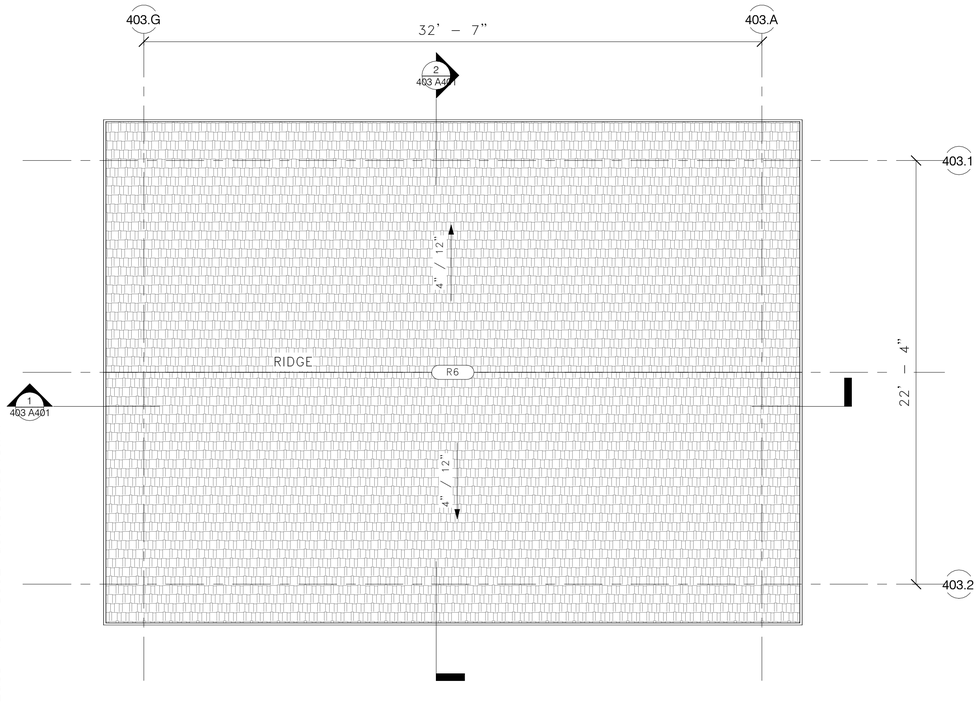

2 403 3–BAY GARAGE – ROOF LEVEL PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# — ROOF TAG
- ### — KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

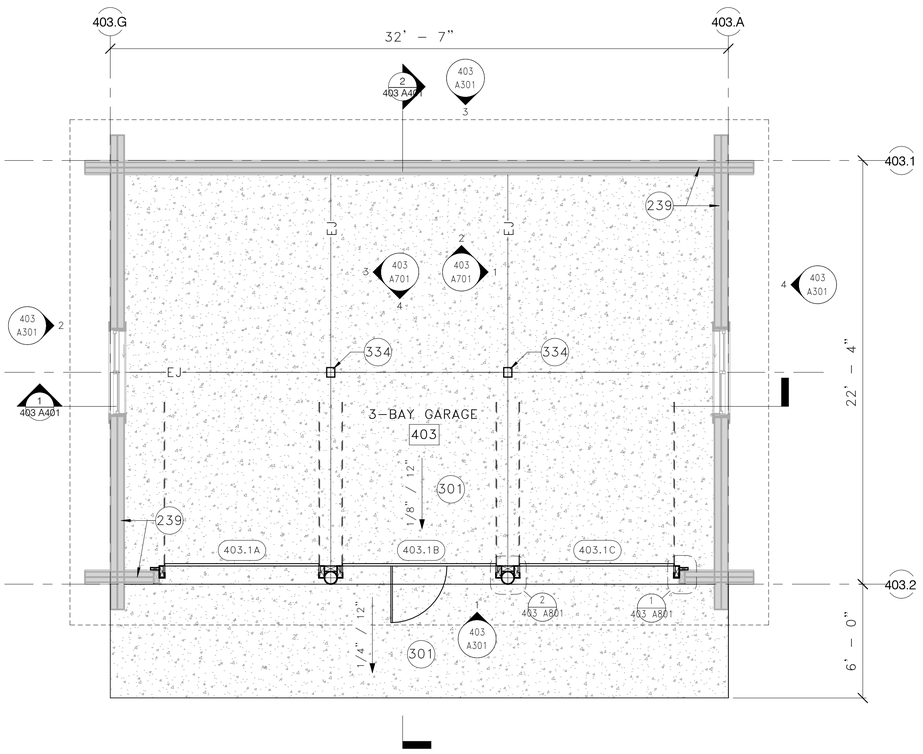

1 403 3–BAY GARAGE – FIRST LEVEL PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## — DOOR TAG
- EXT–XX — WALL TAG
- EDGE OF ROOF ABOVE
- ### — KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

239 RECONSTRUCT ENTIRE STRUCTURE WITH SALVAGED COMPONENTS IN EXACT SAME CONFIGURATION. ASSUME 20% OF LOG REPLACEMENT

301 PROVIDE CONCRETE SLAB ON GRADE

334 PROVIDE WOOD COLUMN PER STRUCTURAL

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM E. IVES — C-3638 — Date 7/21/26 — STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A201

TITLE OF SHEET
3–BAY GARAGE – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 211 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

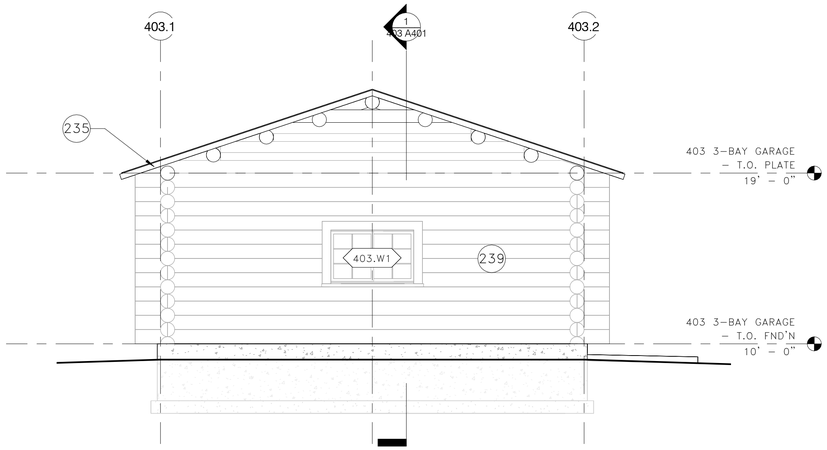

2 403 3–BAY GARAGE – WEST ELEVATION

1/4" = 1'–0"

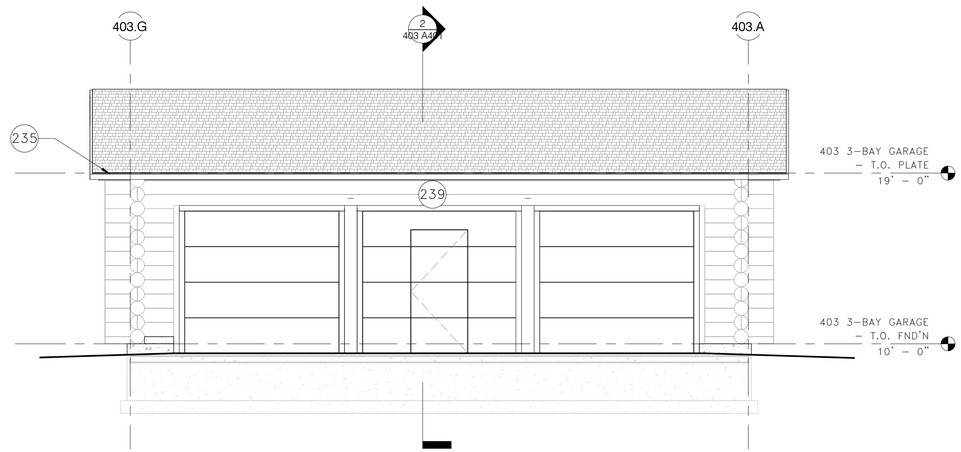

1 403 3–BAY GARAGE – SOUTH ELEVATION

1/4" = 1'–0"

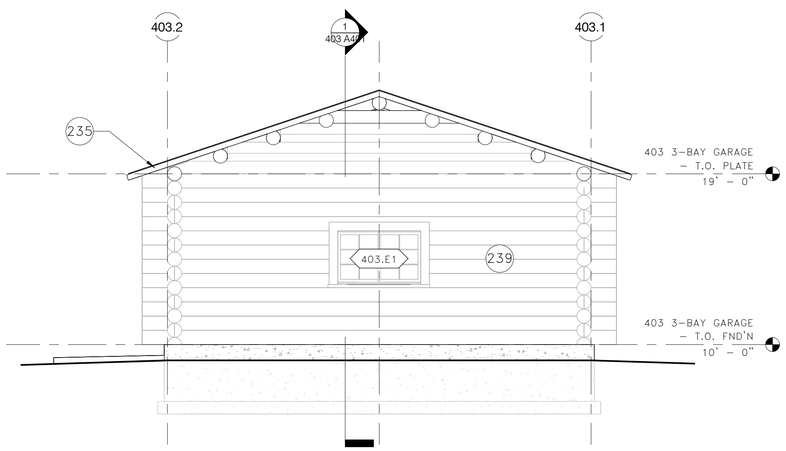

4 403 3–BAY GARAGE – EAST ELEVATION

1/4" = 1'–0"

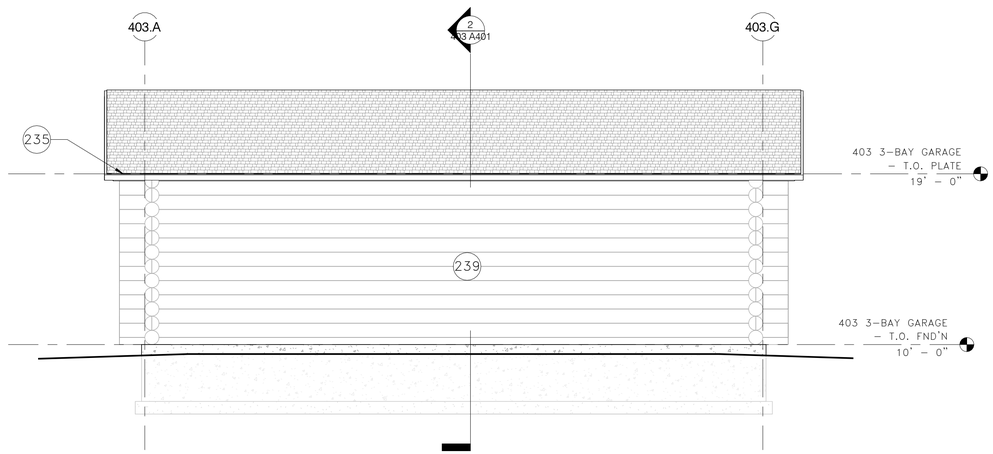

3 403 3–BAY GARAGE – NORTH ELEVATION

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###.XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

235 REPLACE (E) WOOD FASCIA

239 RECONSTRUCT ENTIRE STRUCTURE WITH SALVAGED COMPONENTS IN EXACT SAME CONFIGURATION. ASSUME 20% OF LOG REPLACEMENT

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL/SD/AG
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A301

TITLE OF SHEET
3–BAY GARAGE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 212 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993–78fe–47d3–9961–a35d9e3691a7\85ccdf7c–2db3–4c18–8662–ac7f3386a545.rvt

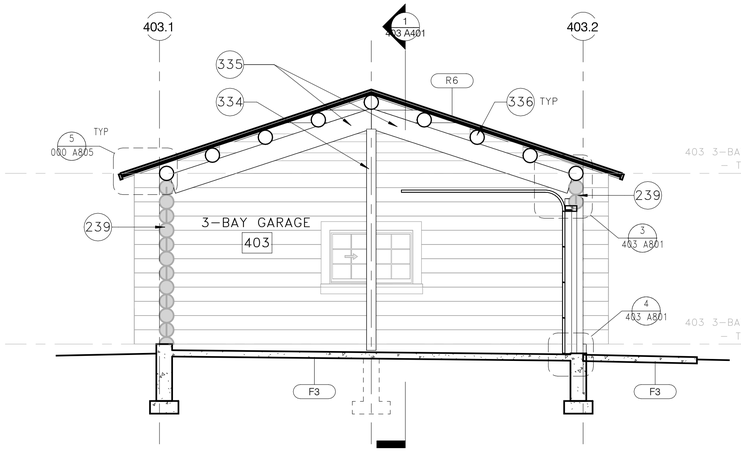

2 403 3–BAY GARAGE – BUILDING SECTION 'B'

1/4" = 1'–0"

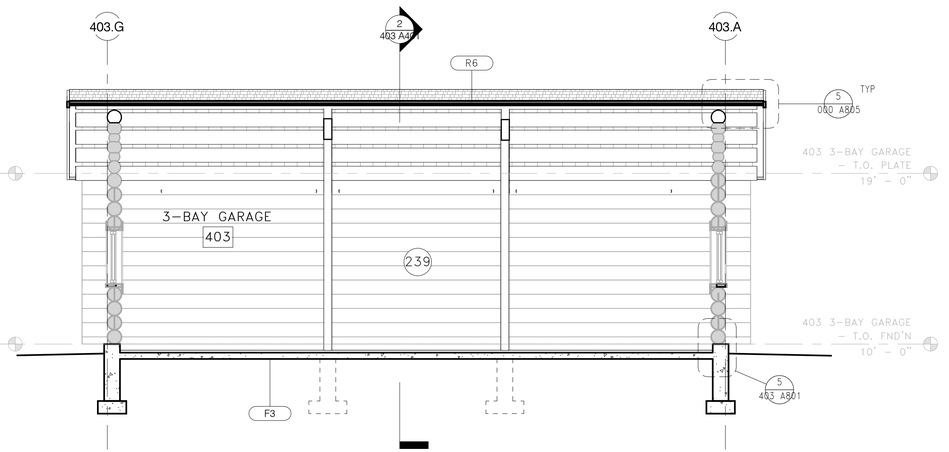

1 403 3–BAY GARAGE – BUILDING SECTION 'A'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

239 RECONSTRUCT ENTIRE STRUCTURE WITH SALVAGED COMPONENTS IN EXACT SAME CONFIGURATION. ASSUME 20% OF LOG REPLACEMENT
334 PROVIDE WOOD COLUMN PER STRUCTURAL
335 PROVIDE GLULAM BEAM PER STRUCTURAL
336 PROVIDE LOG PURLIN PER STRUCTURAL

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TREIB
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL/SD/AG
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A401

TITLE OF SHEET
3–BAY GARAGE – BUILDING SECTION

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 213 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

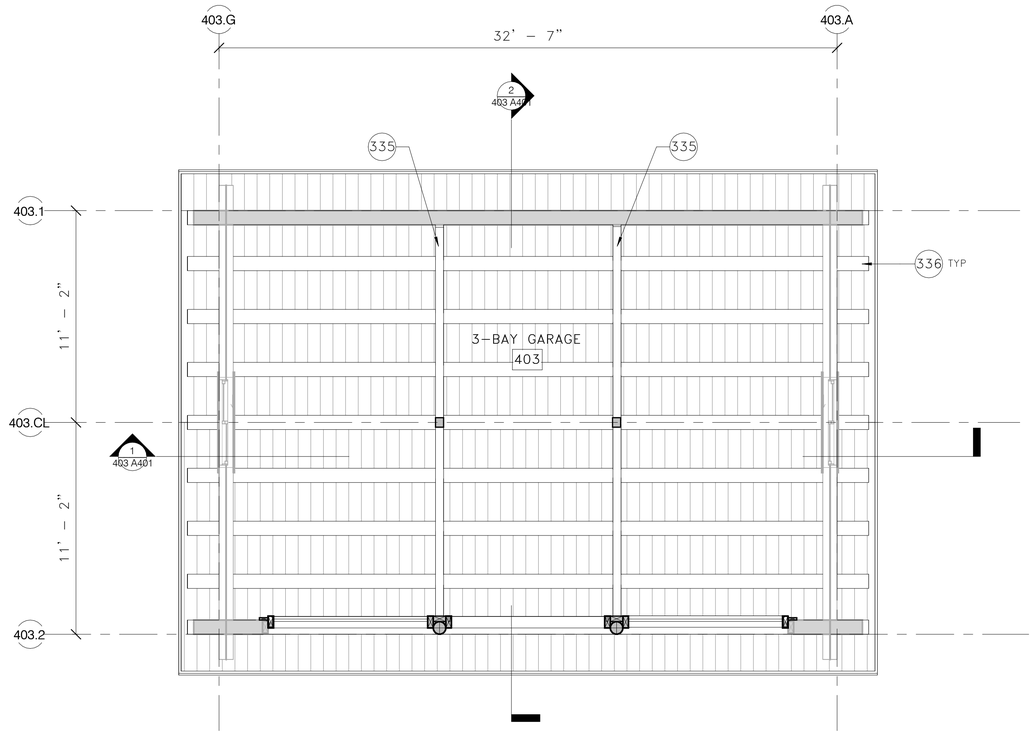

1 403 3–BAY GARAGE – FIRST LEVEL RCP

1/4" = 1'–0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

335 PROVIDE GLULAM BEAM PER STRUCTURAL
336 PROVIDE LOG PURLIN PER STRUCTURAL

SCALE B 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVES STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A601

TITLE OF SHEET
3–BAY GARAGE – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 214 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-781e-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

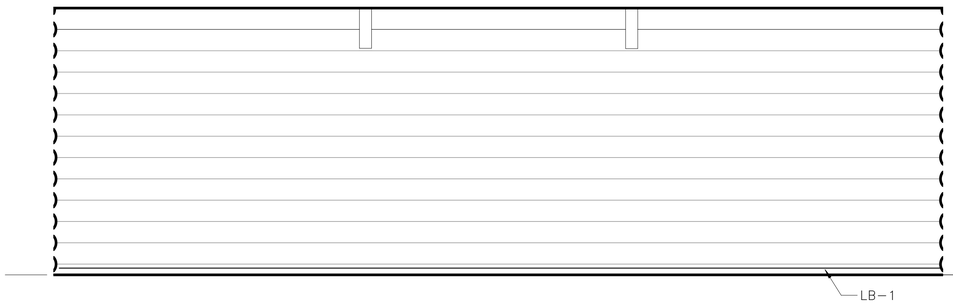

2 3-BAY GARAGE 403 – NORTH

3/8" = 1'-0"

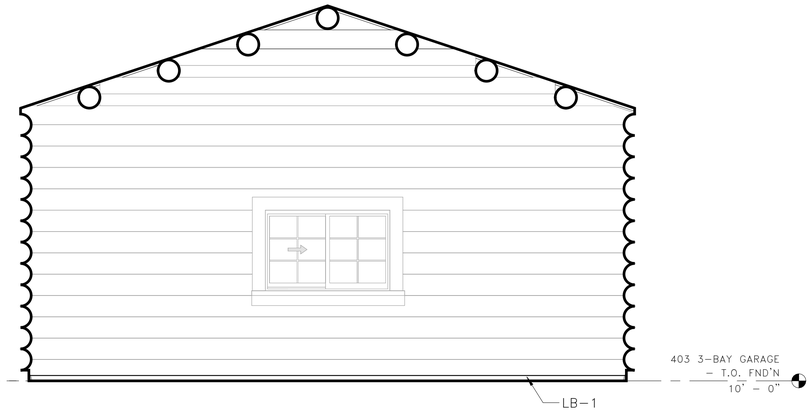

1 3-BAY GARAGE 403 – EAST

3/8" = 1'-0"

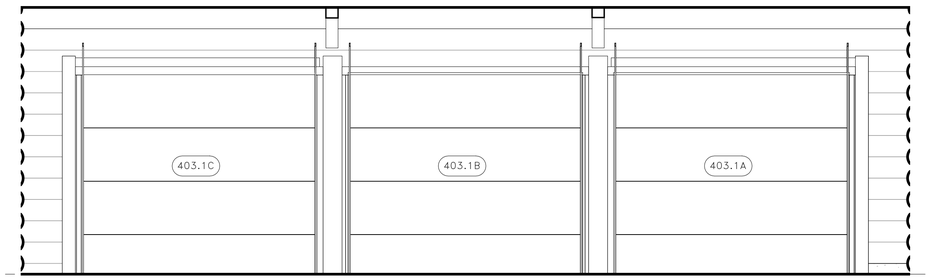

4 3-BAY GARAGE 403 – SOUTH

3/8" = 1'-0"

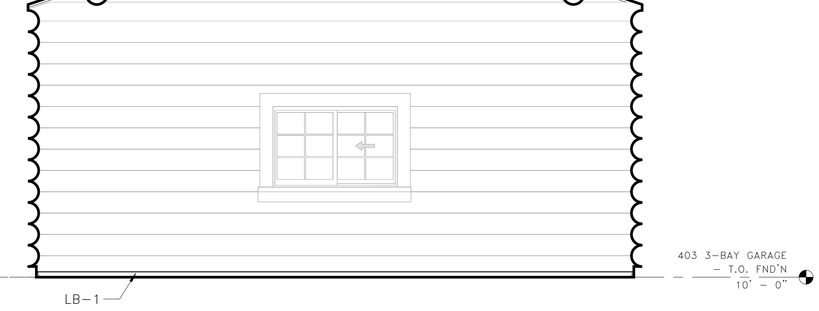

3 3-BAY GARAGE 403 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/31/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

403

A701

TITLE OF SHEET

3-BAY GARAGE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 / 193826
PMIS/PKG NO.	237343
SHEET	215 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

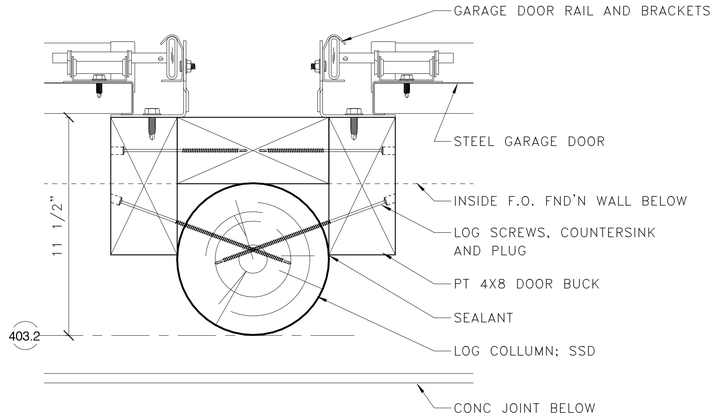

2 403 3–BAY GARAGE – CENTER JAMB DETAIL

3" = 1'–0"

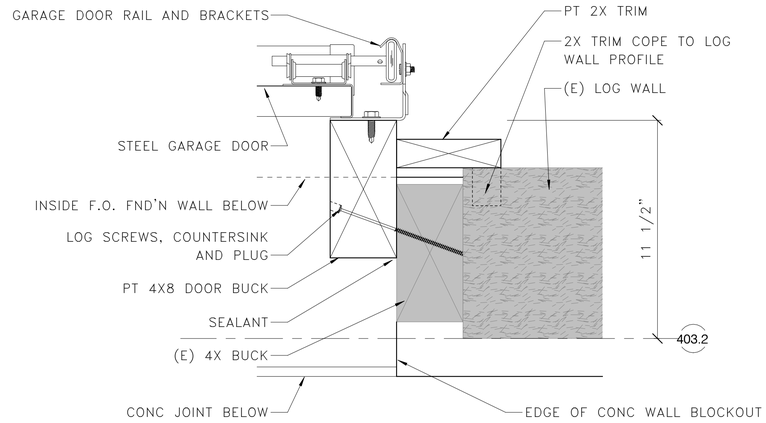

1 403 3–BAY GARAGE – END JAMB DETAIL

3" = 1'–0"

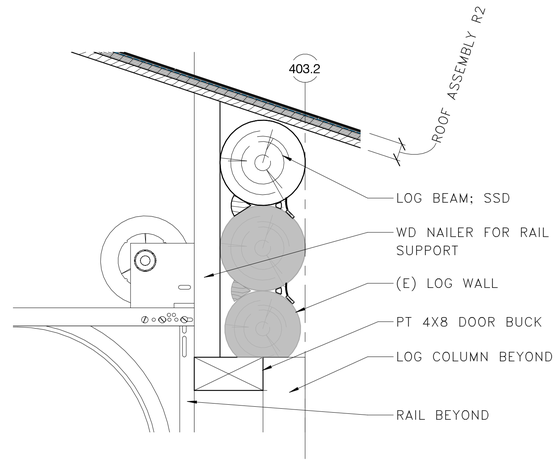

3 403 3–BAY GARAGE – GARAGE DOOR HEAD DETAIL

1 1/2" = 1'–0"

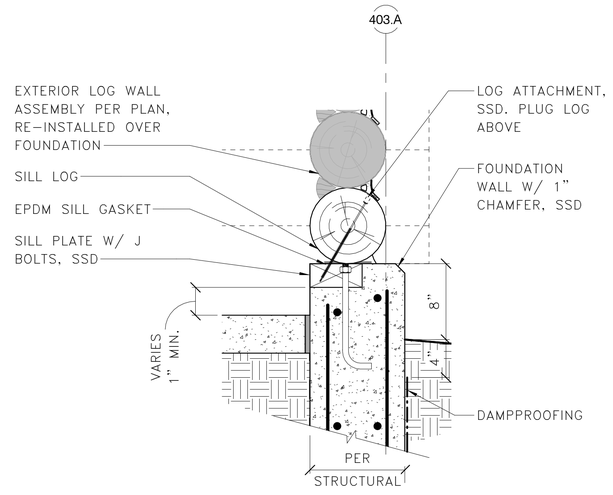

5 403 3–BAY GARAGE – SLAB EDGE DETAIL

1 1/2" = 1'–0"

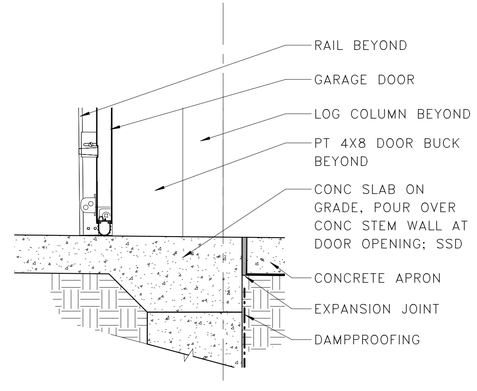

4 403 3–BAY GARAGE – GARAGE DOOR SILL DETAIL

1 1/2" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A801

TITLE OF SHEET
3–BAY GARAGE – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 216 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

403 3–BAY GARAGE – WINDOW SCHEDULE

WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	NOTES
403.E1		2' – 10"	4' – 6"				N.
403.W1		2' – 10"	4' – 6"				N.

403 3–BAY GARAGE – DOOR SCHEDULE

DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
403.1B	DR–8b	8' – 1"	7' – 6"	MTL	PER MFR	DRF–3	WD		PER MFR	N/A	
403.1A	DR–8a	8' – 1 1/2"	7' – 6"	MTL	PER MFR	DRF–3	WD		PER MFR	N/A	
403.1C	DR–8a	8' – 1 1/2"	7' – 6"	MTL	PER MFR	DRF–3	WD		PER MFR	N/A	

403 3–BAY GARAGE – ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
		MATERIAL	FINISH	BASE MATERIAL	BASE FINISH	WALL MATERIAL	WALL FINISH	MATERIAL	FINISH	
403	3–BAY GARAGE	CONC–1		LB–1		(E)LOG		EXP		

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO. 403 A905

TITLE OF SHEET
3–BAY GARAGE – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 217 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

NORTH AND WEST ELEVATIONS, LOOKING SOUTHEAST

SOUTH ELEVATION, LOOKING NORTHWEST INTO GARAGE

GARAGE INTERIOR, LOOKING EAST

GARAGE INTERIOR, LOOKING WEST

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
403
A920

TITLE OF SHEET
3-BAY GARAGE - (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 218 OF 371

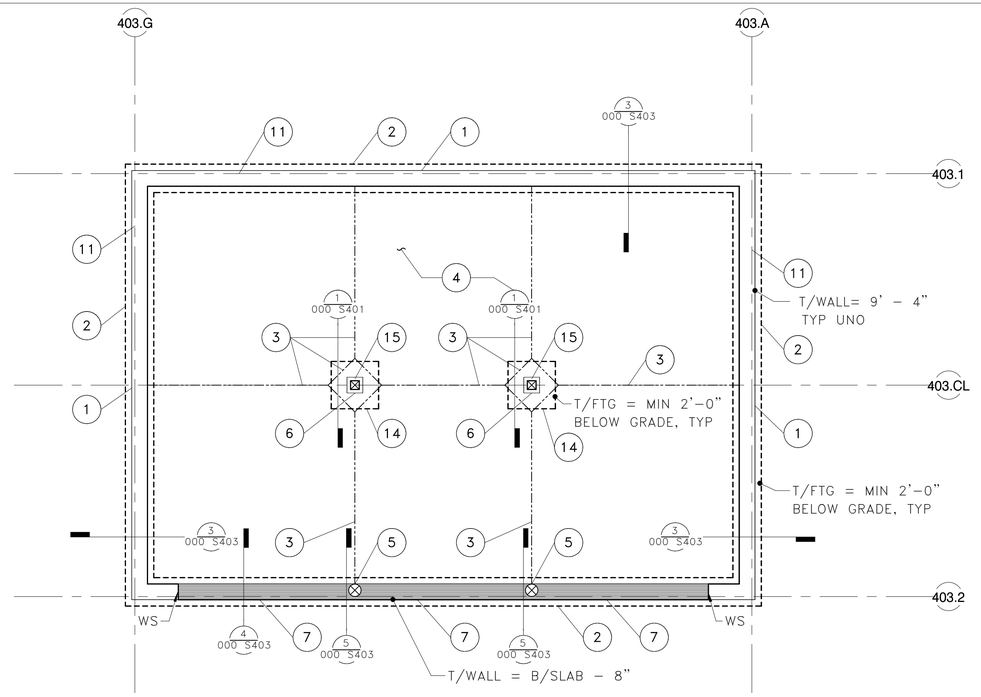

1 3-BAY GARAGE - FOUNDATION PLAN

1/4" = 1'-0"

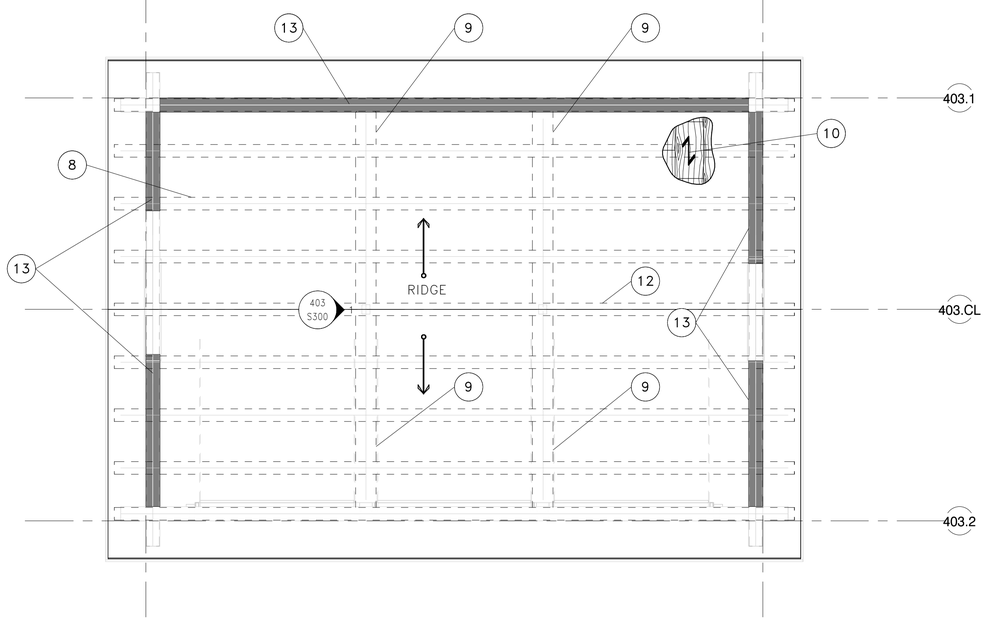

2 3-BAY GARAGE ROOF - FRAMING PLAN

1/4" = 1'-0"

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ EF; T/WALL = MIN 6" ABOVE FINISHED GRADE
2. 1'-6"Wx10"DP CONCRETE FOOTING W/ (2) # 4 BARS CONT; B/FTG = 2'-10" BELOW GRADE.
3. CONTROL JOINTS PER 6/000 S402
4. 6" CONCRETE SLAB ON GRADE W/ #4 @ 12"OC EA WAY CENTERED, T/SLAB = SLOPED PER ARCH
5. 8"Ø LOG POSTS
6. 10"SQ CONC PIER W/ (8) #4 VERT & #3 TIES @ 8"OC & #3 TIES AT 3"OC AT TOP; T/PIER = T/SLAB
7. WALL BLOCKOUT FOR SLAB POUROVER.
8. 8"Ø LOG PURLIN, TYP 9 PLACES
9. GL5 1/8x12 DROP BEAM
10. 1/2" ROOF SHEATHING ATOP 1x8 FLAT PLANKS PER 7/000 S500
11. (E) 8"Ø LOG WALL FRAMING TO BE DECONSTRUCTED, CATALOGUED, & SALVAGED FOR RE-ASSEMBLY. CONTRACTOR OPTION TO LIFT SOUND WALL SEGMENTS.
12. 8"Ø LOG RIDGE PURLIN. APPROVED (E) LOG MAY BE USED.
13. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501
14. 2'-6"SQx12"DP CONC FOOTING W/ (4) #4B EA WAY, B/FTG = MIN 2'-10" BELOW EXTERIOR GRADE
15. 6x6 POST

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
403
S201

TITLE OF SHEET
3-BAY GARAGE - FDN & ROOF FRAMING PLANS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
SHEET 219 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

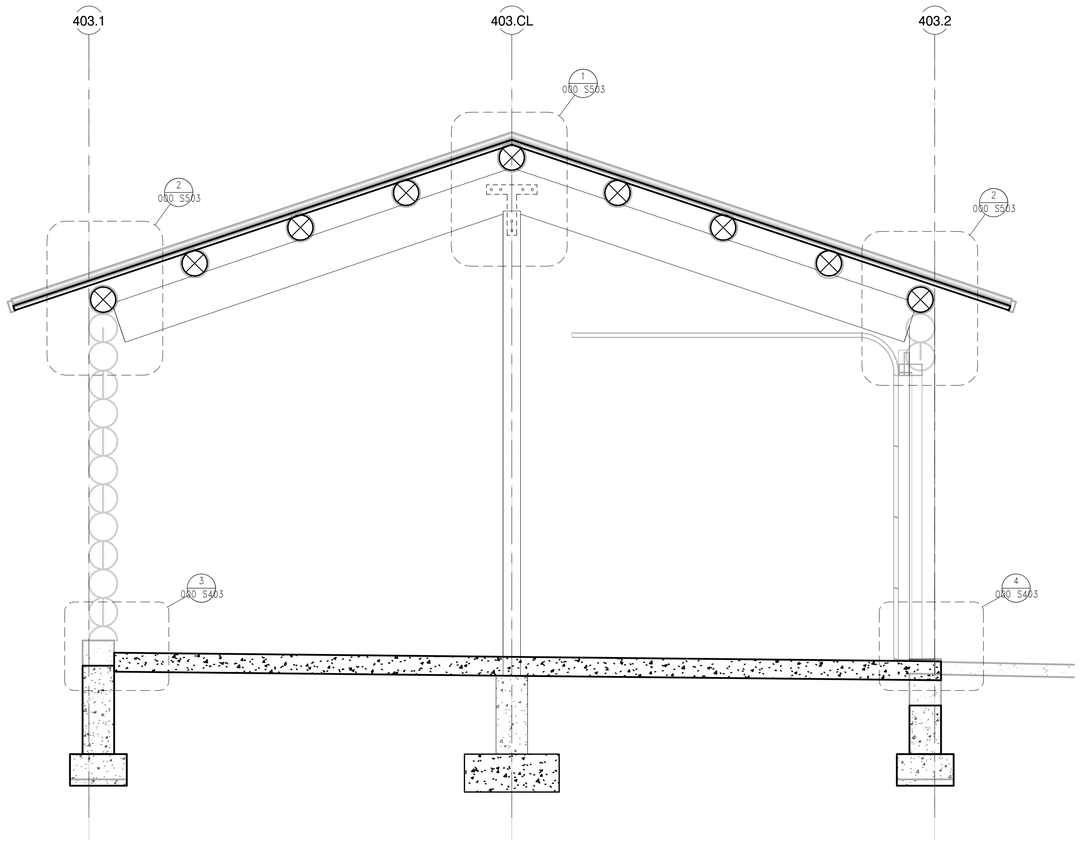

1 3–BAY GARAGE – INTERIOR FRAMING ELEVATION

1/2" = 1'–0"

Autodesk Docs://24_041–01T NPS GRTE 4 Lazy F/Struct_25151–0013 NPS GRTE Lazy F Ranch_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
403
S300

TITLE OF SHEET
3–BAY GARAGE – ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 220 OF 371

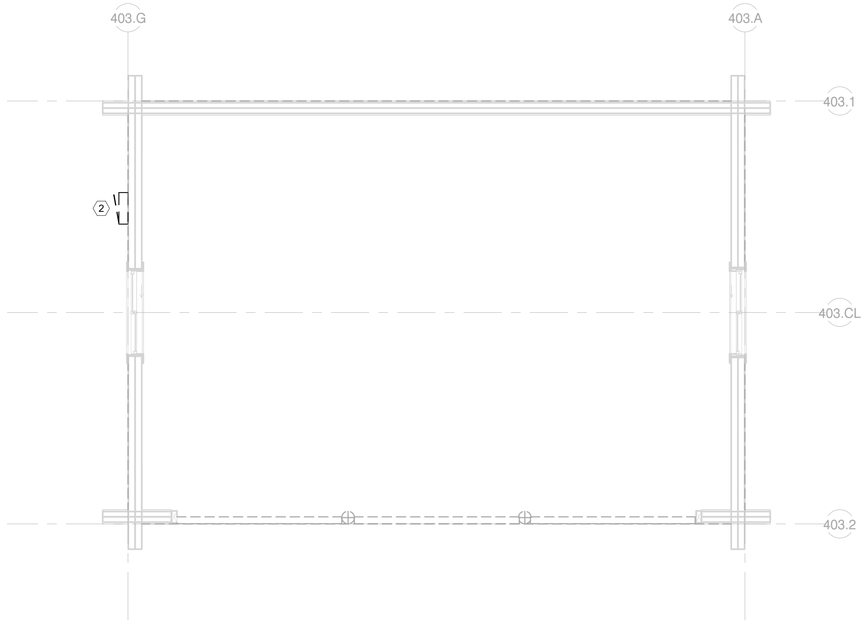

1 3–BAY GARAGE – ELECTRICAL DEMO PLAN

1/4" = 1'–0"

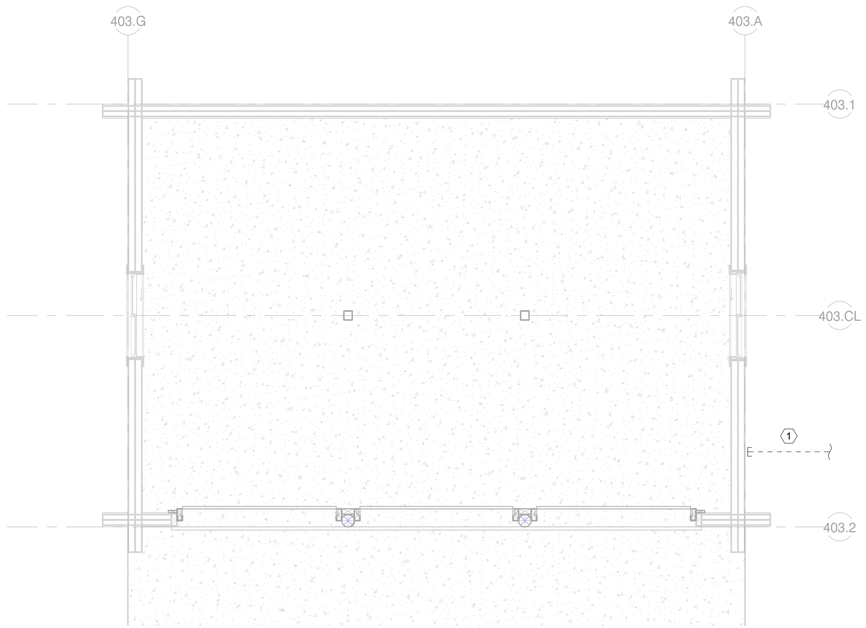

2 3–BAY GARAGE – ELECTRICAL RENOVATION PLAN

1/4" = 1'–0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. PROVIDE A SPARE 2" EMPTY CONDUIT UNDERGROUND RUN FROM THE NORTH SERVICE H-FRAME. CAP AND LABEL FOR FUTURE USE.
2. REMOVE EXISTING ELECTRICAL LOAD CENTER.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer RYAN P. MARONEY 18841 WYOMING Date 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
403
E100

TITLE OF SHEET
3–BAY GARAGE – ELECTRICAL PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 221 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING EAST TOWARDS 404 GEORGES CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

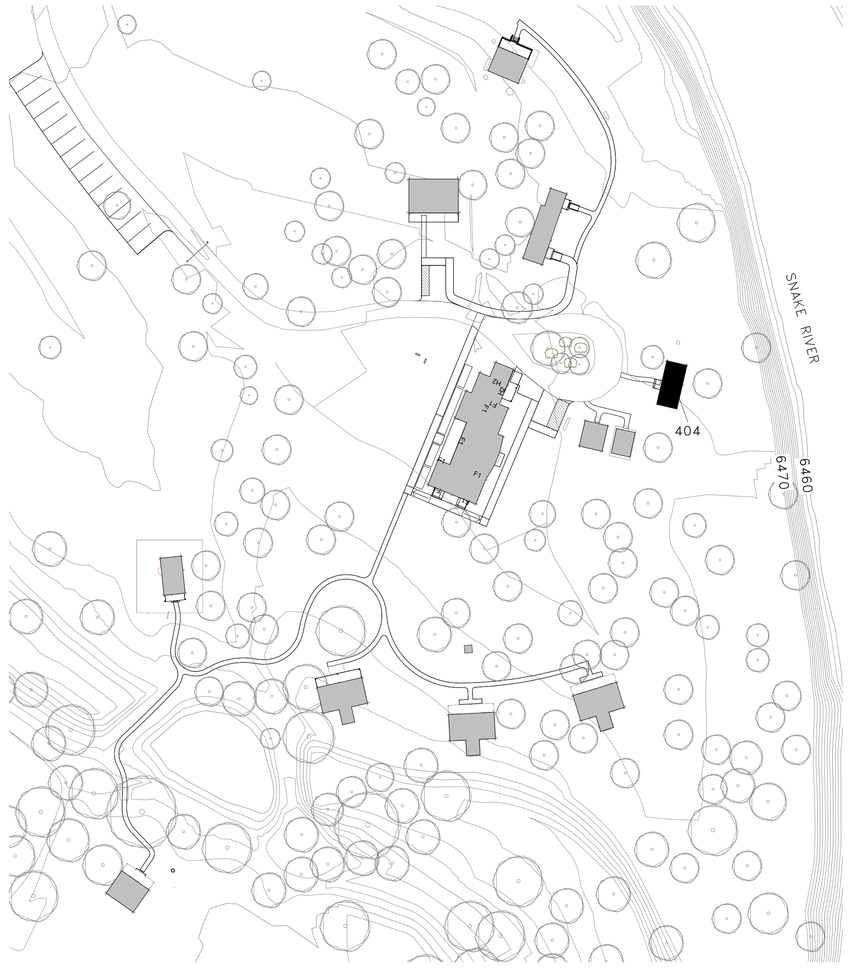

1 KEY PLAN – 404 GEORGES CABIN

1" = 50'-0"

SCALE OF FEET 50 0 50 100

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TYLER
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
G000

TITLE OF SHEET
GEORGE'S CABIN – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 222 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

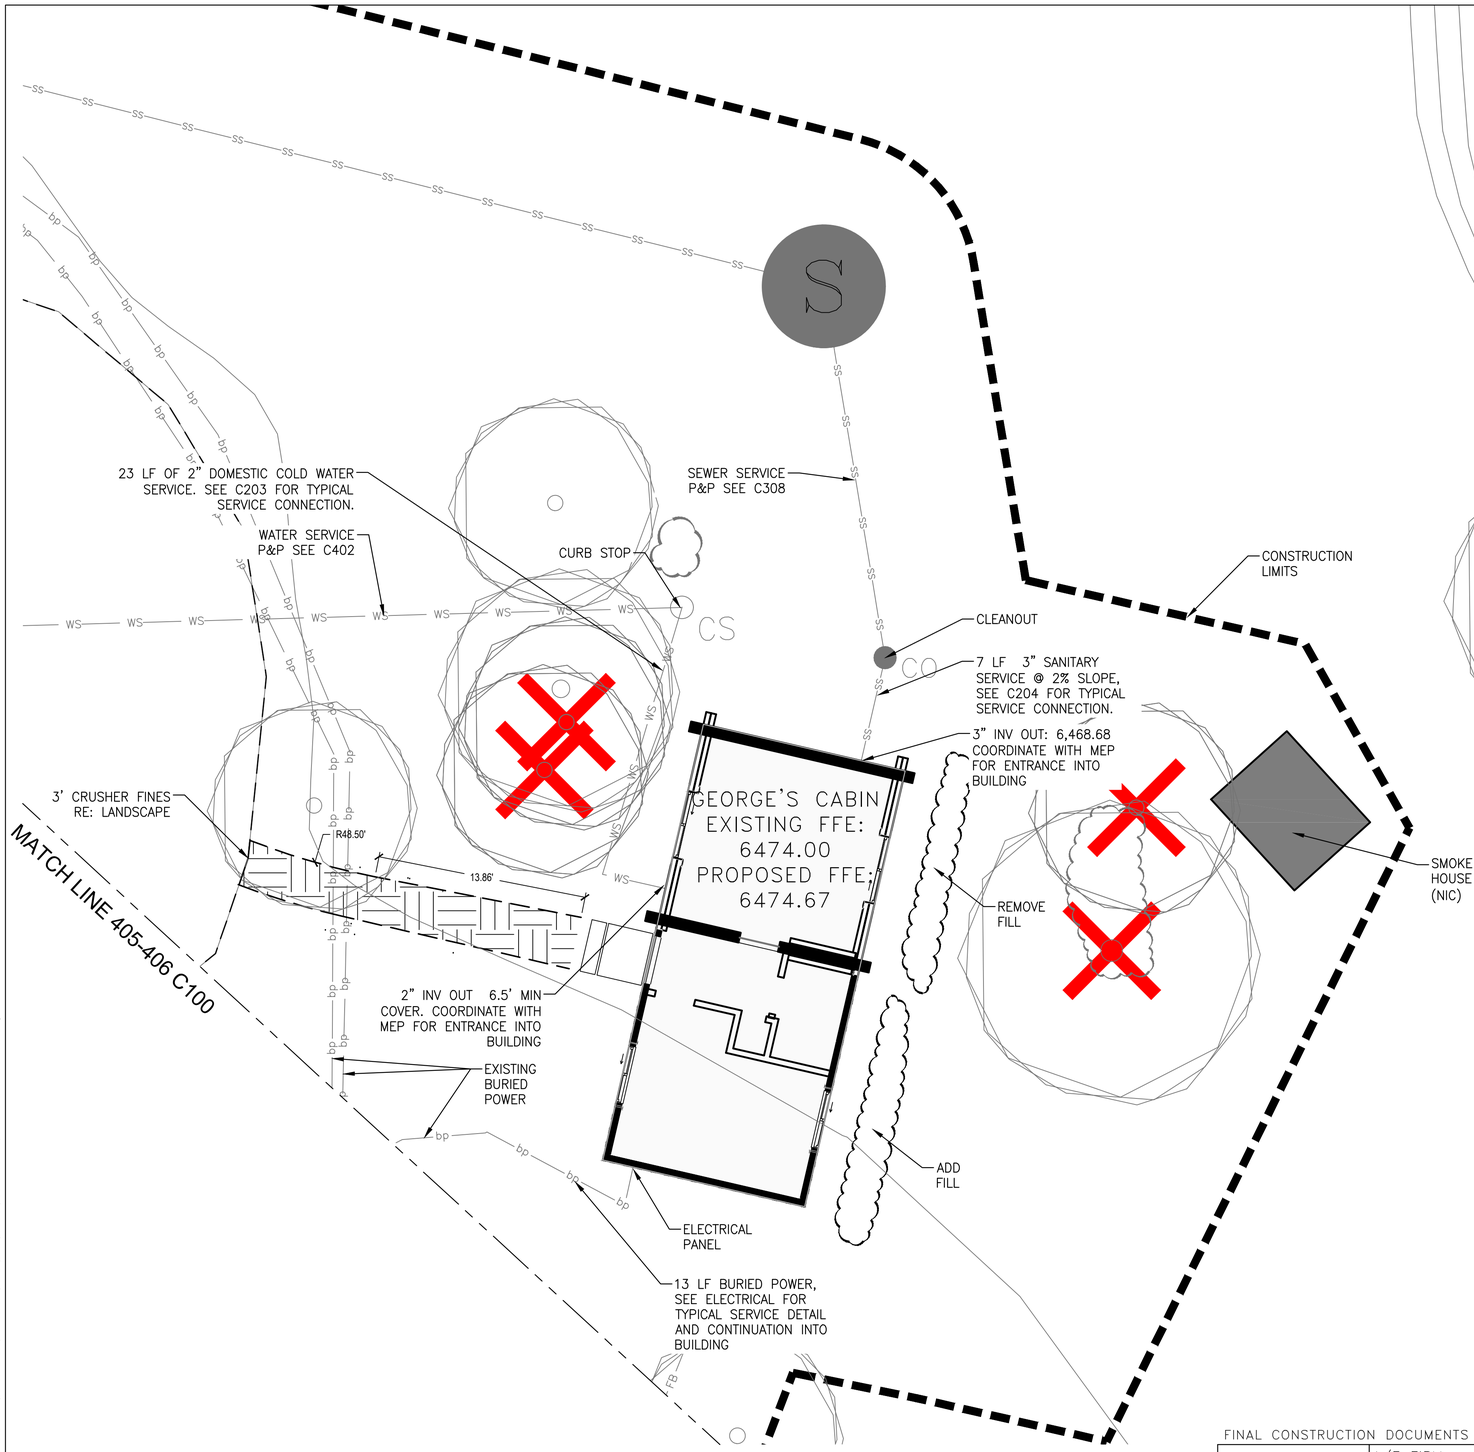

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE MARIE SAUCIER 22155 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 404 C100	TITLE OF SHEET GEORGE'S CABIN – SITE AND UTILITY PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 223 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

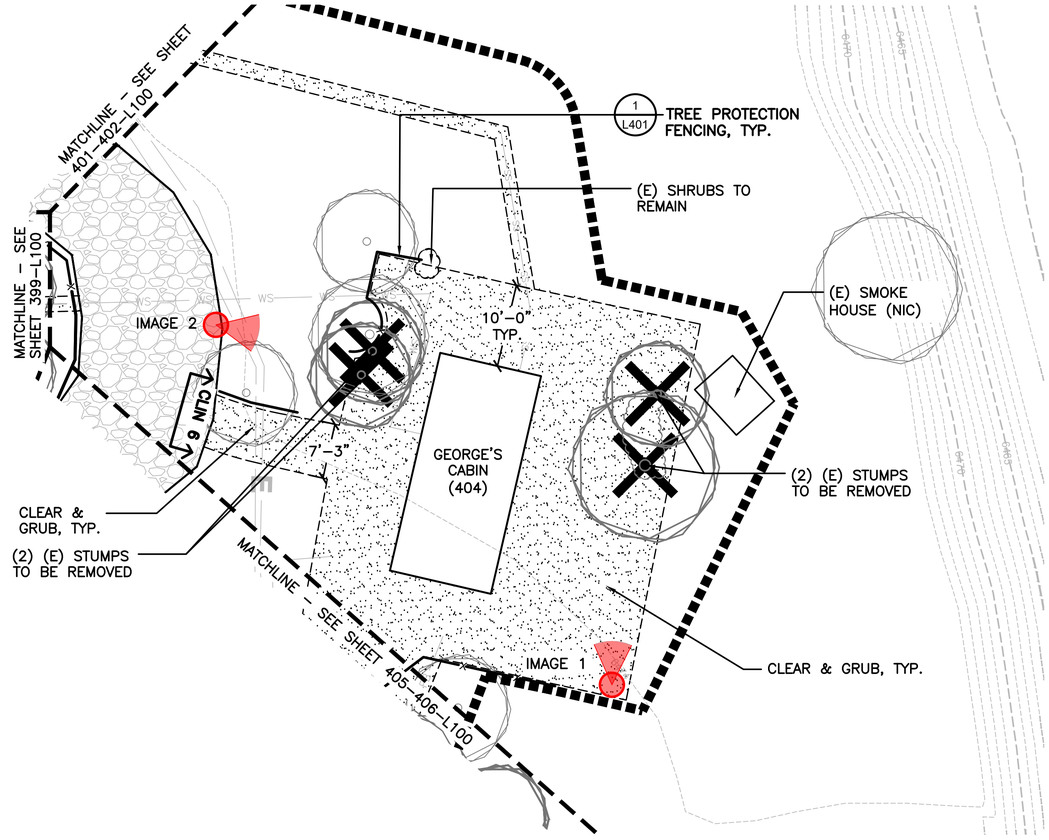

IMAGE 1: (E) STUMPS TO BE REMOVED.

IMAGE 2: (E) STUMPS TO BE REMOVED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE/ STUMP TO BE REMO

KEY MAP

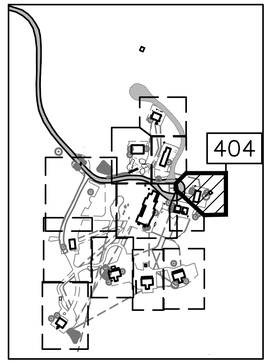

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 404 L100	TITLE OF SHEET GEORGE'S CABIN & SMOKE HOUSE – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 224 OF 371

File Path
Z:\Files 08\43_SKERSTIENS_R25 P\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\ALL\1-0_GRTE-L4_DEMO.DWG
XREFS: \\A_SESS36_0808_NPS GRTE 4 LAZY F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_DEMO.DWG
IMAGES: ...\\...\2_Admin\Photos\Garage\Debri-1.jpg\Debri-2.jpg\Debri-3.jpg\Debri-4.jpg\Debri.jpg\...\\...\2_Admin\Photos\Gate\Gate-1.jpg\Gate.jpg\...\\...\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg\...\\...\2_Admin\Photos\LogCabin\Mouse and Ice .jpg\...\\...\

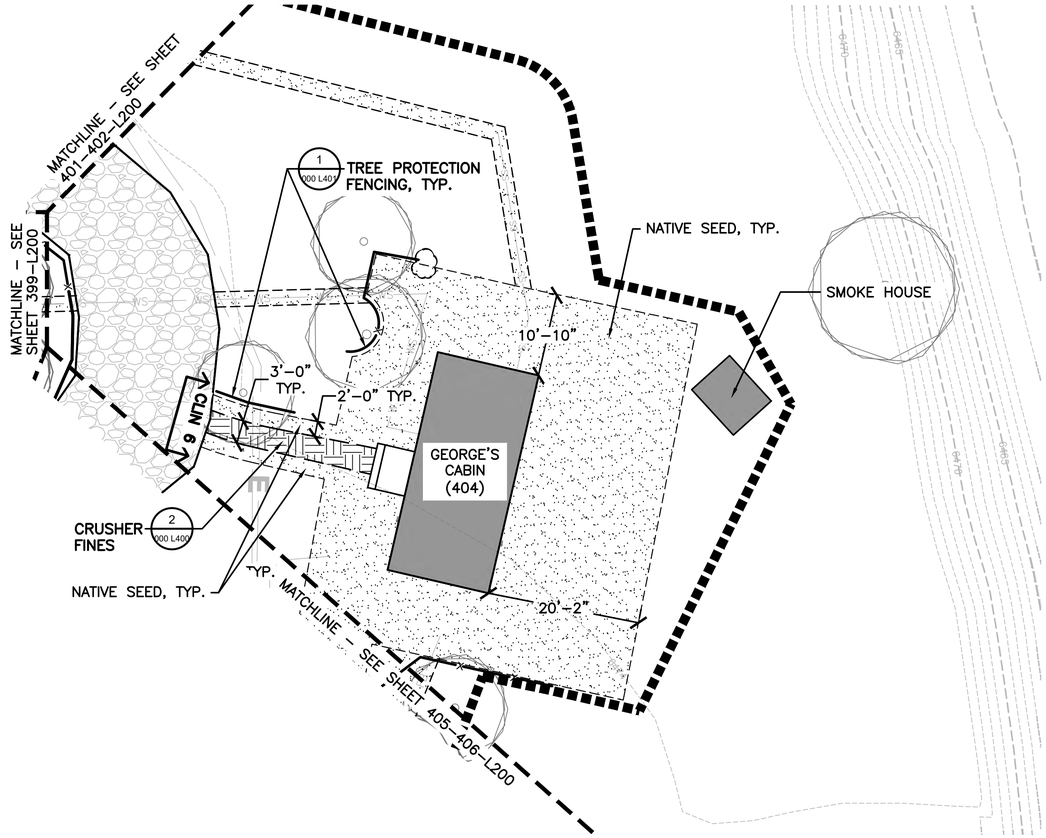

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

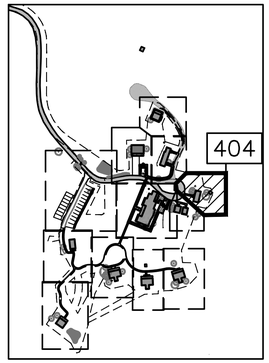

10 0 10 20
SCALE OF FEET

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 06.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 404 L200	TITLE OF SHEET GEORGE'S CABIN & SMOKE HOUSE SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 225 OF 371

File Path
Z:\ERS 0644\KERSTIENS, R25 P\DENVER\PS GRTE 4LAZY F RANCH- 199539\ FINAL CD\CAD\LAU\1-0_GRTE-L4_LAYOUT.DWG
XREFS: BASES26_0308_NPS GRTE 4 Lazy F ARCH_PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock_22x34_GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_LAYOUT.dwg
IMAGES: ..\..\2_Admin\Photos\MainLodge\IMG_3706.JPG|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\ParkingLot\Parking lot 4.jpg|Parking lot toe-5.jpg|...\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...

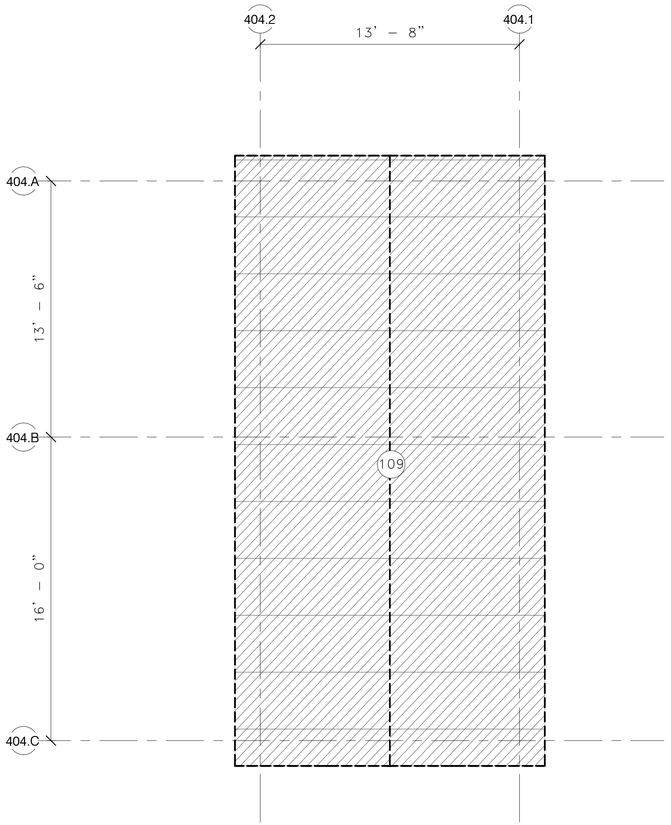

2 404 GEORGES CABIN – DEMO ROOF PLAN

1/4" = 1'–0"

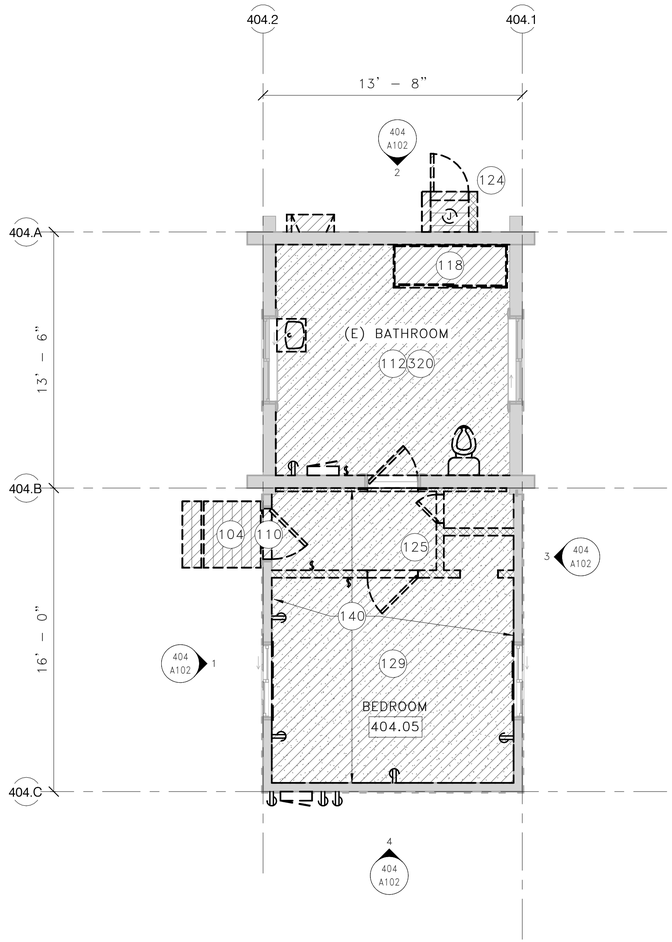

1 404 GEORGES CABIN – DEMO PLAN

1/4" = 1'–0"

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

110 REMOVE (E) DOOR, CASING & FRAME TO REMAIN

112 REMOVE (E) BATHROOM INCLUDING ALL FIXTURES, PLUMBING AND INTERIOR WALLS. SALVAGE FOR REINSTALLATION OF (E) LAVATORY

118 SALVAGE FOR REINSTALLATION OF (E) CASEWORK

124 SALVAGE FOR REINSTALLATION OF (E) WOOD PANELING AND REMOVE (E) WATER HEATER ENCLOSURE

125 REMOVE (E) INTERIOR WALLS, ASSOCIATED DOORS, AND ACCESSORIES

129 REMOVE (E) FLOORING AND ALL ACCESSORIES. COORDINATE WITH HAZARDOUS MATERIALS MITIGATION REQUIREMENTS.

140 REMOVE INTERIOR WALL FINISH TO UNDERLYING STRUCTURE INCLUDING ALL TRIMS AND ACCESSORIES.

320 PROVIDE CRAWL SPACE ACCESS

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)

(E) WOOD FRAMED WALL OR LOG WALL TO REMAIN

(E) COLUMN TO REMAIN

(E) DOOR TO REMAIN

SALVAGE (E) DOOR

(E) WINDOW TO REMAIN

(E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FIX C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO.

404
A101

TITLE OF SHEET

GEORGE'S CABIN – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 226 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

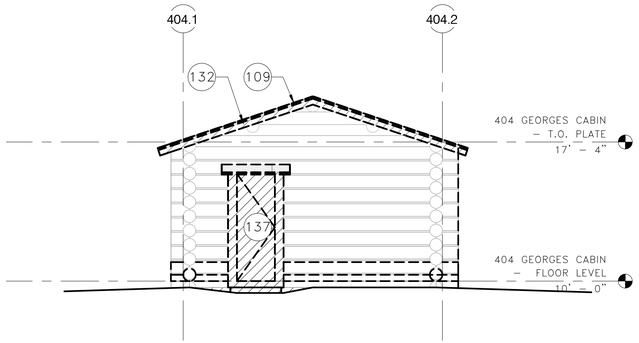

2 404 GEORGES CABIN – NORTH DEMO ELELVATION

1/4" = 1'–0"

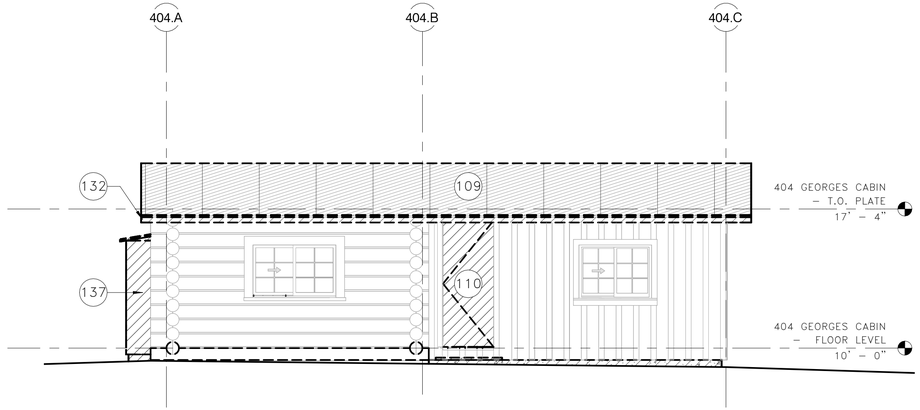

1 404 GEORGES CABIN – WEST DEMO ELELVATION

1/4" = 1'–0"

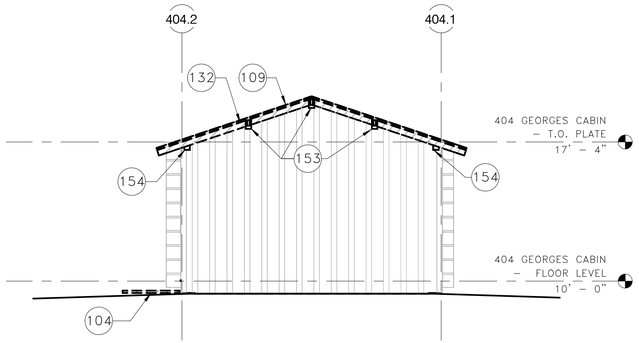

4 404 GEORGES CABIN – SOUTH DEMO ELELVATION

1/4" = 1'–0"

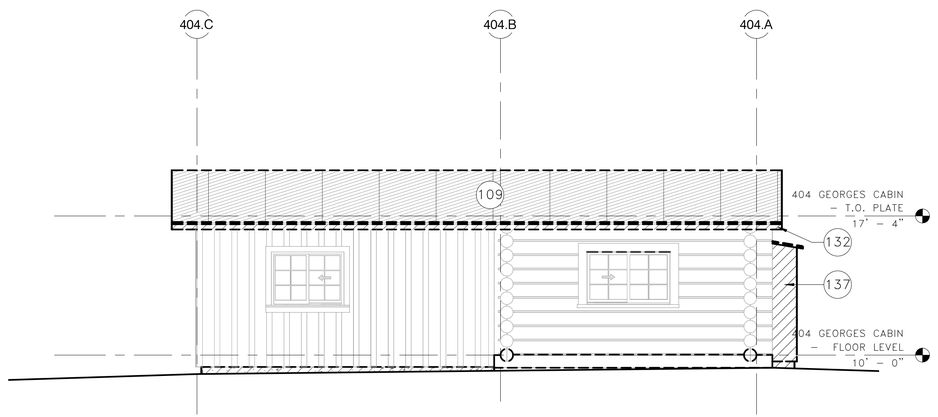

3 404 GEORGES CABIN – EAST DEMO ELELVATION

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
110 REMOVE (E) DOOR. CASING & FRAME TO REMAIN
132 REMOVE (E) FASCIA
137 REMOVE ENTIRE (E) WOOD FRAMED PORTION OF BUILDING. SALVAGE FOR REINSTALLATION (E) EXTERIOR SIDING, INCLUDING TRIMS. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
153 REMOVE WOOD BEAMS, SEE STRUCTURAL DRAWINGS
154 REMOVE VISIBLE PORTION OF WOOD BEAMS, SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A102

TITLE OF SHEET
GEORGE'S CABIN – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 227 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691d7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

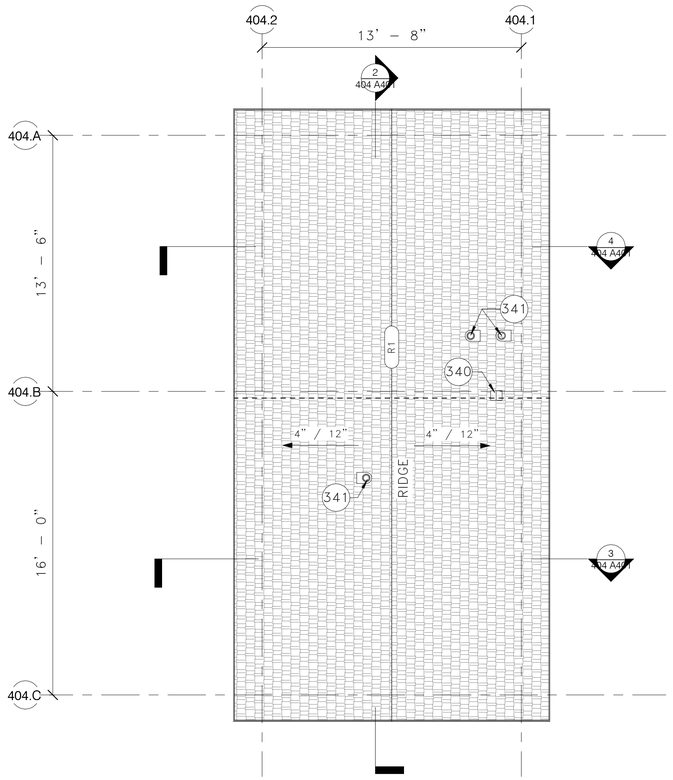

2 404 GEORGES CABIN – ROOF PLAN

1/4" = 1'-0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

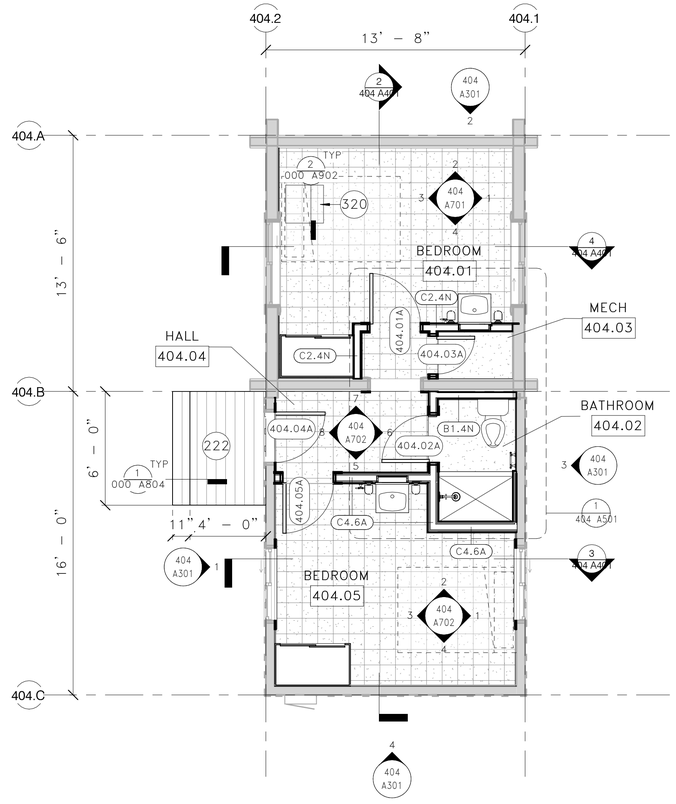

1 404 GEORGES CABIN – FLOOR PLAN

1/4" = 1'-0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###-## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
320 PROVIDE CRAWL SPACE ACCESS
340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS
341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET
NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KES C-3538 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A201

TITLE OF SHEET
GEORGE'S CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 228 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

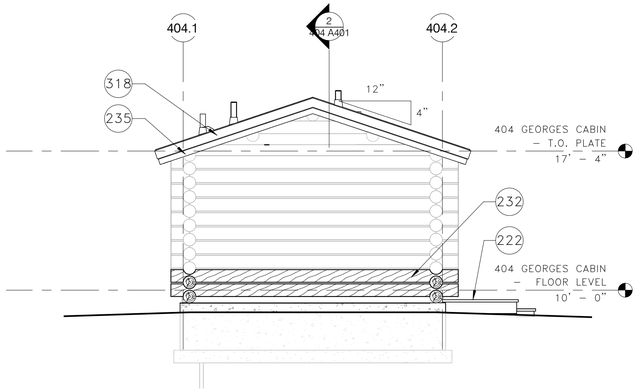

2 404 GEORGES CABIN – NORTH

1/4" = 1'–0"

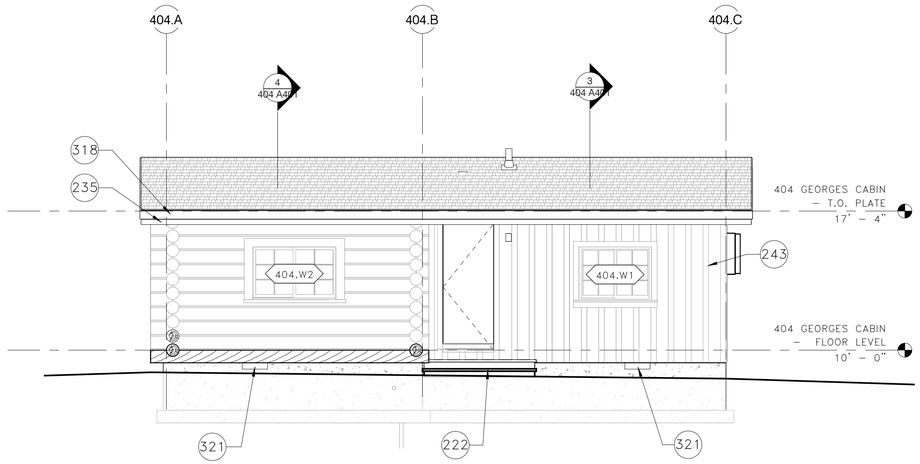

1 404 GEORGES CABIN – WEST

1/4" = 1'–0"

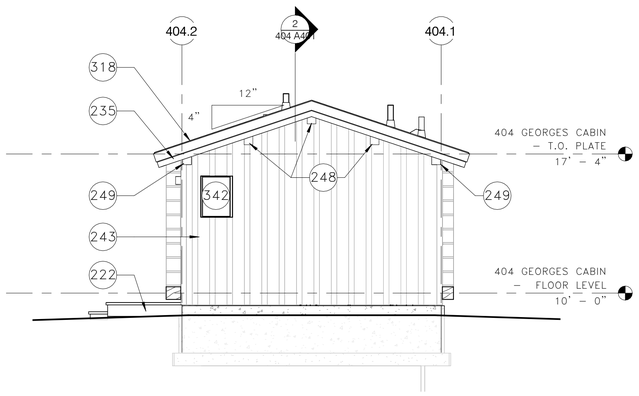

4 404 GEORGES CABIN – SOUTH

1/4" = 1'–0"

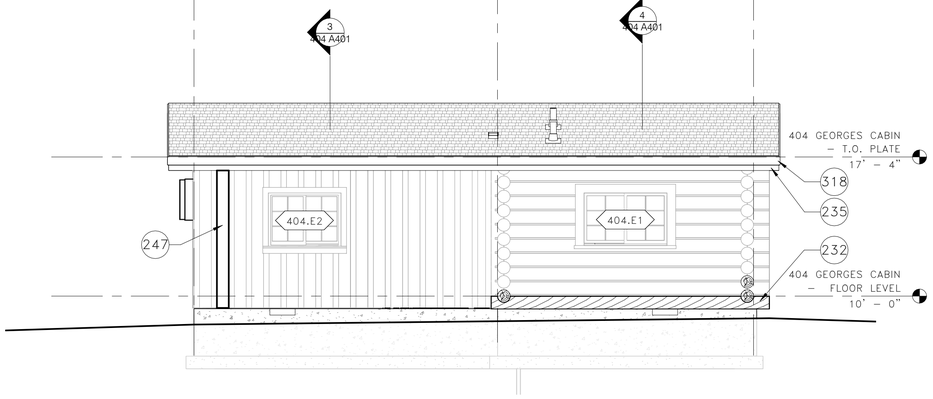

3 404 GEORGES CABIN – EAST

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
243 REPAIR AND REFINISH (E) WOOD BOARD AND BATTEN SIDING. ASSUME 20% REPLACEMENT
247 REPLACE DAMAGED SIDING BOARD
248 PROVIDE WOOD BEAMS, SEE STRUCTURAL DRAWINGS
249 PROVIDE WOOD BEAM ENDS TO MATCH REPLACED BEAMS, SEE STRUCTURAL DRAWINGS
318 PROVIDE SECONDARY WOOD FASCIA
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS

SCALE (B) 0 1 2 4 8
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM R. REED Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A301

TITLE OF SHEET
GEORGE'S CABIN – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 229 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

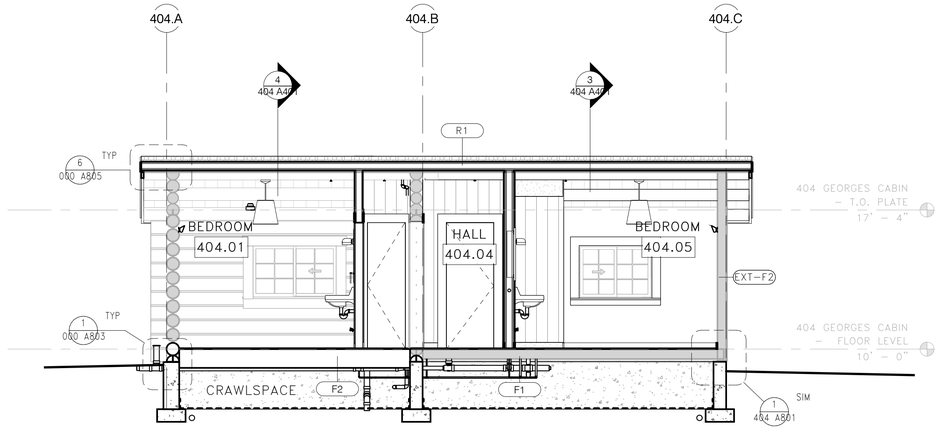

2 404 GEORGES CABIN – SECTION 'A'

1/4" = 1'–0"

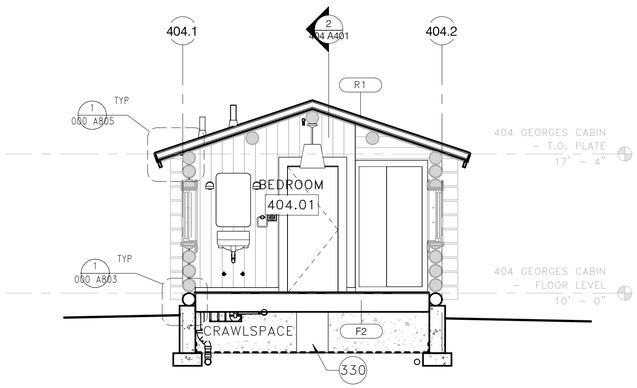

4 404 GEORGES CABIN – SECTION 'C'

1/4" = 1'–0"

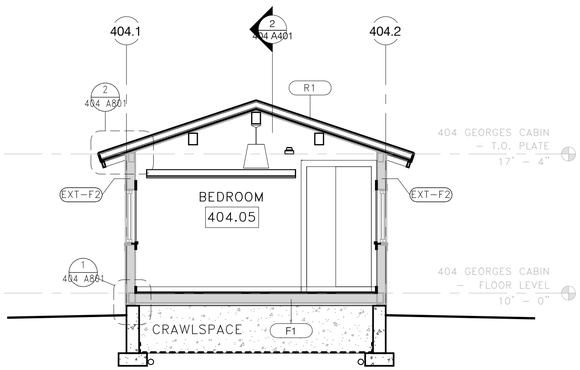

3 404 GEORGES CABIN – SECTION 'B'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS

SCALE (E) 0" 2" 4" 1'–4"
SCALE OF FEET

SCALE (B) 0" 2" 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM H. PEYES C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A401

TITLE OF SHEET
GEORGE'S CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 230 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

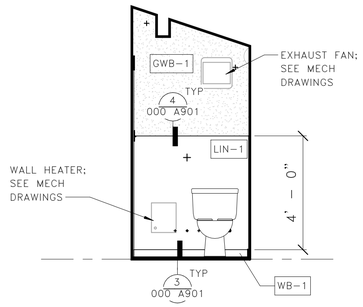

3 BATHROOM 404.02 – NORTH

3/8" = 1'-0"

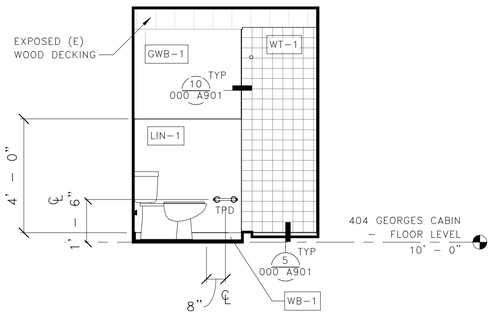

2 BATHROOM 404.02 – EAST

3/8" = 1'-0"

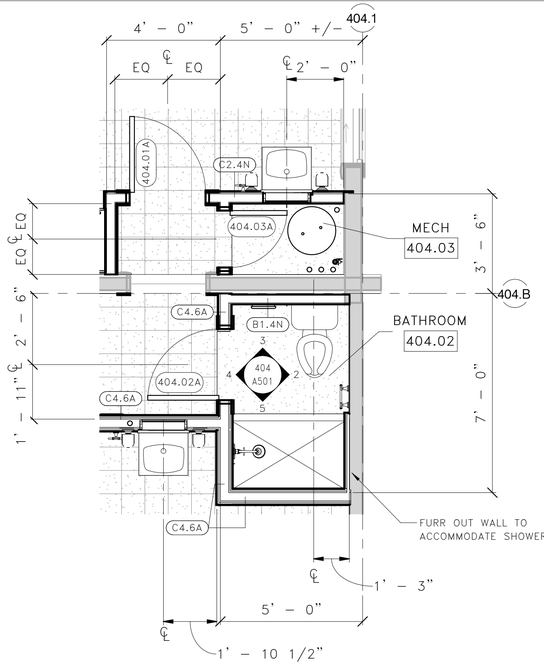

1 404 GEORGES CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

KEYNOTES

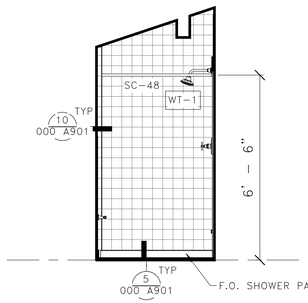

5 BATHROOM 404.02 – SOUTH

3/8" = 1'-0"

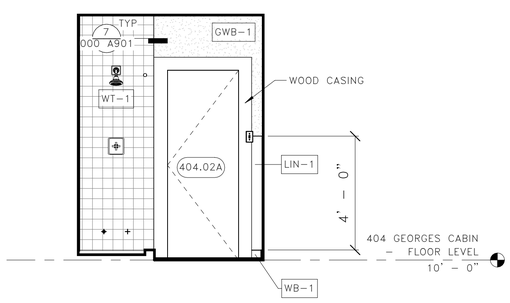

4 BATHROOM 404.02 – WEST

3/8" = 1'-0"

SCALE Ⓒ 2'-8" 0 2'-8" 5'-4"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KIES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A501

TITLE OF SHEET
GEORGE'S CABIN – ENLARGED BATHROOMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 231 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

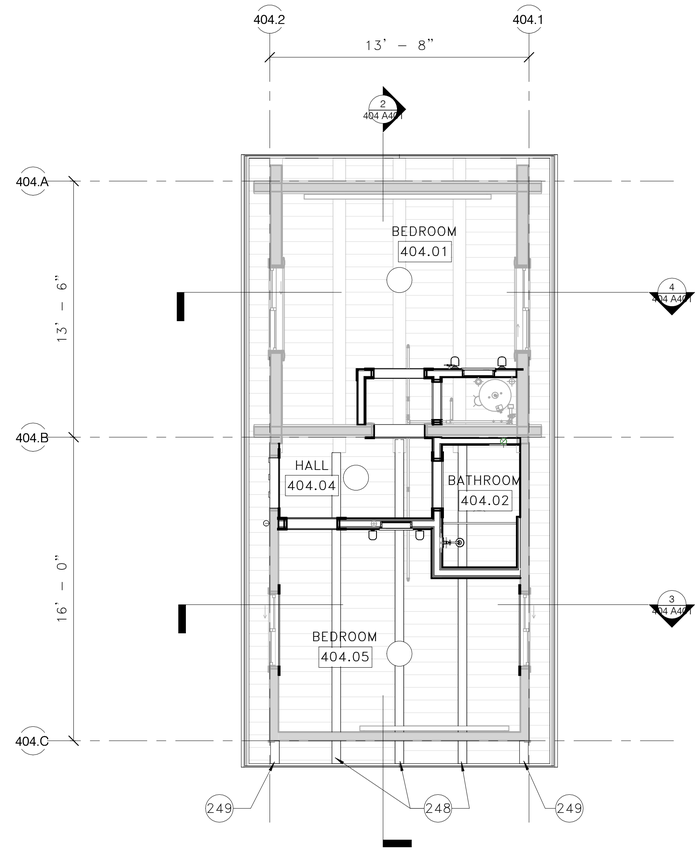

1 404 GEORGES CABIN – FIRST LEVEL RCP

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

248 PROVIDE WOOD BEAMS, SEE STRUCTURAL DRAWINGS

249 PROVIDE WOOD BEAM ENDS TO MATCH REPLACED BEAMS, SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0" 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FEIG C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A601

TITLE OF SHEET
GEORGE'S CABIN – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 232 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

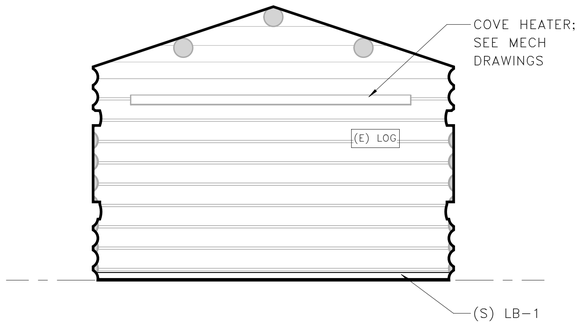

2 BEDROOM 404.01 – NORTH

3/8" = 1'-0"

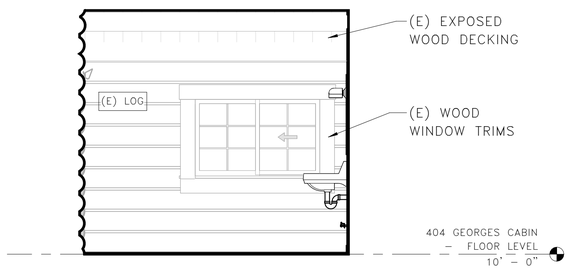

1 BEDROOM 404.01 – EAST

3/8" = 1'-0"

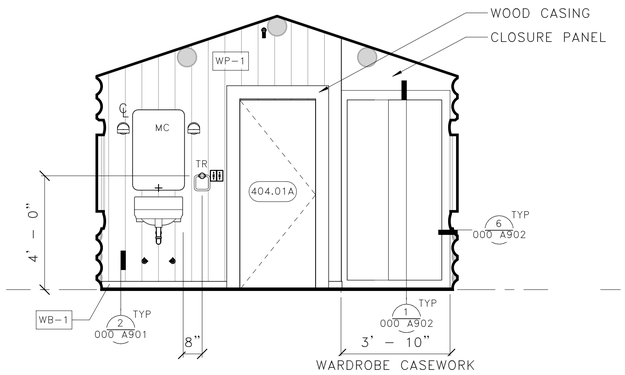

4 BEDROOM 404.01 – SOUTH

3/8" = 1'-0"

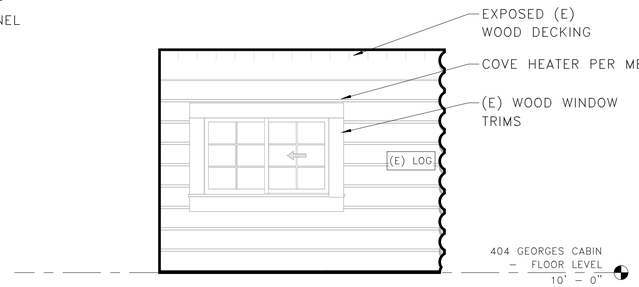

3 BEDROOM 404.01 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2' 8" 0 2' 8" 5' 4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A701

TITLE OF SHEET
GEORGE'S CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 233 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

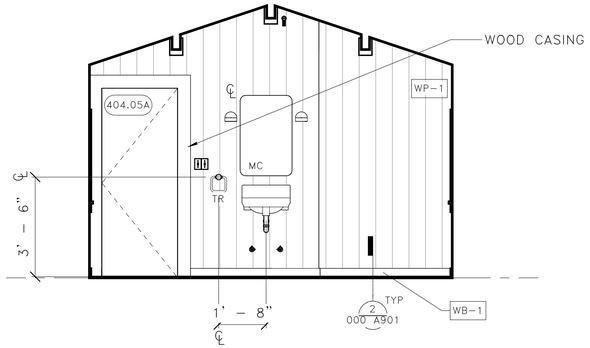

2 BEDROOM 404.05 – NORTH

3/8" = 1'-0"

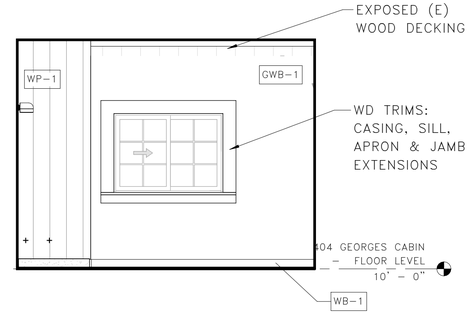

1 BEDROOM 404.05 – EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

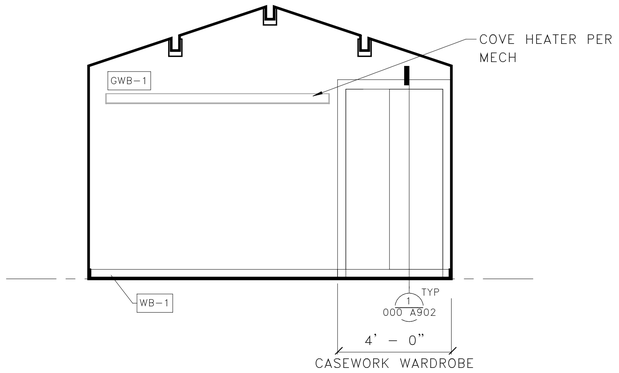

4 BEDROOM 404.05 – SOUTH

3/8" = 1'-0"

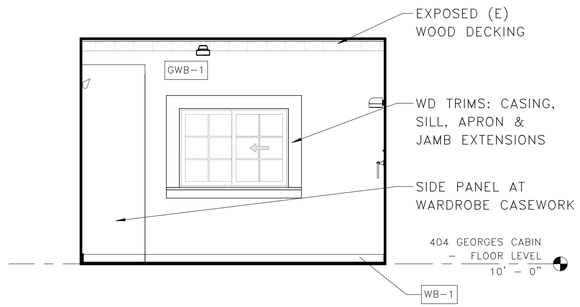

3 BEDROOM 404.05 – WEST

3/8" = 1'-0"

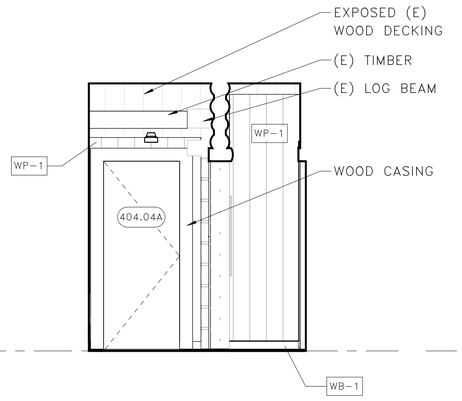

8 HALL 404.04 – WEST

3/8" = 1'-0"

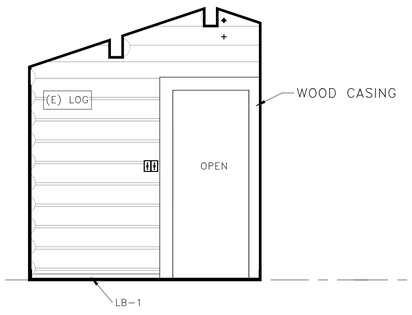

7 HALL 404.04 – NORTH

3/8" = 1'-0"

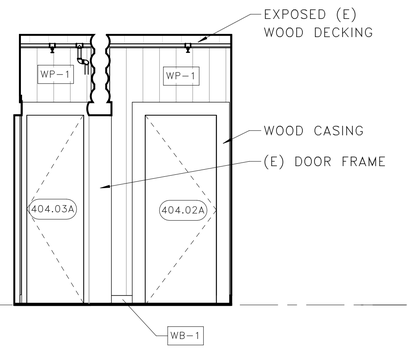

6 HALL 404.04 – EAST

3/8" = 1'-0"

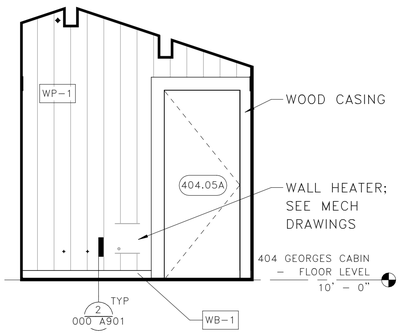

5 HALL 404.04 – SOUTH

3/8" = 1'-0"

SCALE © 2' 5" 0 2' 8" 5' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM F. KYES Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A702

TITLE OF SHEET
GEORGE'S CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 234 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

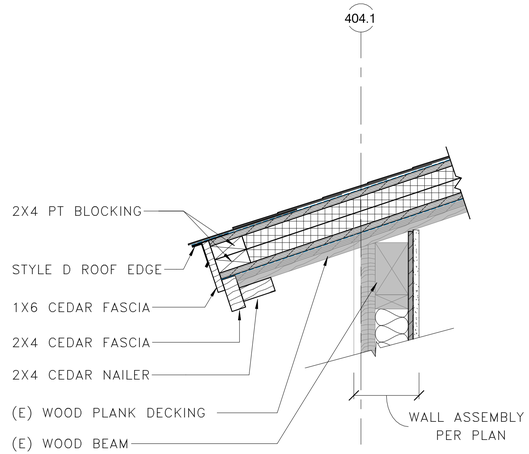

2 404 GEORGES CABIN – EAVE DETAIL AT FRAMED WALLS

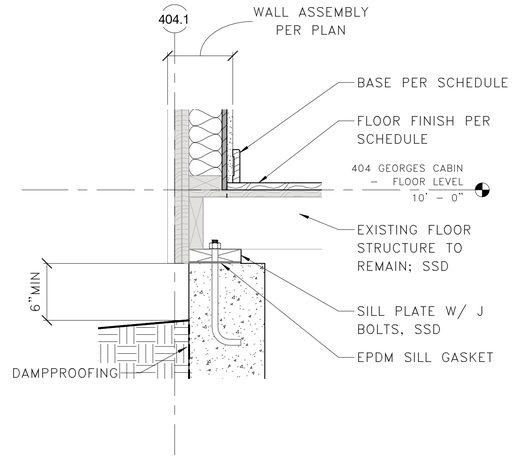

1 404 GEORGES CABIN – BASE OF WALL AT NEW FOUNDATION

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KIES C-3535 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A801

TITLE OF SHEET
GEORGE'S CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 235 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

404 GEORGE'S CABIN – WINDOW SCHEDULE							
WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			NOTES
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	
404.E1		2' – 10"	4' – 6"				M.
404.E2		2' – 10"	3' – 10"				M.
404.W1		2' – 10"	3' – 10"				M.
404.W2		2' – 10"	4' – 6"				M.

404 GEORGES CABIN – DOOR SCHEDULE											
DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
404.01A	DR–1	2' – 8"	6' – 8"			DRF–1					
404.02A	DR–1	2' – 6"	6' – 8"			DRF–1					
404.03A	DR–1	2' – 0"	6' – 8"			DRF–1					
404.04A	DR–1	2' – 8"	6' – 8"			DRF–1				SDR–3	
404.05A	DR–1	2' – 8"	6' – 8"			DRF–1					

404 GEORGES CABIN – ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
		MATERIAL	FINISH	BASE MATERIAL	BASE FINISH	WALL MATERIAL	WALL FINISH	MATERIAL	FINISH	
404.01	BEDROOM	LIN–2	N/A	(E)LB–1/WB–1		(E)LOG/WP–1		EXP		
404.02	BATHROOM	LIN–1	N/A	WB–1		GWB–1/LIN–1/WT–1		EXP		
404.03	MECH	LIN–1	N/A	RB–1	N/A	GWB–1		EXP		
404.04	HALL	LIN–2	N/A	WB–1		(E)LOG/WP–1		EXP		
404.05	BEDROOM	LIN–2	N/A	WB–1		GWB–1/WP–1		EXP		

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TODD C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A905

TITLE OF SHEET
GEORGE'S CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 236 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993–78fe–47d3–9961–a35d9e3691a7\85ccdf7c–2db3–4c18–8662–ac7f3386a545.rvt

WEST ELEVATION, LOOKING EAST

NORTH AND WEST ELEVATIONS, LOOKING SOUTHEAST

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

TYPICAL LOG CONDITION

TYPICAL LOG CONDITION

TYPICAL WOOD SIDING CONDITION

WEST ELEVATION, LOOKING NORTH

WEST ELEVATION EXTERIOR DOOR

TYPICAL CEILING STRUCTURE

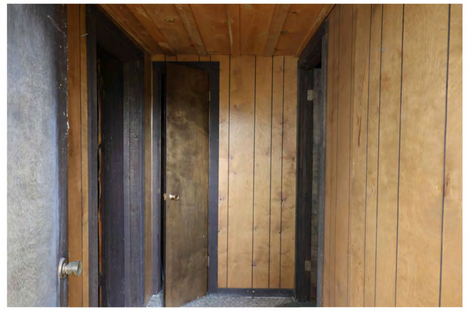

ENTRY HALLWAY, LOOKING EAST

BEDROOM 404.05, LOOKING SOUTHWEST

BATHROOM, LOOKING NORTH

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
404
A920

TITLE OF SHEET
GEORGE'S CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 237 OF 371

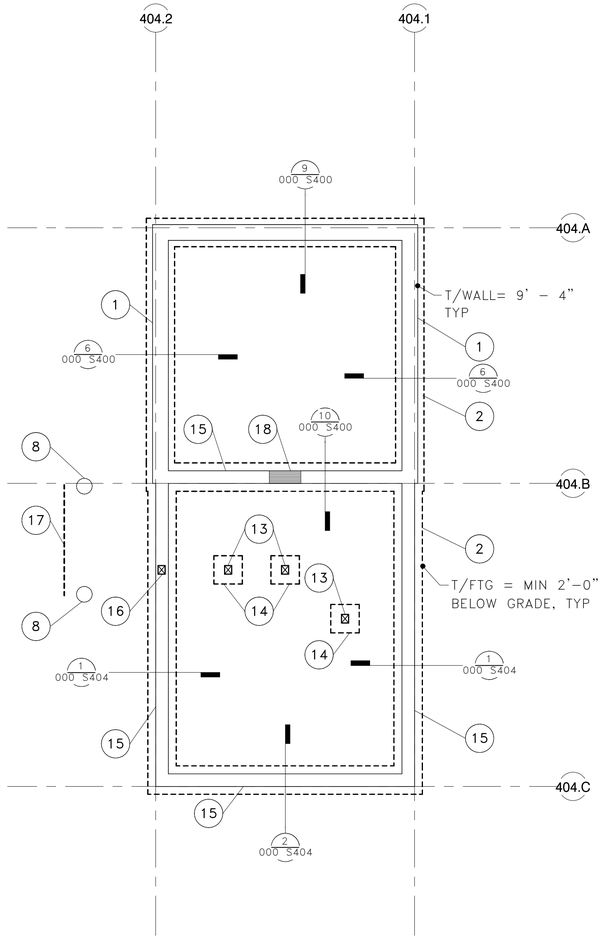

1 GEORGE'S CABIN – FOUNDATION PLAN

1/4" = 1'-0"

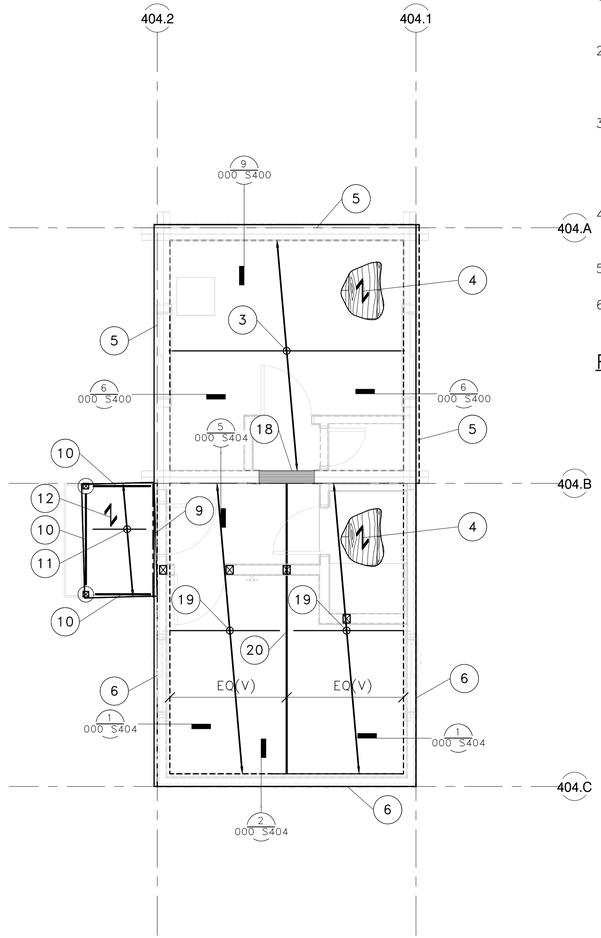

2 GEORGE'S CABIN – FLOOR FRAMING PLAN

1/4" = 1'-0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/FINISHED FLOOR ASSUMED TO BE 10'-0", VERIFY WITH ARCHITECTURAL DRAWINGS.
4. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ EF; T/WALL = MIN 6" ABOVE FINISHED GRADE
2. 1'-6"Wx10"DP CONCRETE FOOTING W/ (2) #4 BARS CONT; B/FTG = 2'-10" BELOW GRADE.
3. (E) 2x8 @ 12"OC OR 2x10 @ 16"OC FLOOR FRAMING TO REMAIN ONCE UNCOVERED & VERIFIED (CONTACT DCI ENGINEERS IF (E) JOISTS ARE OTHER THAN SPECIFIED) OR 11 7/8" TJI 210 @ 16"OC. ASSUME 100% REPLACEMENT.
4. 3/4" FLOOR SHEATHING
5. (E) 8"Ø LOG WALL FRAMING ABOVE TO BE LIFTED & TEMPORARILY RE-LOCATED AS REQUIRED TO CONSTRUCT FOUNDATION ELEMENTS
6. (E) STUD WALL FRAMING ABOVE TO BE LIFTED & TEMPORARILY RE-LOCATED AS REQUIRED TO CONSTRUCT FOUNDATION ELEMENTS.
7. PT 4x4 POST
8. 10"Ø CONCRETE PIER W/ (4) #4 BARS VERT & #3 TIES @ 10"OC
9. PT 2x6 LEDGER
10. PT 2x6 BEAM W/ HUC26 EA END, TYP AT PERIMETER OF DECK
11. PT 2x6 @ 16"OC
12. DECKING PER ARCH
13. 6x6 POST
14. 1'-6"SQx10"DP CONC FOOTING W/ (2) #4B EA WAY, B/FTG = TO MATCH EXTERIOR FTG
15. 8" CONC INTERIOR FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = PER ARCH
16. HEADER TRIMMER TO CONTINUE DOWN TO FOUNDATION WALL
17. FLAT PT4x6 FOR STEP CONNECTION
18. STEMWALL OPENING FOR CRAWLSPACE ACCESS. LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER 9/000 S403
19. 2x6 @ 16"OC FRAMING. IF (E) CONDITIONS MATCH SPECIFIED FRAMING, MAY REMAIN ONCE VERIFIED. ASSUME 100% REPLACEMENT. (CONTACT DCI ENGINEERS IF (E) JOISTS ARE OTHER THAN SPECIFIED)
20. 6x12 OR 8x10 BEAM AT FLOOR MIDSPAN. IF (E) CONDITIONS MATCH SPECIFIED FRAMING, MAY REMAIN ONCE VERIFIED. ASSUME 100% REPLACEMENT.

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
404
S201

TITLE OF SHEET
GEORGE'S CABIN – FDN & FLOOR FRAMING PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 238 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

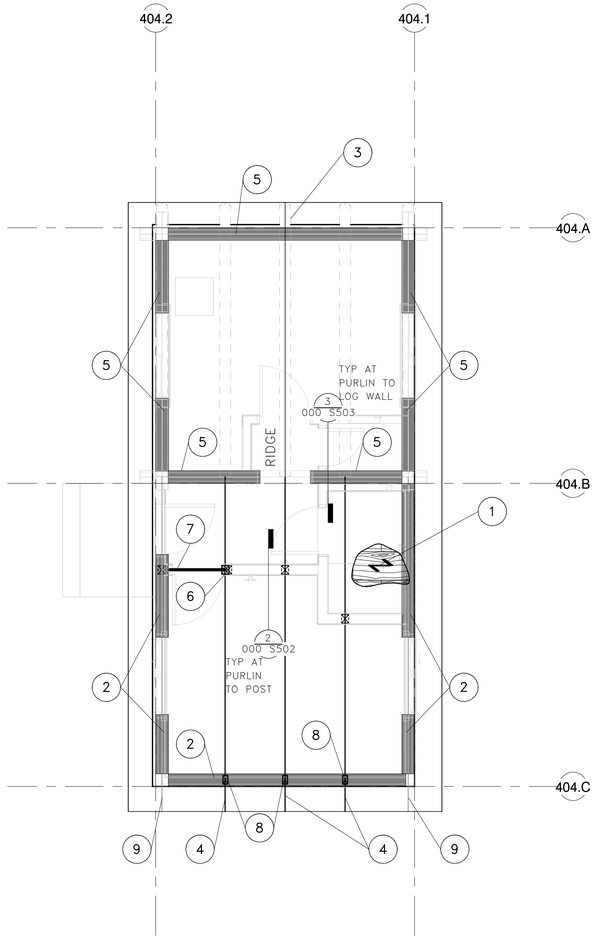

1 GEORGE'S CABIN – ROOF FRAMING PLAN

1/4" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. 1/2" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
2. 1/2" SHTHG W/ 0.131"Ø x 2 1/2" NAILS @ 6"OC ALL PANEL EDGES AT INTERIOR FACE OF WALLS PER 5/000 S510
3. (E) 7"Ø LOG PURLIN, TYP. 5 PLACES; CONNECT TO ROOF SHEATHING TO ALL INTERIOR PURLINS PER 3/000 S500
4. (E) 4x6 TIMBER PURLIN, TYP 3 PLACES; UPGRADE TO 6x8 TIMBER PURLINS. SHORE AS NEEDED
5. RETROFIT (E) 8"Ø LOG WALL BELOW W/ PINNING AS SHOWN FOR WALL TYPE "L1" PER 7/000 S501
6. (2)2x6 POST TO HEADER BELOW
7. (2)2x8 HEADER W/ (2)2x6 TRIMMER EA SIDE
8. (3)2x4 STUD PACK UNDER TIMBER
9. (E) 4x6 PURLIN ABOVE (E) WALL TO REMAIN

NORTH

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E. 18351 WYOMING Date 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	DCI ENGINEERS BOZEMAN, MT
DESIGNED:	ACF
DRAWN:	JNH
TECH REVIEW:	LMB
DATE:	07/21/2026

SUB SHEET NO.
404
S202

TITLE OF SHEET
GEORGE'S CABIN – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 239 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-404)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-404-1	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-2	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	26 / 26	-	-	-	-	#12	3/4"
EH-404-3	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-4	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	26 / 26	-	-	-	-	#12	3/4"
WH-404-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-404)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
5. ROOF CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	MOUNTING HEIGHT (IN)	CONTROL
EF-404-1	PANASONIC	FV-0510VS1	100	0.25	1.3	DIRECT	WALL	72	1

ELECTRIC HEATER SCHEDULE (HS-404)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-404-1	Q MARK	RCC15024C	240 - 1	1500	72	WALL	4	118	4-3/16
EH-404-2	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-404-3	Q MARK	RCC12024C	240 - 1	1200	72	WALL	4	94	4-3/16
EH-404-4	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HEINES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
404
M001

TITLE OF SHEET
GEORGES CABIN – MECHANICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 240 OF 371

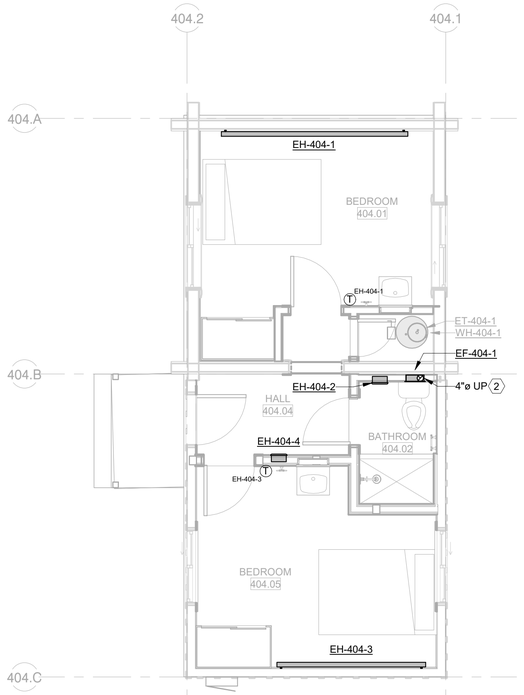

1 GEORGES CABIN – MECHANICAL PLAN

1/4" = 1'–0"

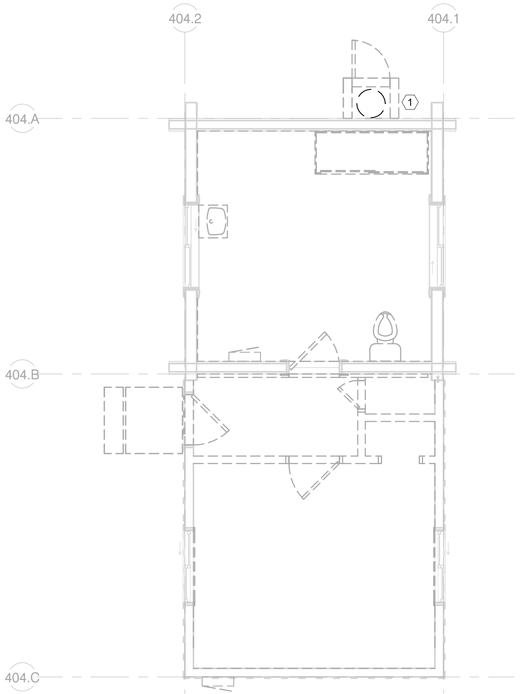

2 404 GEORGES CABIN – MECHANICAL DEMO PLAN

1/4" = 1'–0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

KEY NOTES:

1. REMOVE EXISTING PROPANE LINES AND VENT PIPING SERVING WATER HEATER.
2. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENKE
16596
07/21/2026
WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: LAG DRAWN: LAG TECH REVIEW: JRH DATE: 07/21/2026	SUB SHEET NO. 404 M201	TITLE OF SHEET GEORGES CABIN – MECHANICAL PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 241 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
C1	LED	13 W	700	3000	4" ROUND LOW PROFILE SURFACE MOUNT DOWNLIGHT	COOPER	HLS4-07-930-1E-WH	SURFACE	120 V	1
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2
U1	LED	27 W	2000	5000	VAPOR PROOF FROSTED GLASS GLOBE	RAB	VXLED26	SURFACE	120 V	1

Branch Panel: P404

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 404 GEORGE'S CABIN **Volts:** 120/240 Single **A.F.C.:** 3,811
Supply From: NORTH SERVICE **Phases:** 1 **Mains Type:** MCB
Mounting: Surface **Wires:** 3 **Mains Rating:** 100 A
Enclosure: 3R **MCB Rating:** 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	750			2	20 A	Heating		EH-404-1	2
3								--	750						4
5	EH-404-2		Heating	20 A	1	150	750			2	20 A	Heating		EH-404-3	6
7	WH-404-1		Power	30 A	2			250	750						8
9						250	1260			1	20 A	Receptacle		RCPT - BEDROOM	10
11	RCPT - BEDROOM		Receptacle	20 A	1			1260	360	1	20 A	Receptacle		RCPT - EXTERIOR	12
13	LTG		Lighting; Power	20 A	1	658	207			1	20 A	Lighting;...		ICE HOUSE	14
15	EH-404-4		Heating	20 A	1			500	180	1	20 A	Receptacle		RCPT - FIBER PANEL	16
17	SPARE		--	20 A	1	0	207			1	20 A	Lighting;...		MOUSE HOUSE	18
19	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	20
21	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	22
23	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	24
					Total Load:	4232 VA		4050 VA							
					Total Amps:	35 A		34 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Heating	3650 VA	100.00%	3650 VA		
Lighting	562 VA	125.00%	703 VA	**Total Conn. Load:**	8282 VA
Power	650 VA	100.00%	650 VA	**Total Est. Demand:**	8423 VA
Receptacle	3420 VA	100.00%	3420 VA	**Total Conn.:**	35 A
				Total Est. Demand:	35 A

MEP COORDINATION SCHEDULE (HS-404)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-404-1	WALL EXHAUST FAN	0.39 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-2	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-404-3	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-404-4	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	26 / 26	-	-	-	-	#12	3/4"
WH-404-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
404
E001

TITLE OF SHEET
GEORGES CABIN – ELECTRICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 242 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

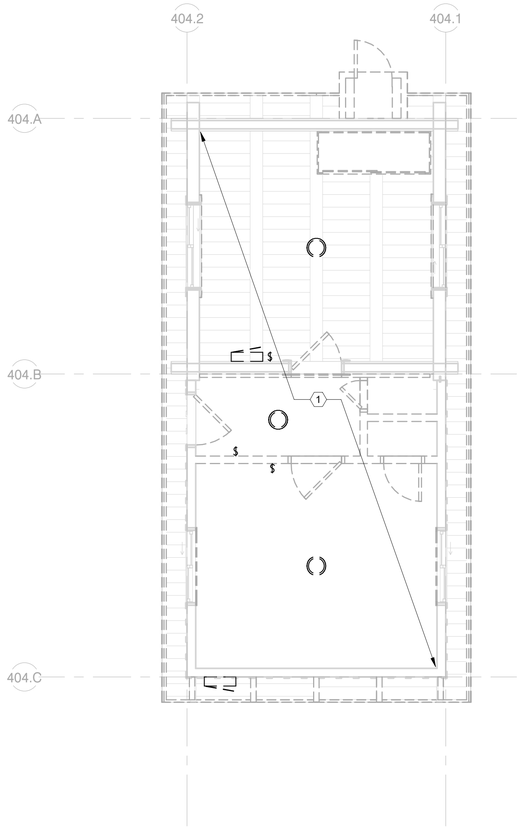

2 GEORGES CABIN – LIGHTING DEMO PLAN

1/4" = 1'-0"

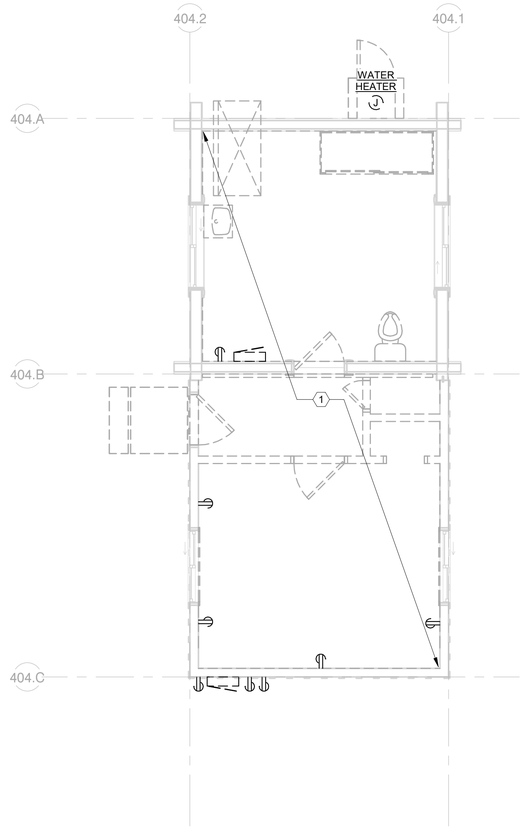

1 GEORGES CABIN – POWER DEMO PLAN

1/4" = 1'-0"

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
State
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
404
E100

TITLE OF SHEET
GEORGES CABIN –
ELECTRICAL DEMO PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 243 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

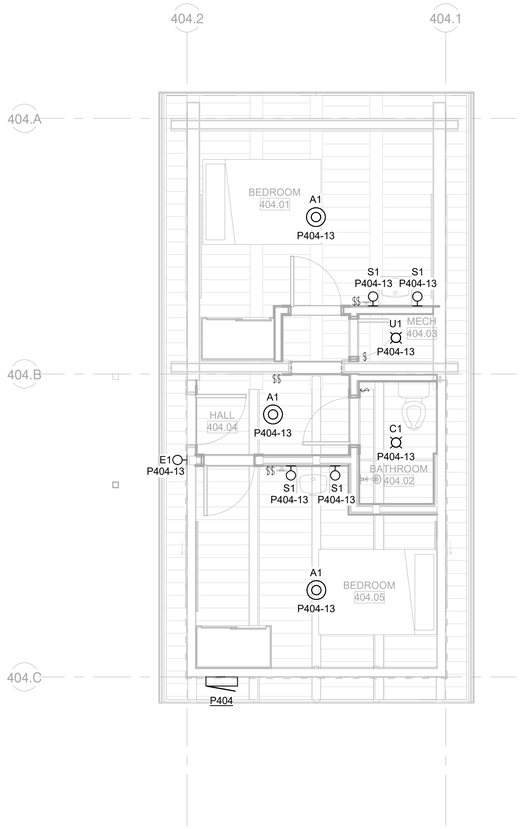

2 GEORGES CABIN – LIGHTING PLAN

1/4" = 1'-0"

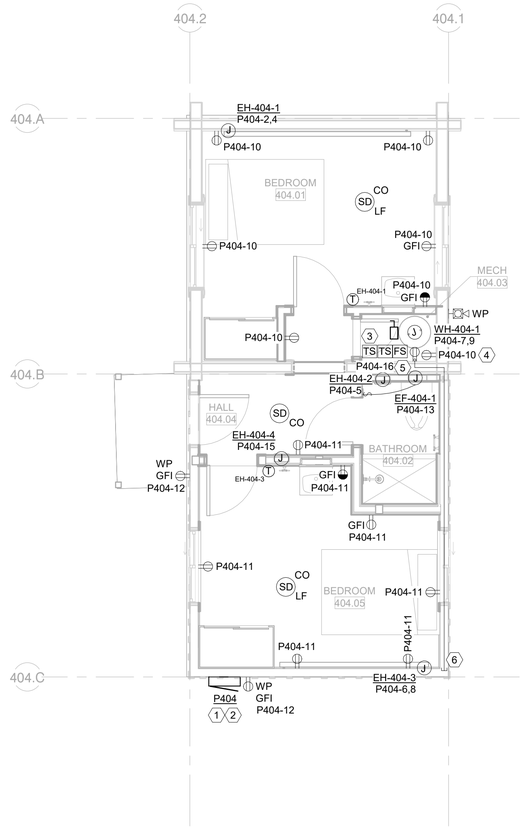

1 GEORGES CABIN – POWER AND SIGNAL PLAN

1/4" = 1'-0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
5. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
6. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
404
E101

TITLE OF SHEET
GEORGES CABIN – ELECTRICAL RENOVATION PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 244 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - GEORGES CABIN (HS-404)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
FD-404-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-404-1	LAVATORY - WALL MOUNTED	YES	KOHLER	K-2868	VITREOUS CHINA	WALL / ABA HEIGHT	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE JR SMITH #700 SERIES CARRIER, WATER STOPS, OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
SH-404-1	SHOWER	NO	KOHLER	K-8639	ACRYLIC	FLOOR	SHOWER TRIM	KOHLER	K-TS97077-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS AND GRID DRAIN.
WC-404-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-404)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. HAND HOLE CLEAN-OUT.
6. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
7. FIVE YEAR LIMITED TANK WARRANTY
8. ZERO INCH CLEARANCE
9. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-404-1	RHEEM	XE40M06ST45U1	ELECTRIC TANK	40	120	4.5	0.93	53	21	48-1/4	20-1/4	106

PLUMBING EXPANSION TANK SCHEDULE (HS-404)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-404-1	TACO	PAX10-150	WH-404-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-404)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	1	3.6	3.6
LAVATORY	2	0.7	1.4
			5
MAX. LENGTH (FT)	40		
TOTAL PEAK FLOW (GPM)	9		
WATER METER SIZE (BY UTILITY)	3"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-404)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	1	5.0	5
EMERGENCY FLOOR DRAIN	1	0.0	0
LAVATORY	2	1.0	2
			7
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MORRIS
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
404
P001

TITLE OF SHEET
GEORGES CABIN – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 245 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

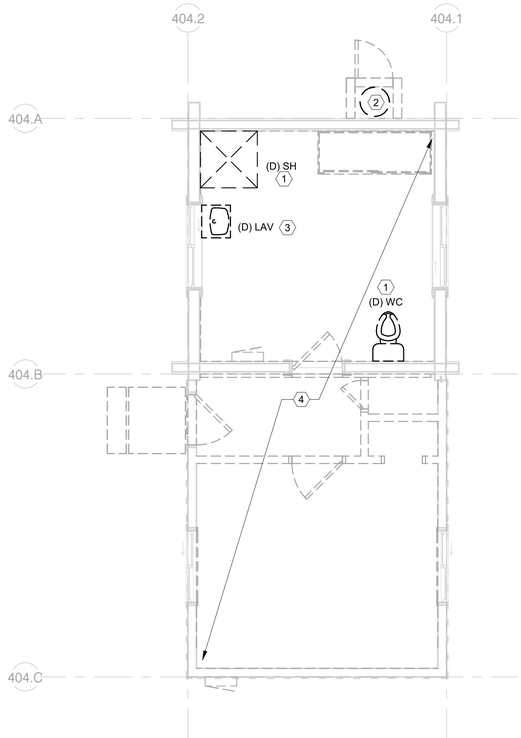

1 404 GEORGES CABIN – PLUMBING DEMO PLAN

1/4" = 1'-0"

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

(#) KEY NOTES:

1. REMOVE EXISTING FIXTURE AND ASSOCIATED PIPING.
2. REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
3. REMOVE LAVATORY, ASSOCIATED PIPING, AND FAUCET.
4. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEIER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
404
P101

TITLE OF SHEET
GEORGES CABIN – DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 246 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

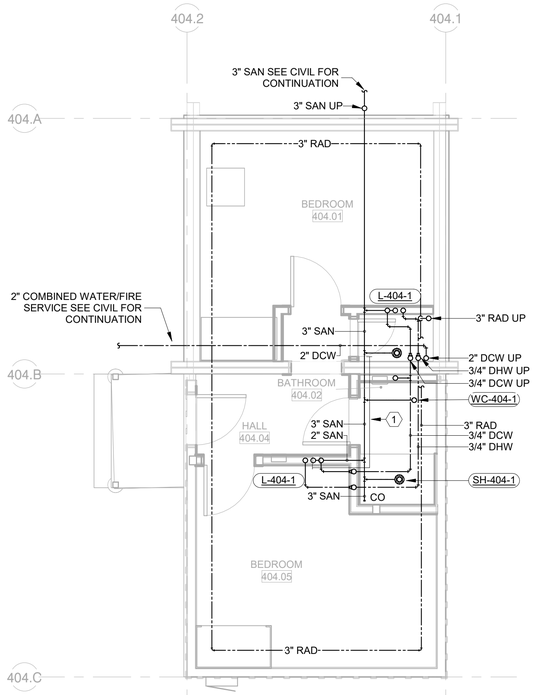

2 GEORGES CABIN – PLUMBING UNDERFLOOR PLAN

1/4" = 1'-0"

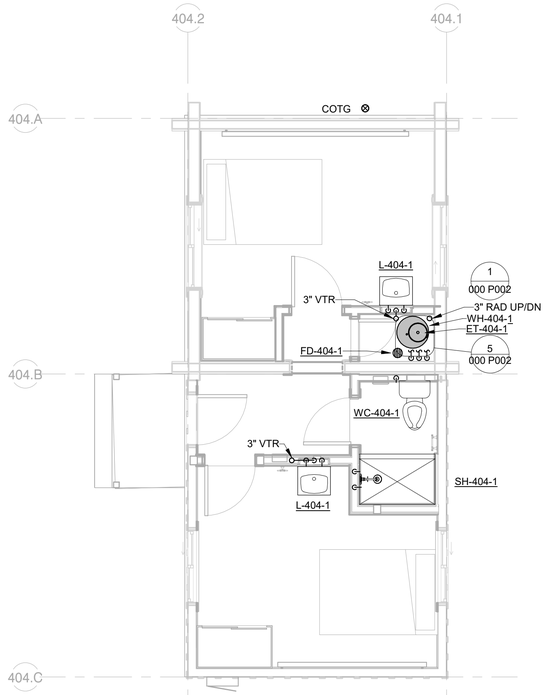

1 GEORGES CABIN – PLUMBING PLAN

1/4" = 1'-0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

(#) KEY NOTES:

1. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEIER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
404
P201

TITLE OF SHEET
GEORGES CABIN – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 247 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

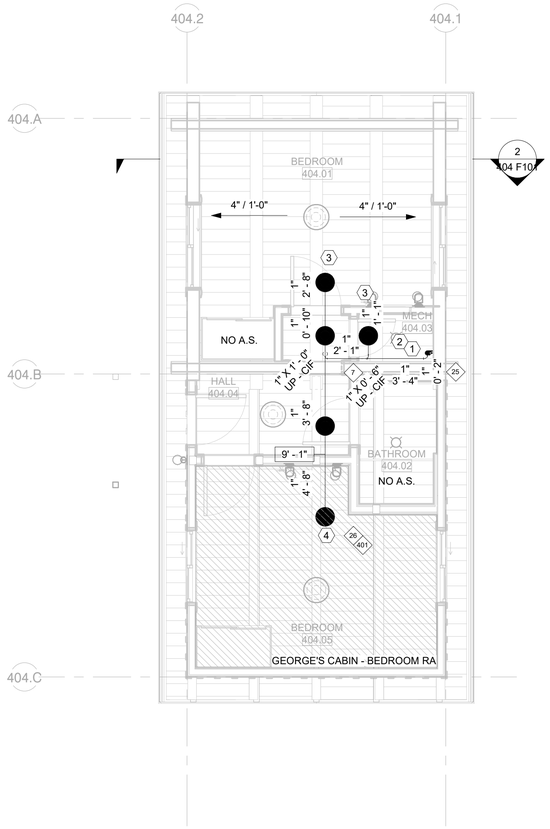

1 404 GEORGES CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'-0"

Hydraulic Information	
Remote Area Name	Georges Cabin - Bedroom
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	123 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.9
Base of Riser	22.02 GPM
Base of Riser	35.28 psi
Safety Margin	+33.92 (46.51%)

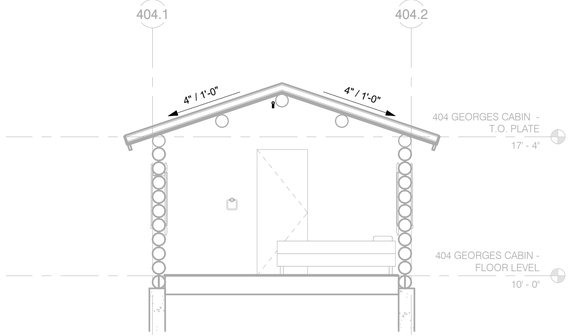

2 GEORGES CABIN – FIRE SUPPRESSION SECTION

1/4" = 1'-0"

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	5
												5

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 WYOMING Date

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
404
F101

TITLE OF SHEET
GEORGES CABIN – MAIN LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 248 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING SOUTH TOWARDS 405 MOUSE CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

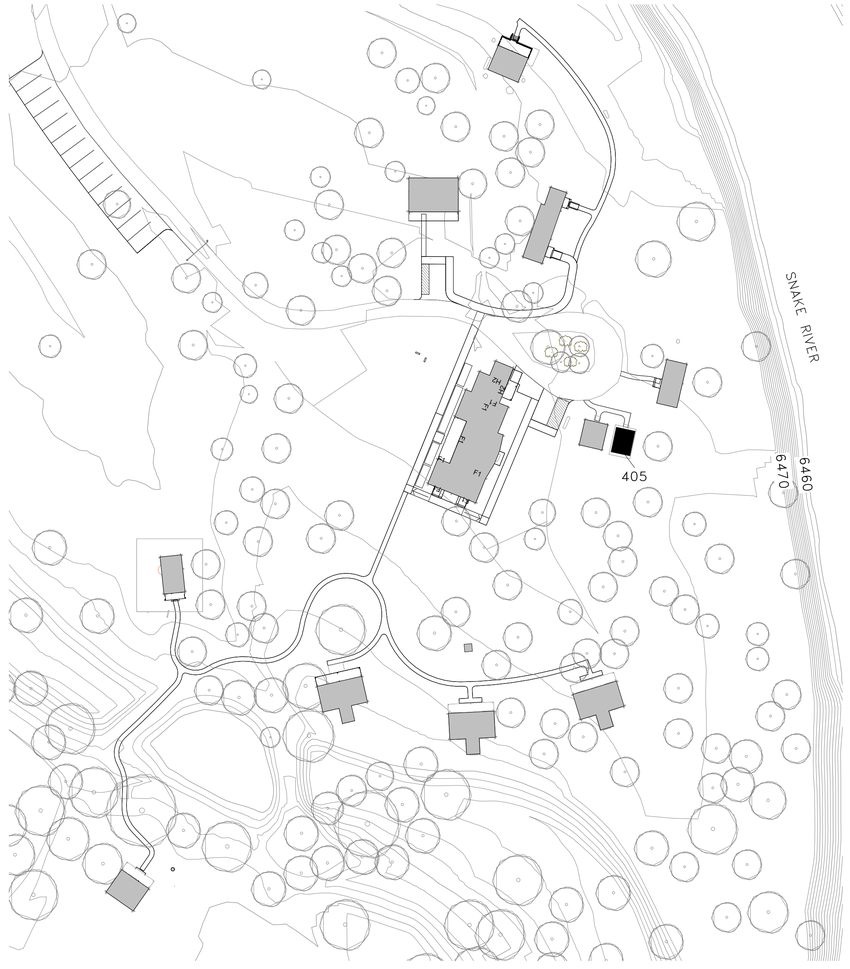

1 KEY PLAN – 405 MOUSE HOUSE

1" = 50'-0"

50 0 50 100
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. REA
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
G000

TITLE OF SHEET
MOUSE HOUSE – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 249 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

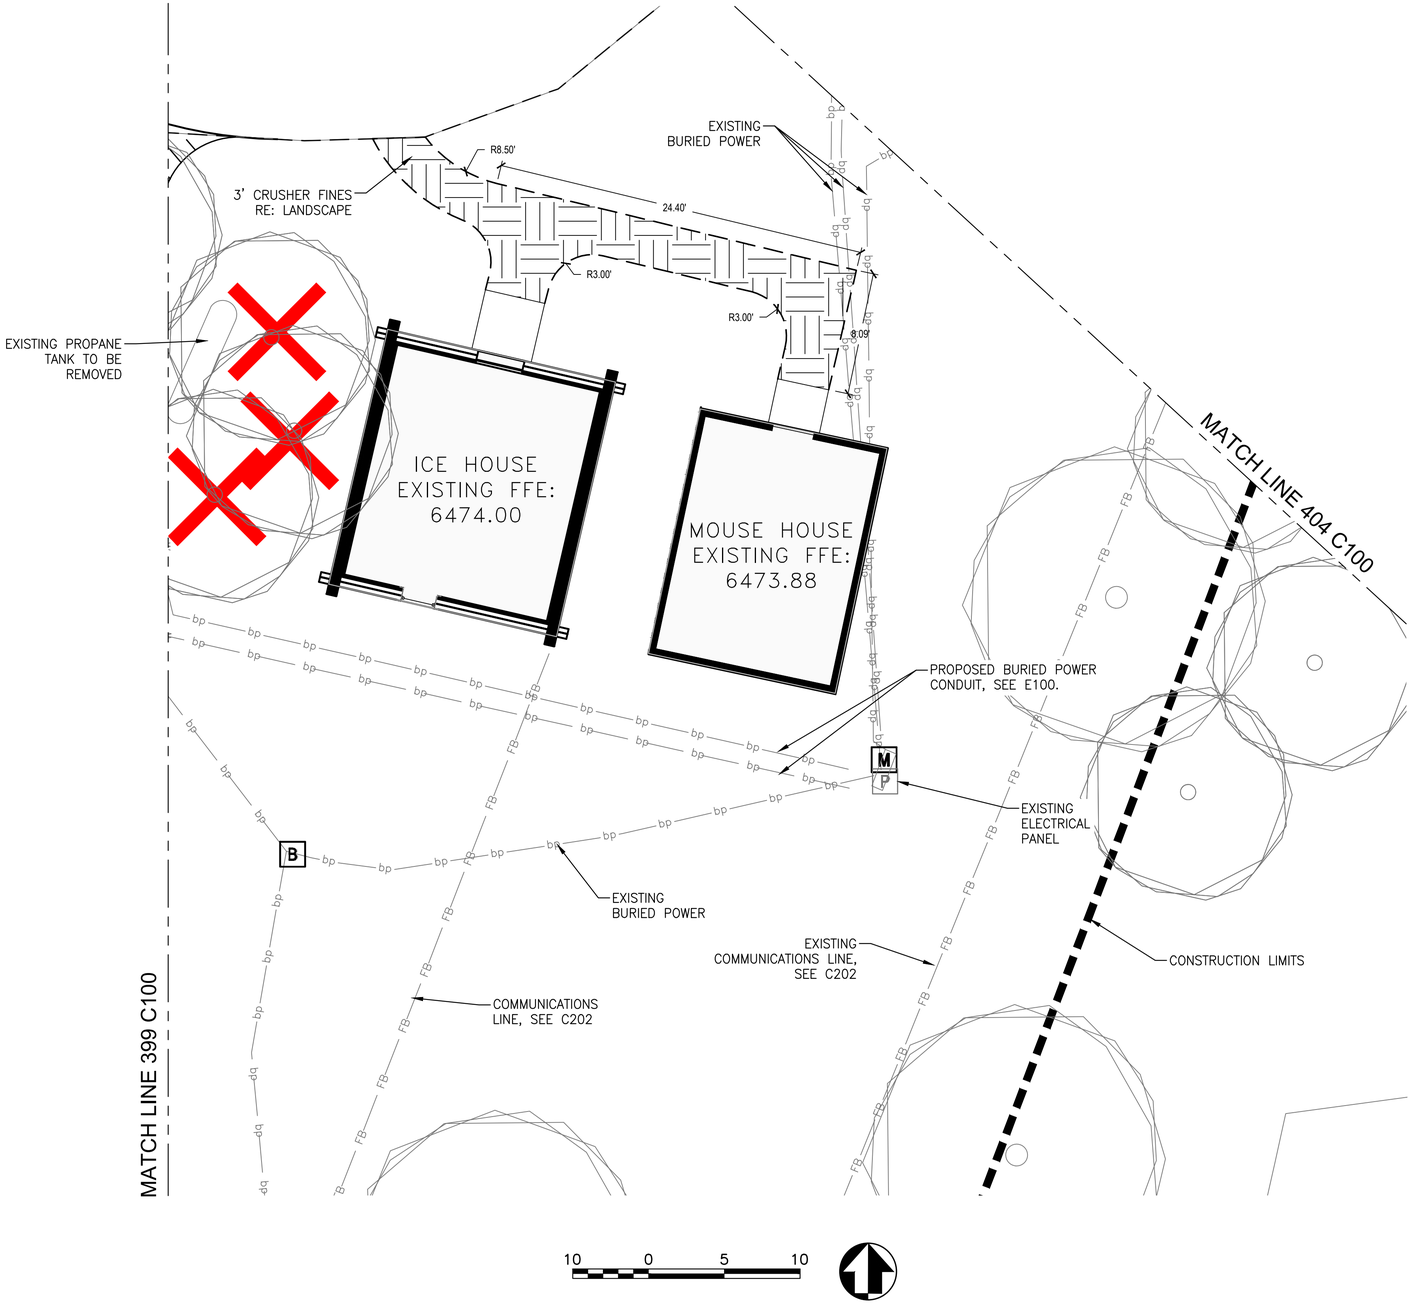

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22345 WYOMING Date: 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 405–406 C100	TITLE OF SHEET MOUSE HOUSE & ICE HOUSE – SITE AND UTILITY PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 250 OF 371

P:\6204-NEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

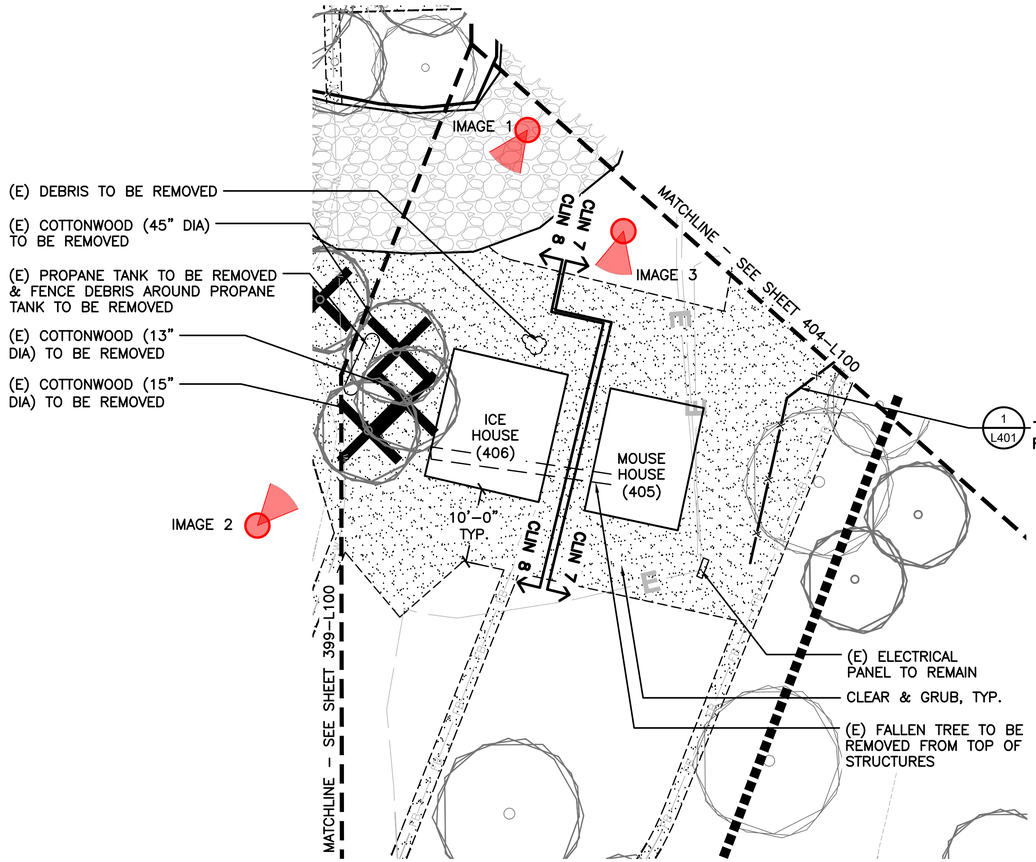

IMAGE 1: (E) PROPANE TANK TO BE REMOVED. RE: CIVIL

IMAGE 2: (E) TREES TO BE REMOVED.

IMAGE 3: (E) FALLEN TREE TO BE REMOVED FROM TOP OF STRUCTURES.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

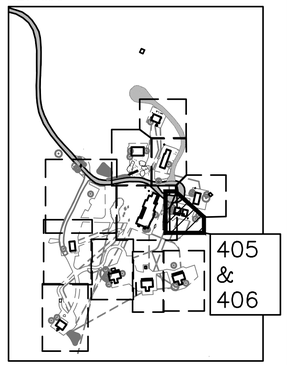

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT — EILEEN M. KEMP — LA-0212C — Date: 07/21/26 — STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 405–406 L100	TITLE OF SHEET MOUSE HOUSE & ICE HOUSE – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 251 OF 371

File Path
Z:\PROJECTS\KERSTIENS_R25 P\DENVER\NPS GRTE 4LAZY F RANCH_199539_FINAL CD\CAD\ALL\1-0_GRTE-L4_DEMO.DWG
XREFS: 0824_BASSIS26_0808_NPS GRTE 4 LAZY F_ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_TitleblockL_22x34_GRTE 4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXIST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_DSGN.dwg
IMAGES: ..\..\2_Admin\Photos\Garage\Debris1.jpg|Debris2.jpg|Debris3.jpg|Debris4.jpg|Debri.jpg\..\..\2_Admin\Photos\Gates\Gate-1.jpg|Gate.jpg\..\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.removes-1.jpg\..\..\2_Admin\Photos\IceHouse\Mouse and Ice .jpg\..\..\...

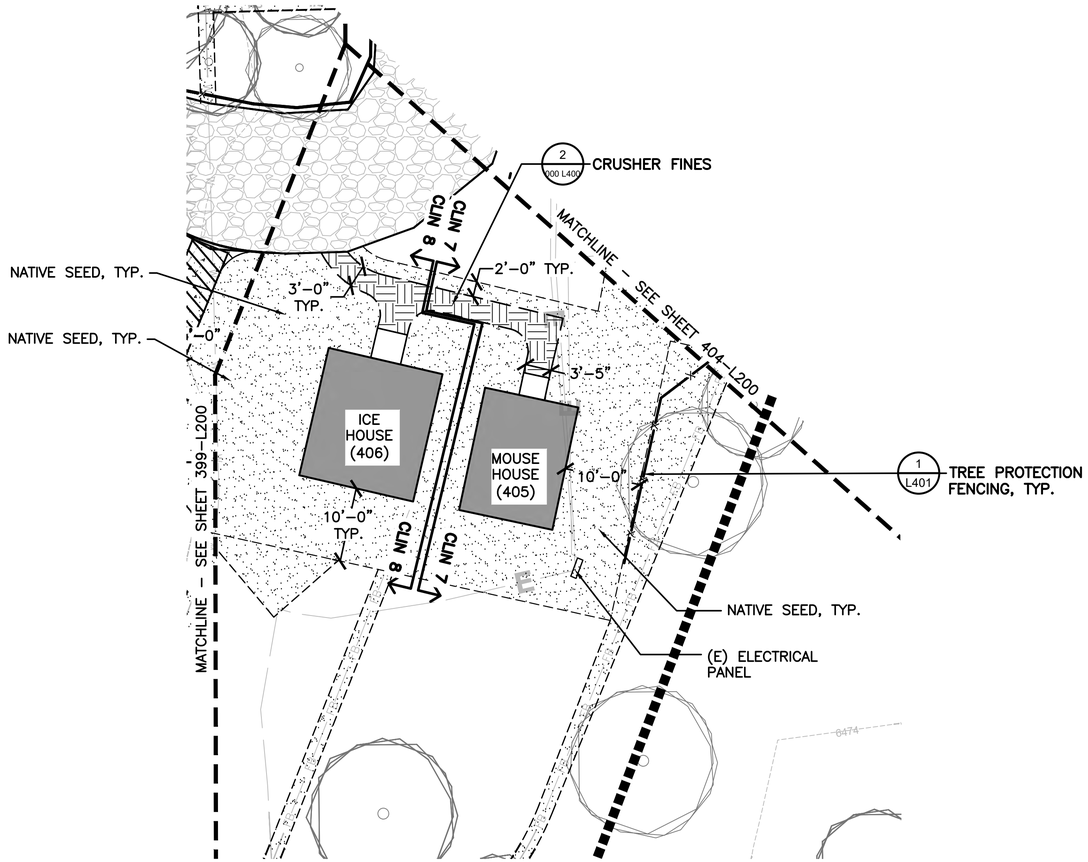

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- CRUSHER FINES
- CONCRETE, RE: CIVIL
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

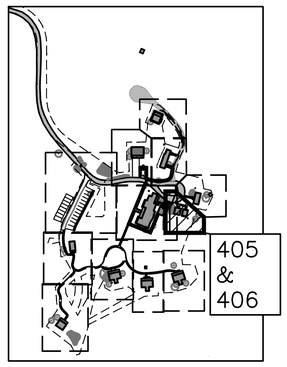

10 0 10 20
SCALE OF FEET

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. ACCESSIBLE PARKING STALLS AND ACCESS AISLE TO BE EXPOSED AGGREGATE CONCRETE.
3. SIDE SLOPES FROM PARKING AREAS SHALL BE 4:1 MAX UNLESS OTHERWISE SPECIFIED.
4. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
5. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
6. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 07 & 08.
7. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 405–406 L200	TITLE OF SHEET MOUSE HOUSE & ICE HOUSE – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 252 OF 371

File Path
T:\ACAD\GTNP\DESIGN\PROJECTS\ERSTIENS, R25 P\DEN\ERNPS GRTE 4\LAZY F RANCH - 199539, FINAL CD\CAD\ALL\1-0, GRTE-L4 LAYOUT.DWG
XREFS: BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_TitleBlock 22x34 - GRTE 4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_TitleBlock 22x34 - GRTE 4 LAZY F.dwg
IMAGES: ..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...
..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg|River cabin-4.jpg|Road connection...
..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG|..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg|..\..\2_Admin\Photos\ParkingLot\Parking lot-4.jpg|Parking lot too-5.jpg|...

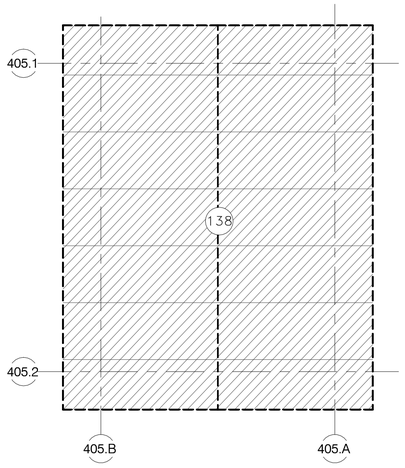

2 405 MOUSE HOUSE – DEMO ROOF PLAN

1/4" = 1'–0"

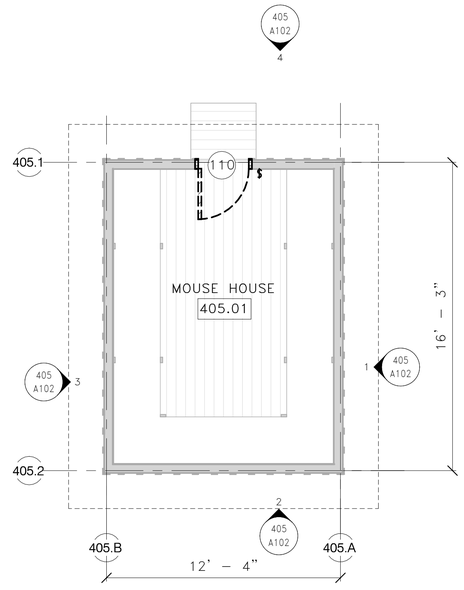

1 405 MOUSE HOUSE – DEMO PLAN

1/4" = 1'–0"

KEYNOTES

110 REMOVE (E) DOOR. CASING & FRAME TO REMAIN

138 REMOVE (E) ROOF ASSEMBLY INCLUDING FRAMING PER STRUCTURAL. SALVAGE FOR REINSTALLATION (E) CEILING METAL PANELING & UNDERLYING WOOD PLANKS. SALVAGE FOR REINSTALLATION SUFFICIENT ROOF DECKING MATERIAL FOR REINSTALLATION AT EAVES.

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. KAYS C-3538 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A101

TITLE OF SHEET
MOUSE HOUSE – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 253 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

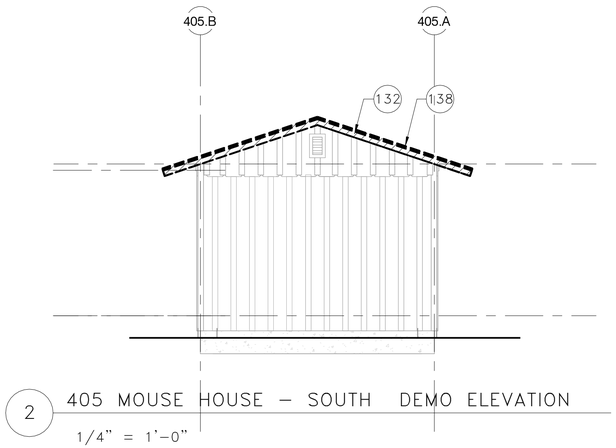

2 405 MOUSE HOUSE – SOUTH DEMO ELEVATION

1/4" = 1'-0"

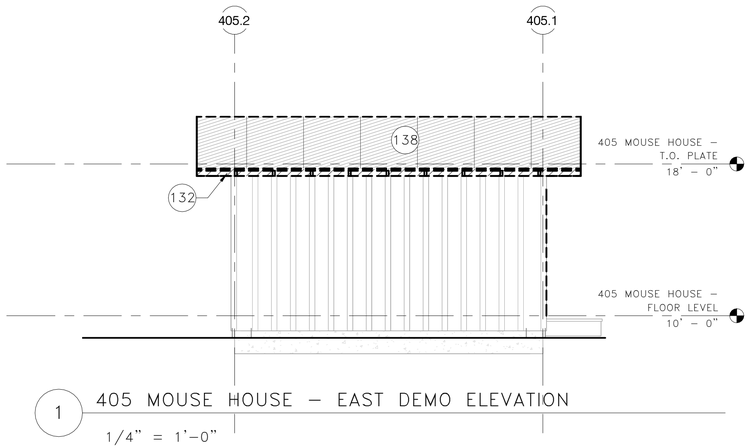

1 405 MOUSE HOUSE – EAST DEMO ELEVATION

1/4" = 1'-0"

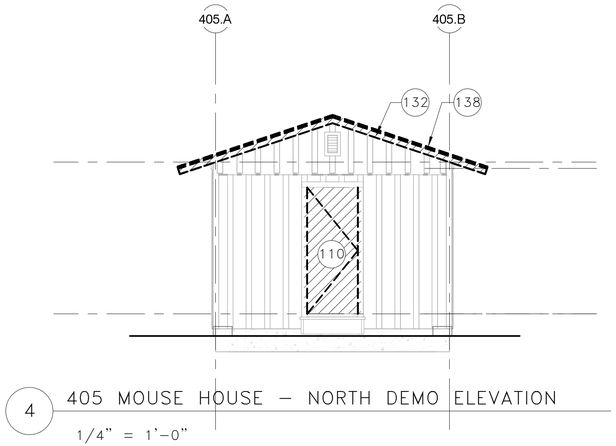

4 405 MOUSE HOUSE – NORTH DEMO ELEVATION

1/4" = 1'-0"

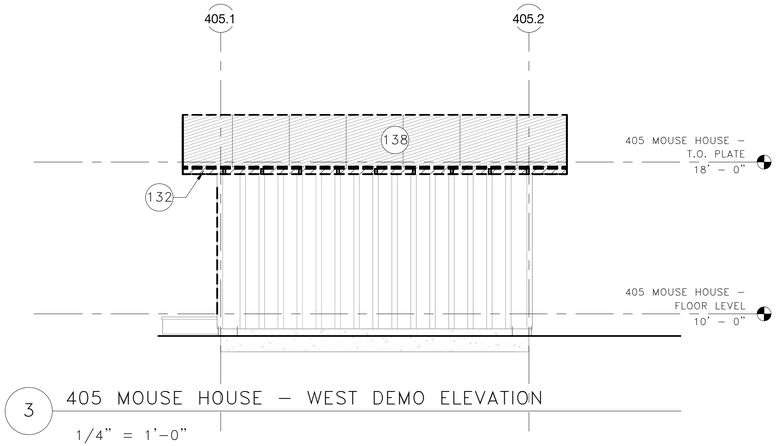

3 405 MOUSE HOUSE – WEST DEMO ELEVATION

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

110 REMOVE (E) DOOR. CASING & FRAME TO REMAIN
132 REMOVE (E) FASCIA
138 REMOVE (E) ROOF ASSEMBLY INCLUDING FRAMING PER STRUCTURAL. SALVAGE FOR REINSTALLATION (E) CEILING METAL PANELING & UNDERLYING WOOD PLANKS. SALVAGE FOR REINSTALLATION SUFFICIENT ROOF DECKING MATERIAL FOR REINSTALLATION AT EAVES.

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A102

TITLE OF SHEET
MOUSE HOUSE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 254 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691d7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

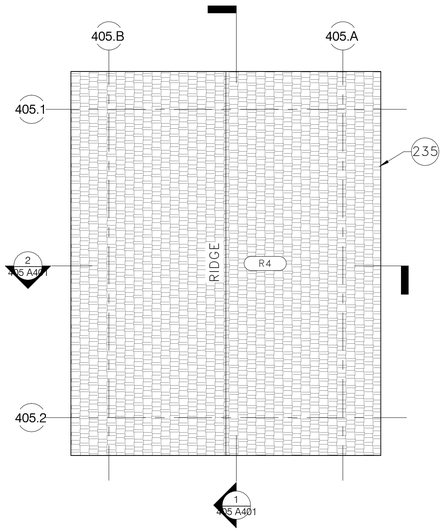

2 405 MOUSE HOUSE – ROOF PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# — ROOF TAG
- ### — KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

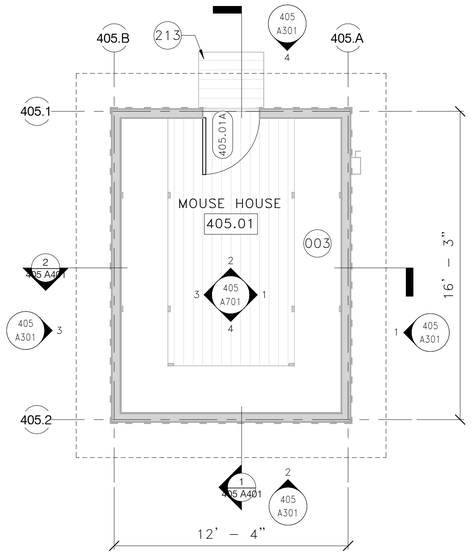

1 405 MOUSE HOUSE – FLOOR PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## — DOOR TAG
- EXT–XX — WALL TAG
- EDGE OF ROOF ABOVE
- ### — KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.
213 RESTORE (E) WOOD DECK, FRAMING, AND/OR STEPS TO REMAIN
235 REPLACE (E) WOOD FASCIA

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM E. IVES — C-3539 — Date 7/21/26 — STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A201

TITLE OF SHEET
MOUSE HOUSE – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 255 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

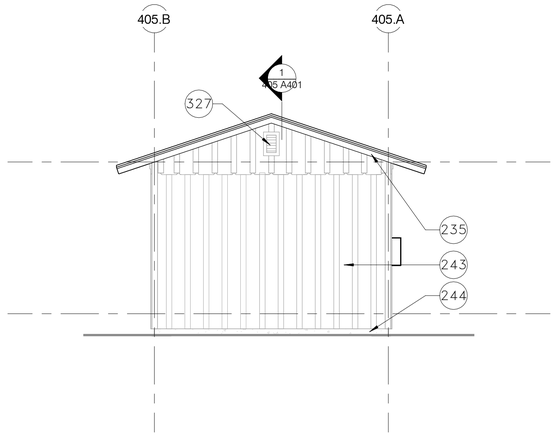

2 405 MOUSE HOUSE – SOUTH

1/4" = 1'–0"

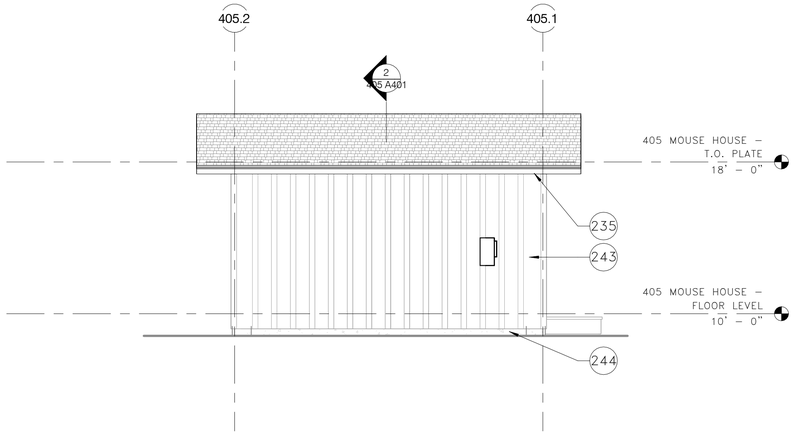

1 405 MOUSE HOUSE – EAST

1/4" = 1'–0"

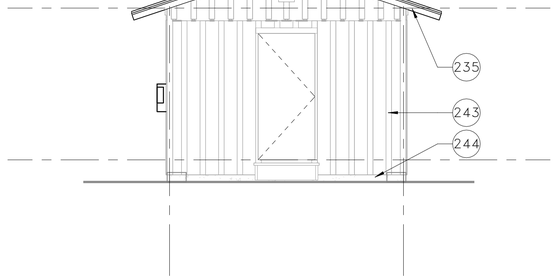

4 405 MOUSE HOUSE – NORTH

1/4" = 1'–0"

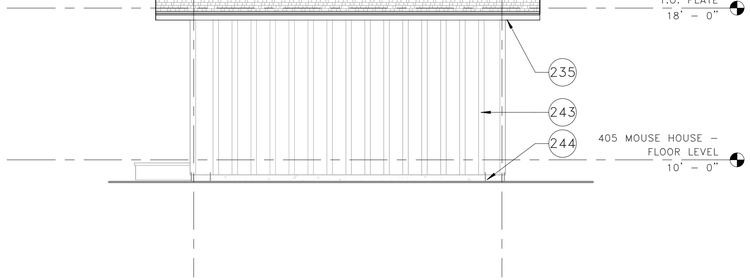

3 405 MOUSE HOUSE – WEST

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS. VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

235 REPLACE (E) WOOD FASCIA
243 REPAIR AND REFINISH (E) WOOD BOARD AND BATTEN SIDING. ASSUME 20% REPLACEMENT
244 PROVIDE 4" GAP WITH PEST CONTROL MESH AT BASE OF STRUCTURE WITHOUT MODIFYING SIDING
327 REPAIR AND REFINISH (E) ATTIC VENT TO REMAIN. PROVIDE PEST CONTROL MESH

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FIGG C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A301

TITLE OF SHEET
MOUSE HOUSE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 256 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

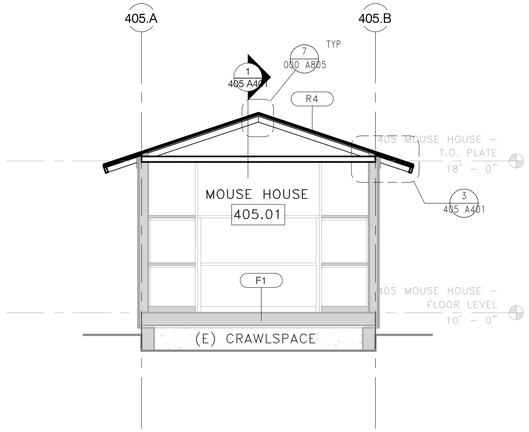

2 405 MOUSE HOUSE – SECTION 'B'

1/4" = 1'–0"

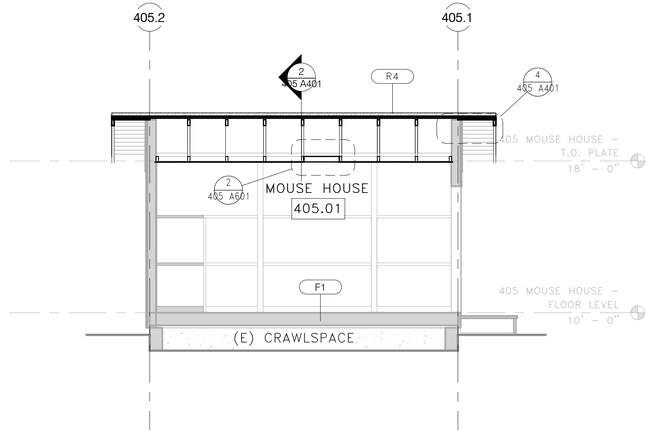

1 405 MOUSE HOUSE – SECTION 'A'

1/4" = 1'–0"

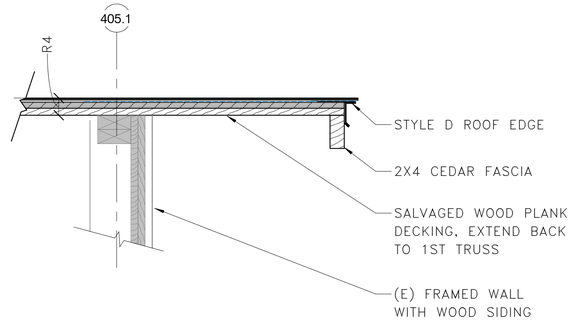

4 405 MOUSE HOUSE – RAKE DETAIL

1 1/2" = 1'–0"

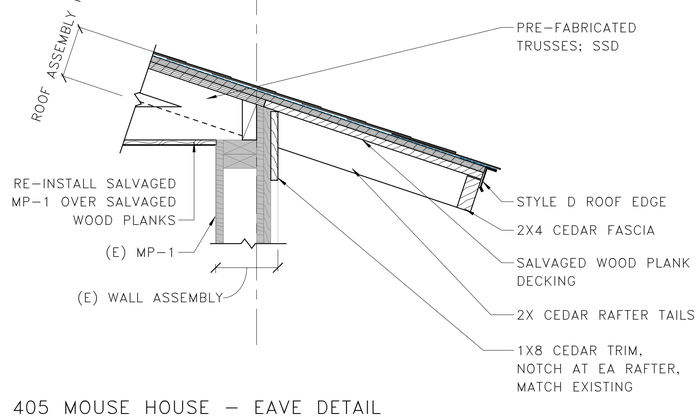

3 405 MOUSE HOUSE – EAVE DETAIL

1 1/2" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

SCALE (E) 8" 0 8" 1' 4"
SCALE OF FEET

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. REED
C-3530
STATE OF WYOMING
Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A401

TITLE OF SHEET
MOUSE HOUSE – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 257 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

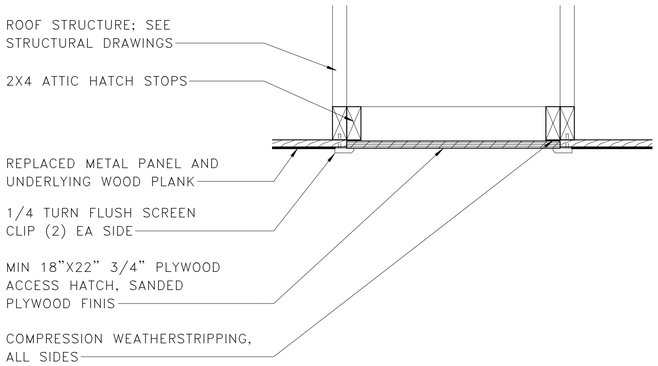

2 405 MOUSE HOUSE – ATTIC ACCESS DETAIL

1 1/2" = 1'-0"

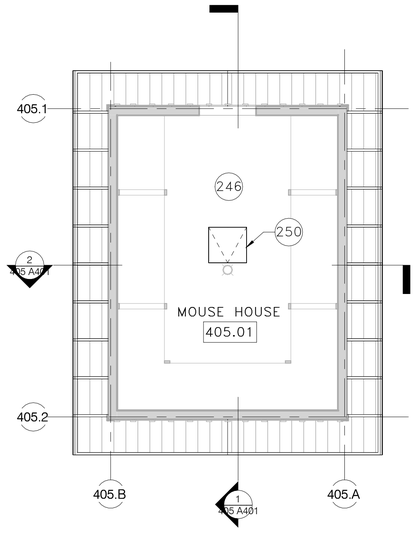

1 405 MOUSE HOUSE – FIRST LEVEL RCP

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

246 REINSTALL SALVAGED METAL PANEL AND ASSOCIATED WOOD PLANK AT CEILING

250 AT EXISTING VENT LOCATION, INSTALL CUSTOM BUILT ATTIC ACCESS HATCH

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
405
A601

TITLE OF SHEET
MOUSE HOUSE – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	258 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.

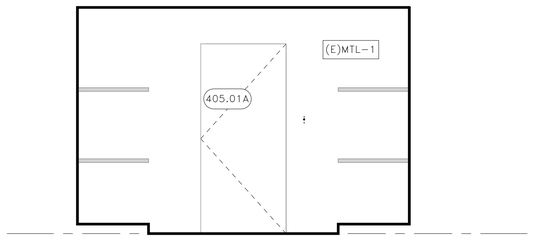

2 MOUSE HOUSE 405 – NORTH

3/8" = 1'-0"

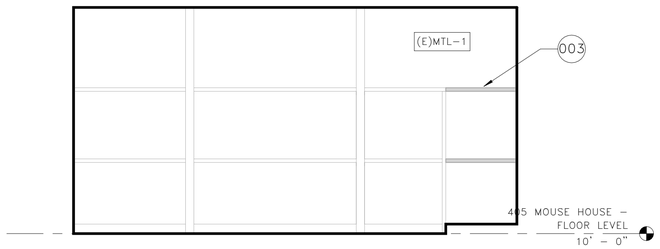

1 MOUSE HOUSE 405 – EAST

3/8" = 1'-0"

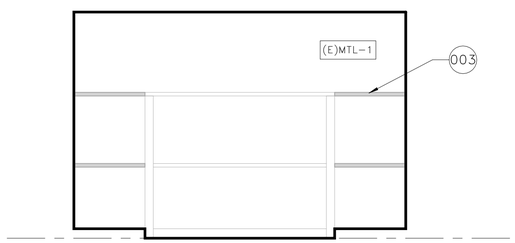

4 MOUSE HOUSE 405 – SOUTH

3/8" = 1'-0"

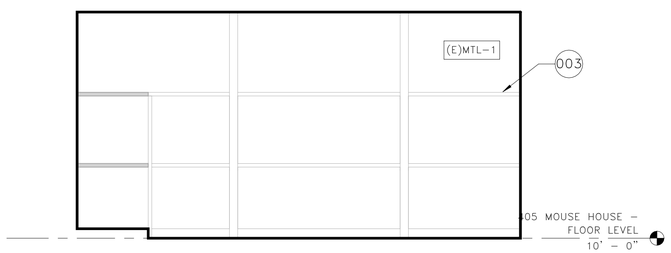

3 MOUSE HOUSE 405 – WEST

3/8" = 1'-0"

SCALE Ⓒ 2'–8" 0 2'–8" 5'–4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A701

TITLE OF SHEET
MOUSE HOUSE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 259 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

405 MOUSE HOUSE – DOOR SCHEDULE

DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE		MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
		WIDTH	HEIGHT								
405.01A	DR–4	3' – 0"	6' – 8"			(E)					

405 MOUSE HOUSE – ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
				BASE		WALL				
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	
405.01	MOUSE HOUSE	(E)MTL–1	CLR–1	NONE		(E)MTL–1		(E)MTL–1		

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TYRES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A905

TITLE OF SHEET
MOUSE HOUSE – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 260 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

NORTH AND WEST ELEVATIONS, LOOKING SOUTHEAST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

NORTH ELEVATION,
EXTERIOR DOOR & STOOP

INTERIOR, LOOKING SOUTH

TYPICAL GABLE END WOOD SIDING, VENT, AND EAVE

TYPICAL WOOD SIDING AND EAVE

TYPICAL WOOD SIDING

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
405
A920

TITLE OF SHEET
MOUSE HOUSE – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 261 OF 371

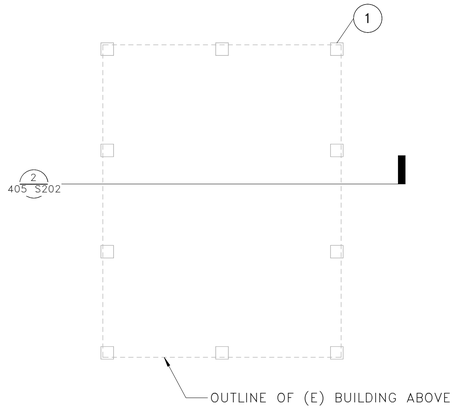

1 MOUSE HOUSE – FOUNDATION PLAN

1/4" = 1'-0"

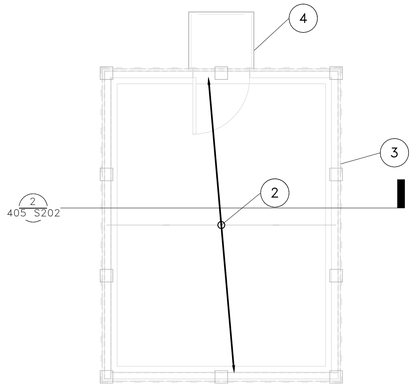

2 MOUSE HOUSE – FLOOR FRAMING PLAN

1/4" = 1'-0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.
4. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

KEYNOTES:

1. (E) CMU FOUNDATION BLOCKS, 10 TOTAL, TO REMAIN
2. (E) WOOD FLOOR FRAMING TO REMAIN
3. (E) BOARD & BATTEN WALL TO REMAIN
4. (E) PORCH STEP TO REMAIN

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO.

405

S201

TITLE OF SHEET

MOUSE HOUSE – FDN & FLOOR FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136

PMIS/PKG NO. 237343

SHEET 262 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

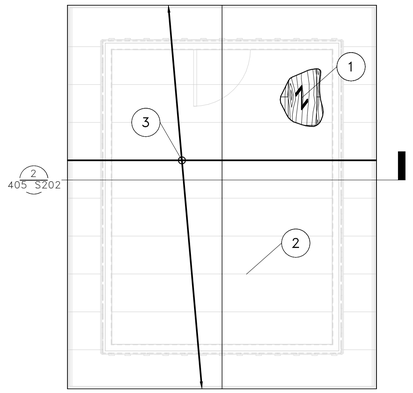

1 MOUSE HOUSE – ROOF FRAMING PLAN

1/4" = 1'-0"

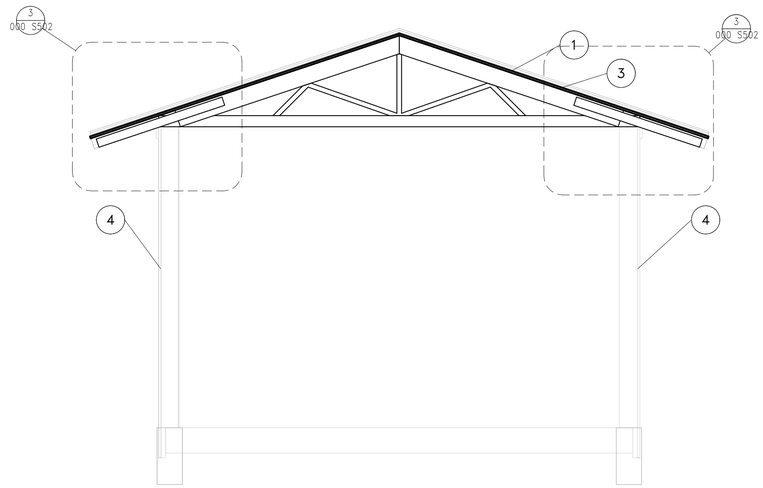

2 MOUSE HOUSE – ELEVATION

1/2" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. 5/8" ROOF SHEATHING TO BE NAILED TO ROOF FRAMING PER 4/000 S503
2. (E) 2x4 RAFTERS @ 16"OC, TO BE DEMOED & REMOVED
3. PRE-FAB ROOF TRUSSES @ 24"OC W/ POST INSTALLED 2x4 RAFTER TAILS TO MATCH (E)
4. (E) BOARD & BATTEN WALL TO REMAIN

NORTH

4 0 4 8

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 405 S202

TITLE OF SHEET

MOUSE HOUSE – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136

193826

PMIS/PKG NO. 237343

SHEET 263 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

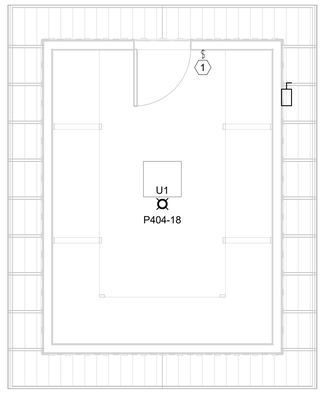

2 MOUSE HOUSE – LIGHTING RENOVATION PLAN

1/4" = 1'-0"

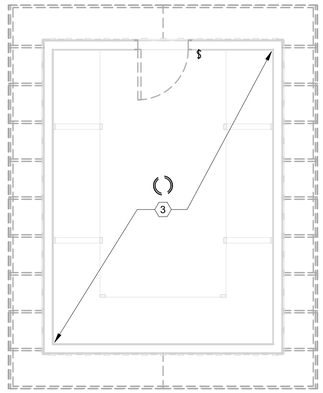

1 MOUSE HOUSE – ELECTRICAL DEMO PLAN

1/4" = 1'-0"

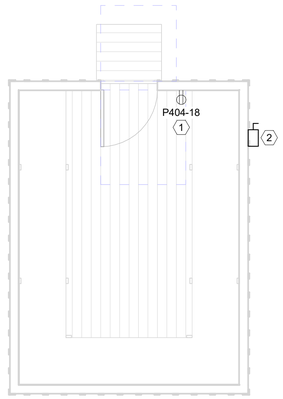

3 MOUSE HOUSE – POWER RENOVATION PLAN

1/4" = 1'-0"

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
U1	LED	27 W	2000	5000	VAPOR PROOF FROSTED GLASS GLOBE	RAB	VXLED26	SURFACE	120 V	1

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. PROVIDE A NEW CIRCUIT FOR LIGHTING / RECEPTACLE FROM PANEL 'P404' AT GEORGES CABIN.
2. PROVIDE NEMA 3R DISCONNECT SWITCH FOR 120V 20A CIRCUIT. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL WITHIN STRUCTURE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
405
E100

TITLE OF SHEET
MOUSE HOUSE – ELECTRICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 264 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING SOUTH TOWARDS 406 ICE HOUSE

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003
FOR CIVIL & LANDSCAPE PLANS ASSOCIATED WITH ICE HOUSE, REFERENCE SET 405 – MOUSE HOUSE

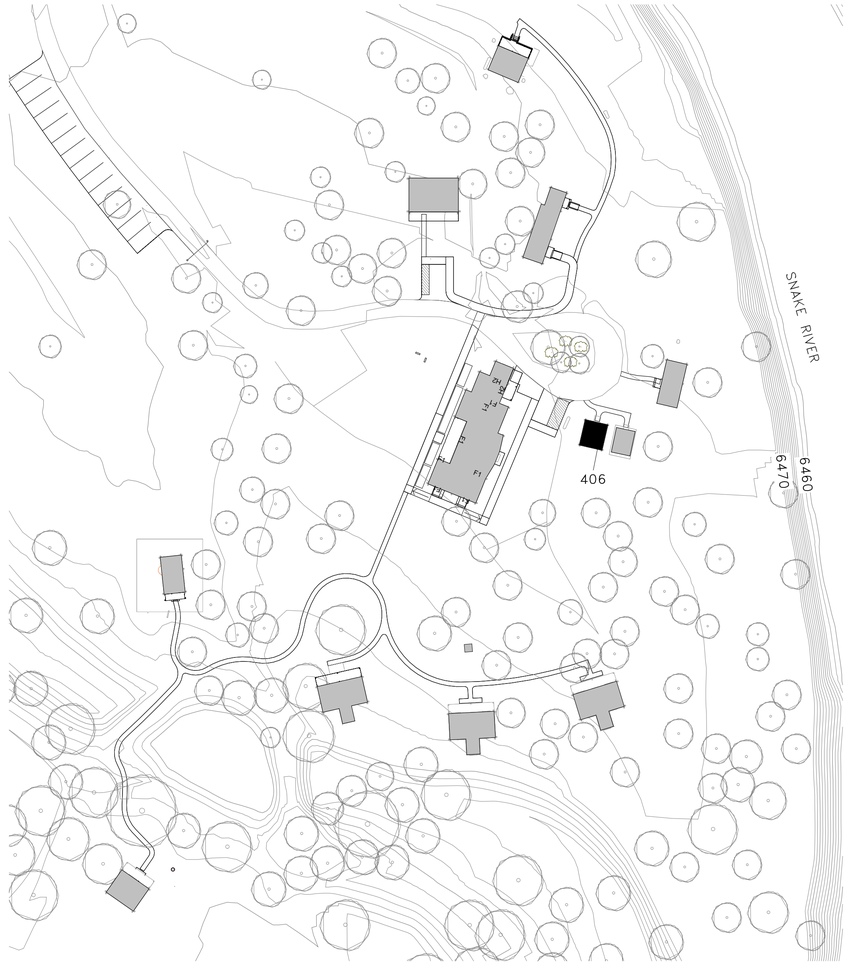

1 KEY PLAN – 406 ICE HOUSE

1" = 50'-0"

50 0 50 100
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TYREE
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
G000

TITLE OF SHEET
ICE HOUSE – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 265 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

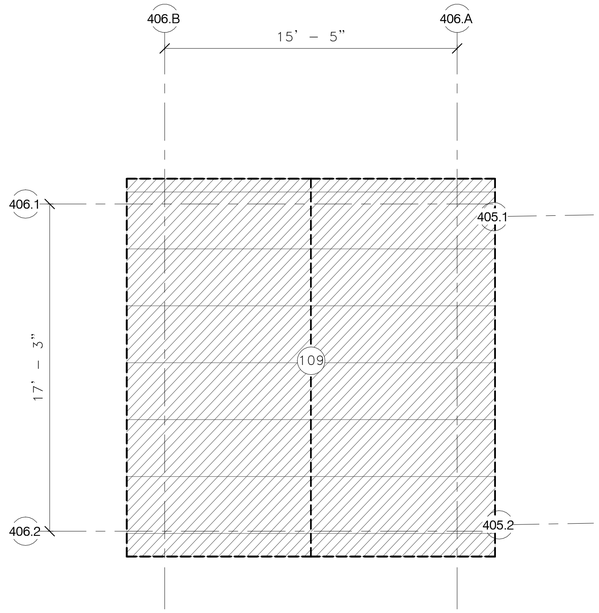

2 406 ICE HOUSE – DEMO ROOF PLAN

1/4" = 1'-0"

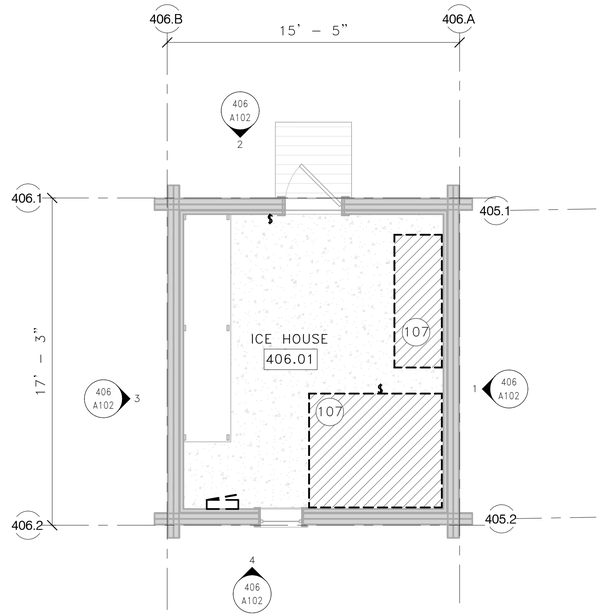

1 406 ICE HOUSE – DEMO PLAN

1/4" = 1'-0"

KEYNOTES

107 REMOVE (E) REFRIGERATION UNITS. REMOVE THROUGH (E) OPENINGS, DISASSEMBLY MAY BE REQUIRED.

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

SCALE B 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TODD C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

406

A101

TITLE OF SHEET

ICE HOUSE – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	266 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

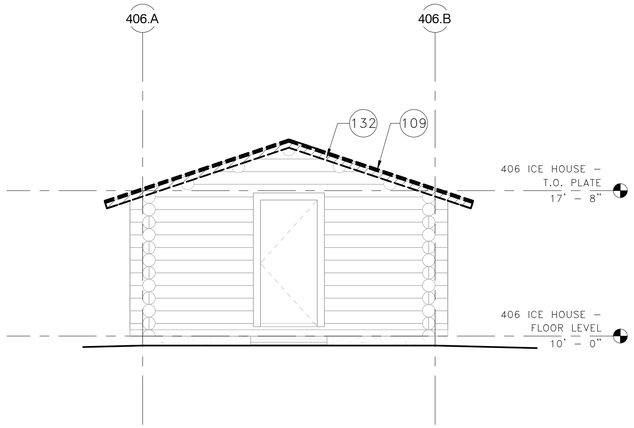

2 406 ICE HOUSE – NORTH DEMO ELEVATION

1/4" = 1'–0"

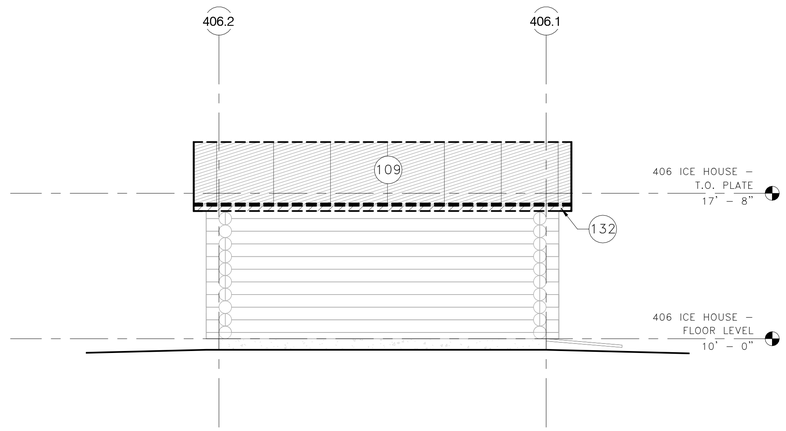

1 406 ICE HOUSE – EAST DEMO ELEVATION

1/4" = 1'–0"

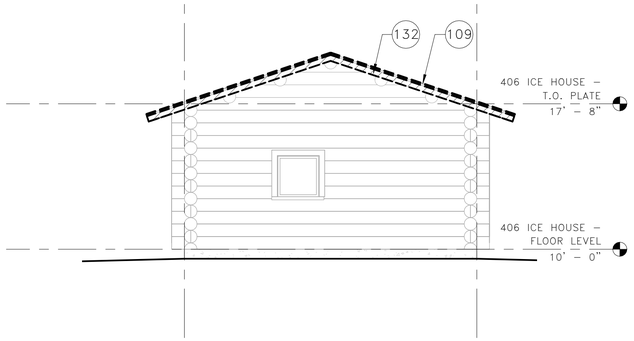

4 406 ICE HOUSE – SOUTH DEMO ELEVATION

1/4" = 1'–0"

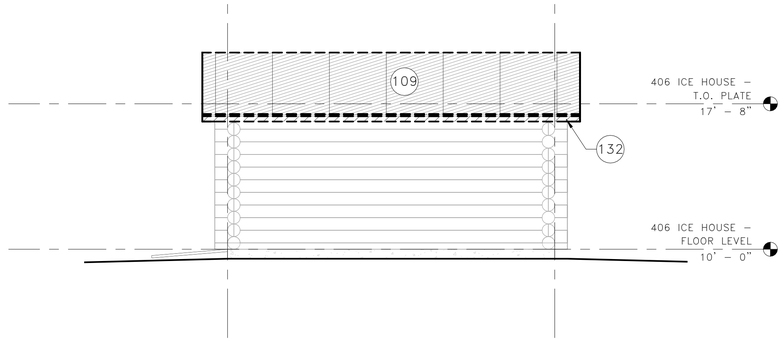

3 406 ICE HOUSE – WEST DEMO ELEVATION

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

132 REMOVE (E) FASCIA

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KES C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A102

TITLE OF SHEET
ICE HOUSE – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 267 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\Collaboration Cache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

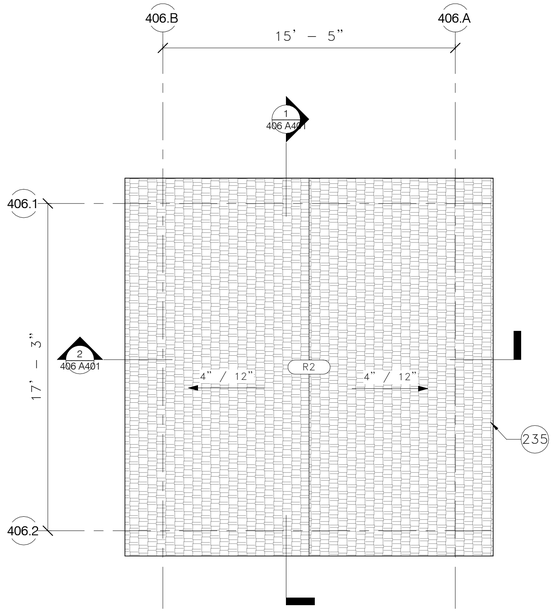

2 406 ICE HOUSE – ROOF PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

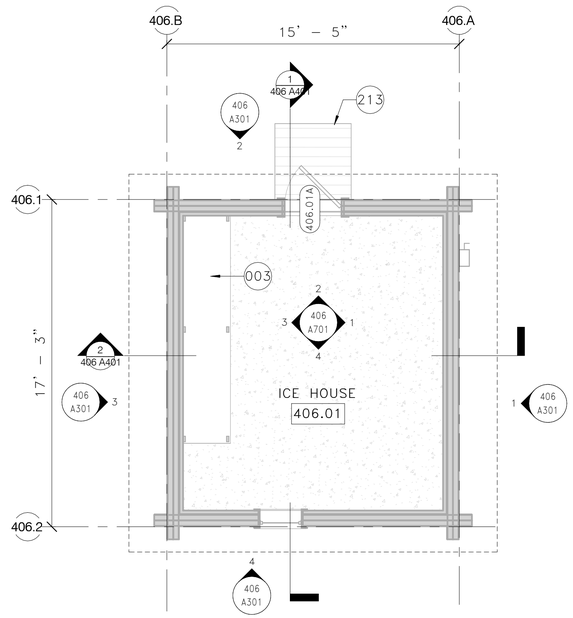

1 406 ICE HOUSE – FLOOR PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT–XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.
213 RESTORE (E) WOOD DECK, FRAMING, AND/OR STEPS TO REMAIN
235 REPLACE (E) WOOD FASCIA

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A201

TITLE OF SHEET
ICE HOUSE – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 268 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

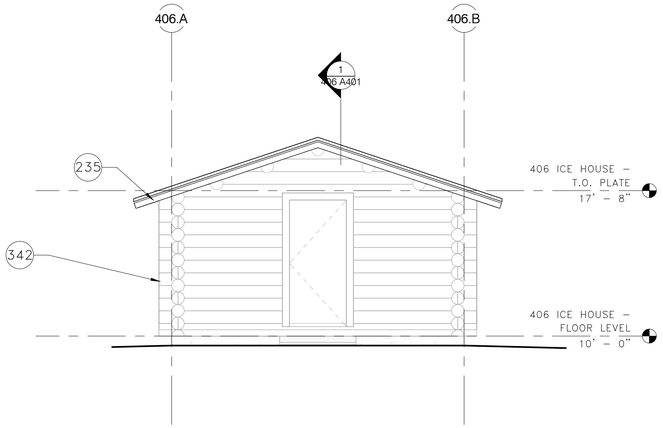

2 406 ICE HOUSE – NORTH

1/4" = 1'–0"

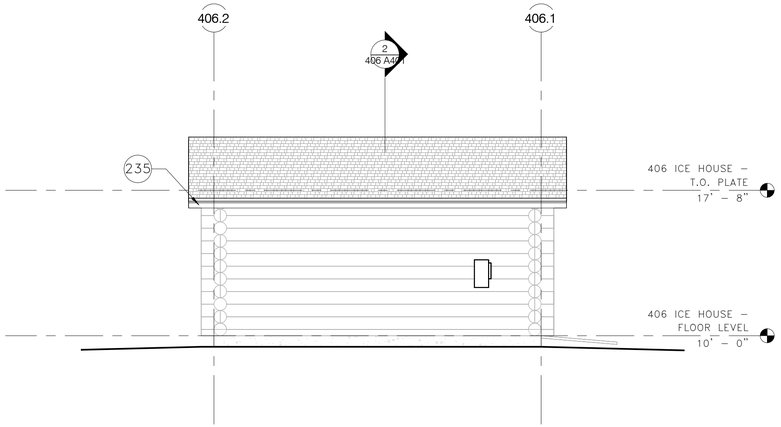

1 406 ICE HOUSE – EAST

1/4" = 1'–0"

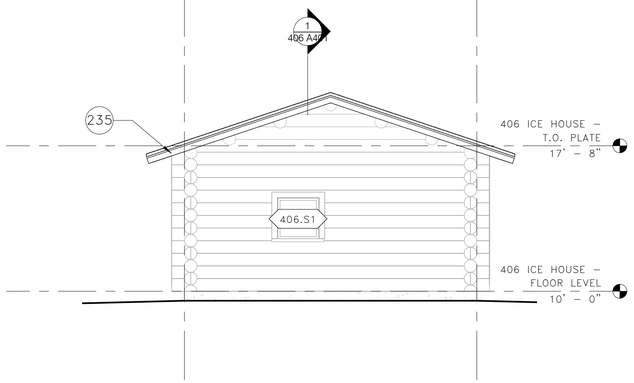

4 406 ICE HOUSE – SOUTH

1/4" = 1'–0"

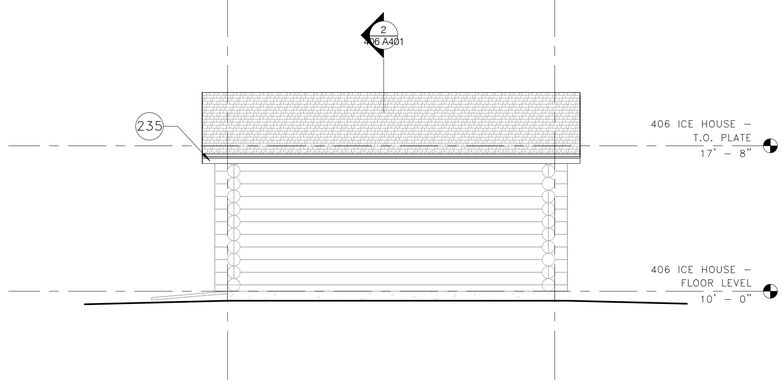

3 406 ICE HOUSE – WEST

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###.XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

235 REPLACE (E) WOOD FASCIA
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. MYERS C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A301

TITLE OF SHEET
ICE HOUSE – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 269 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

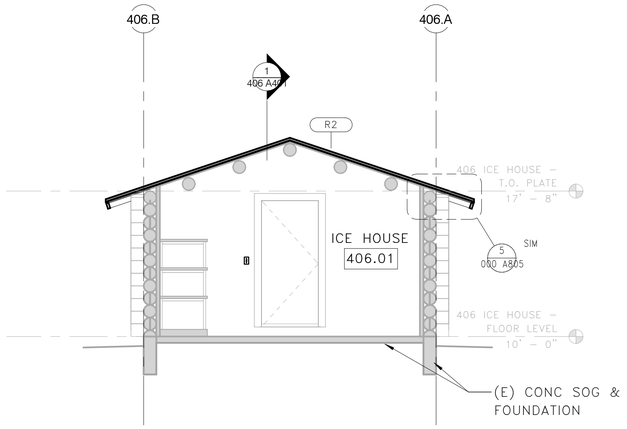

2 406 ICE HOUSE – SECTION 'A'

1/4" = 1'-0"

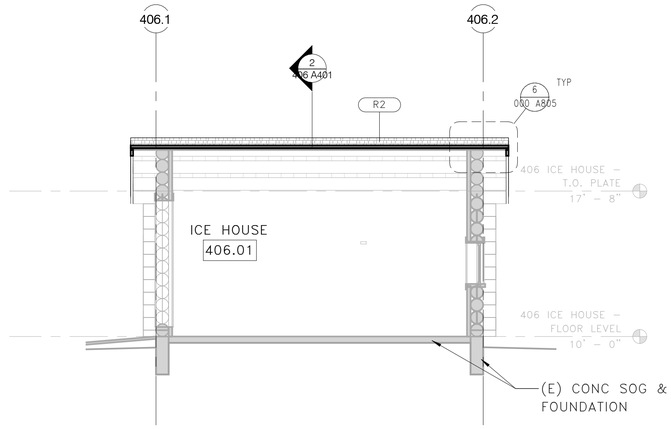

1 406 ICE HOUSE – SECTION 'B'

1/4" = 1'-0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A401

TITLE OF SHEET
ICE HOUSE – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 270 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

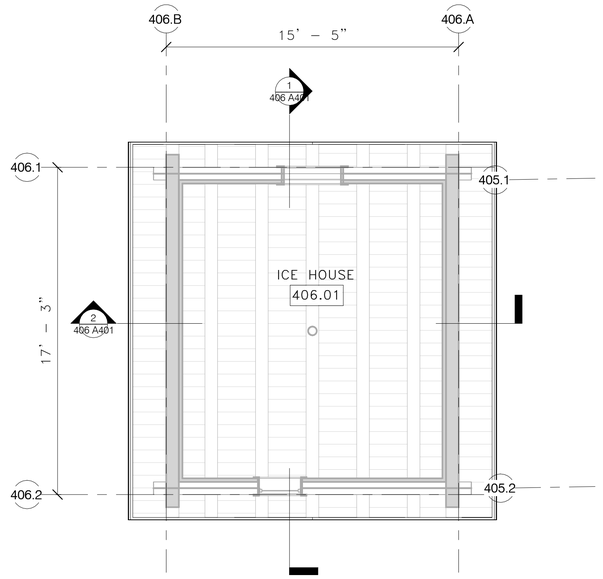

1 406 ICE HOUSE – FIRST LEVEL RCP

1/4" = 1'–0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVEY Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
406
A601

TITLE OF SHEET
ICE HOUSE – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 271 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

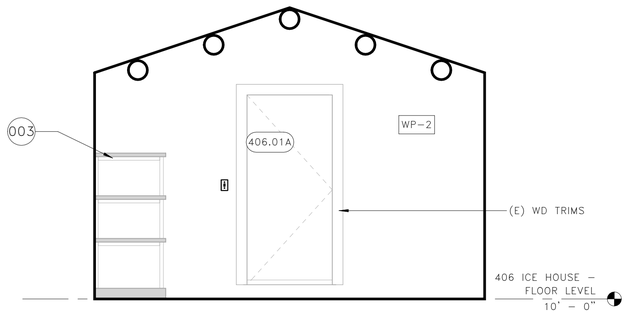

2 ICE HOUSE 406 – NORTH

3/8" = 1'-0"

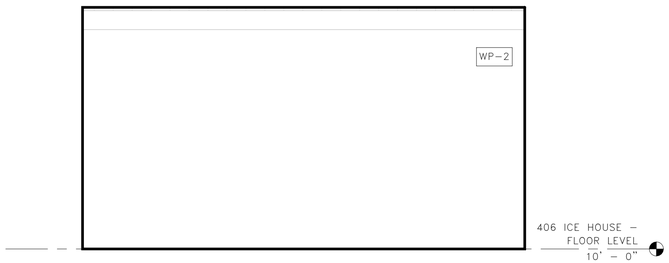

1 ICE HOUSE 406 – EAST

3/8" = 1'-0"

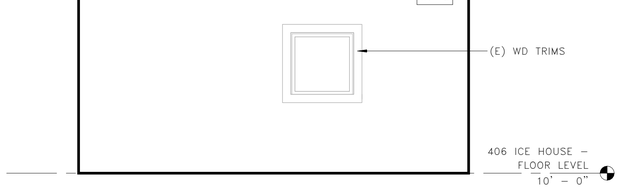

4 ICE HOUSE 406 – SOUTH

3/8" = 1'-0"

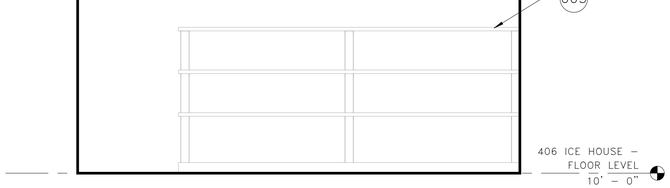

3 ICE HOUSE 406 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.

SCALE Ⓒ 2" 0 2' 8" 5' 4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVEY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A701

TITLE OF SHEET
ICE HOUSE – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 272 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

406 ICE HOUSE – WINDOW SCHEDULE							
WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	NOTES
406.S1		2' – 4"	2' – 4"				O.

406 ICE HOUSE – DOOR SCHEDULE											
DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE		MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
		WIDTH	HEIGHT								
406.01A	(E) DR–6	3' – 0"	6' – 8"			(E) DRF–2					K.

406 ICE HOUSE – ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
				BASE		WALL				
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	
406.01	ICE HOUSE	(E) CONC		(E) RUBBER BASE	N/A	(E) WP–2	CLR	EXP		

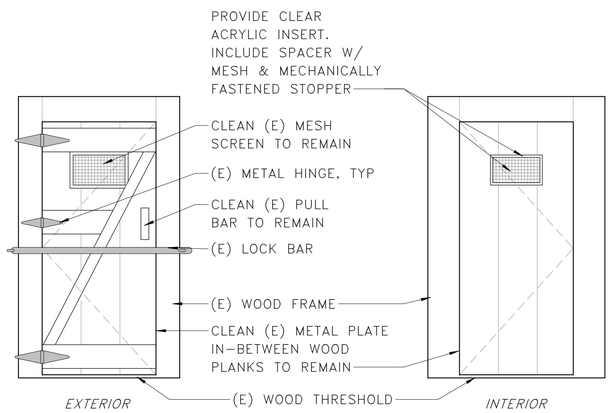

1 ICE HOUSE DOOR (DR–6) – REPAIR TREATMENT

1/2" = 1'–0"

DR–6 TREATMENT:

1. ALL EXISTING DOOR COMPONENTS TO REMAIN AND BE TREATED AS HISTORIC ARTIFACTS.

2. REMOVE ALL DUST AND DEBRIS FROM ALL SURFACES PRIOR TO WORK.

3. CAREFULLY REMOVE HINGES WITHOUT MODIFYING BENT HINGE SHAPE. REMOVE SURFACE CORROSION FROM ALL METAL AND APPLY RUST INHIBITOR.

4. PROVIDE CL–2 TREATMENT AND ST–1 COATING AT DOOR, FRAME, AND THRESHOLD WOOD SURFACES.

5. REATTACH RESTORED DOOR LEAF AND HINGES AT EXACT SAME LOCATION WITH IN–KIND SCREWS. PLUG SCREW HOLES AND RE–DRILL AS NEEDED WHEN STRIPPED.

6. REFASTEN ANY LOOSE BOARDS WITH SS NAILS.

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

SCALE (D) 2" 0 2" 4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM H. REED C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A905

TITLE OF SHEET
ICE HOUSE – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 273 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

NORTH ELEVATION, LOOKING SOUTH

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

NORTH ELEVATION, ENTRY STOOP

INTERIOR, LOOKING SOUTH

INTERIOR, LOOKING EAST

INTERIOR, LOOKING WEST

TYPICAL LOG CONDITION

NORTH ELEVATION, EXTERIOR DOOR

DETAIL VIEW OF EXTERIOR DOOR

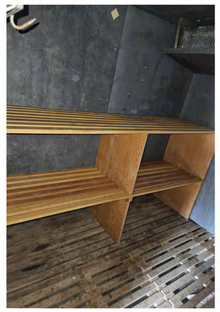

INTERIOR, INSIDE ICEBOX

NORTH ELEVATION, EXTERIOR DOOR

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. REED STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
406
A920

TITLE OF SHEET
ICE HOUSE – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 274 OF 371

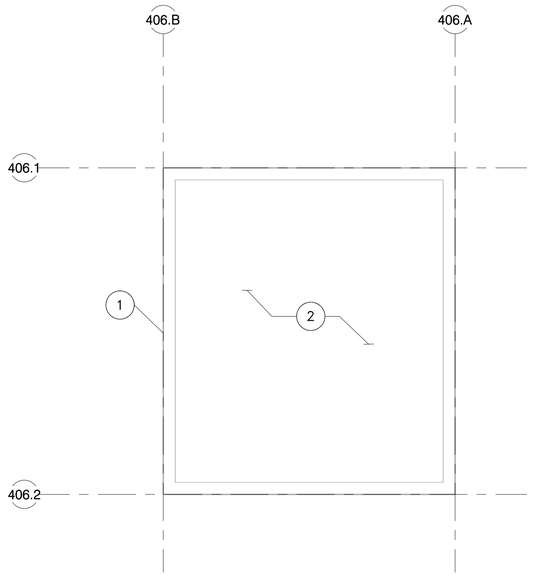

1 ICE HOUSE – FOUNDATION PLAN

1/4" = 1'-0"

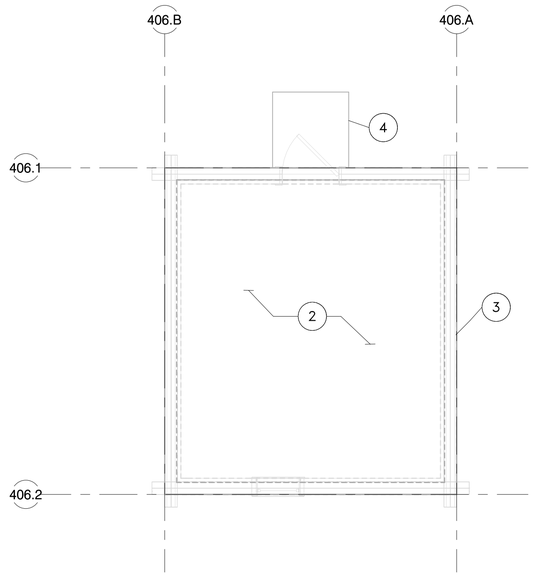

2 ICE HOUSE – FLOOR FRAMING PLAN

1/4" = 1'-0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
4. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/FINISHED FLOOR ASSUMED TO BE 10'-0", VERIFY WITH ARCHITECTURAL DRAWINGS.
4. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. (E) 8" CMU FOUNDATION
2. (E) SLAB ON GRADE
3. (E) 8"Ø LOG WALL
4. (E) PORCH STEP TO REMAIN

NORTH

4 0 4 8

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.

406

S201

TITLE OF SHEET

ICE HOUSE – FDN & FLOOR FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 275 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

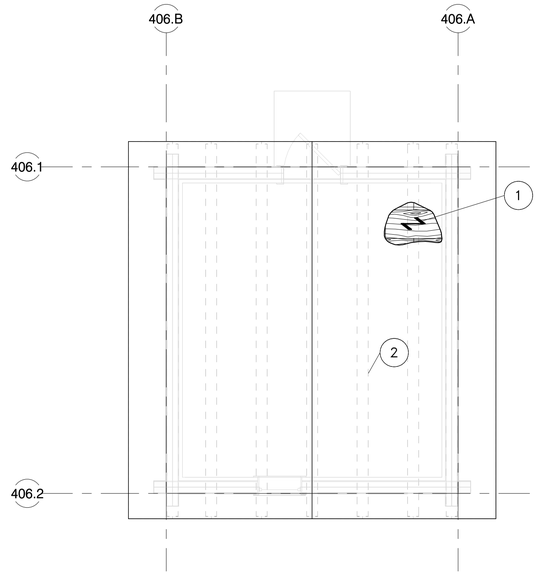

1 ICE HOUSE – ROOF FRAMING PLAN

1/4" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

(1) 1/2" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500

(2) (E) 7"Ø LOG PURLIN, TYP. 7 PLACES; UPGRADES AT ALL INTERIOR PURLINS PER 3/000 S500

NORTH

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 406 S202

TITLE OF SHEET: ICE HOUSE – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 276 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

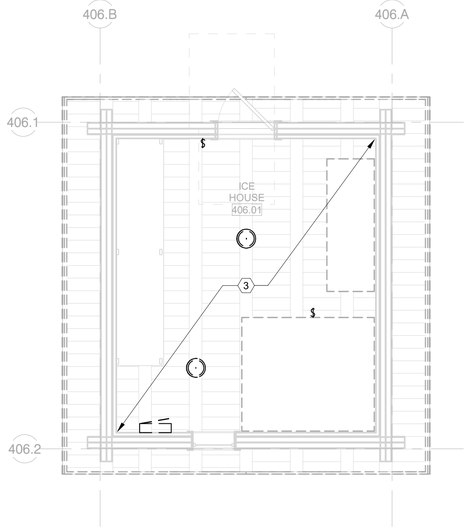

2 ICE HOUSE – LIGHTING DEMO PLAN

1/4" = 1'-0"

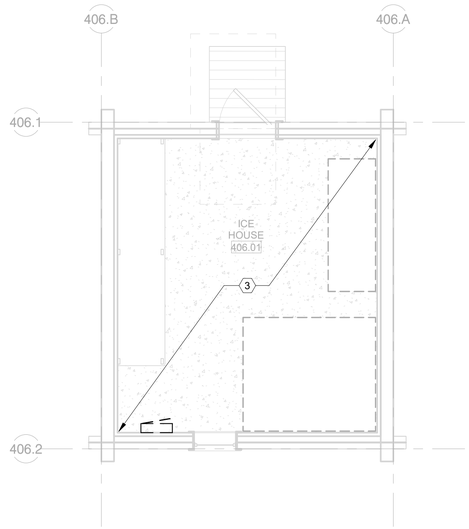

1 ICE HOUSE – POWER DEMO PLAN

1/4" = 1'-0"

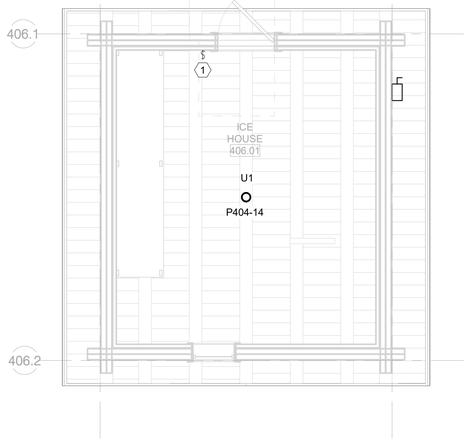

4 ICE HOUSE – LIGHTING RENOVATION PLAN

1/4" = 1'-0"

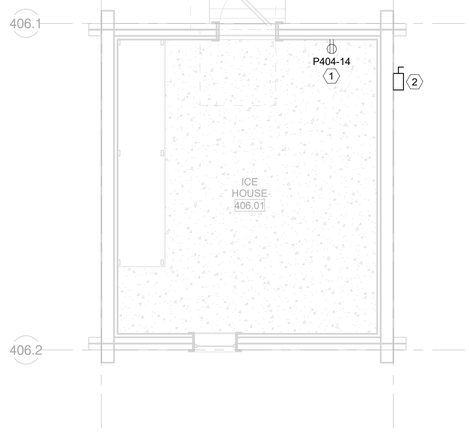

3 ICE HOUSE – POWER RENOVATION PLAN

1/4" = 1'-0"

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
U1	LED	27 W	2000	5000	VAPOR PROOF FROSTED GLASS GLOBE	RAB	VXLED26	SURFACE	120 V	1

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

KEY NOTES:

1. PROVIDE A NEW CIRCUIT FOR LIGHTING / RECEPTACLES FROM PANEL 'P404' AT GEORGES CABIN.
2. PROVIDE NEMA 3R DISCONNECT SWITCH FOR 120V 20A CIRCUIT. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL WITHIN STRUCTURE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
406
E101

TITLE OF SHEET
ICE HOUSE – ELECTRICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 277 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING SOUTHWEST TOWARDS 407 END CABIN

LOOKING SOUTH TOWARDS 408 MIDDLE CABIN

LOOKING SOUTH TOWARDS 409 MRS OLIVER'S CABIN

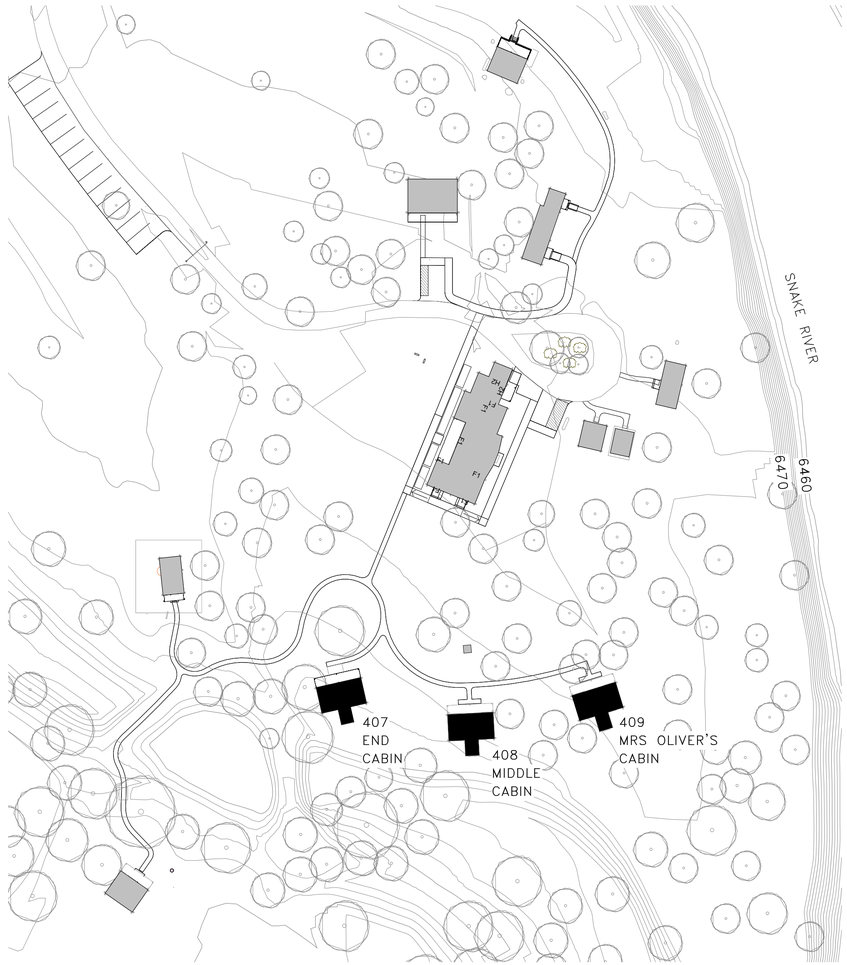

1 KEY PLAN – 407–409 CABINS

1" = 50'–0"

FOR DRAWING SHEET INDEX, REFERENCE
000 G001 THRU 000 G003.

NOTE: THE END CABIN (407), THE MIDDLE CABIN (408), AND MRS. OLIVER'S CABIN (409) ALL HAVE SIMILAR ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION SCOPE OF WORK. THE REQUIRED WORK FOR SUCH DISCIPLINES FOR ALL (3) STRUCTURES IS THEREFORE CAPTURED IN THE 407 DRAWING SERIES, U.N.O.. THE CIVIL AND LANDSCAPE SCOPE OF WORK VARIES BETWEEN THE (3) STRUCTURES AND INDIVIDUAL SHEETS ARE THEREFOR PROVIDED.

50 0 50 100
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. EDDY C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
G000

TITLE OF SHEET
407–409 CABINS – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 278 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

MATCH LINE 399 C100

R63.50'

R23.50'

R48.50'

3' CRUSHER FINES
RE: LANDSCAPE

R26.50'

3' CRUSHER FINES
RE: LANDSCAPE

R28.50'

R15.00'

R51.50'

21.19'

LOWER GRADE 1"
BELOW FLATWORK

5.69'

10.01'

WATER SERVICE
P&P, SEE C404

END CABIN
EXISTING FFE:
6471.49
PROPOSED FFE:
6472.16

2" INV OUT 6.5' MIN
COVER. COORDINATE WITH
MEP FOR ENTRANCE INTO
BUILDING

CURB STOP

SEWER SERVICE
P&P, SEE C311

3" INV OUT: 6,468.19
COORDINATE WITH MEP
FOR ENTRANCE INTO
BUILDING

ELECTRICAL PANEL

BURIED POWER,
SEE ELECTRICAL FOR
TYPICAL SERVICE DETAIL
AND CONTINUATION INTO
BUILDING

23 LF OF 2" DOMESTIC COLD WATER
SERVICE. SEE C204 FOR TYPICAL
SERVICE CONNECTION.

15 LF 3" SANITARY
SERVICE @ 2% SLOPE,
SEE C203 FOR TYPICAL
SERVICE CONNECTION.

CLEANOUT

CONSTRUCTION
LIMITS

6472

6471

6470

6469

LOWER
GRADE 4"

MATCH LINE 410 C100

MATCH LINE 408 C100

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

10 0 5 10

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE SAUCIER 22242 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
407
C100

TITLE OF SHEET
END CABIN – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 279 OF 371

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

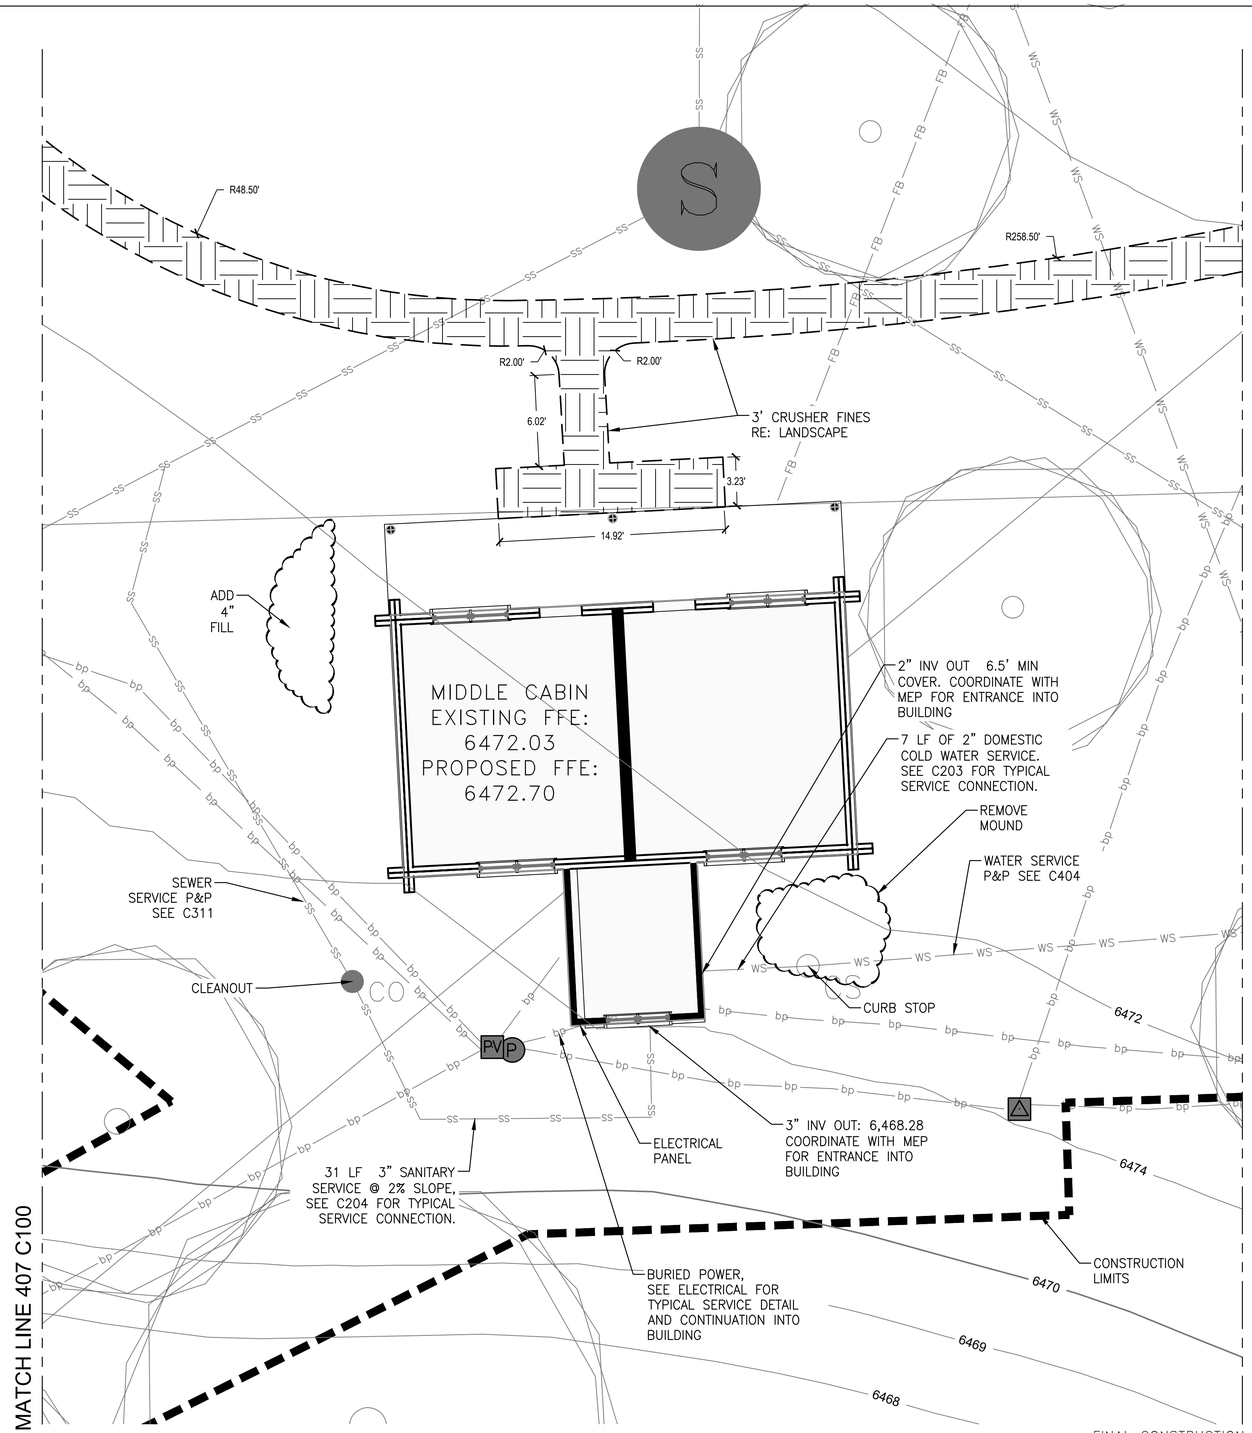

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

10 0 5 10

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE OF AUTHORIZATION Date: 07/21/2026 WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: MMI DRAWN: CMS TECH REVIEW: CMS DATE: 07/21/2026	SUB SHEET NO. 408 C100	TITLE OF SHEET MIDDLE CABIN – SITE AND UTILITY PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 280 OF 371

P:\6204-HEA_Arch\010 – NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

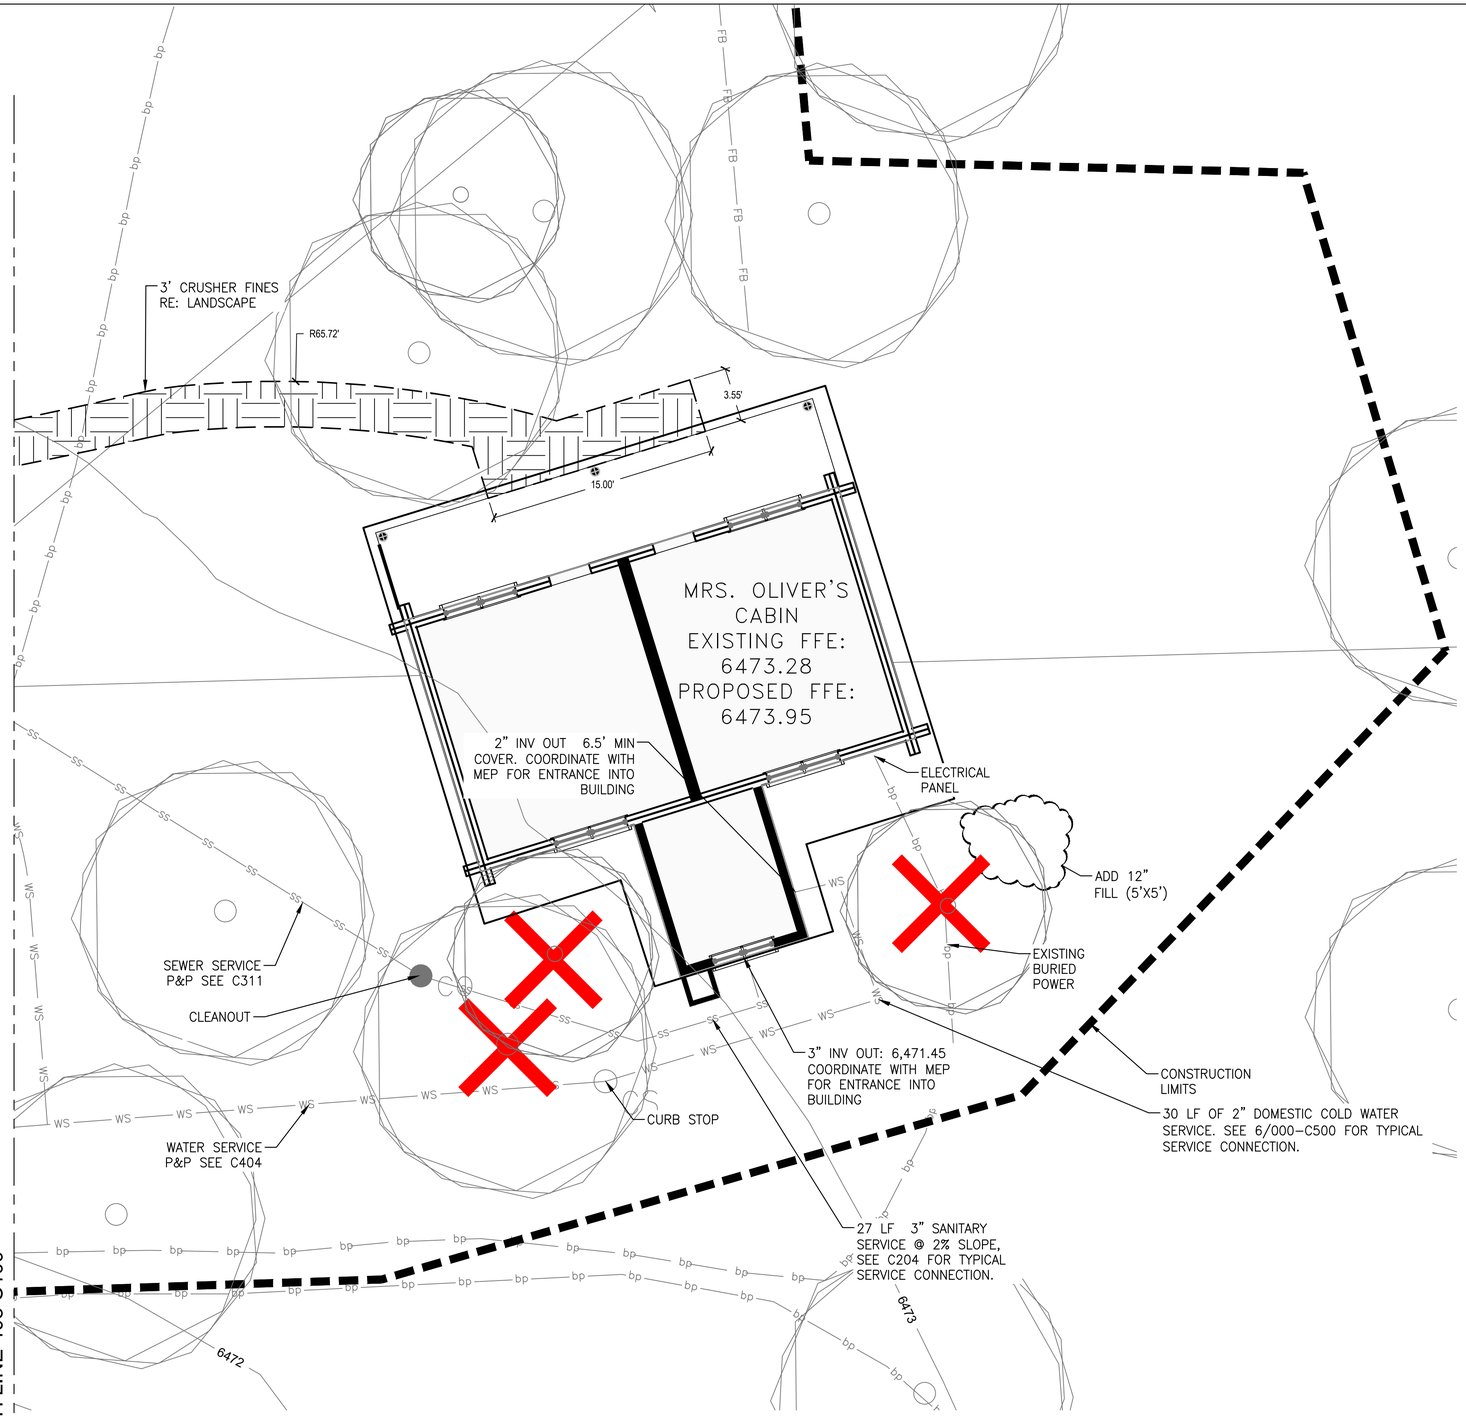

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- SEWER LINE (SIZE INDICATED)
- SEWER SERVICE
- WATER LINE (SIZE INDICATED)
- WATER SERVICE
- BURIED POWER
- OVERHEAD POWER
- BURIED TELEPHONE
- FENCE
- BURIED FIBER OPTIC COMMUNICATIONS
- BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- POWER METER
- POWER VAULT
- FIBER OPTIC COMMUNICATIONS VAULT
- SEWER MANHOLE
- LIFT STATION
- GRINDER PUMP
- WATER SERVICE CURB STOP
- SEWER SERVICE CLEANOUT
- WATER WELL
- TREE

PROPOSED LEGEND

- SEWER MAIN
- WATER MAIN
- SEWER SERVICE
- WATER SERVICE
- BURIED COMMUNICATIONS
- BURIED FIBER OPTIC SERVICE
- BURIED POWER
- FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

10 0 5 10

P:\6204-HEA_Arch\010 - NPS 1010 MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CERTIFICATE 22265 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
409
C100

TITLE OF SHEET
MRS. OLIVER'S CABIN - SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING - GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 281 OF 371

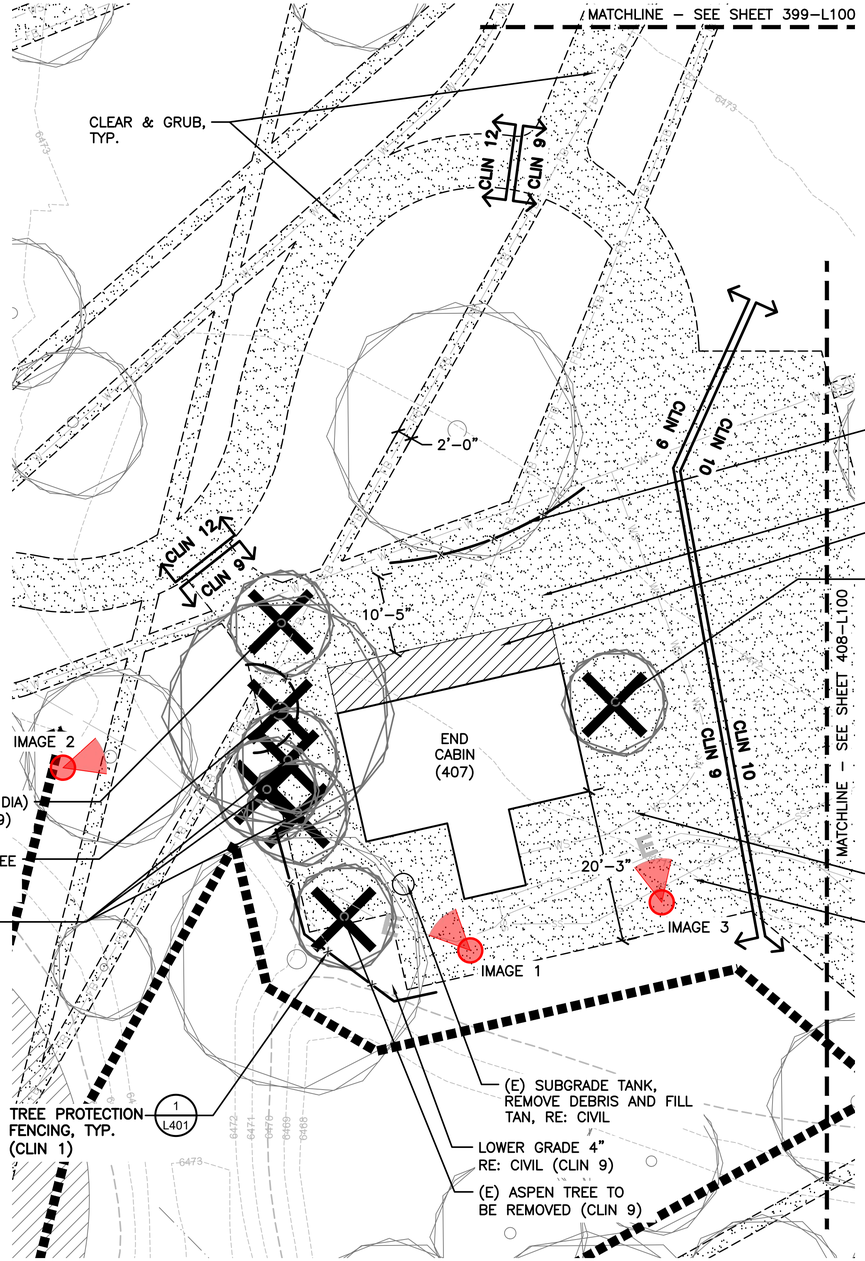

(E) SUBGRADE TANK, REMOVE DEBRIS AND FILL, RE: CIVIL (CLIN 9)

IMAGE 1: (E) SUBGRADE TANK TO BE REMOVED.

(E) ASPEN TREES TO BE REMOVED (CLIN 9)

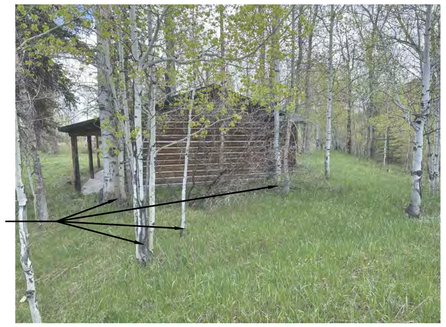

IMAGE 2: (E) TREES TO BE REMOVED.

(E) COTTONWOOD TO BE REMOVED (CLIN 9)

IMAGE 3: (E) TREE TO BE REMOVED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- WS (E) WATER SERVICE LINE
- FB (E) FIBER OPTIC LINE
- SS (E) SANITARY SEWER LINE
- E (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

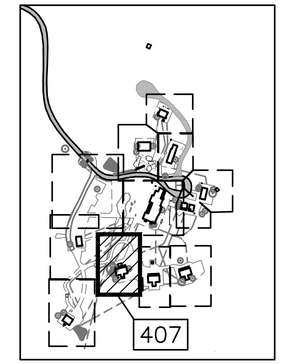

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/24 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 407 L100	TITLE OF SHEET END CABIN – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 282 OF 371

File Path
T:\DSC\PROJECTS\KERSTIENS_R2E P:\DEN\VERNPS GRTE-4LAZY F RANCH_198539 FINAL CD\CAD\LAL1.1-0_GRTE-L4_DEMO.DWG
XREFs: 08&SSS26_0308_NPS_GRTE 4 LAZY F ARCH_PROJECT OVERVIEW SITE PLAN.dwg(NPS_TitleBloc ZOS4_GRTE 4 LAZY F.dwg)XC-4LAZYF_DSGN.dwg(XC-BASE-699421_EX01.dwg)XC-EXST SITE.dwg)XC-MOOSE_AER_TOPO.dwg)XC-PLAN-PROF-FORCE MAIN 1.dwg)XC-WATR-4LAZYH.dwg)XL-GRTE-L4_AERIAL.dwg)XL-GRTE-L4_DEMO.dwg)XC-BASE-699421_EX01.dwg)XC-EXST SITE.dwg)XC-MOOSE_AER_TOPO.dwg)XC-PLAN-PROF-FORCE MAIN 1.dwg)XC-WATR-4LAZYH.dwg)XL-GRTE-L4_AERIAL.dwg)XL
IMAGES: ...\..\2_Admin\Photos\Garage\Debris-1.jpg|...\..\2_Admin\Photos\Gate\Debris-2.jpg|...\..\2_Admin\Photos\Gate\Debris-3.jpg|...\..\2_Admin\Photos\Gate\Debris-4.jpg|...\..\2_Admin\Photos\Gate\Gate-1.jpg|...\..\2_Admin\Photos\Gate\Gate-2.jpg|...\..\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg|...\..\2_Admin\Photos\IceHouse\Mouse and Ice .jpg|...\..\...

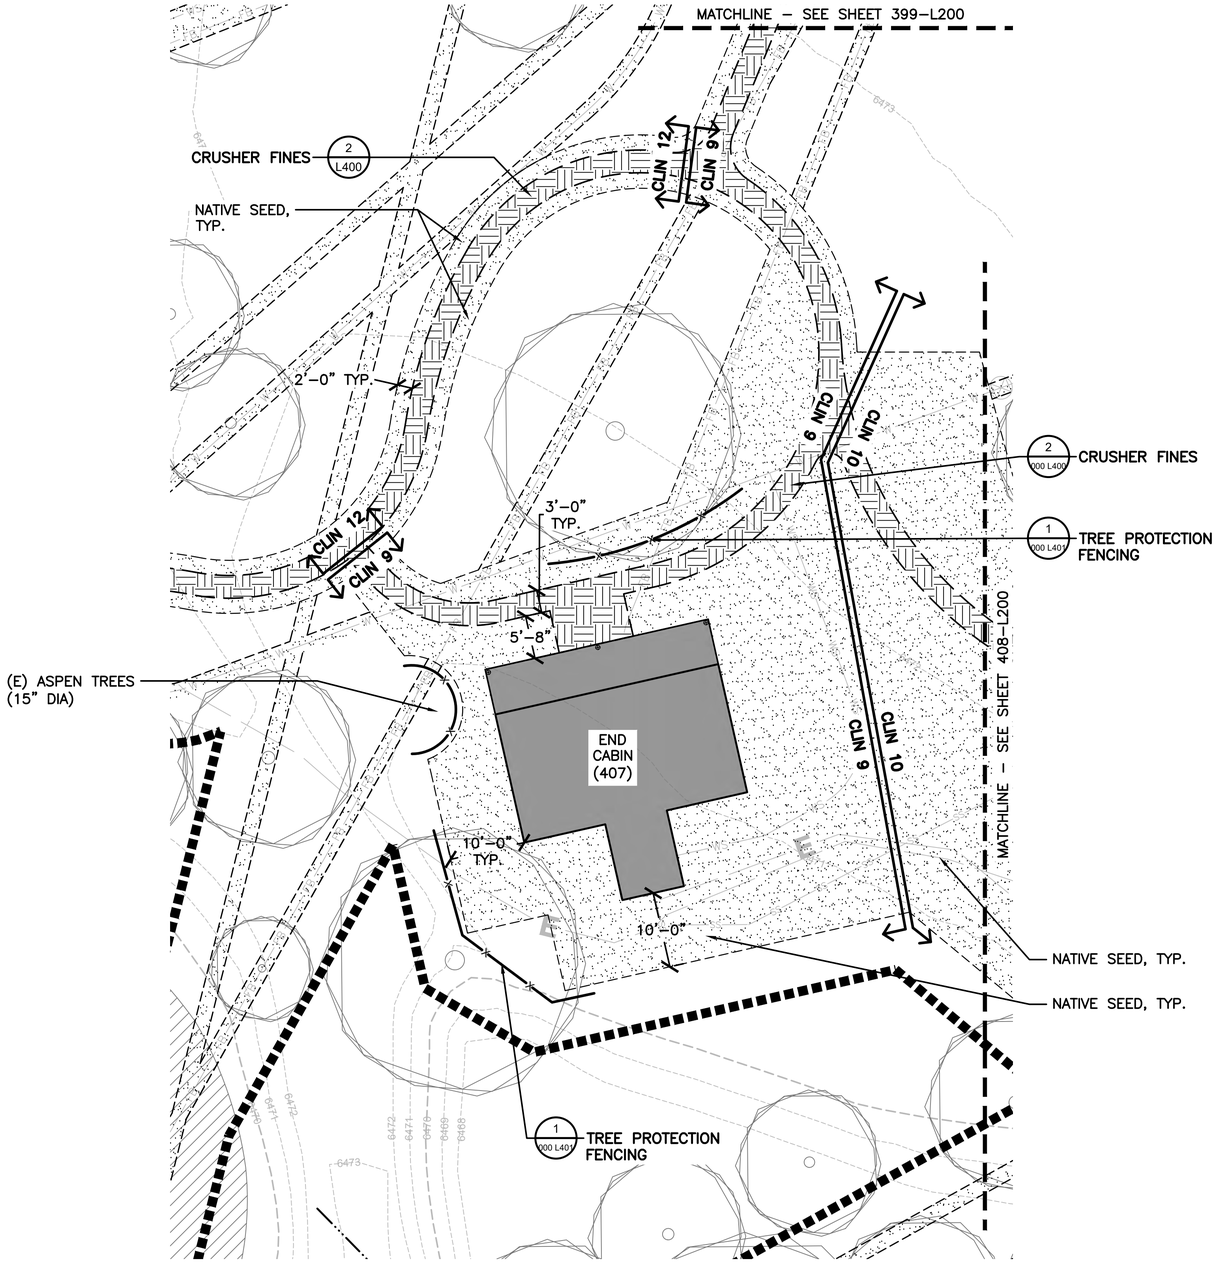

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

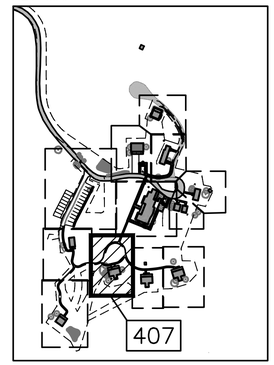

10 0 10 20
SCALE OF FEET

NOTES:
1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 09.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT — EILEEN M. KEMP — LA-0212C — Date: 07/21/26 — STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 407 L200	TITLE OF SHEET END CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 283 OF 371

File Path
Z:\Projects\GRTE\4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.DWG
XREFS: 08_BASES26_0308_NPS GRTE 4 LazyF ARCH-PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34_GRTE 4 LazyF.dwg\XC-4LAZYF_DSGN.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.DWG
IMAGES: ..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG\..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg\..\..\2_Admin\Photos\ParkingLot\Parking lot 4.jpg\Parking lot toe-5.jpg\..\..\2_Admin\Photos\RiverCabin\River cabin-3.jpg\River cabin-4.jpg\Road connection...

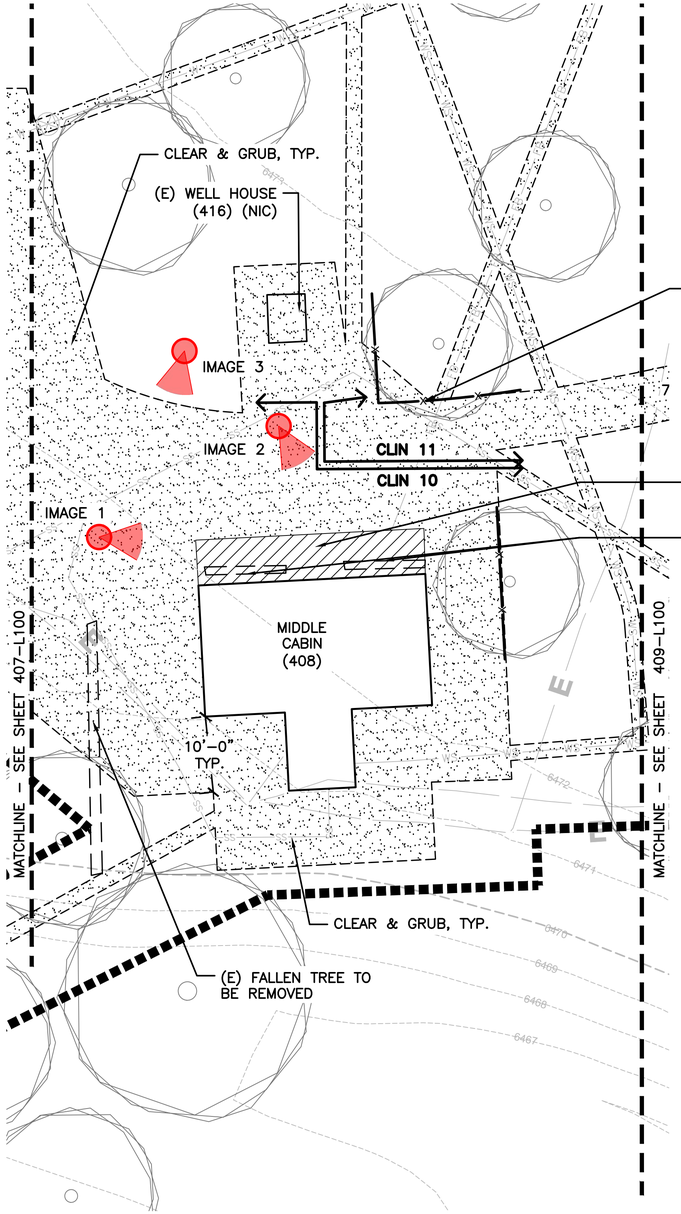

IMAGE 1: (E) TREES TO BE REMOVED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE/ STUMP TO BE REMOVE

IMAGE 2: (E) TREES TO BE REMOVED.

IMAGE 3: (E) FALLEN TREE TO BE REMOVED.

KEY MAP

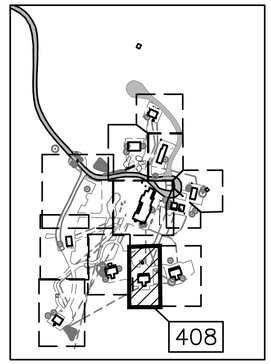

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT BILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 408&416 L100	TITLE OF SHEET MIDDLE CABIN & WELL HOUSE – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 284 OF 371

File Path:
X:\ENV\JACKSON\PROJECTS\KERSTIENS_R25 P\DENVER\NPS GRTE 4 LAZY F RANCH_199539\ FINAL CD\CAD\ALL\1-0_GRTE-I-4_DEMO.DWG
XREFS: 08438SES26_0308_NPS GRTE 4 Lazy F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock_22x34_GRTE 4 Lazy F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXIST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_EXIST.dwg
IMAGES: ..\..\2_Admin\Photos\Garage\Debris-1.jpg|Debris-2.jpg|Debris-3.jpg|Debri-4.jpg|Debri.jpg|..\..\2_Admin\Photos\Gate\Gate-1.jpg|Gate.jpg|..\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.remove-1.jpg|..\..\2_Admin\Photos\HarrysCabin\Mouse and Ice .jpg|..\..\...

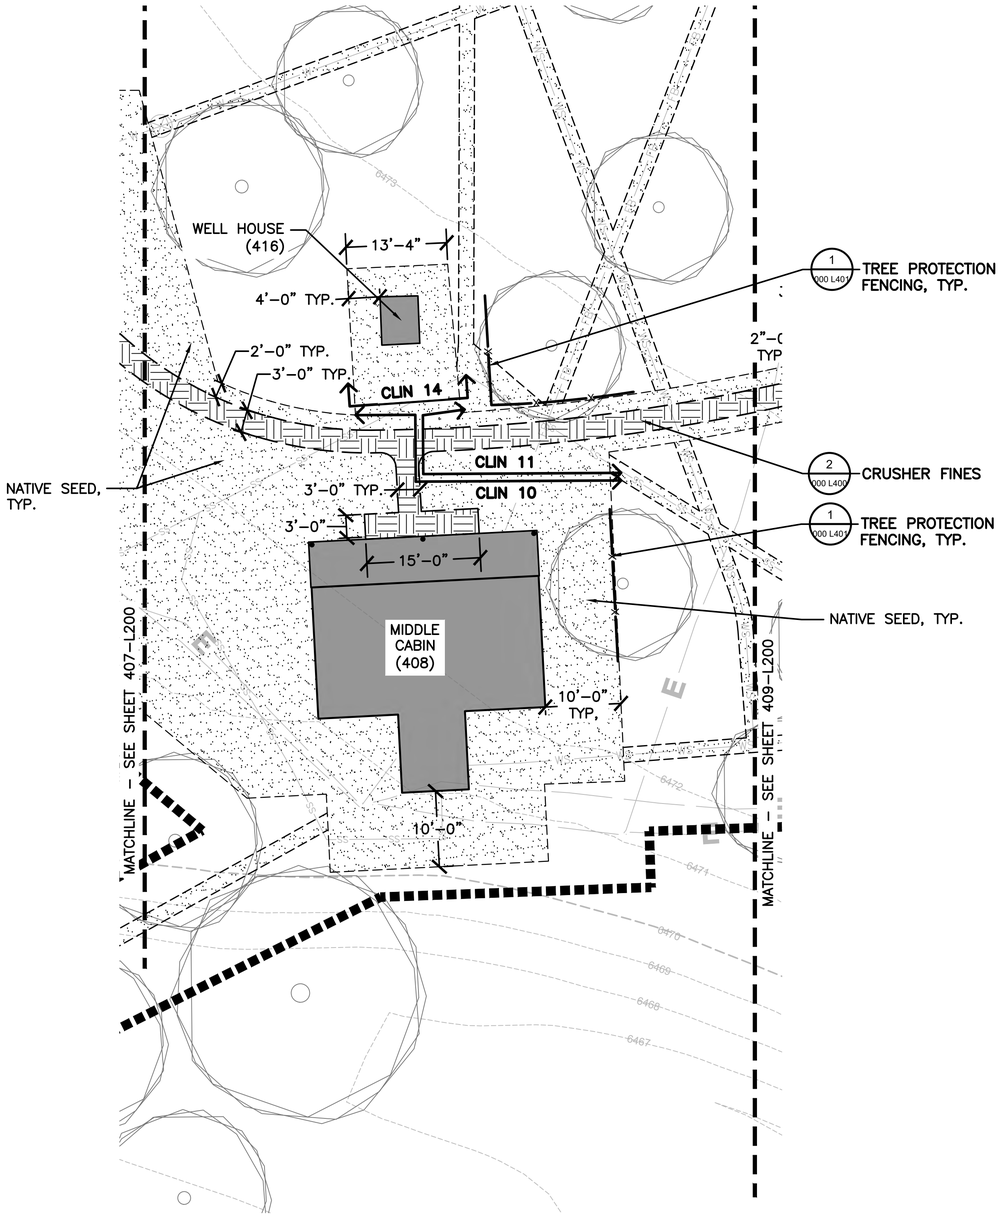

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

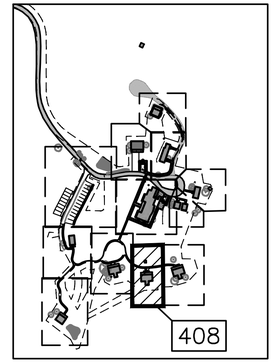

10 0 10 20
SCALE OF FEET

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 10.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/24
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 408&416 L200	TITLE OF SHEET MIDDLE CABIN & WELL HOUSE – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 285 OF 371

File Path
77\Projs\0693\SKERSTIENS_R25 P\DENVER\NPS GRTE 4LAZY F RANCH - 199539 FINAL CD\CAD\ALH-0, GRTE-L4 LAYOUT.DWG
XREFS: 0693_SKERSTIENS_0308_NPS GRTE 4 LAZY F ARCH-PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock 22x34 - GRTE 4 LAZY F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4 - LAYOUT.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4 - LAYOUT.dwg
IMAGES: ..\..\2_Admin\Photos\MainLodge\IMG_3706.JPG\..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg\..\..\2_Admin\Photos\ParkingLot\ParkingLot-4.jpg\Parking lot toe-5.jpg\..\..\2_Admin\Photos\RiverCabin\RiverCabin-3.jpg\River cabin-4.jpg\Road connection...

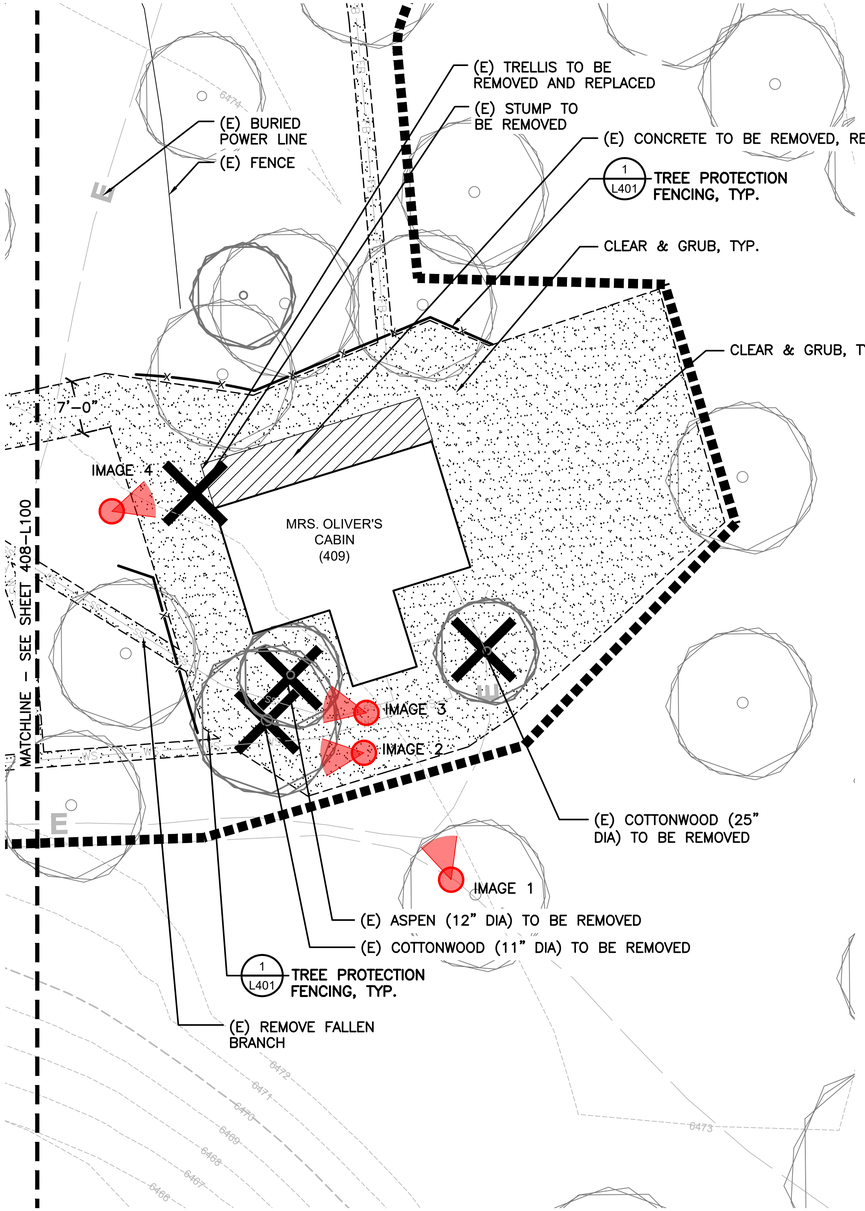

IMAGE 1: (E) TREES TO BE REMOVED.

IMAGE 2: REMOVE (E) BROKEN BRANCH.

IMAGE 3: (E) TREES TO BE REMOVED.

IMAGE 4: (E) TRELLIS TO BE REMOVED AND REPLACED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- (E) FENCE
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

NOTES:

1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

TRELLIS AND HOPS NOTE:

THE EXISTING TRELLIS SHALL BE REMOVED AND REPLACED AS INDICATED ON THE PLANS. EXISTING HOP VINES SHALL BE PROTECTED FROM DISTURBANCE DURING CONSTRUCTION TO THE GREATEST EXTENT PRACTICABLE. PRIOR TO TRELLIS REMOVAL, THE HOP VINES SHALL BE CAREFULLY TRANSPLANTED TO A TEMPORARY LOCATION OR SUPPORT STRUCTURE AND MAINTAINED THROUGHOUT CONSTRUCTION. UPON COMPLETION OF THE NEW TRELLIS INSTALLATION, THE HOP VINES SHALL BE REPLANTED AND TRAINED ONTO THE NEW STRUCTURE. ANY VINES DAMAGED OR LOST DUE TO CONSTRUCTION ACTIVITIES SHALL BE REPLACED IN KIND.

KEY MAP

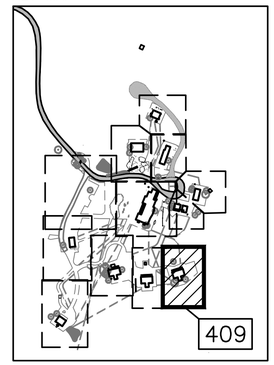

10 0 10 20
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/26 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 409 L100	TITLE OF SHEET MRS. OLIVER'S CABIN – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 286 OF 371

File Path
T:\Projects\08438\SKYERSTIENS R25 P1\DENVER\NPS GRTE 4LAZY F RANCH -1985\9 FINAL CD\CAD\ALL\1-0 GRTE-L4 DEMO.DWG
XREFs: 08438_NPS GRTE 4 LAZY F ARCH +PROJECT OVERVIEW# SITE PLAN_wwgNPS_TitleBlock 22x34 - GRTE 4 LAZY F.dwg)XC-4LAZYF_DSGN.dwg)XC-BASE-699421_EX01.dwg)XC-EXST SITE.dwg)XC-MOOSE_AER_TOPO.dwg)XC-PLAN-PROF-FORCE MAIN 1.dwg)XC-WATR-4LAZYH.dwg)XL-GRTE-L4_AERIAL.dwg)XL-GRTE-L4_DEMO.dwg
IMAGES: ..\..\2_Admin\Photos\Garage\Debri-1.jpg|Debri-2.jpg|Debri-3.jpg|Debri-4.jpg|Debri.jpg|..\..\2_Admin\Photos\Gate\Gate-1.jpg|Gate.jpg|..\..\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg|..\..\2_Admin\Photos\HarrysCabin\Mouse and Ice .jpg|..\..\...

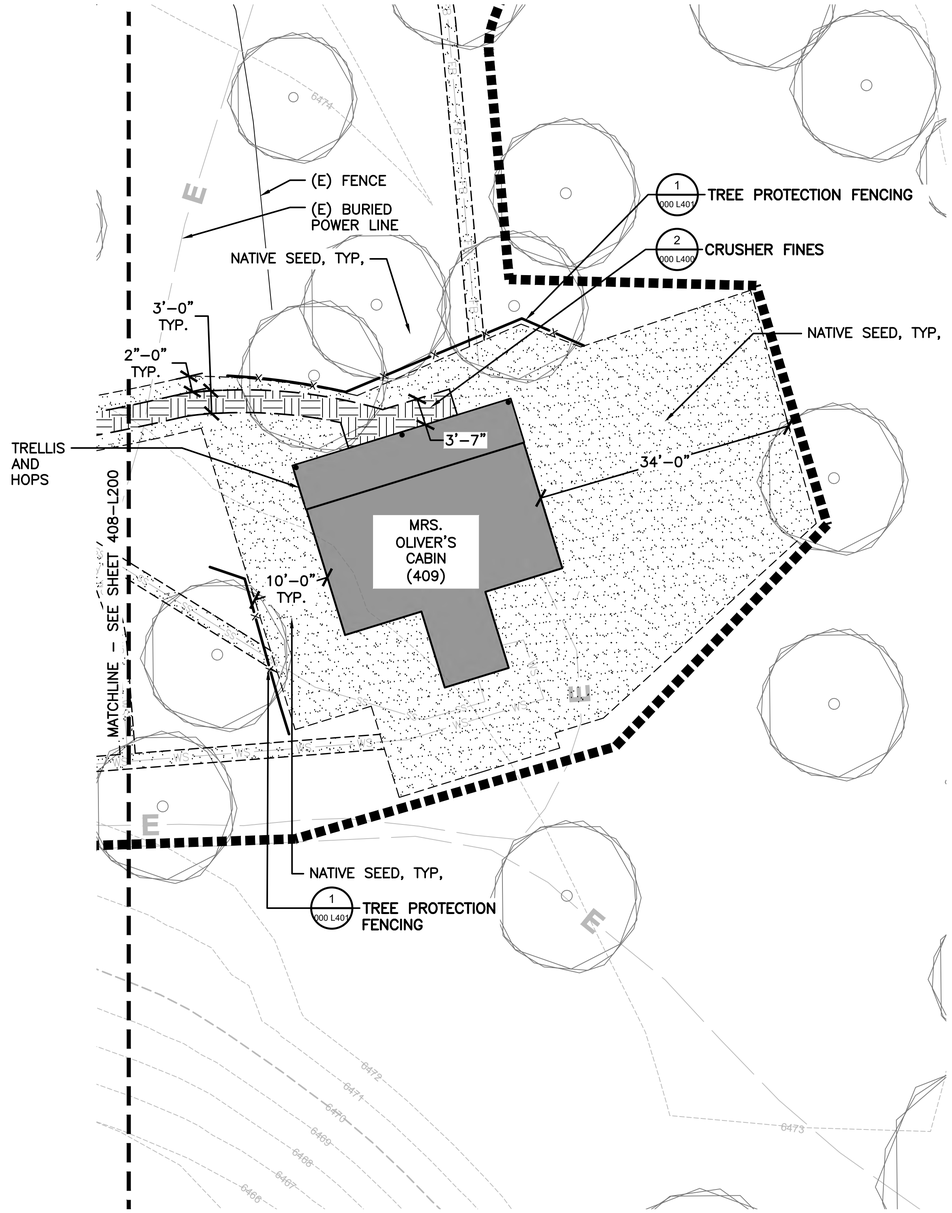

IMAGE 1: TRELLIS EXAMPLE, LOCATED AT WHITE GRASS.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) BUILDING
- (E) TREE
- (E) FENCE
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

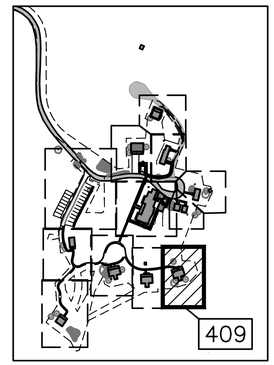

10 0 10 20
SCALE OF FEET

NOTES:
1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 11.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/26
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 409 L200	TITLE OF SHEET MRS. OLIVER'S CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 287 OF 371

File Path
Z:\Files\GIS\KERSTIENS_R25 P\DEN\VER\NPS GRTE 4LAZY F RANCH_199539_FINAL CD\CAD\LAU\1-0_GRTE-L4_LAYOUT.DWG
XREFS: 08_BASES_0808_NPS GRTE 4 LazyF ARCH_PROJECT OVERVIEW SITE PLAN.dwg(NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg)(XC-4LAZYF_DSGN.dwg)XC-BASE-699421_EX01.dwg)XC-EXIST SITE.dwg)XC-MOOSE_AER_TOPO.dwg)XC-PLAN-PROF-FORCE MAIN 1.dwg)XC-WATR-4LAZYH.dwg)XL-GRTE-L4_AERIAL.dwg)XL-GRTE-L4_EXISTING UTILITIES.dwg)XL-GRTE-L4_LAYOUT.dwg)XL-GRTE-L4_PLANTING.dwg)XL-GRTE-L4_SITE DETAILS.dwg)XL-GRTE-L4_SITE PLAN.dwg)XL-GRTE-L4_TOPO.dwg)XL-GRTE-L4_UTILITY PLAN.dwg)XL-GRTE-L4_WATER.dwg)XL-GRTE-L4_WATER PLAN.dwg)XL-GRTE-L4_WATER PLAN.dwg)XL-GRTE-L4_WATER PLAN

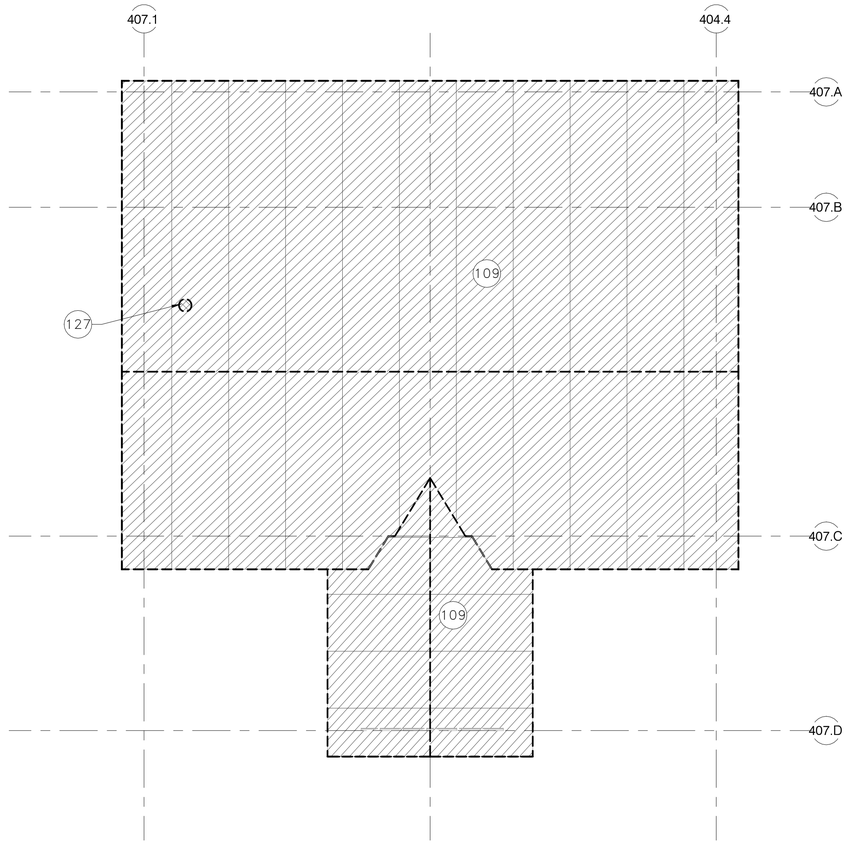

2 407 END CABIN – DEMO ROOF PLAN

1/4" = 1'–0"

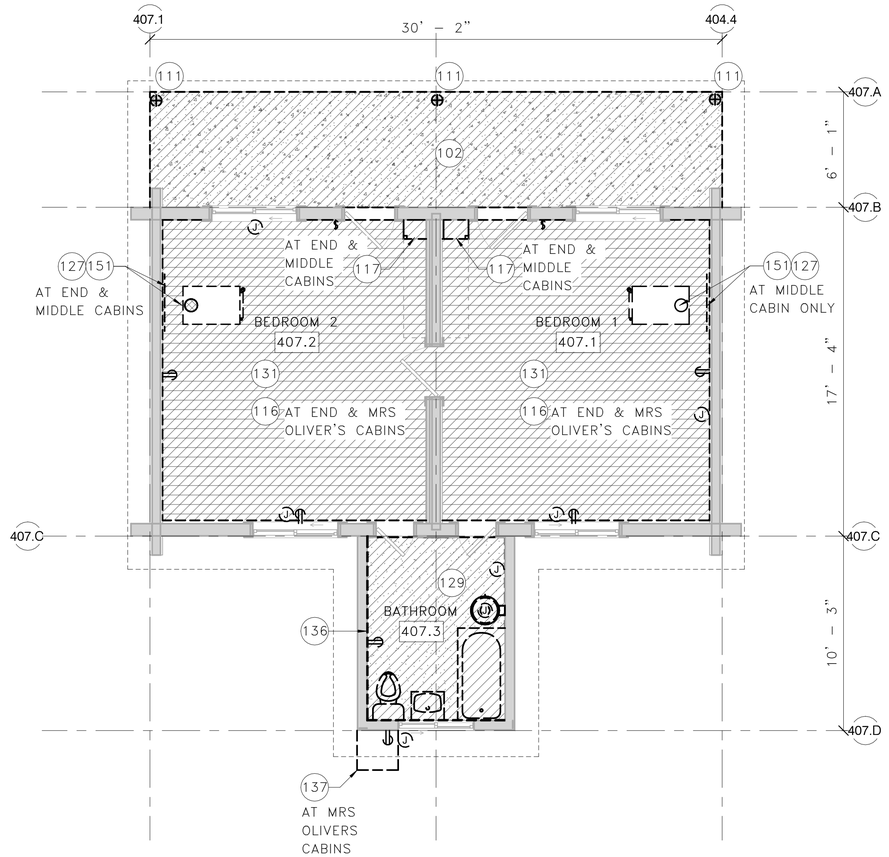

1 407 END CABIN – DEMO FLOOR PLAN

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

102 REMOVE (E) CONCRETE SLAB AND ASSOCIATED STEPS

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS

116 REMOVE CEILING. CLEAN, PATCH, REPAIR, AND REFINISH EXPOSED STRUCTURE TO REMAIN

117 REMOVE (E) CASEWORK INCLUDING PLUMBING FIXTURES AND ALL ACCESSORIES AS APPLICABLE

127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE

129 REMOVE (E) FLOORING AND ALL ACCESSORIES. COORDINATE WITH HAZARDOUS MATERIALS MITIGATION REQUIREMENTS.

131 SALVAGE FOR REINSTALLATION (E) WOOD PLANK FLOORING AND LOG BASE

136 SALVAGE FOR REINSTALLATION (E) WOOD PANELING AT EXTERIOR WALLS & CEILING

137 REMOVE ENTIRE (E) WOOD FRAMED PORTION OF BUILDING. SALVAGE FOR REINSTALLATION (E) EXTERIOR SIDING, INCLUDING TRIMS. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

151 REMOVE WALL PROTECTION PANEL AT WOOD BURNING STOVE LOCATION. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS

DEMOLITION PLAN LEGEND

REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)

(E) WOOD FRAMED WALL OR LOG WALL TO REMAIN

(E) COLUMN TO REMAIN

(E) DOOR TO REMAIN

SALVAGE (E) DOOR

(E) WINDOW TO REMAIN

(E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FOX C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A101

TITLE OF SHEET
END CABIN – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 288 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

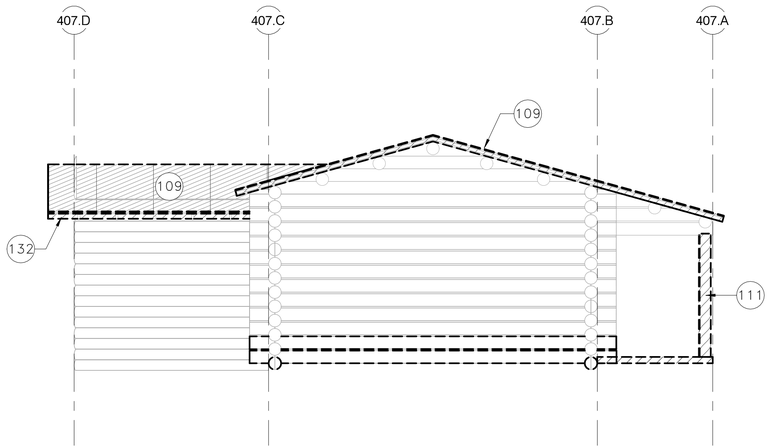

2 407 END CABIN – EAST DEMO

1/4" = 1'–0"

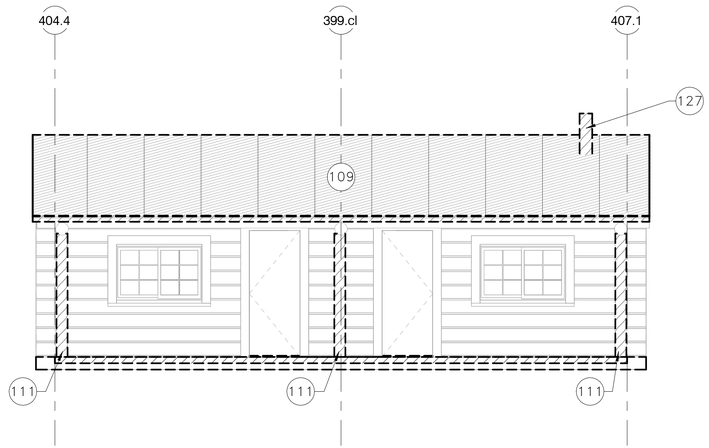

1 407 END CABIN – NORTH DEMO

1/4" = 1'–0"

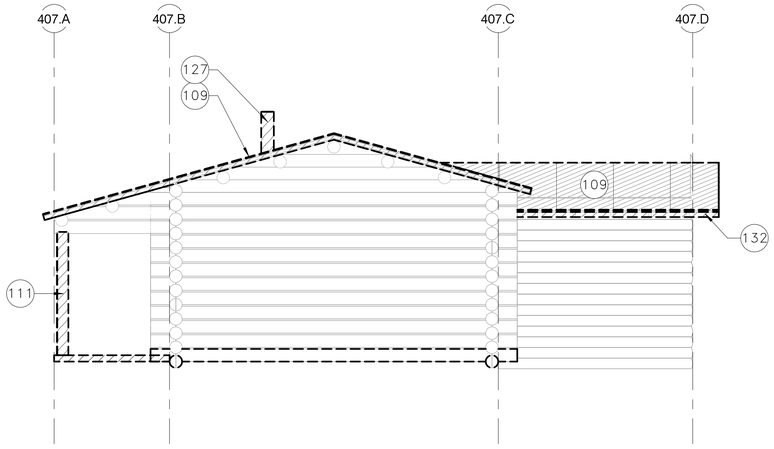

4 407 END CABIN – WEST DEMO

1/4" = 1'–0"

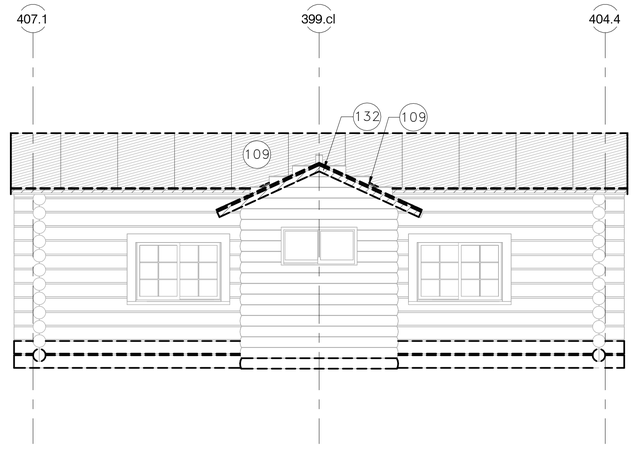

3 407 END CABIN – SOUTH DEMO

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
132 REMOVE (E) FASCIA

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. HYDE C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A102

TITLE OF SHEET
END CABIN – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 289 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

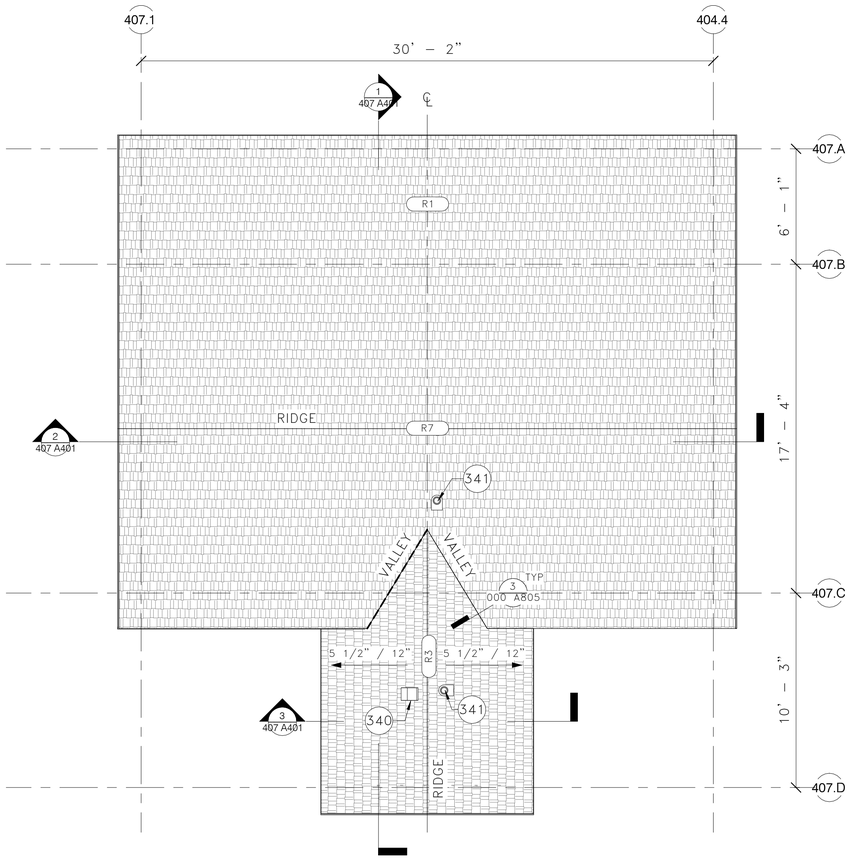

2 407 END CABIN – ROOF PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

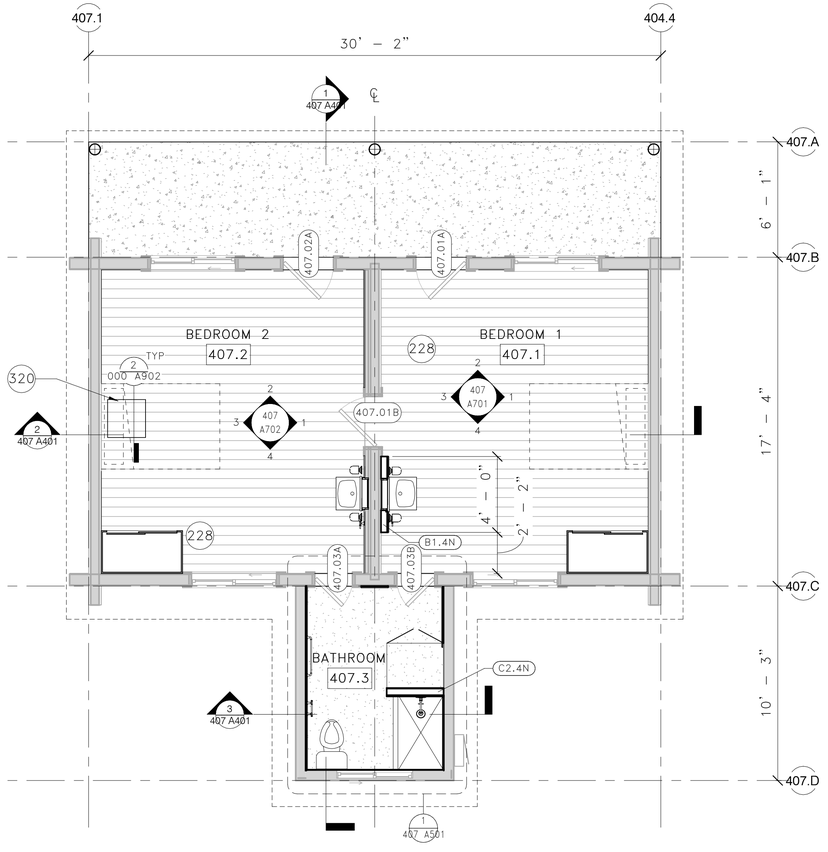

1 407 END CABIN – FLOOR PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT–XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

228 RESTORE (E) CASEWORK. NOTE: CONFIGURATION OF CASEWORK VARIES AT MRS OLIVER'S CABIN, REFER TO ELEVATION 5/407 A701

320 PROVIDE CRAWL SPACE ACCESS

340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS

341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

SCALE (B) 4" 4 0 0 4" 4 8" 8 SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A201

TITLE OF SHEET
END CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 290 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

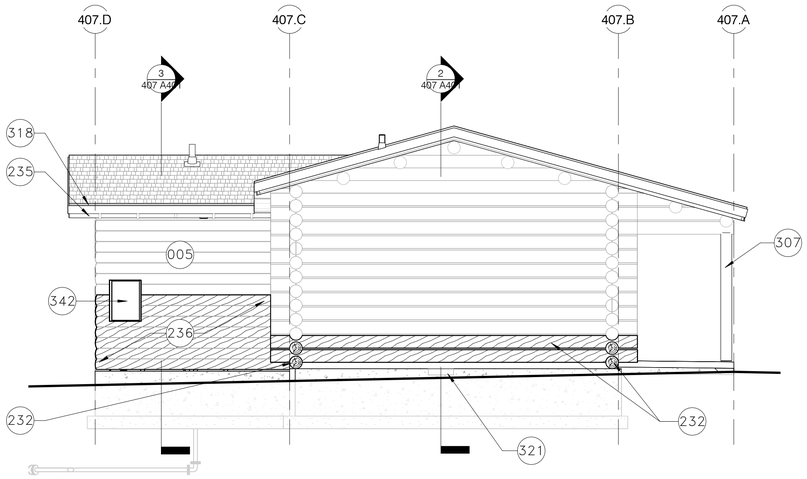

2 407 END CABIN – EAST

1/4" = 1'-0"

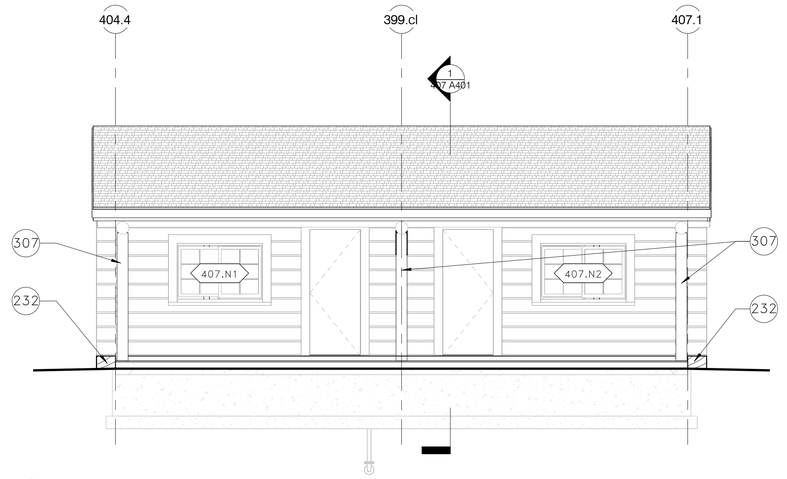

1 407 END CABIN – NORTH

1/4" = 1'-0"

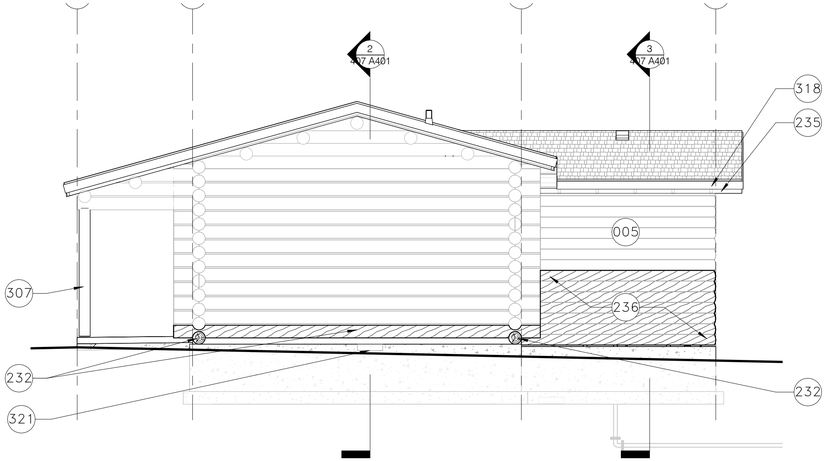

4 407 END CABIN – WEST

1/4" = 1'-0"

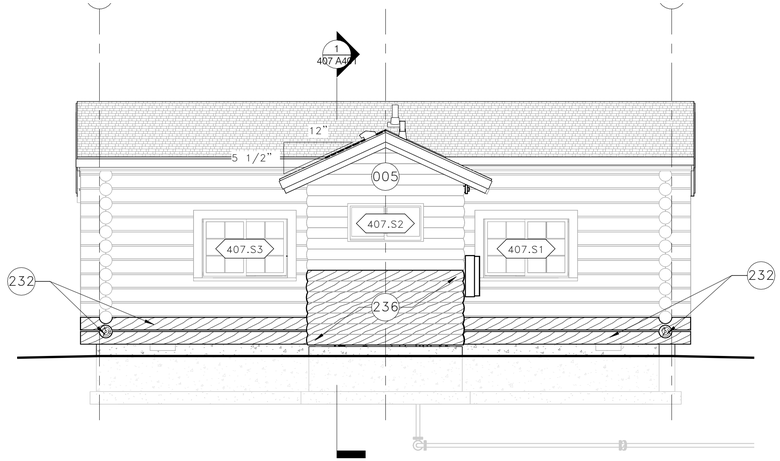

3 407 END CABIN – SOUTH

1/4" = 1'-0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS. VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL-1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL-2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN-KIND REPLACEMENT.
12. ST-2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

005 EXISTING LOG SIDING TO REMAIN
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
236 AT BOTTOM 4'-0" OF WALL, REPAIR DETERIORATED (E) LOG SIDING. ASSUME REPLACEMENT OF (4) BOARDS EACH SIDE, REFASTEN ALL BOARDS. REPLACE WEATHERBARRIER WHERE EXPOSED.
307 PROVIDE LOG COLUMN PER STRUCTURAL
318 PROVIDE SECONDARY WOOD FASCIA
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS

SCALE (B) 0" 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EDDY C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A301

TITLE OF SHEET
END CABIN – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 291 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

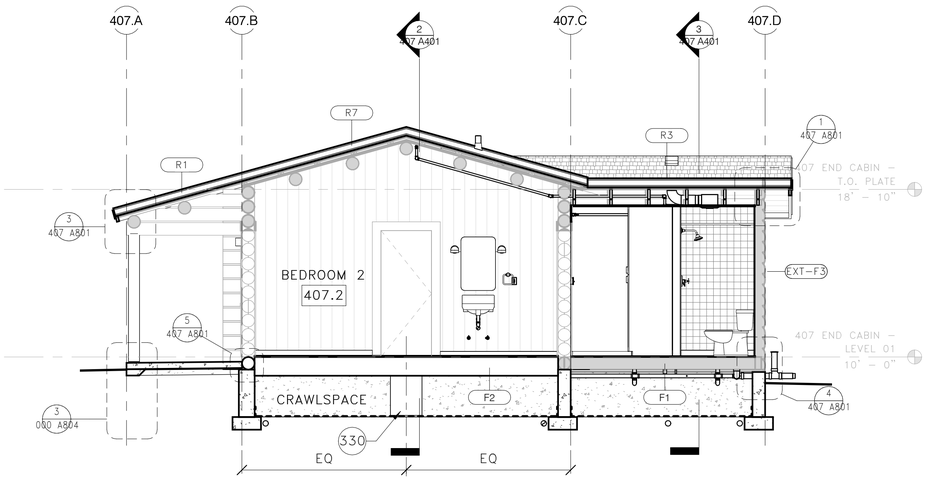

1 407 END CABIN – SECTION A

1/4" = 1'-0"

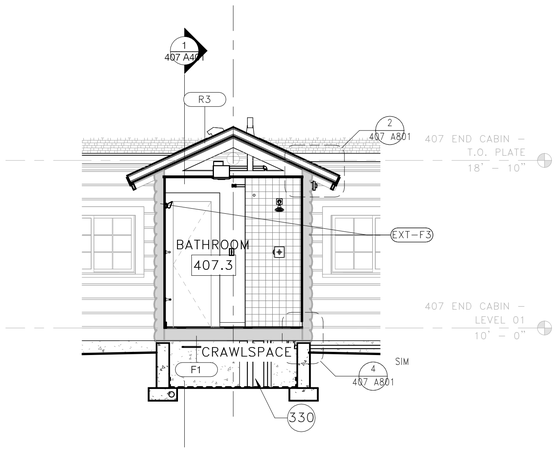

3 407 END CABIN – SECTION 'C'

1/4" = 1'-0"

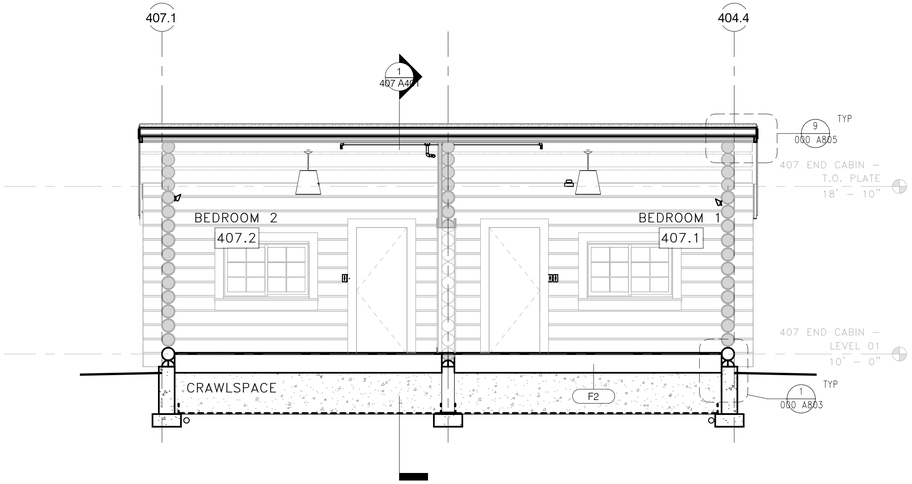

2 407 END CABIN – SECTION 'B'

1/4" = 1'-0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- CRAWLSPACE VAPOR BARRIER
- CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS
- CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A401

TITLE OF SHEET
END CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 292 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

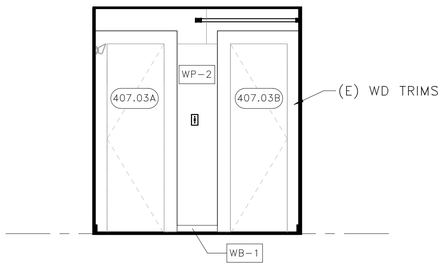

3 BATHROOM 407.05 – NORTH

3/8" = 1'-0"

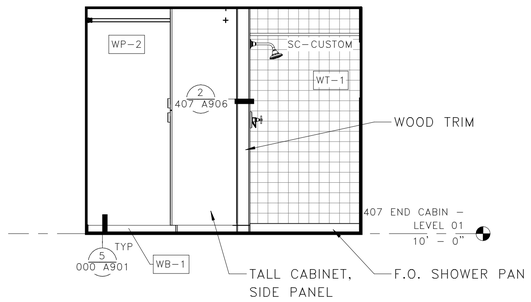

2 BATHROOM 407.05 – EAST

3/8" = 1'-0"

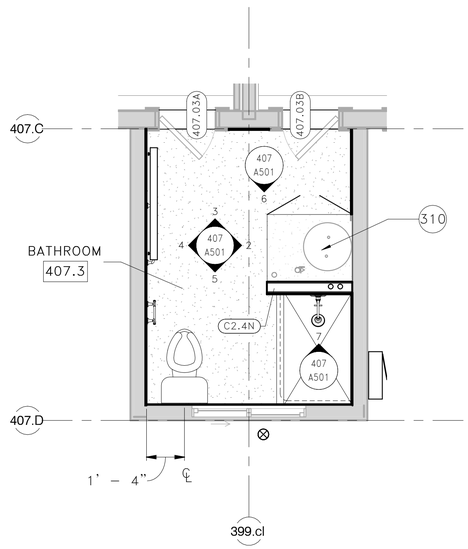

1 407 END CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'-0"

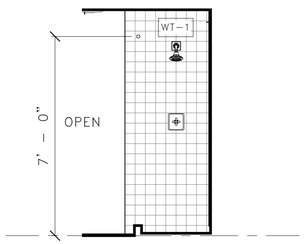

7 BATHROOM 407.05 – NORTH 'B'

3/8" = 1'-0"

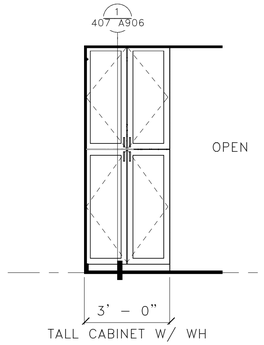

6 BATHROOM 407.05 – SOUTH 'B'

3/8" = 1'-0"

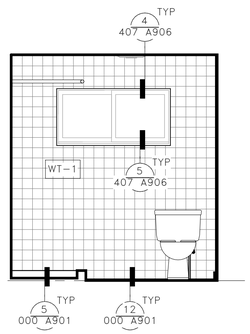

5 BATHROOM 405.05 – SOUTH

3/8" = 1'-0"

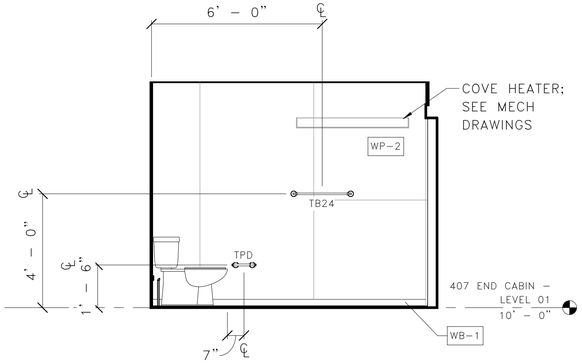

4 BATHROOM 405.05 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00-G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00-G005 & 00-G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

KEYNOTES

310 PROVIDE WATER HEATER AND FIRE SPRINKLER RISER, SEE FS & PLUMBING DRAWINGS

SCALE C 2" 0 2' 8" 5' 4"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVEY C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A501

TITLE OF SHEET
END CABIN – ENLARGED BATHROOMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 293 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

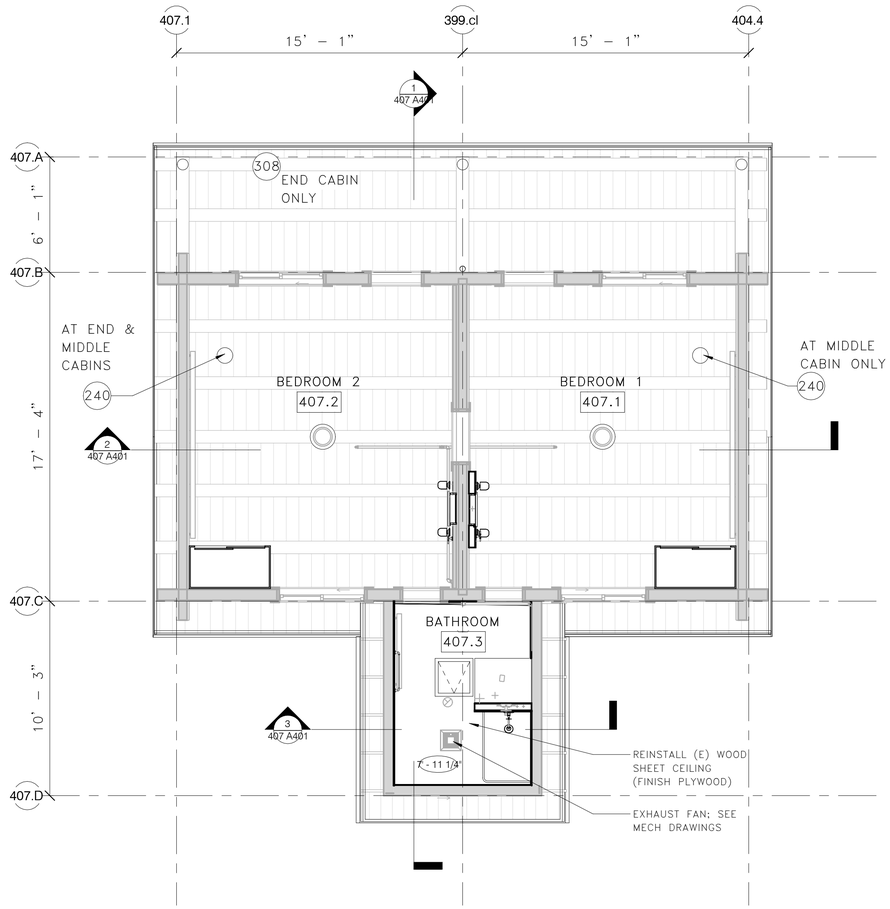

1 407 END CABIN – FIRST LEVEL RCP

1/4" = 1'–0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- VARIES — COVE HEATER

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

308 PROVIDE LOG BEAM PER STRUCTURAL

SCALE (b) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. FIGG C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A601

TITLE OF SHEET
END CABIN –
REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 294 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

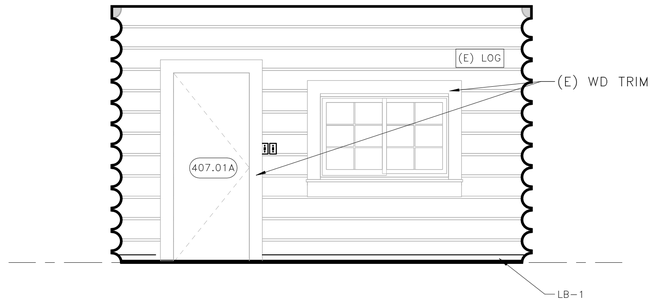

2 BEDROOM 1 407.1 – NORTH

3/8" = 1'-0"

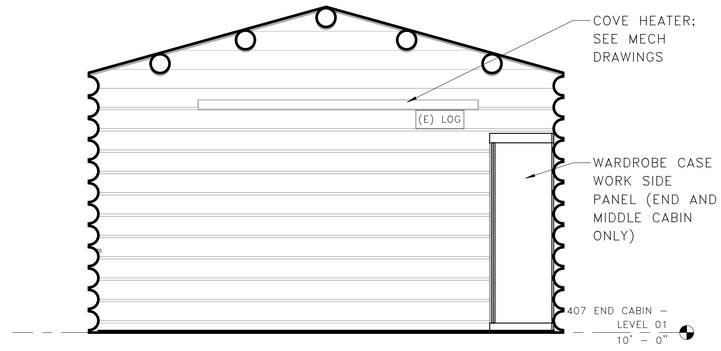

1 BEDROOM 1 407.1 – EAST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

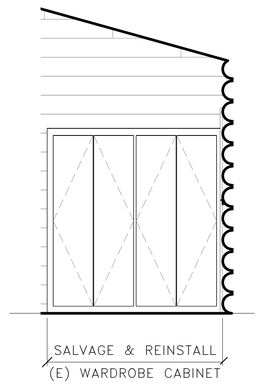

NOTE:
SALVAGE, REPAIR & REINSTALL (2) (E) CABINETS

5 WARDROBE – MRS OLIVER'S CABIN

3/8" = 1'-0"

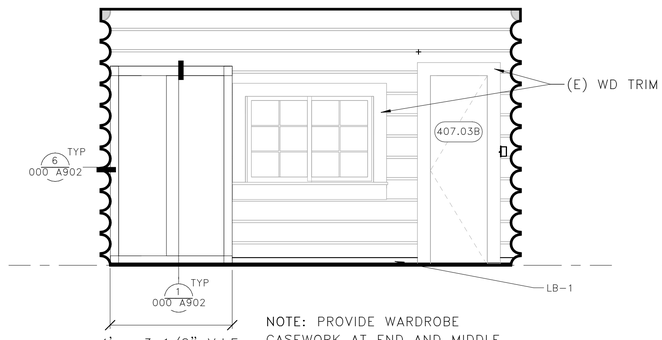

NOTE: PROVIDE WARDROBE CASEWORK AT END AND MIDDLE CABINS ONLY. SEE 5/407 A701 FOR CASEWORK REHABILITATION AT MRS OLIVER'S CABIN

4 BEDROOM 1 407.1 – SOUTH

3/8" = 1'-0"

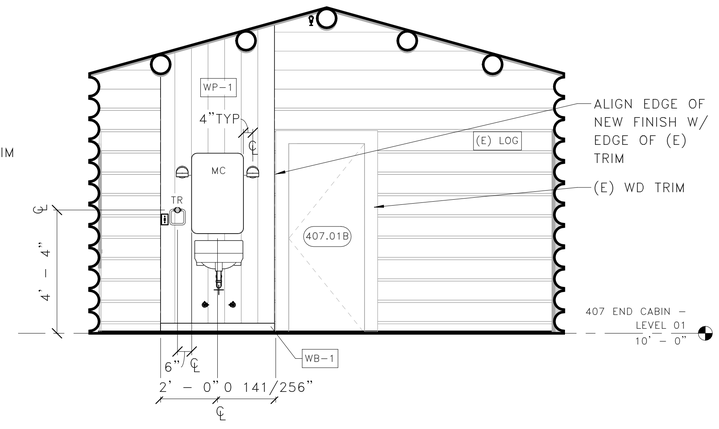

3 BEDROOM 1 407.1 – WEST

3/8" = 1'-0"

SCALE Ⓒ 2' 0" 0 2' 8" 5' 4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. RIPS STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A701

TITLE OF SHEET
END CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 295 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

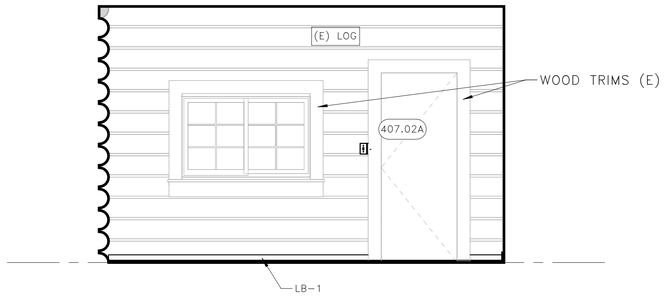

2 BEDROOM 2 407.1 – NORTH

3/8" = 1'-0"

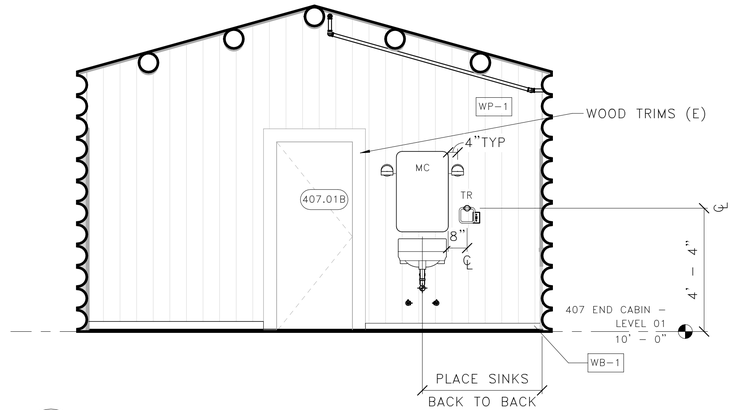

1 BEDROOM 2 407.1 – EAST

3/8" = 1'-0"

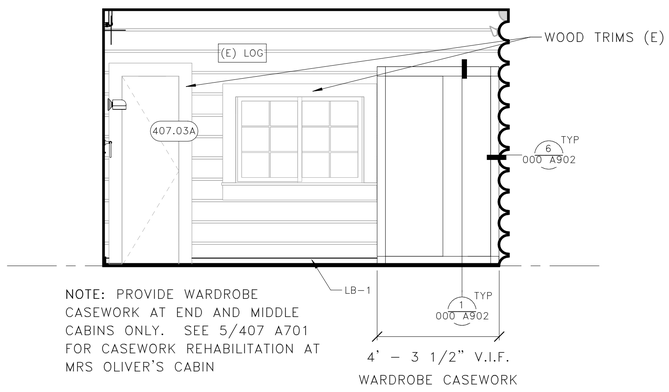

NOTE: PROVIDE WARDROBE CASEWORK AT END AND MIDDLE CABINS ONLY. SEE 5/407 A701 FOR CASEWORK REHABILITATION AT MRS OLIVER'S CABIN

4 BEDROOM 2 407.1 – SOUTH

3/8" = 1'-0"

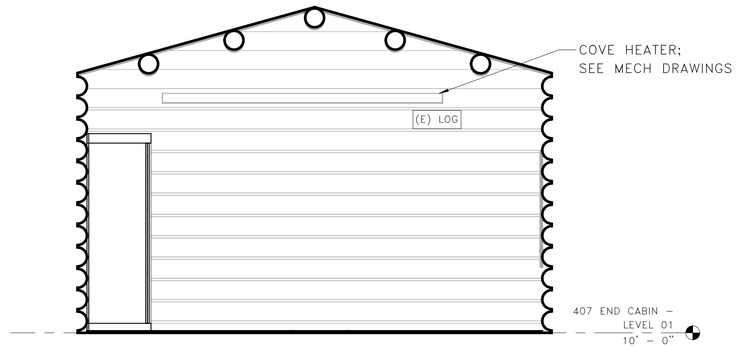

3 BEDROOM 2 407.1 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE © 2' 5" 0 2' 8" 5' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYER C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A702

TITLE OF SHEET
END CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 296 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

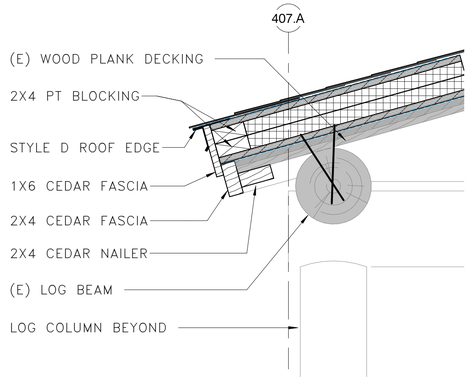

3 407 END CABIN – PORCH EAVE DETAIL

1 1/2" = 1'–0"

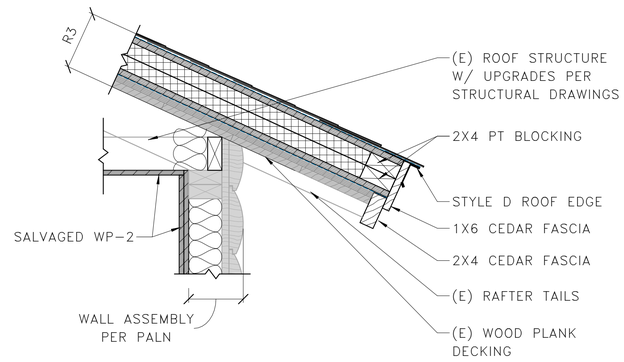

2 407 END CABIN – EAVE AT BATHROOM ADDITION

1 1/2" = 1'–0"

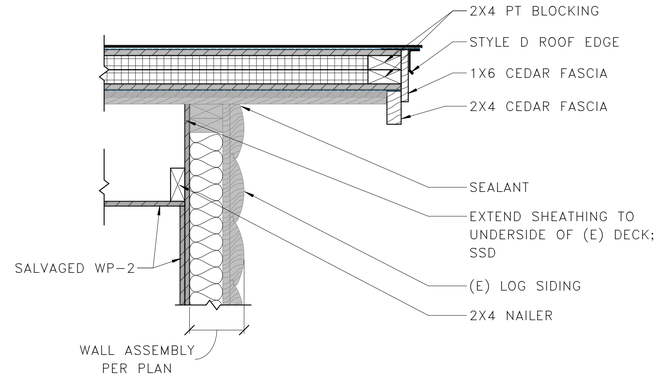

1 407 END CABIN – RAKE AT BATHROOM ADDITION

1 1/2" = 1'–0"

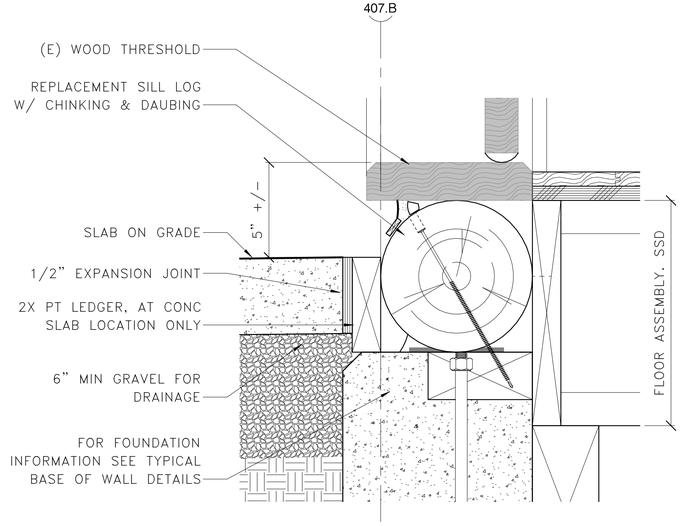

5 407 END CABIN – PORCH TRANSITION DETAIL

3" = 1'–0"

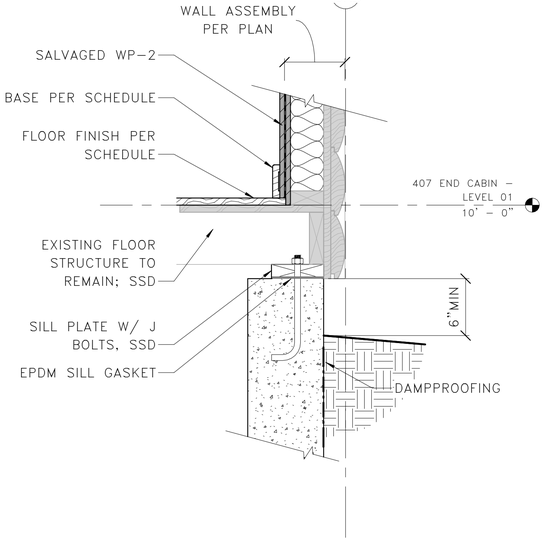

4 407 END CABIN – FOUNDATION AT BATHROOM ADDITION

1 1/2" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'–4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KYES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A801

TITLE OF SHEET
END CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 297 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

407 END CABIN – WINDOW SCHEDULE

WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	NOTES
407.N1		2' – 10"	4' – 6"				
407.N2		2' – 10"	4' – 6"				
407.S1		3' – 2"	4' – 6"				
407.S2		2' – 0"	4' – 0"				
407.S3		3' – 2"	4' – 6"				

407 END CABIN – DOOR SCHEDULE

DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
407.01A	(E) DR–1	2' – 8"	6' – 8"							(E) SDR–1	
407.01B	(E) DR–1	2' – 8"	6' – 8"								
407.02A	(E) DR–1	2' – 8"	6' – 8"							(E) SDR–1	
407.03A	(E) DR–1	2' – 0"	6' – 8"								
407.03B	(E) DR–1	2' – 0"	6' – 8"								

407 END CABIN – ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
				BASE		WALL				
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	
407.1	BEDROOM 1	(S)WD–1	CLR	(S)LB–1/WB–1	CLR	(E)LOG/WP–1	CLR	EXP	CLR	
407.2	BEDROOM 2	(S)WD–1	CLR	(S)LB–1/WB–1	CLR	(E)LOG/(E)WP–1	CLR	EXP	CLR	
407.3	BATHROOM	LIN–1	NA	WB–1	CLR	(S)WP–2/T–1	CLR/NA	(S)WP–2	CLR	

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A905

TITLE OF SHEET
END CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 298 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

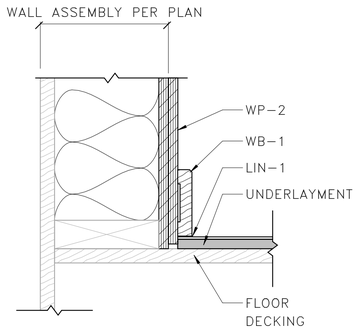

3 407 END CABIN – BASE OF WALL AT WP-2

3" = 1'-0"

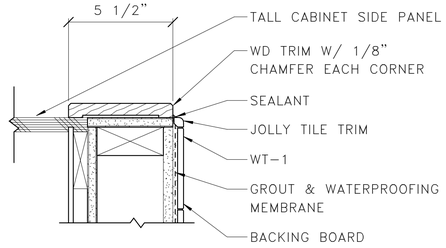

2 407 END CABIN – WALL END AT WT-1/ WOOD TRIM

3" = 1'-0"

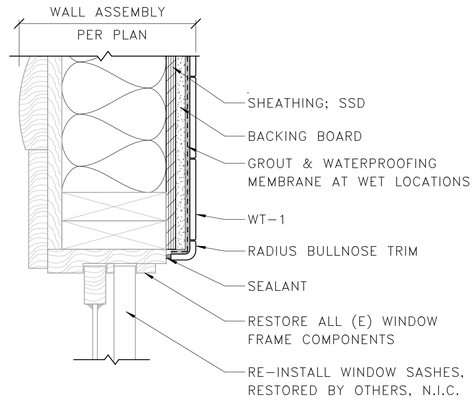

4 407 END CABIN – WINDOW HEAD/JAMB AT WT-1

3" = 1'-0"

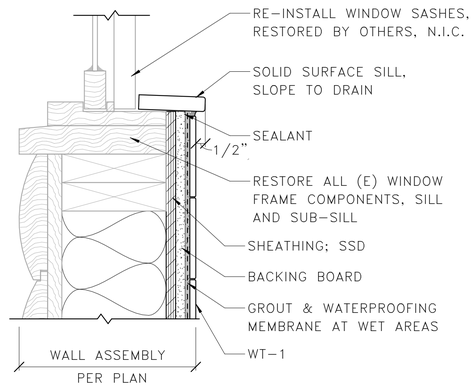

5 407 END CABIN – WINDOW SILL AT WT-1

3" = 1'-0"

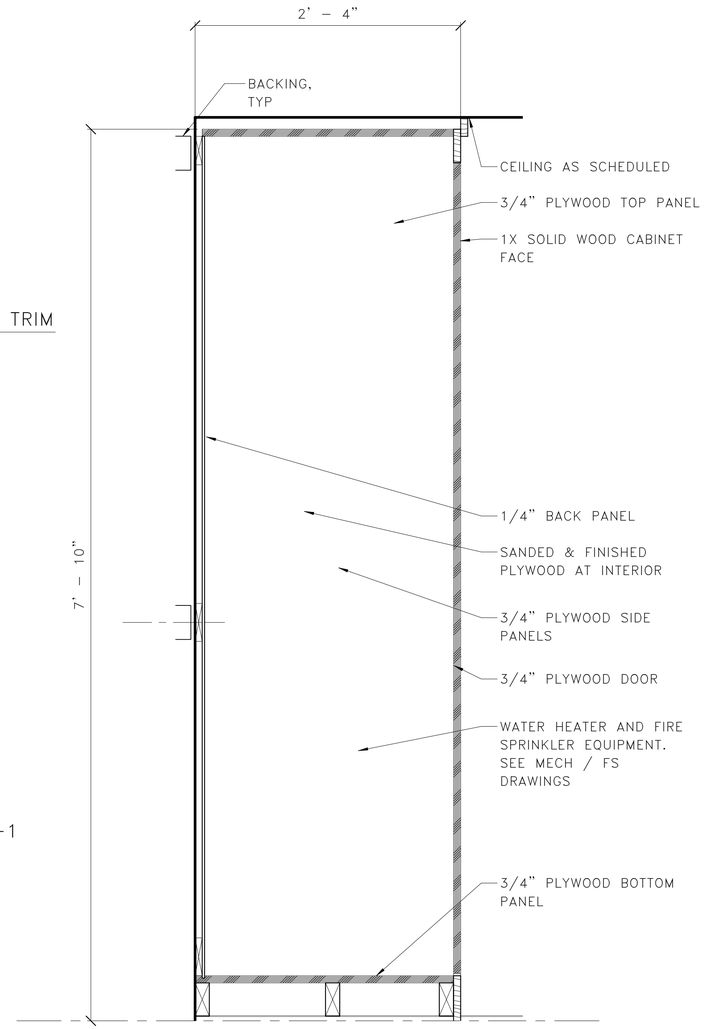

1 407 END CABIN – TALL CABINET WITH WATER HEATER

1 1/2" = 1'-0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TAGG C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A906

TITLE OF SHEET
END CABIN – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 299 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66844993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

WEST AND NORTH ELEVATIONS, LOOKING SOUTHEAST

SOUTH ELEVATION, LOOKING NORTH

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

SOUTH ELEVATION, WOOD LOG CONDITION

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

BEDROOM 407.1, LOOKING NORTH

BEDROOM 407.2, LOOKING WEST

BEDROOM 407.2, LOOKING EAST

BATHROOM 407.3, LOOKING NORTH

BATHROOM 407.3, LOOKING SOUTHWEST

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYER C-3530 Date 7/23/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
407
A920

TITLE OF SHEET
END CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 300 OF 371

WEST AND NORTH ELEVATIONS, LOOKING SOUTHEAST

NORTH AND EAST ELEVATIONS, LOOKING SOUTHWEST

EAST ELEVATION, LOOKING WEST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

SOUTH ELEVATION, LOOKING NORTH

BEDROOM 408.1, LOOKING EAST

BEDROOM 408.2, LOOKING EAST

BEDROOM 408.1, LOOKING SOUTH

BATHROOM 407.3, LOOKING NORTH

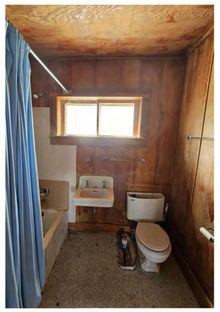

BATHROOM 407.3, LOOKING SOUTH

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
408
A920

TITLE OF SHEET
MIDDLE CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 237343
SHEET 301 OF 371

NORTH AND EAST ELEVATIONS, LOOKING SOUTHWEST

WEST AND NORTH ELEVATIONS, LOOKING SOUTHEAST

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

SOUTH ELEVATION, WH ENCLOSURE

EAST ELEVATION, LOOKING WEST

NORTH ELEVATION, FRONT PORCH

BEDROOM 409.2, LOOKING NORTH

BEDROOM 409.1, LOOKING EAST

BEDROOM 409.1, LOOKING WEST

BEDROOM 409.2, LOOKING SOUTH

BATHROOM 409.3, LOOKING SOUTH

BATHROOM 409.3, LOOKING NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. FOX STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
409
A920

TITLE OF SHEET
MRS OLIVER'S CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 302 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YK03\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

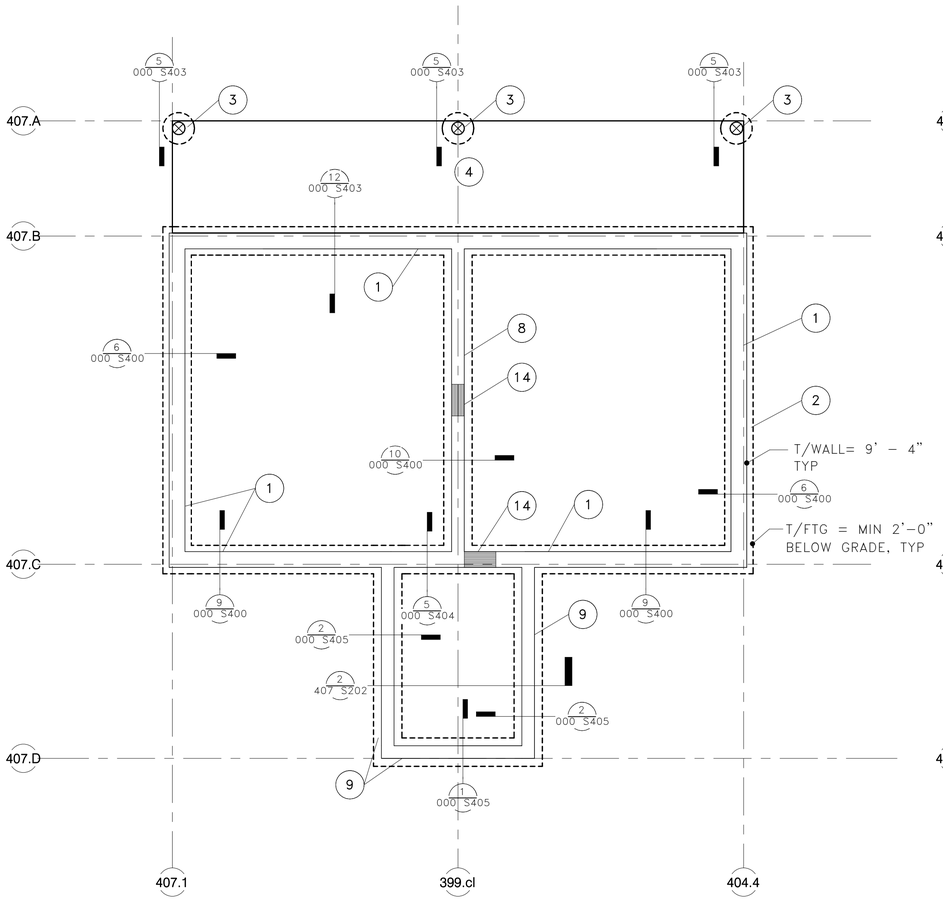

1 2 BEDROOM CABIN – FOUNDATION PLAN

1/4" = 1'-0"

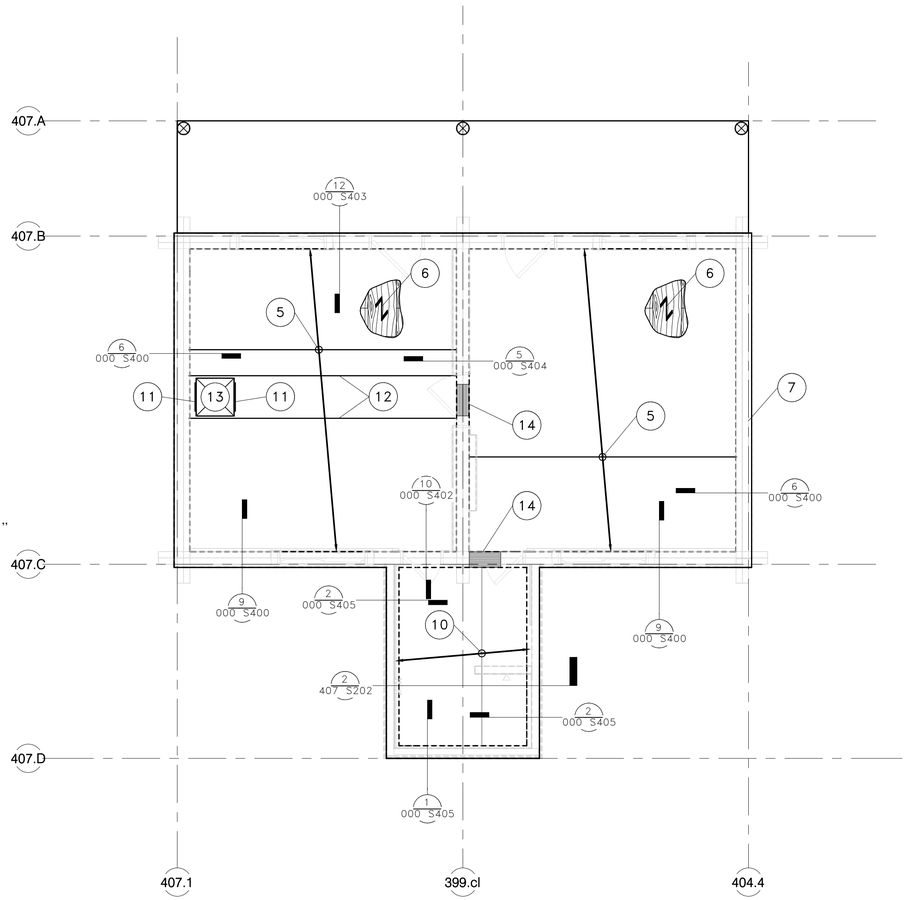

2 2 BEDROOM CABIN – FLOOR FRAMING PLAN

1/4" = 1'-0"

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ EF; T/WALL = MIN 6" ABOVE FINISHED GRADE
2. 1'-6"Wx10"DP CONCRETE FOOTING W/ (2) #4 BARS CONT; B/FTG = 2'-10" BELOW GRADE
3. 8"Ø LOG COLUMNS W/ 20"Ø MIN SONO-TUBE FOOTING W/ (8) #4 VERT & #3 TIES @ 8"OC & (3) #3 TIES @ 3"OC AT TOP; B/FTG = 3'-0" BELOW GRADE
4. 4" CONCRETE SLAB ON GRADE W/ #4 BARS @ 18"OC EACH WAY W/ THICKENED SLAB EDGE
5. 11 7/8" TJI 210 @ 16"OC
6. 3/4" FLOOR SHEATHING
7. (E) 8"Ø LOG WALL & STICK FRAMING ABOVE TO BE LIFTED & TEMPORARILY RE-LOCATED AS REQ'D TO CONSTRUCT FOUNDATION ELEMENTS
8. 8" CONCRETE INTERIOR FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = PER ARCH
9. 8" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = MIN 6" ABOVE FINISHED GRADE
10. (E) 2x8 @ 16"OC FLOOR JOISTS, VERIFY IN FIELD
11. 2x6 BEAM W/ LU26 HANGERS EA END
12. (2)2x12
13. CRAWLSPACE ACCESS HATCH PER ARCH
14. STEMWALL OPENING FOR CRAWLSPACE ACCESS, LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER 9/000 S403

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/FINISHED FLOOR ASSUMED TO BE 10'-0", VERIFY WITH ARCHITECTURAL DRAWINGS.
4. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM	
PRIME:	HENNEBERY EDDY PORTLAND, OR
SUB:	DCI ENGINEERS BOZEMAN, MT
DESIGNED:	ACF
DRAWN:	JNH
TECH REVIEW:	LMB
DATE:	07/21/2026

SUB SHEET NO. 407 S201

TITLE OF SHEET: 2 BEDROOM CABIN – FDN & FLOOR FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 303 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

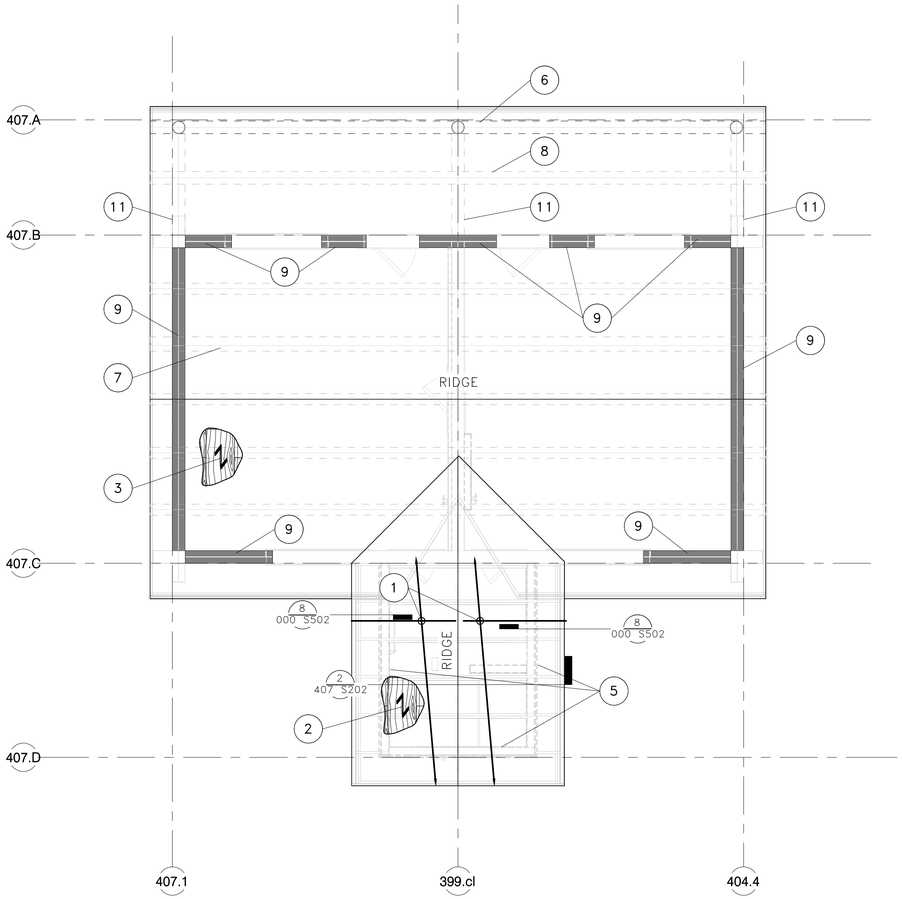

1 2 BEDROOM CABIN – ROOF FRAMING PLAN

1/4" = 1'-0"

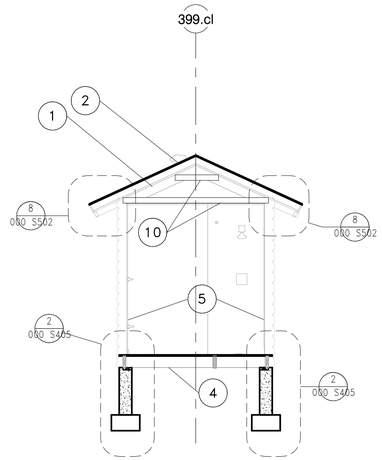

2 2 BEDROOM CABIN – STUD WALL ELEVATION

1/4" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. (E) 2x4 RAFTERS (VERIFY IN FIELD) @ 24"OC W/ 2x4 SISTERED MEMBER PER 7/000 S502 . CONTRACTOR OPTION TO INSTALL PRE-FAB TRUSSES @ 24"OC W/ 2x4 RAFTER TAILS (CONTACT DCI ENGINEERS FOR DESIGN)
2. 5/8" ROOF SHTHG, TYP. AT REAR ADDITION TO BE NAILED TO ROOF FRAMING PER 4/000 S503
3. 1/2" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
4. FLOOR FRAMING PER 2/407 S201
5. (E) 2x4 STUD WALL (VERIFY IN FIELD) W/ 1/2" SHTHG W/ 0.131"Ø x 2 1/2" NAILS @ 6"OC AT ALL PANEL EDGES AT INTERIOR FACE OF WALLS, TYP. AT REAR ADDITION PER 5/000 S510
6. 8"Ø LOG BEAM TO REPLACE BROKEN (E) LOG BEAMS; SHORE ROOF FRAMING ABOVE AS REQ'D. ANTICIPATE BEAMS NEED TO BE REPLACED ONLY AT END CABIN, CONNECT TO & (E) ROOF SHEATHING PER 3/000 S500
7. (E) 7"Ø LOG PURLIN, TYP. 7 PLACES; CONNECT TO ROOF SHEATHING AT PURLINS PER 3/000 S500
8. UNBROKEN PORCH 8"Ø LOG BEAMS TO REMAIN
9. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501
10. 2X4 CEILING JOIST & COLLAR TIE AT EA RAFTER
11. (E) 8"Ø WALL LOG EXTENSION TO REMAIN

4 0 4 8 SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM	DESIGNED:	SUB SHEET NO.	TITLE OF SHEET	DRAWING NO.
PRIME: HENNEBERY EDDY PORTLAND, OR	ACF	407 S202	2 BEDROOM CABIN – ROOF FRAMING PLAN	136 193826
SUB: DCI ENGINEERS BOZEMAN, MT	DRAWN: JNH			PMIS/PKG NO. 237343
	TECH REVIEW: LMB		REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	SHEET 304 OF 371
	DATE: 07/21/2026			

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-407)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-407-1	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-3	COVE HEATER	600 W	-	120 -1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
WH-407-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-407)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
5. ROOF CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	CONTROL
EF-407-1	PANASONIC	FV-0511VKL2	110	0.25	0.9	DIRECT	CEILING	1

ELECTRIC HEATER SCHEDULE (HS-407)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-407-1	Q MARK	RCC15024C	240 - 1	1500	96	WALL	4	118	4-3/16
EH-407-2	Q MARK	RCC15024C	240 - 1	1500	96	WALL	4	118	4-3/16
EH-407-3	Q MARK	RCC6012C	120 - 1	600	72	WALL	4	47	4-3/16

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEYER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
407
M001

TITLE OF SHEET
END CABIN – MECHANICAL SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 305 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

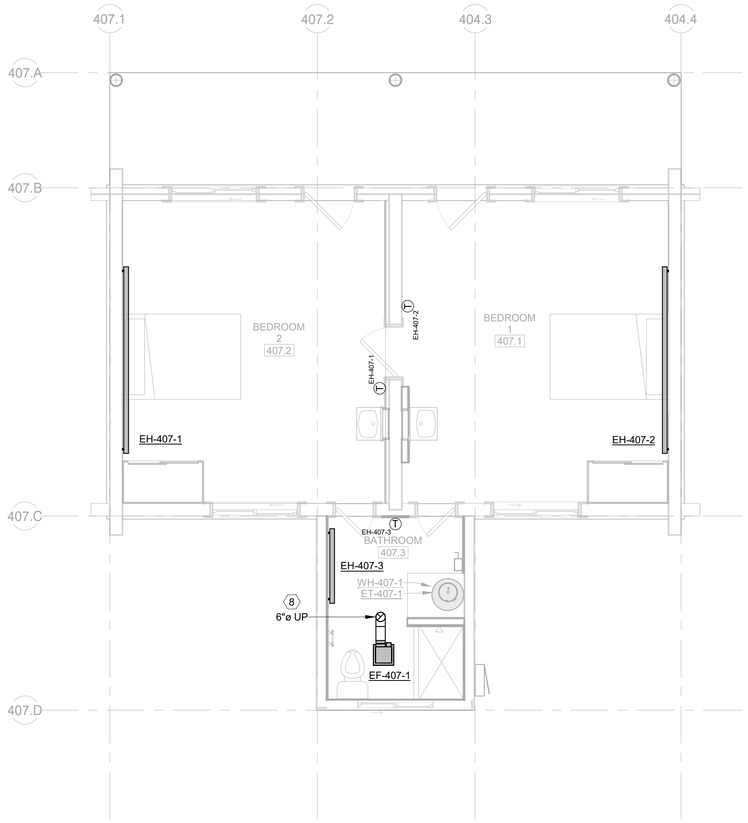

2 END CABIN – MECHANICAL PLAN

1/4" = 1'–0"

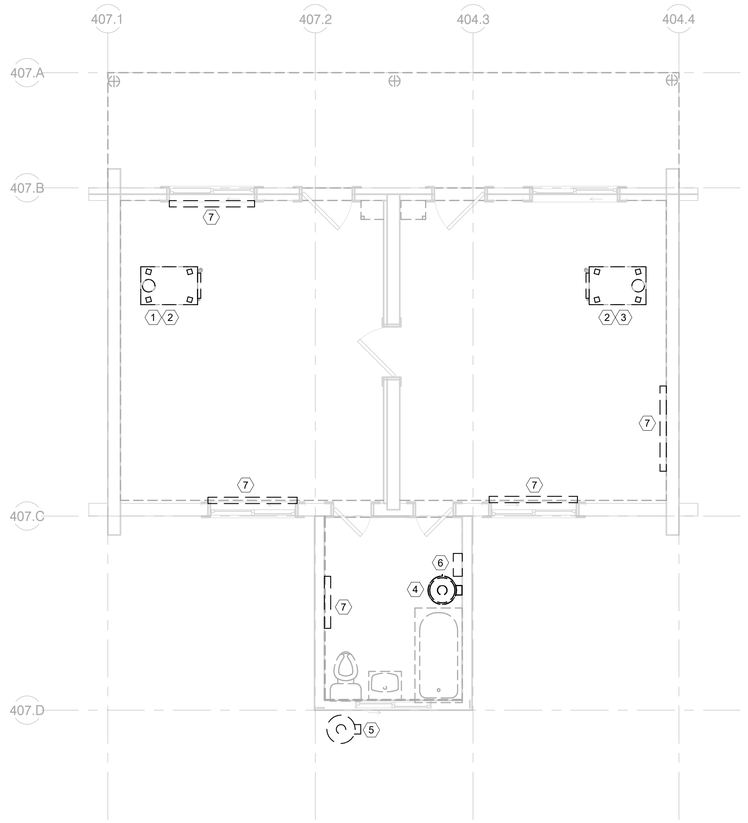

1 END CABIN – MECHANICAL DEMO PLAN

1/4" = 1'–0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

(#) KEY NOTES:

1. FOR END CABIN (HS-407) REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
2. FOR MIDDLE CABIN (HS-408) REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
3. FOR MRS. OLIVER'S CABIN (HS-409) REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
4. FOR HS-407 AND HS-408 REMOVE EXISTING VENT AND PROPANE PIPING SERVING WATER HEATER.
5. FOR HS-409 REMOVE EXISTING VENT AND PROPANE PIPING SERVING WATER HEATER.
6. FOR HS-407, HS-408, AND HS-409 REMOVE EXISTING WALL HEATER.
7. FOR HS-409 REMOVE EXISTING ELECTRIC BASEBOARD HEATERS.
8. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer — Joseph R. Hynes — 16596 — WYOMING — 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED:	LAG
DRAWN:	LAG
TECH REVIEW:	JRH
DATE:	07/21/2026

SUB SHEET NO.
407
M101

TITLE OF SHEET
END CABIN –
MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 / 193826
PMIS/PKG NO.	237343
SHEET	306 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2

Branch Panel: P407

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 407, 408, 409
Supply From: SOUTH SERVICE
Mounting: Surface
Enclosure: 3R
Volts: 120/240 Single
Phases: 1
Wires: 3
A.F.C.: 3,213
Mains Type: MCB
Mains Rating: 100 A
MCB Rating: 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	750			2	20 A	Heating		EH-407-1	2
3								--	750						4
5	EH-407-3		Heating	20 A	1	600	750			2	20 A	Heating		EH-407-2	6
7	WH-407-1		Heating	30 A	2			2250	750						8
9						2250	360			1	20 A	Receptacle		RCPT - EXTERIOR	10
11	RCPT - BATHROOM		Receptacle	20 A	1			540	1080	1	20 A	Receptacle		RCPT - BEDROOM	12
13	LTG		HVAC; Lighting	20 A	1	960	1080			1	20 A	Receptacle		RCPT - BEDROOM	14
15	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	16
17	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	18
					Total Load:	6750 VA		5370 VA							
					Total Amps:	56 A		45 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
HVAC	500 VA	100.00%	500 VA		
Heating	8100 VA	100.00%	8100 VA	**Total Conn. Load:**	12120 VA
Lighting	460 VA	125.00%	575 VA	**Total Est. Demand:**	12235 VA
Receptacle	3060 VA	100.00%	3060 VA	**Total Conn.:**	51 A
				Total Est. Demand:	51 A

MEP COORDINATION SCHEDULE (HS-407)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-407-1	CEILING EXHAUST FAN	0.19 A	-	120 - 1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-407-3	COVE HEATER	600 W	-	120 -1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
WH-407-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
407
E001

TITLE OF SHEET
END CABIN – ELECTRICAL SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 307 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

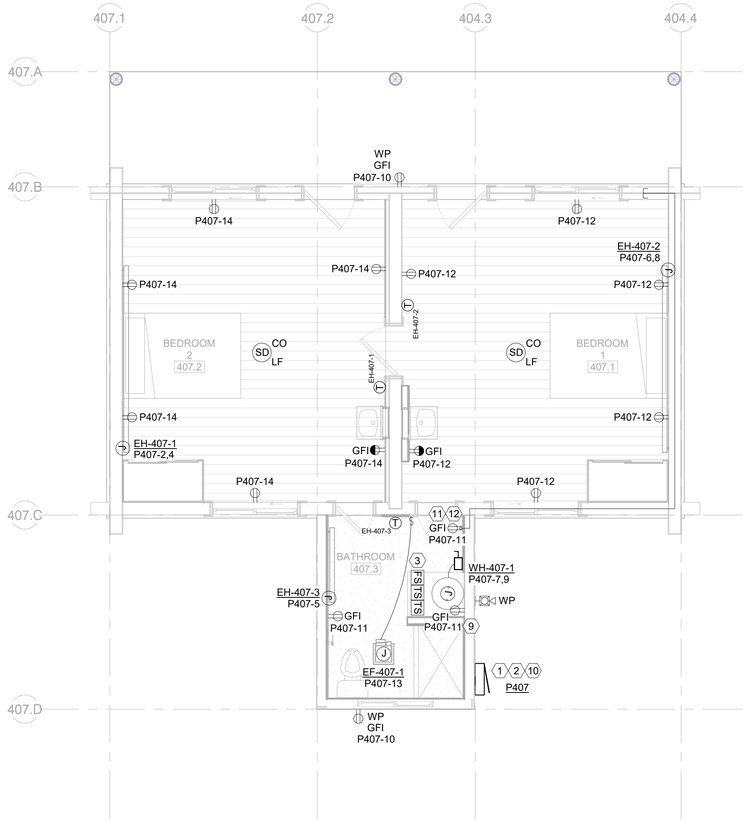

2 END CABIN – POWER AND SIGNAL RENOVATION PLAN

1/4" = 1'–0"

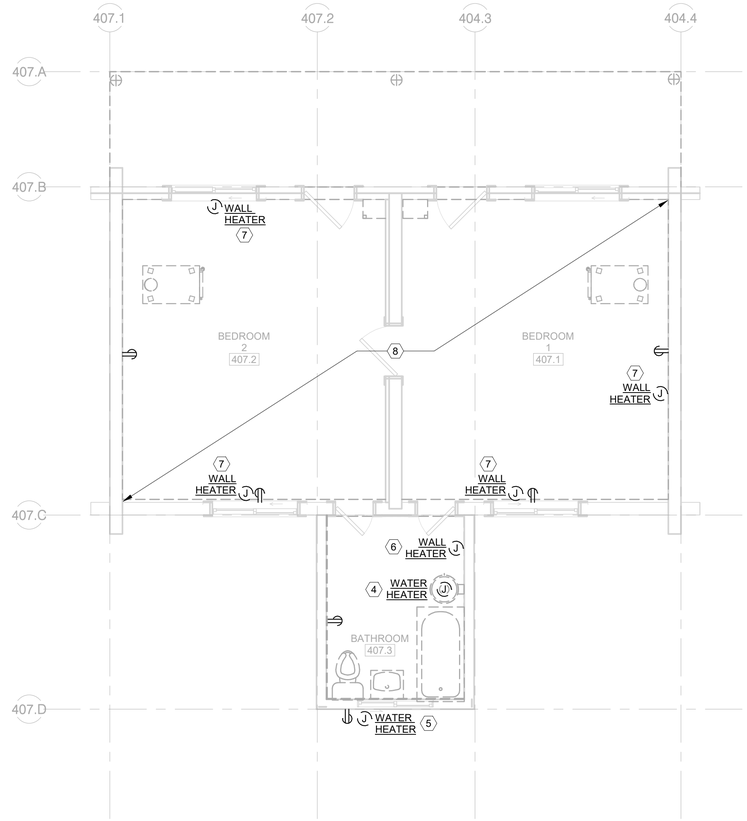

1 END CABIN – POWER AND SIGNAL DEMO PLAN

1/4" = 1'–0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS. CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. FOR HS-407 AND HS-408 DEMOLISH EXISTING ELECTRICAL CONNECTION SERVING WATER HEATER.
5. FOR HS-409 DEMOLISH EXISTING ELECTRICAL CONNECTION SERVING WATER HEATER.
6. FOR HS-407, HS-408, AND HS-409 DEMOLISH EXISTING ELECTRICAL CONNECTION SERVING WALL HEATER.
7. FOR HS-409 DEMOLISH EXISTING ELECTRICAL CONNECTION SERVING ELECTRIC BASEBOARD HEATERS.
8. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.
9. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
10. REFER TO THE SITE PLAN ON SHEET 000 E100 FOR EXACT ELECTRICAL PANEL LOCATION FOR EACH OF THE (3) TYPICAL UNITS.
11. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
12. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE.

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
407
E101

TITLE OF SHEET
END CABIN – POWER AND SIGNAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 308 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

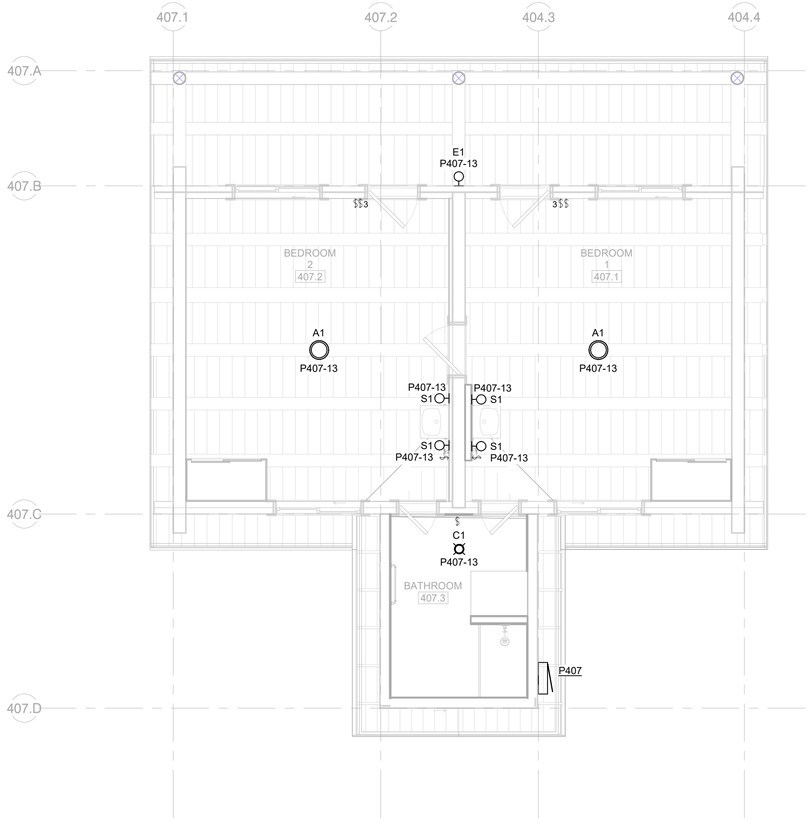

2 END CABIN – LIGHTING RENOVATION PLAN

1/4" = 1'-0"

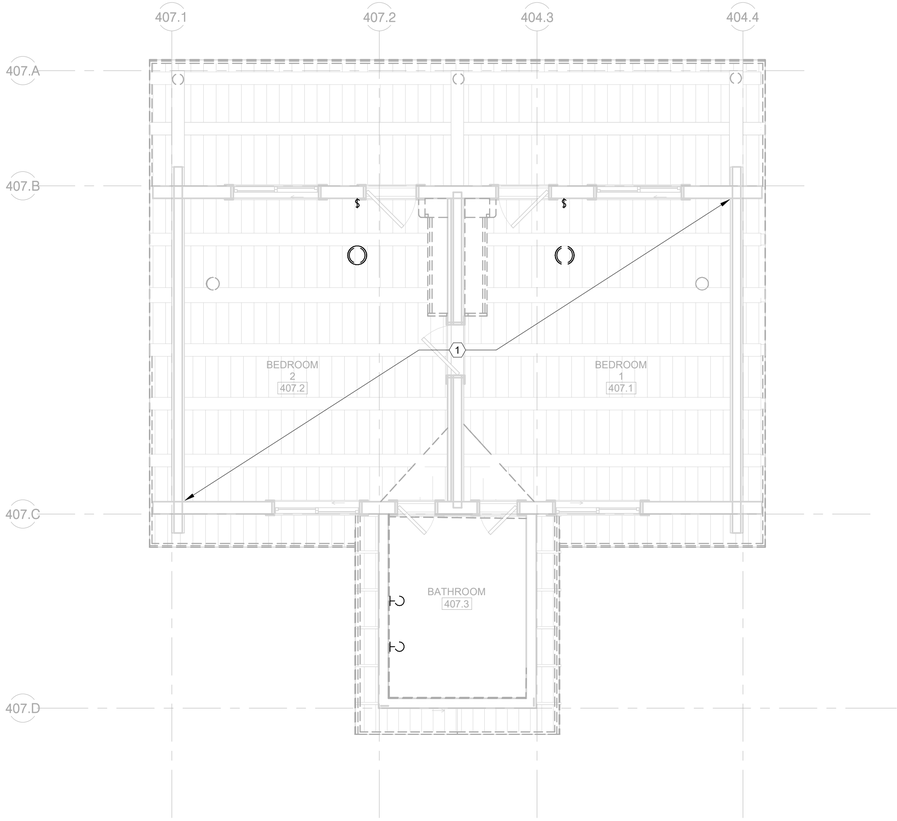

1 END CABIN – LIGHTING DEMO PLAN

1/4" = 1'-0"

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
407
E201

TITLE OF SHEET
END CABIN – LIGHTING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 309 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - END CABIN (HS-407)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
FD-407-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-407-1	LAVATORY - WALL MOUNTED	YES	KOHLER	K-2868	VITREOUS CHINA	WALL / ABA HEIGHT	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE JR SMITH #700 SERIES CARRIER, WATER STOPS, OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
SH-407-1	SHOWER	NO	KOHLER	K-8639	ACRYLIC	FLOOR	SINGLE-HANDLE SHOWER TRIM	KOHLER	K-TS97077-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS AND GRID DRAIN.
WC-407-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-407)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
6. FIVE YEAR LIMITED TANK WARRANTY
7. ZERO INCH CLEARANCE
8. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-407-1	RHEEM	XE40M06ST45U1	ELECTRIC TANK	40	120	4.5	0.93	53	21	48-1/4	20-1/4	106

PLUMBING EXPANSION TANK SCHEDULE (HS-407)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-407-1	TACO	PAX10-150	WH-407-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-407)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	1	3.6	3.6
LAVATORY	2	0.7	1.4
			5
MAX. LENGTH (FT)	40		
TOTAL PEAK FLOW (GPM)	9		
WATER METER SIZE (BY UTILITY)	2"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-407)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	1	5.0	5
EMERGENCY FLOOR DRAIN	1	0.0	0
LAVATORY	2	1.0	2
			7
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENKE
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
407
P001

TITLE OF SHEET
END CABIN – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 310 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

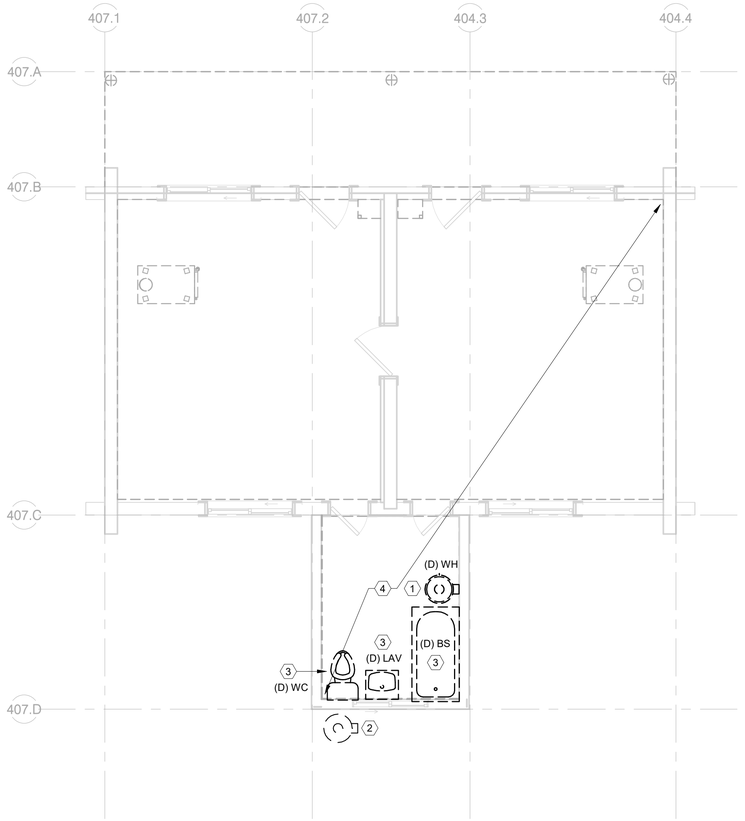

1 END CABIN – PLUMBING DEMO PLAN

1/4" = 1'–0"

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

(#) KEY NOTES:

1. FOR END CABIN (HS-407) AND MIDDLE CABIN (HS-408) REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
2. FOR MRS. OLIVER'S CABIN (HS-409) REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
3. FOR HS-407, HS-408, AND HS-409 REMOVE EXISTING FIXTURE AND ASSOCIATED PIPING.
4. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENNEBERY
16596
WYOMING
07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
407
P101

TITLE OF SHEET
END CABIN – PLUMBING DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 311 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

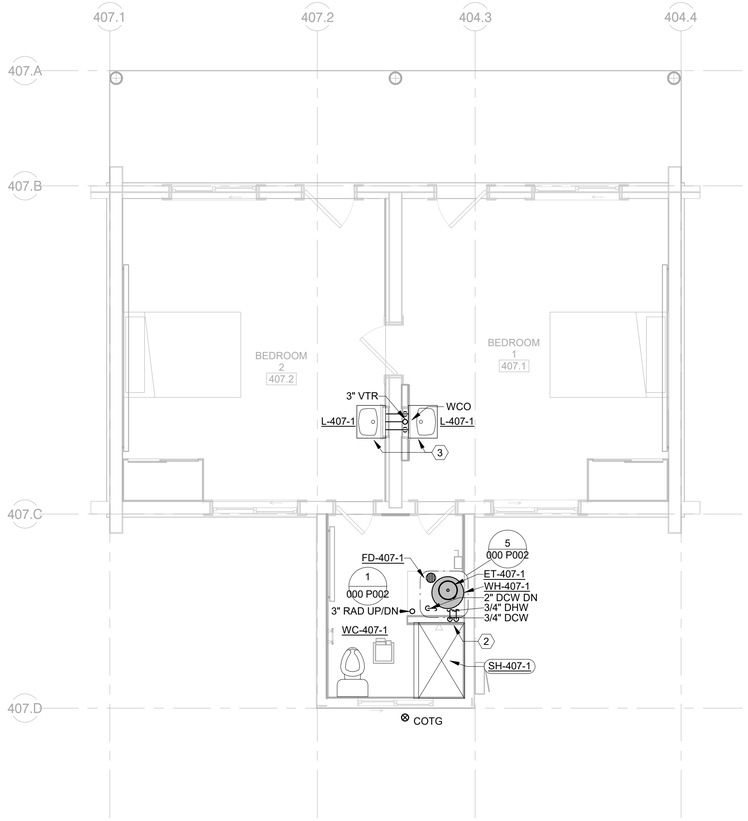

2 END CABIN – PLUMBING PLAN

1/4" = 1'–0"

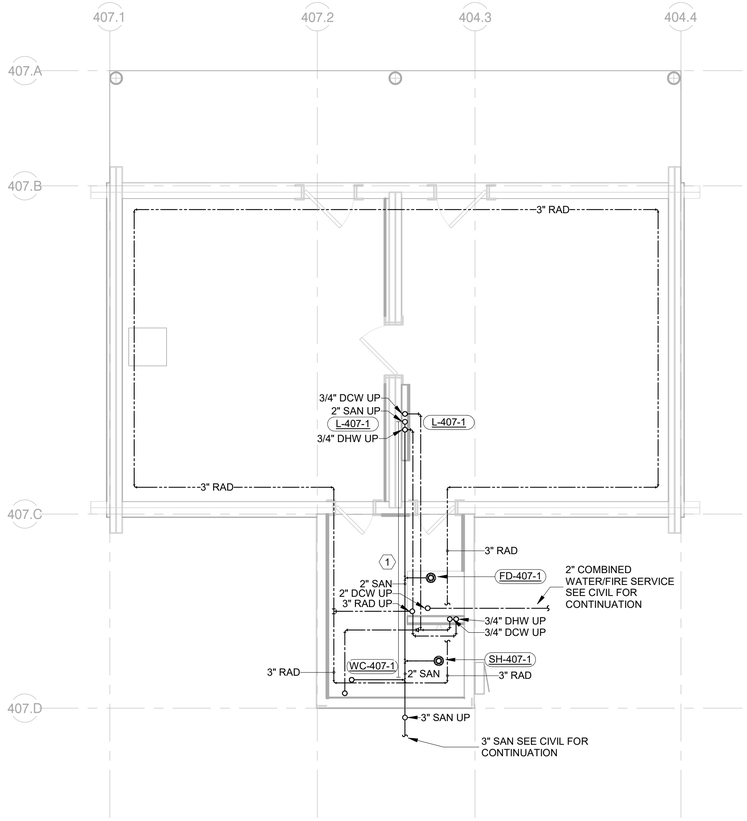

1 END CABIN – UNDERFLOOR PLUMBING PLAN

1/4" = 1'–0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

TYPICAL UNIT NOTE

A. PLANS SHOWN ON THIS SHEET ARE TYPICAL FOR END CABIN (HS-407), MIDDLE CABIN (HS-408), AND MRS. OLIVER'S CABIN (HS-409).

(#) KEY NOTES:

1. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
2. 3/4" DCW AND 3/4" DHW DOWN. 1/2" DCW AND 1/2" DHW TO SH-407-1.
3. 3/4" DCW, 3/4" DHW DOWN AND 2" SAN DOWN 1/2" DCW, 1/2" DHW, 1-1/2" SAN TO L-407-1.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer JOSEPH R. HENKE 16596 WYOMING 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: LAG DRAWN: LAG TECH REVIEW: JRH DATE: 07/21/2026	SUB SHEET NO. 407 P201	TITLE OF SHEET END CABIN – PLUMBING PLANS REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 312 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

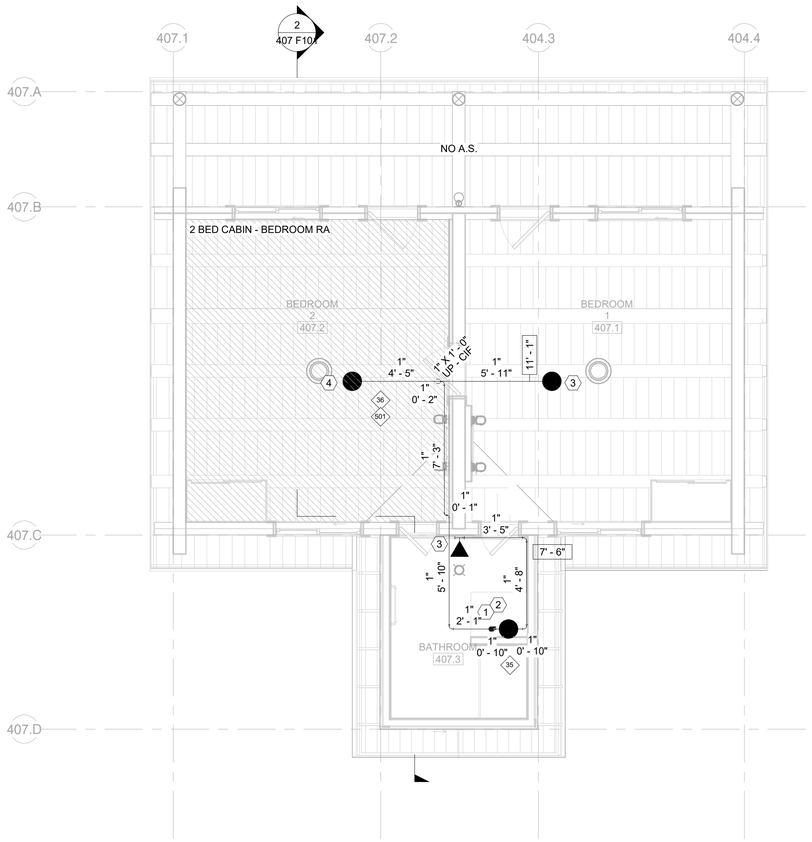

1 END CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

Hydraulic Information	
Remote Area Name	2 Bed Cabin - Bedroom
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	222 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.9
Base of Riser	22.02 GPM
Base of Riser	38.12 psi
Safety Margin	+30.99 (42.5%)

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D
12. END CABIN (407), MIDDLE CABIN (408) AND MRS OLIVER'S CABIN (409) ARE TYPICAL.

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

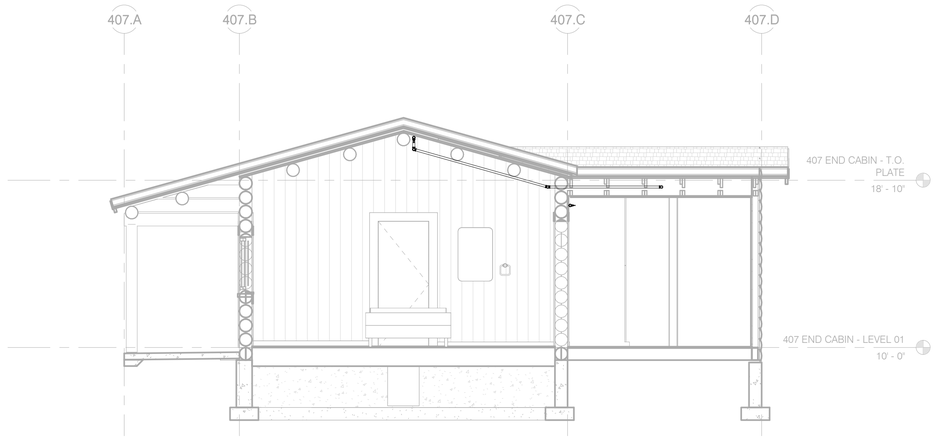

2 END CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	3
◀	Reliable	F1Res44	R3531	4.4	Quick	Horizontal Sidewall	1/2"	175 °F	Model F2	White	Residential Sidewall	1
												4

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TERRY J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
407
F101

TITLE OF SHEET
END CABIN – MAIN LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 313 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING NORTHEAST TOWARDS 410 HARRYS CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

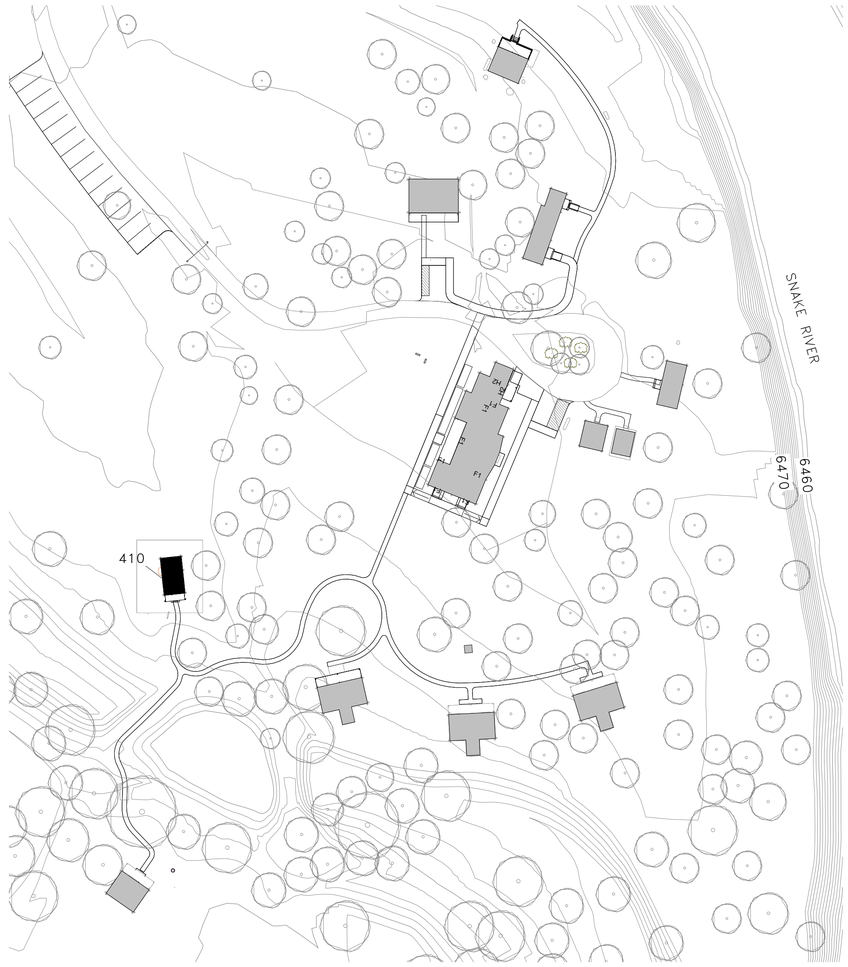

1 KEY PLAN – 410 HARRY'S CABIN

1" = 50'–0"

50 0 50 100

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REEVES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
G000

TITLE OF SHEET
HARRY'S CABIN – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826

PMIS/PKG NO. 237343

SHEET 314 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

MATCH LINE C100

EXISTING PROPANE TANK AND SURROUNDING FENCE TO BE REMOVED

TRACE ROAD

7 LF 3" SANITARY SERVICE @ 2% SLOPE, SEE C204 FOR TYPICAL SERVICE CONNECTION.

3" INV OUT: 6,469.22 COORDINATE WITH MEP FOR ENTRANCE INTO BUILDING

SEWER SERVICE P&P SEE C310

CLEANOUT

CURB STOP

WATER SERVICE P&P SEE C403

EXISTING COMMUNICATIONS LINE, SEE C202

R98.06'

HARRY'S CABIN
EXISTING FFE: 6474.34
PROPOSED FFE: 6475.00

EXISTING FENCE TO REMAIN

CONSTRUCTION LIMITS

7 LF OF 2" DOMESTIC COLD WATER SERVICE. SEE C203 FOR TYPICAL SERVICE CONNECTION.

2" INV OUT 6.5' MIN COVER. COORDINATE WITH MEP FOR ENTRANCE INTO BUILDING

R2.00'

R7.71'

R2.00'

R26.50'

BURIED POWER, SEE ELECTRICAL FOR TYPICAL SERVICE DETAIL AND CONTINUATION INTO BUILDING

ELECTRICAL PANEL

6474

6473

6472

6471

6470

3' CRUSHER FINES RE: LANDSCAPE

3' CRUSHER FINES RE: LANDSCAPE

R46.50'

R23.50'

R13.50'

R10.00'

R2.00'

46.62'

3' CRUSHER FINES RE: LANDSCAPE

R16.62'

MATCH LINE 411 C100

MATCH LINE 407 C100

10 0 5 10

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- x — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\ACAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELINE GAUCHER 22035 Date: 07/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: MMI
DRAWN: CMS
TECH REVIEW: CMS
DATE: 07/21/2026

SUB SHEET NO.
410
C100

TITLE OF SHEET
HARRY'S CABIN – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 315 OF 371

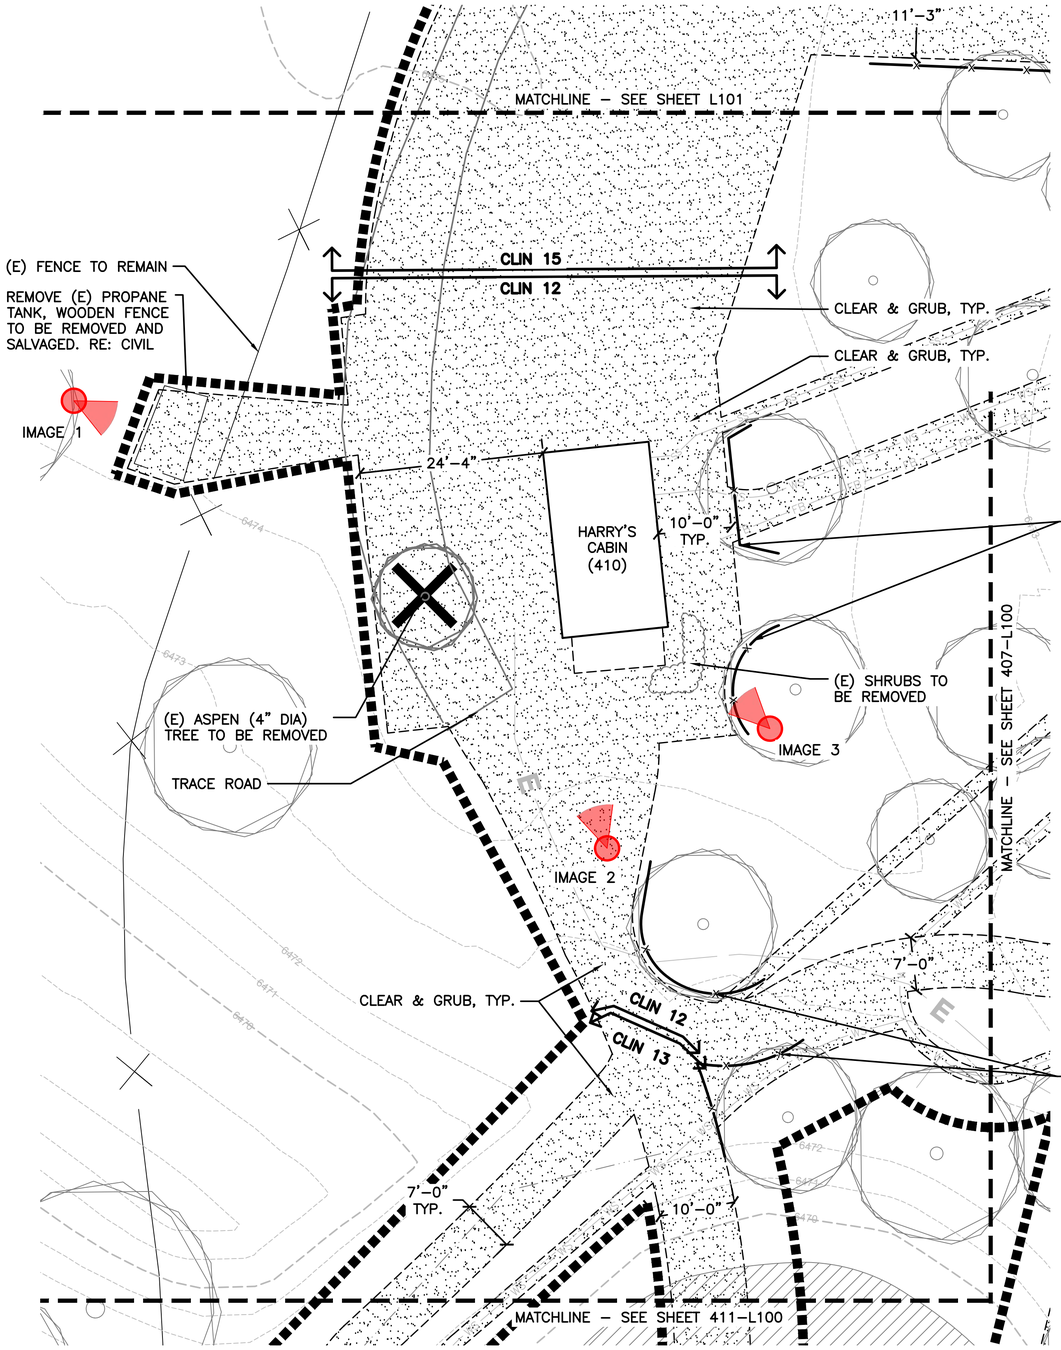

(E) PROPANE TANK TO BE REMOVED

(E) WOODEN FENCE TO BE REMOVED

IMAGE 1: (E) PROPANE TANK TO BE REMOVED. (E) WOODEN FENCE TO BE REMOVED AND SALVAGED.

(E) ASPEN TREE TO BE REMOVED IF CONTRACTOR DECIDES TO MOVE CABIN FOR STAGING

IMAGE 2: (E) TREE TO BE REMOVED.

IMAGE 3: (E) SHRUBS TO BE REMOVED.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- RIVER ROCK
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

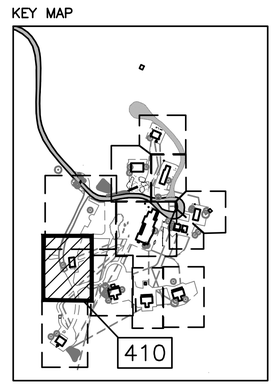

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT EILEEN M. KEMP LA-0212C Date: 07/21/24 STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 410 L100	TITLE OF SHEET HARRY'S CABIN SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 316 OF 371

File Path
Z:\Projects\0643_NPS\KERSTIENS_R25 P:\DENVER\NPS GRTE 4LAZY F RANCH - 198539_FINAL CD\CAD\ALI 1-0_GRTE-L4_DEMO.DWG
XREFS: 0643_NPS_SESS26_0808_NPS GRTE 4 LAZY F_ARCH PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34 - GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_DEMO.DWG
IMAGES: ...\\...\2_Admin\Photos\Garage\Debri-1.jpg\Debri-2.jpg\Debri-3.jpg\Debri-4.jpg\Debri.jpg\...\\2_Admin\Photos\HarrysCabin\HarrysCabin shrub removes-1.jpg\...\\2_Admin\Photos\IceHouse\Mouse and Ice .jpg\...\\...

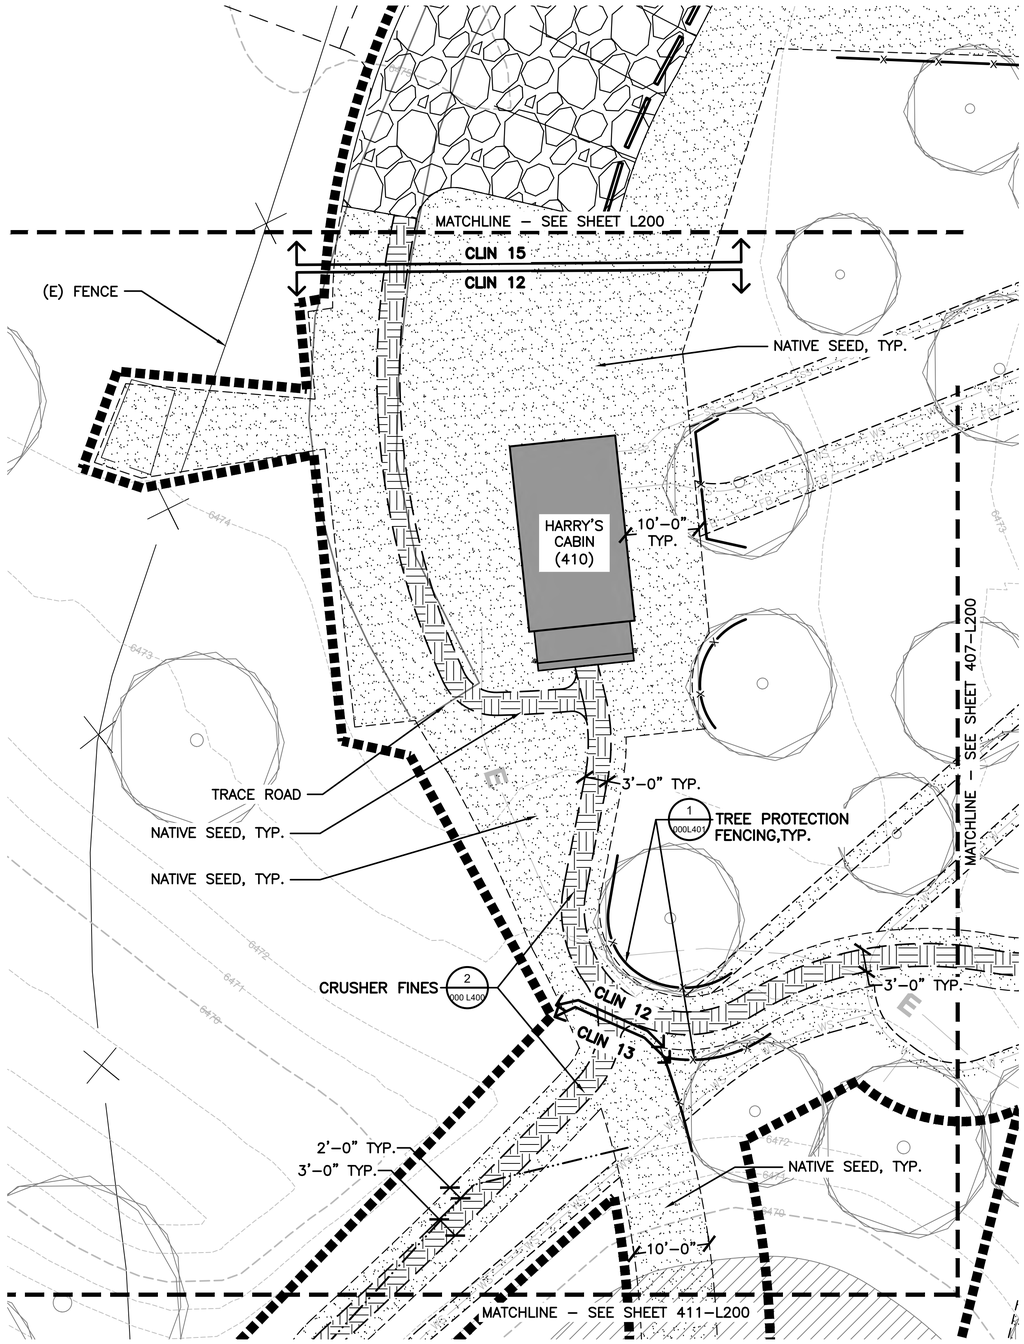

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) BURIED POWER LINE
- (E) GRAVEL ROAD
- (E) BUILDING
- (E) TREE
- (E) FENCE
- CRUSHER FINES
- (E) RIVER ROCK
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 12.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

KEY MAP

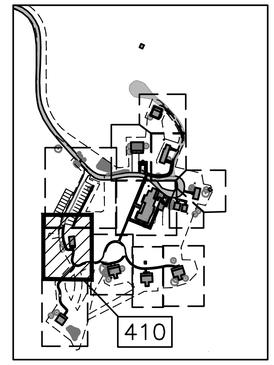

10 0 10 20
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/24
STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 410 L200	TITLE OF SHEET HARRY'S CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 317 OF 371

File Path
Z:\Active 08\43SKERSTIENS_R25.P\DENVER\NPS GRTE 4 LAZY F RANCH - 198539_FINAL CD\CAD\ALI-1-0_GRTE-L4_LAYOUT.DWG
XREFS: 08\43SKERSTIENS_0808_NPS GRTE 4 LAZY F ARCH-PROJECT OVERVIEW SITE PLAN.dwg|NPS_Titleblock_22x34 - GRTE 4 LAZY F.dwg|XC-4LAZYF_DSGN.dwg|XC-BASE-699421_EX01.dwg|XC-EXIST SITE.dwg|XC-MOOSE_AER_TOPO.dwg|XC-PLAN-PROF-FORCE MAIN 1.dwg|XC-WATR-4LAZYH.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_AERIAL.dwg|XL-GRTE-L4_AERIAL

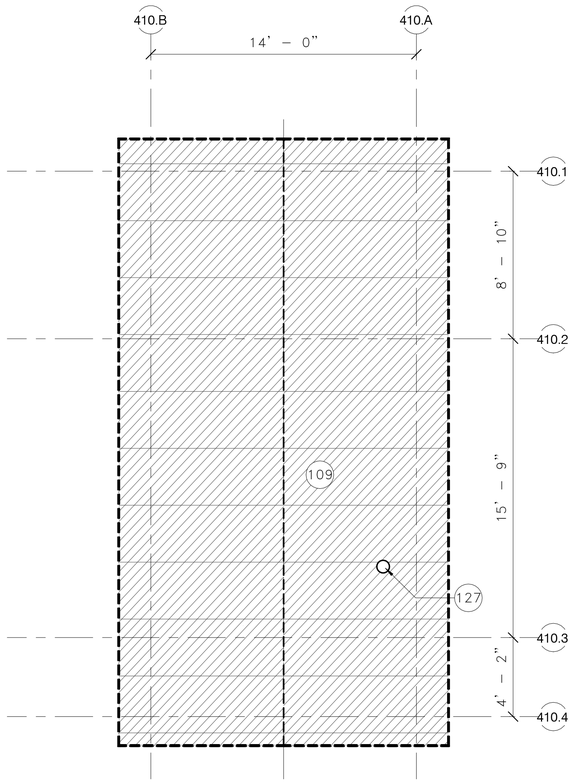

2 410 HARRYS CABIN – ROOF DEMO PLAN

1/4" = 1'-0"

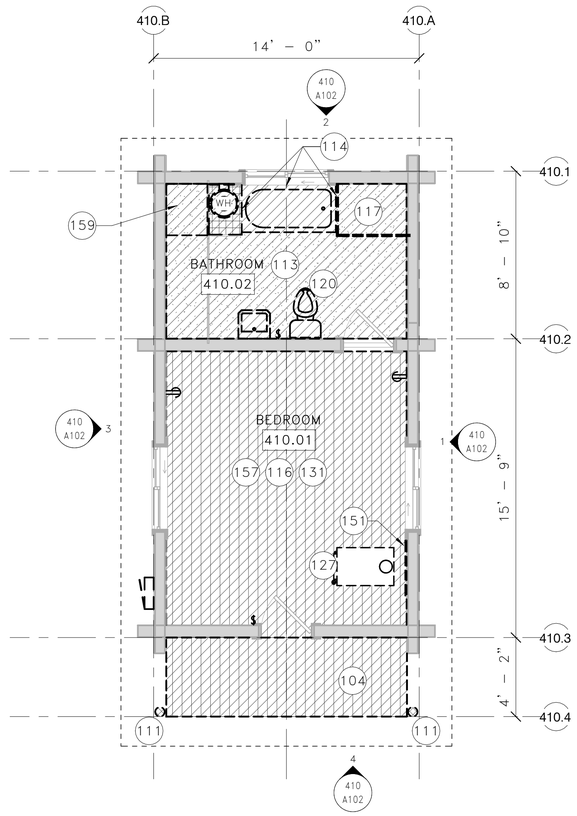

1 410 HARRYS CABIN – DEMO PLAN

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
113 REMOVE (E) FLOOR ASSEMBLY AND ALL ACCESSORIES. SALVAGE FOR REUSE (E) UNDAMAGED WOOD FLOORING
114 REMOVE (E) TILE AND ALL ACCESSORIES
116 REMOVE CEILING. CLEAN, PATCH, REPAIR, AND REFINISH EXPOSED STRUCTURE TO REMAIN
117 REMOVE (E) CASEWORK INCLUDING PLUMBING FIXTURES AND ALL ACCESSORIES AS APPLICABLE
120 REMOVE (E) TOILET FIXTURE, SEE PLUMBING DRAWINGS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
131 SALVAGE FOR REINSTALLATION (E) WOOD PLANK FLOORING AND LOG BASE
151 REMOVE WALL PROTECTION PANEL AT WOOD BURNING STOVE LOCATION. COORDINATE WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
157 REMOVE WALL BASE IN ROOM
159 REMOVE (E) TILE AND TILE BACKER BOARD

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

SCALE B 6" 0 6" 12" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TAGG C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A101

TITLE OF SHEET
HARRY'S CABIN – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 318 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

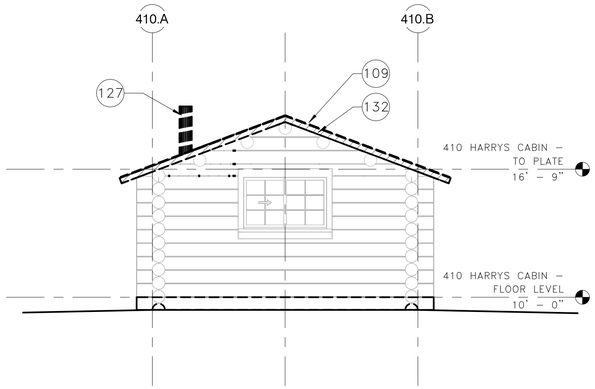

2 410 HARRY'S CABIN – NORTH DEMO ELEVATION

1/4" = 1'-0"

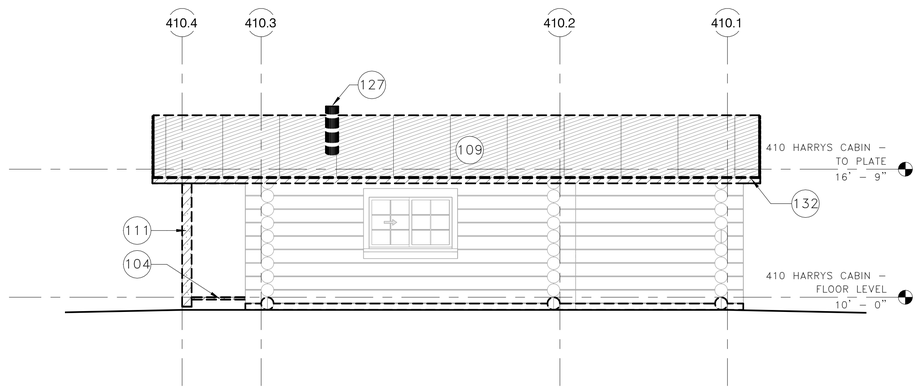

1 410 HARRY'S CABIN – EAST DEMO ELEVATION

1/4" = 1'-0"

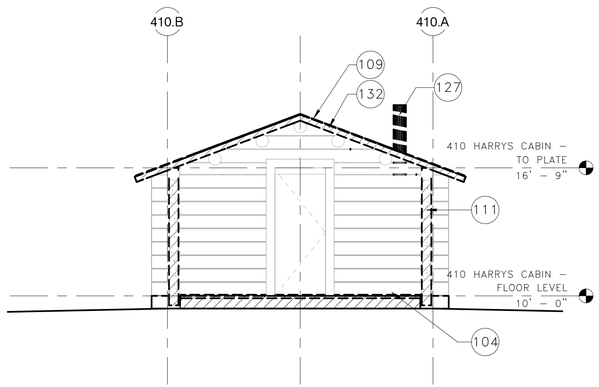

4 410 HARRY'S CABIN – SOUTH DEMO ELEVATION

1/4" = 1'-0"

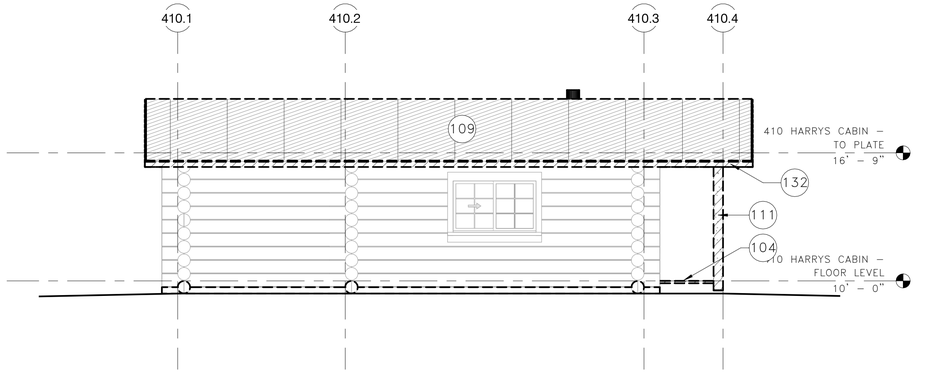

3 410 HARRY'S CABIN – WEST DEMO ELEVATION

1/4" = 1'-0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

104 REMOVE (E) WOOD PORCH DECKING, JOISTS, AND ACCESSORIES
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
111 REMOVE (E) COLUMN; SEE STRUCTURAL DRAWINGS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
132 REMOVE (E) FASCIA

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. ITKIS Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A102

TITLE OF SHEET
HARRY'S CABIN – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 319 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

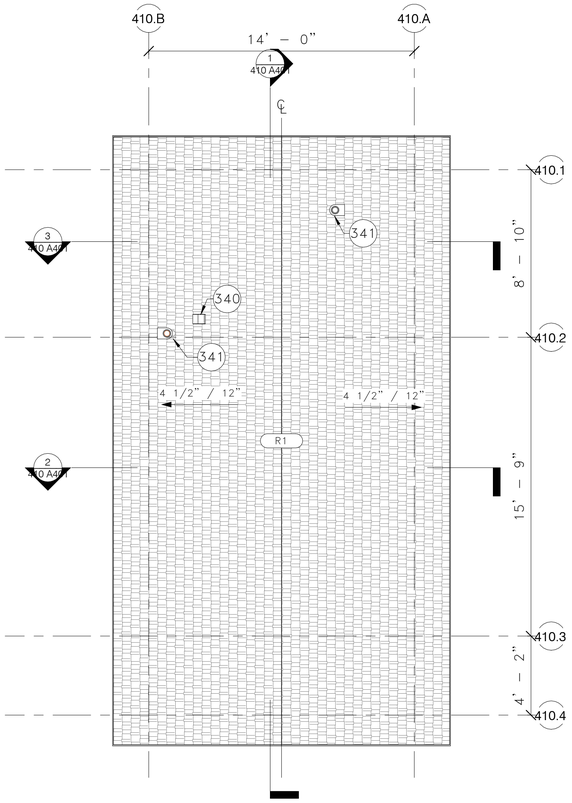

2 410 HARRYS CABIN – ROOF PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

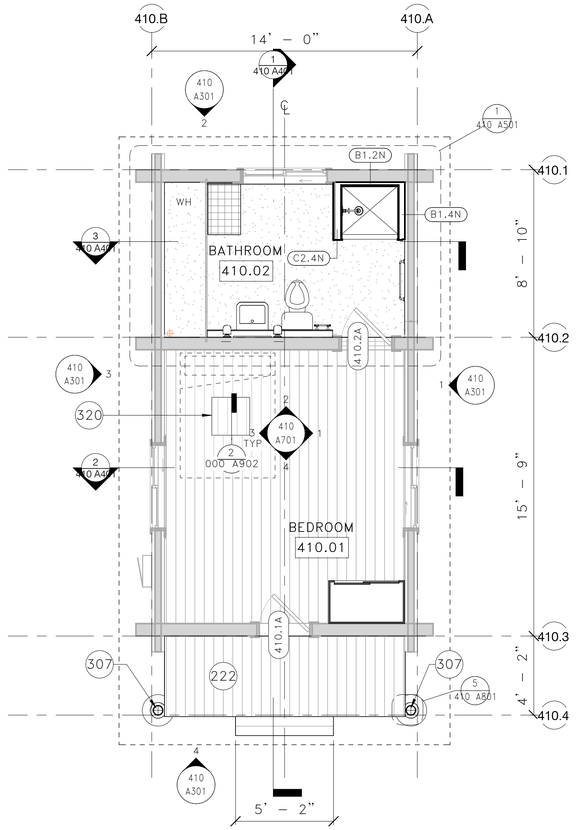

1 410 HARRYS CABIN – FLOOR PLAN

1/4" = 1'–0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###-## DOOR TAG
- (EXT–XX) WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
307 PROVIDE LOG COLUMN PER STRUCTURAL
320 PROVIDE CRAWL SPACE ACCESS
340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS
341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

SCALE (B) 0" 2" 4" 6"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TYRE C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
410
A201

TITLE OF SHEET
HARRY'S CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	320 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

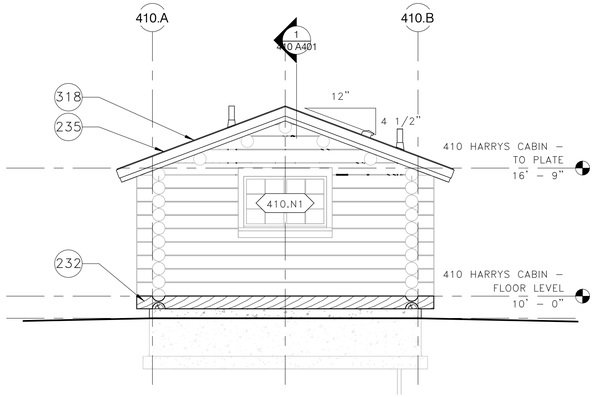

2 410 HARRY'S CABIN – NORTH

1/4" = 1'–0"

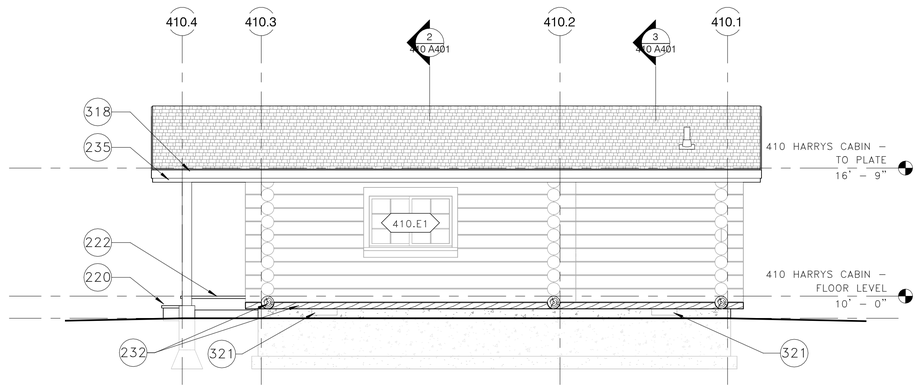

1 310 HARRY'S CABIN – EAST

1/4" = 1'–0"

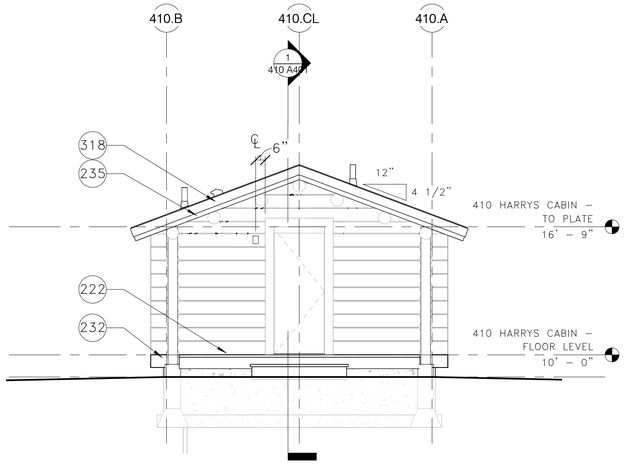

4 410 HARRY'S CABIN – SOUTH

1/4" = 1'–0"

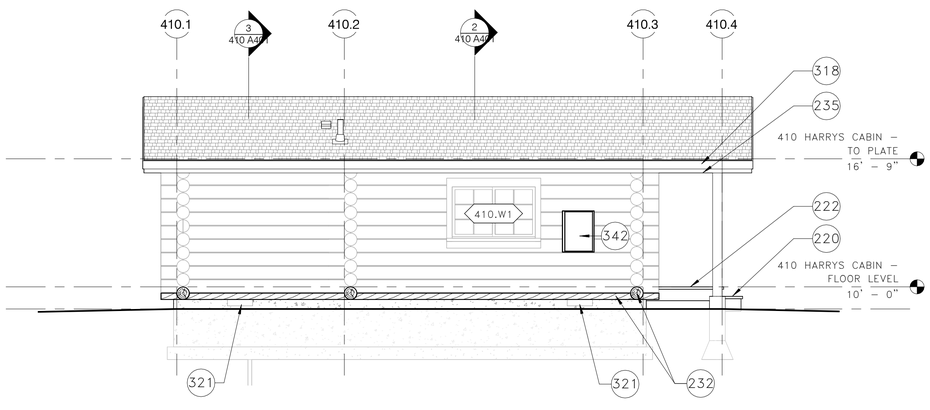

3 410 HARRY'S CABIN – WEST

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

220 PROVIDE WOOD STEP TO MATCH (E)
222 PROVIDE PORCH FLOOR STRUCTURE, DECKING, AND STEPS (WHERE APPLICABLE) TO MATCH (E)
232 REPLACE DETERIORATED LOG
235 REPLACE (E) WOOD FASCIA
318 PROVIDE SECONDARY WOOD FASCIA
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS

SCALE (B) 4" 0 4" 5"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A301

TITLE OF SHEET
HARRY'S CABIN – EXTERIOR ELEVATIONS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 321 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

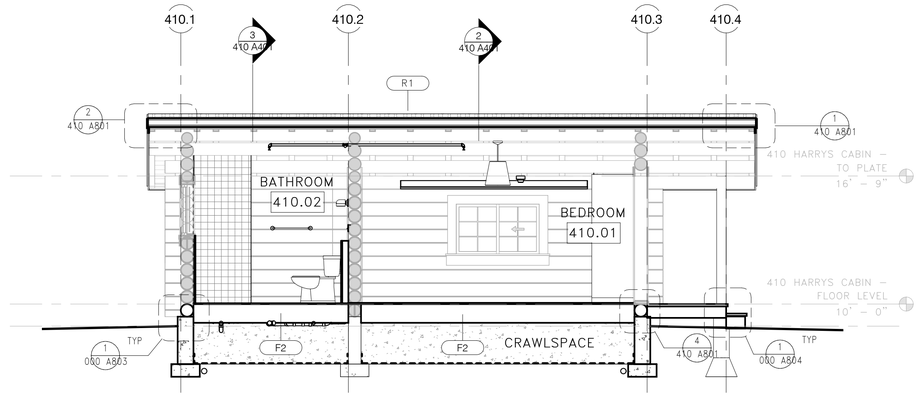

1 410 HARRY'S CABIN – SECTION 'A'

1/4" = 1'–0"

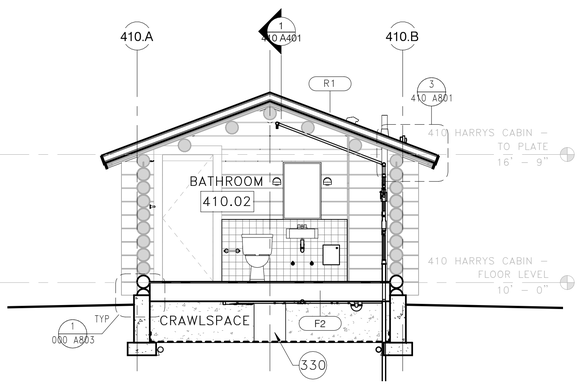

3 410 HARRY'S CABIN – SECTION 'B'

1/4" = 1'–0"

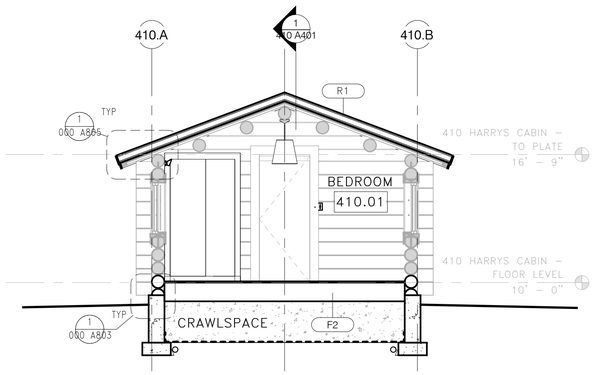

2 410 HARRY'S CABIN – SECTION 'C'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

CRAWLSPACE VAPOR BARRIER

CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS

CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

330 INSTALL 20" WIDE GAP IN CONCRETE WALL FOR CRAWLSPACE ACCESS; SEE STRUCTURAL DRAWINGS

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EYRES C-3530 STATE OF WYOMING 7/21/26

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

410

A401

TITLE OF SHEET

HARRY'S CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	322 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

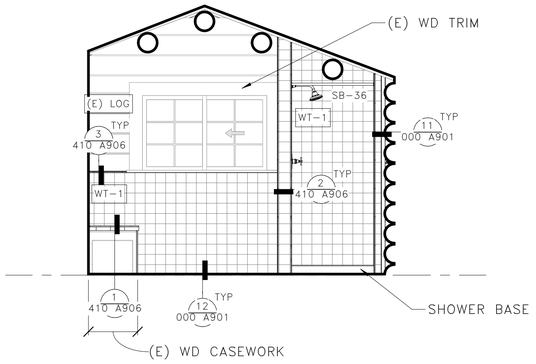

3 BATHROOM 410.05 – NORTH

3/8" = 1'–0"

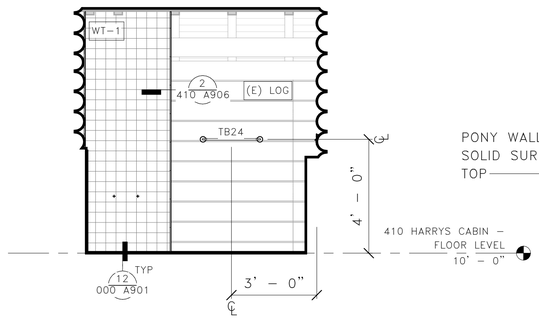

2 BATHROOM 410.05 – EAST

3/8" = 1'–0"

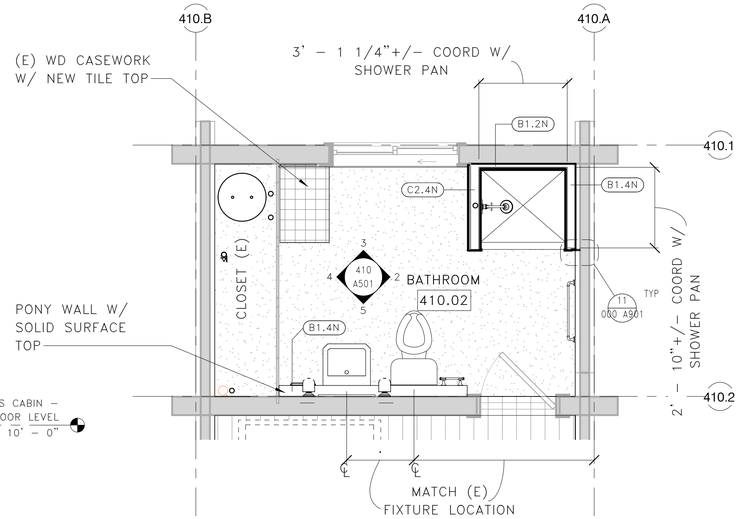

1 410 HARRYS CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'–0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

KEYNOTES

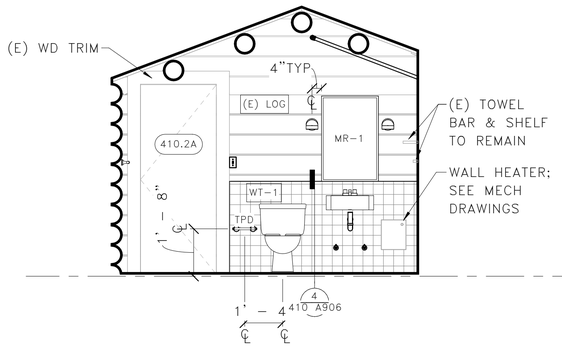

5 BATHROOM 410.05 – SOUTH

3/8" = 1'–0"

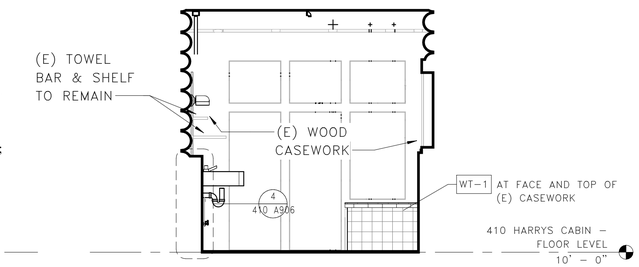

4 BATHROOM 410.05 – WEST

3/8" = 1'–0"

SCALE © 2" 5" 0 2'–8" 5'–4"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A501

TITLE OF SHEET
HARRY'S CABIN – ENLARGED BATHROOMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 323 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

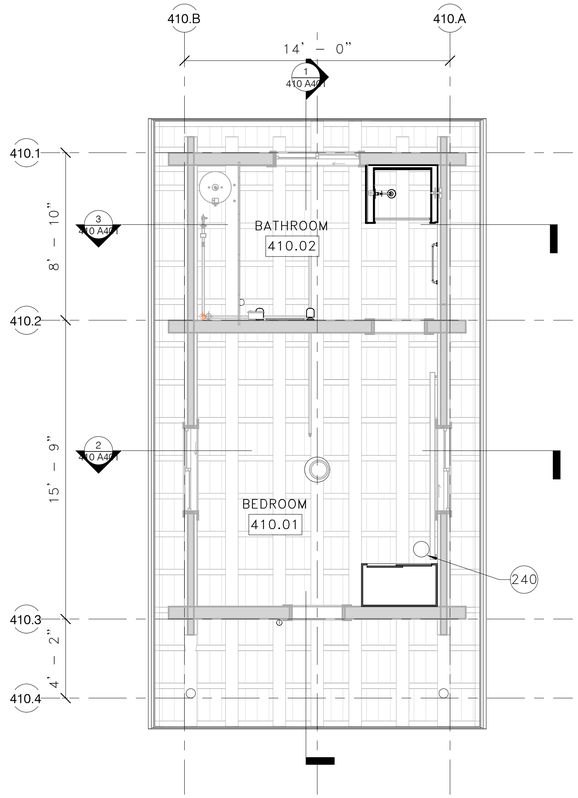

1 410 HARRYS CABIN – FIRST LEVEL RCP

1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- COVE HEATER (VARIES)

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

SCALE (B) 4" 0 4" 8" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM P. EDDY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A601

TITLE OF SHEET
HARRY'S CABIN – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 324 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

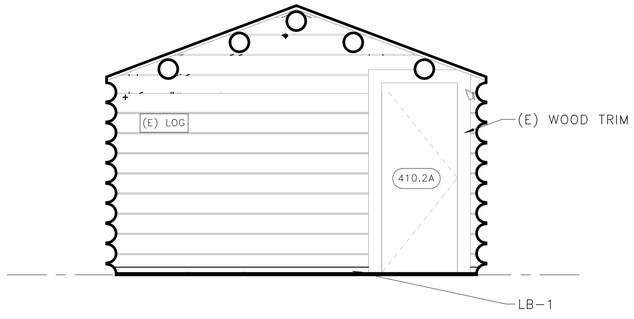

2 BEDROOM 410.1 – NORTH

3/8" = 1'-0"

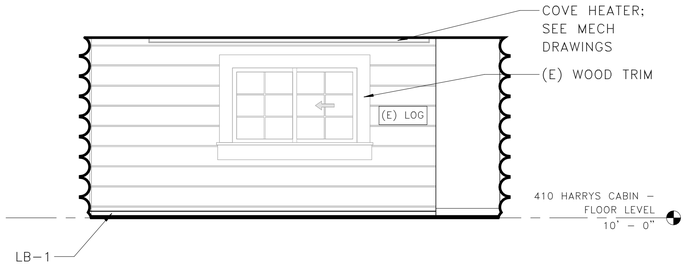

1 BEDROOM 410.1 – EAST

3/8" = 1'-0"

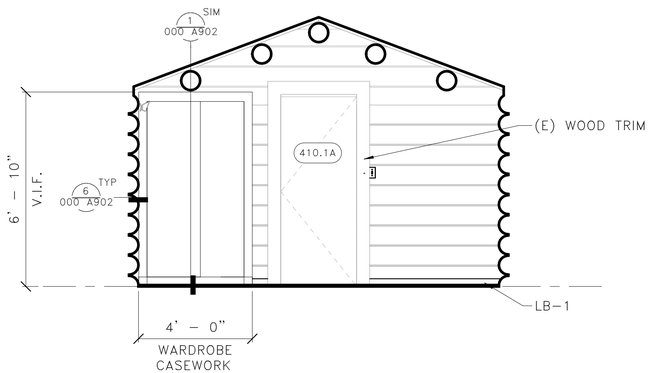

4 BEDROOM 410.1 – SOUTH

3/8" = 1'-0"

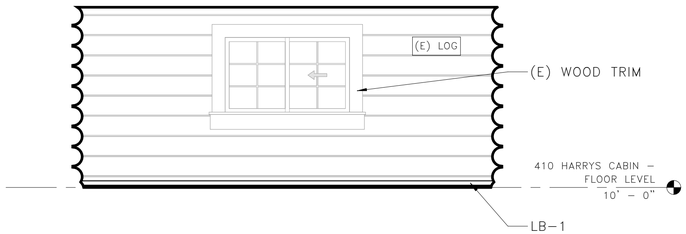

3 BEDROOM 410.1 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE © 2'-8" 0 2'-8" 5'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. MYERS C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A701

TITLE OF SHEET
HARRY'S CABIN – INTERIOR ELEVATIONS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 325 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

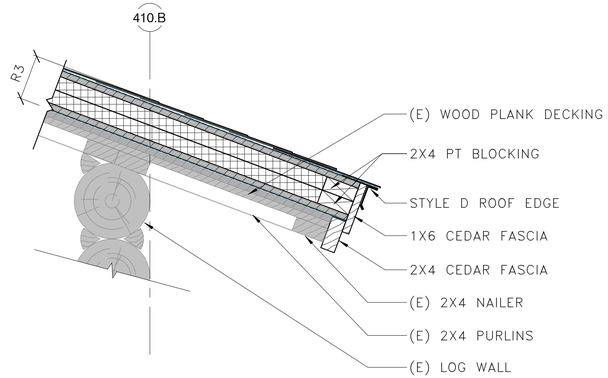

3 410 HARRY'S CABIN – EAVE DETAIL

1 1/2" = 1'–0"

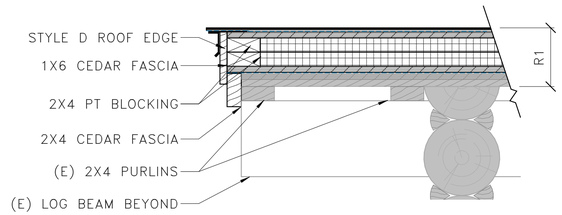

2 410 HARRY'S CABIN – RAKE DETAIL

1 1/2" = 1'–0"

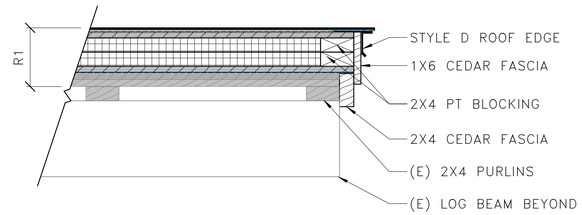

1 410 HARRY'S CABIN – PORCH ROOF DETAIL

1 1/2" = 1'–0"

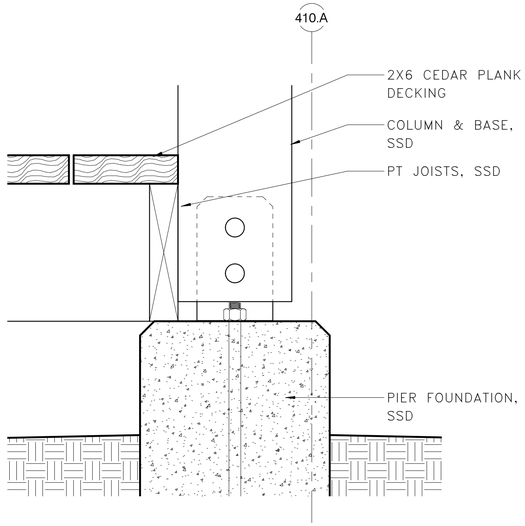

6 410 HARRY'S CABIN – PORCH COLUMN ELEVATION

3" = 1'–0"

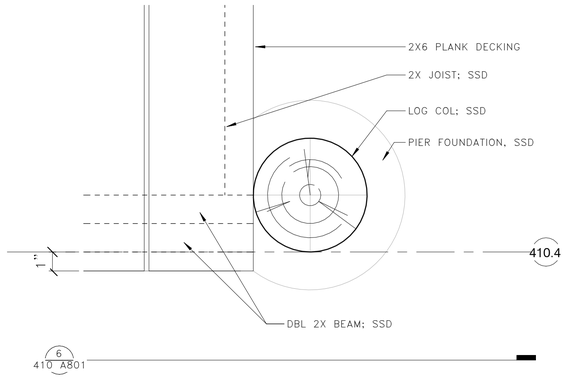

5 410 HARRY'S CABIN – PORCH COLUMN DETAIL

3" = 1'–0"

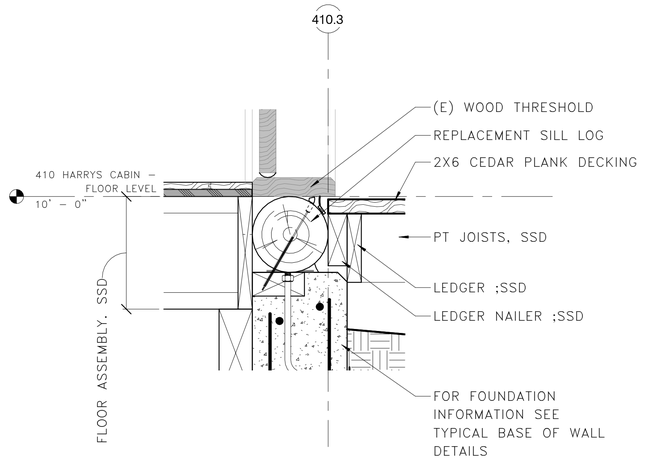

4 410 HARRY'S CABIN – FOUNDATION DETAIL AT PORCH

1 1/2" = 1'–0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KEYSER C-3530 STATE OF WYOMING 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A801

TITLE OF SHEET
HARRY'S CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 326 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

410 HARRY'S CABIN – WINDOW SCHEDULE							
WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			NOTES
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	
407.N1		2' – 10"	4' – 6"				
407.N2		2' – 10"	4' – 6"				
407.S1		3' – 2"	4' – 6"				
407.S2		2' – 0"	4' – 0"				
407.S3		3' – 2"	4' – 6"				

410 HARRY'S CABIN – DOOR SCHEDULE												
DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE WIDTH	SIZE HEIGHT	MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
410.1A	(E) DR–5	2' – 8"	6' – 8"							(E) SDR–1	EXT.
410.2A	(E) DR–5	2' – 8"	6' – 8"								

410 HARRY'S CABIN – ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
		MATERIAL	FINISH	BASE MATERIAL	BASE FINISH	WALL MATERIAL	WALL FINISH	MATERIAL	FINISH	
410.01	BEDROOM	(S)WD–1	CLR	LB–1	CLR	(E)LOG	CLR	EXP	CLR	
410.02	BATHROOM	LIN–1	NA	WB–1	CLR	(E)GWB–1/WT–1	CLR/NA	EXP	CLR	

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. TREIB C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A905

TITLE OF SHEET
HARRY'S CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 327 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

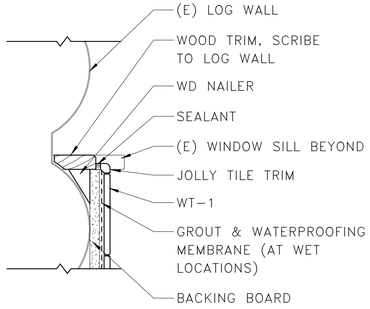

3 410 HARRY'S CABIN – TRANSITION AT WT-1 / (E) LOG

3" = 1'-0"

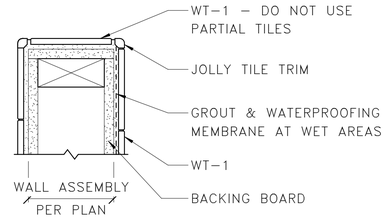

2 410 HARRY'S CABIN – WALL END AT WT-1

3" = 1'-0"

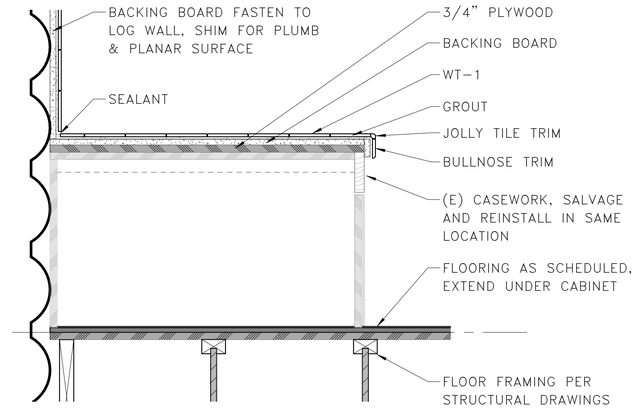

1 410 HARRY'S CABIN – WT-1 AT (E) CASEWORK

1 1/2" = 1'-0"

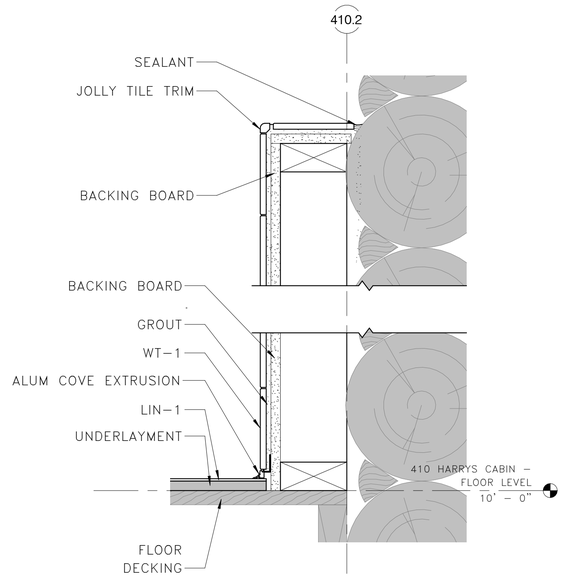

4 410 HARRY'S CABIN – BATHROOM PARITIAL HT WALL

3" = 1'-0"

SCALE (F) 4" 0 4" 8"
SCALE OF FEET

SCALE (E) 8" 0 8" 1'-4"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. IVES Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A906

TITLE OF SHEET
HARRY'S CABIN – INTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 328 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

WEST AND SOUTH ELEVATIONS, LOOKING NORTHEAST

SOUTH AND EAST ELEVATIONS, LOOKING NORTHWEST

NORTH AND WEST ELEVATIONS, LOOKING SOUTHEAST

EAST AND NORTH ELEVATIONS, LOOKING SOUTHWEST

SOUTH ELEVATION ENTRY PORCH, LOOKING NORTHWEST

BEDROOM 410.01, LOOKING SOUTH

BEDROOM 410.01, LOOKING NORTH

TYPICAL WOOD WINDOW CONDITION

BEDROOM 410.01, LOOKING SOUTHWEST

BEDROOM 410.01, LOOKING NORTHEAST

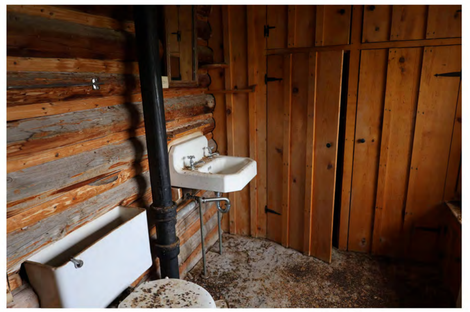

BATHROOM 410.02, LOOKING SOUTHWEST

BATHROOM 410.02,
LOOKING NORTHWEST

EXTERIOR VIEW OF DOOR
410.1A

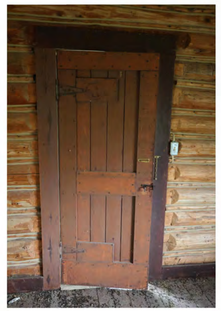

INTERIOR VIEW OF DOOR
410.1A

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT C-3530 WILLIAM E. ITEN Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
410
A920

TITLE OF SHEET
HARRY'S CABIN – (E) CONDITION PHOTOS
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 329 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

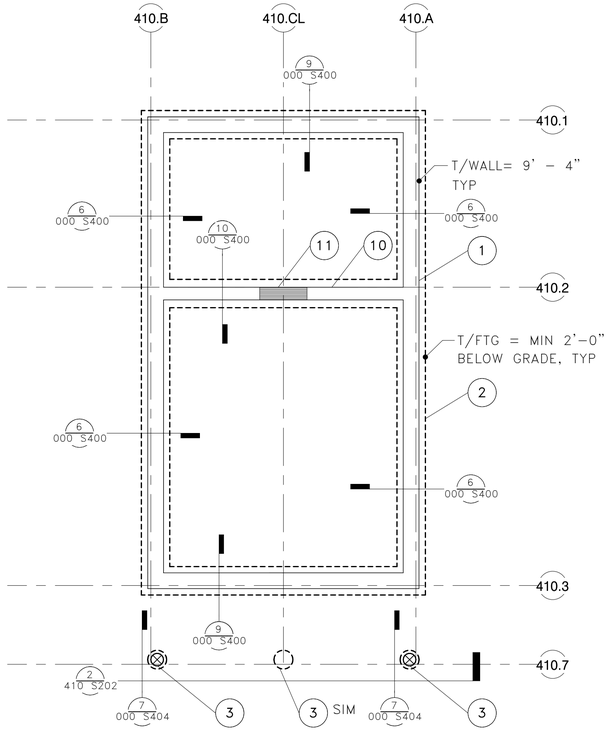

1 HARRY'S CABIN – FOUNDATION PLAN

1/4" = 1'-0"

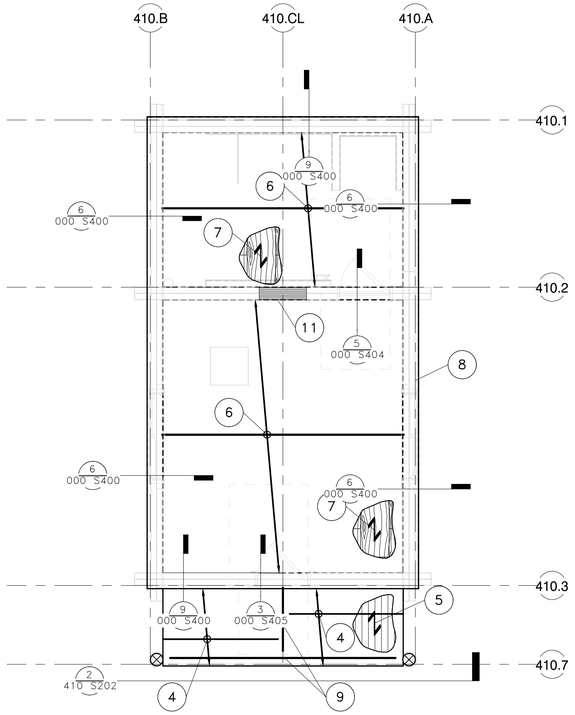

2 HARRY'S CABIN – FLOOR FRAMING PLAN

1/4" = 1'-0"

KEYNOTES:

1. 10" CONCRETE FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ EF; T/WALL = MIN 6" ABOVE FINISHED GRADE
2. 1'-6"Wx10"DP CONCRETE FOOTING W/ (2) #4 BARS CONT; B/FTG = 2'-10" BELOW GRADE
3. 6"Ø MIN LOG COLUMNS TO MATCH Ø OF (E) W/ 12"Ø REINF. SONO-TUBE FOOTINGS W/ (8) #4 VERT & #3 TIES @ 8"OC & (3) #3 TIES @ 3"OC AT TOP; B/FTG = 3'-0" BELOW GRADE, AT SIM CONDITION, NO POST ABOVE. LOCATE PIERS TO SUPPORT BEAMS ABOVE PER 5/000 S405 & 6/000 S405
4. PT2x8 @ 16"OC DECK JOISTS W/ LUS26 HGR EA END
5. DECKING PER ARCH
6. 11 7/8" TJI 210 @ 16"OC
7. 3/4" FLOOR SHEATHING
8. (E) 8"Ø LOG WALL FRAMING ABOVE TO BE LIFTED & TEMPORARILY RE-LOCATED AS REQUIRED TO CONSTRUCT FOUNDATION ELEMENTS
9. (2) 2x8, BOTH MEMBERS TO BEAR ON INTERMEDIATE SONOTUBE
10. 8" CONCRETE INTERIOR FOUNDATION WALL W/ #4 @ 18"OC VERT & #4 @ 12"OC HORIZ CTRD; T/WALL = PER ARCH
11. STEMWALL OPENING FOR CRAWLSPACE ACCESS, LOCATIONS PER ARCH. SILL LOG ABOVE TO SPAN OVER OPENING WITHOUT BREAK PER 9/000 S403

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. NEW FOUNDATION MEMBERS ARE INTENDED TO SUPPORT EXISTING STRUCTURE ABOVE. DIMENSIONS & LOCATION OF ALL NEW CONCRETE MEMBERS MUST BE FIELD VERIFIED WITH EXISTING STRUCTURE.
4. EXISTING LOG STRUCTURE MUST BE MOVED OR LIFTED IN PLACE TO INSTALL CONCRETE FOOTING.
5. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
6. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.
4. T/FINISHED FLOOR ASSUMED TO BE 10'-0", VERIFY WITH ARCHITECTURAL DRAWINGS.

4 0 4 8
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
410
S201

TITLE OF SHEET
HARRY'S CABIN – FDN & FLOOR FRAMING PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 330 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

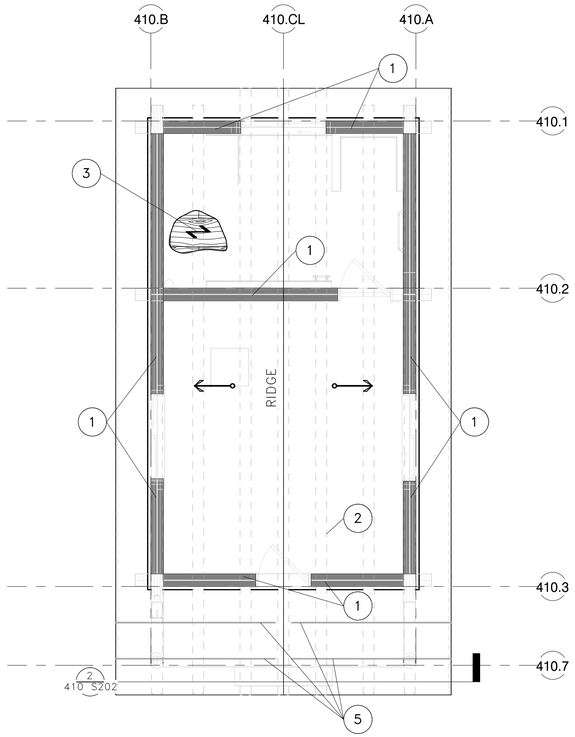

1 HARRY'S CABIN – ROOF FRAMING PLAN

1/4" = 1'-0"

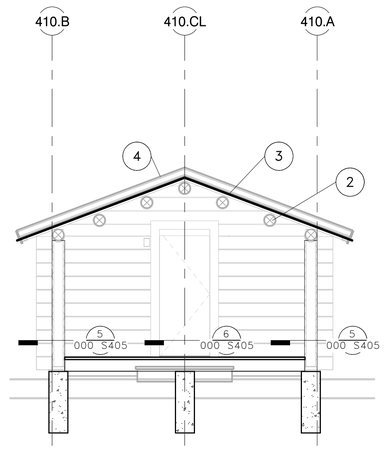

2 HARRY'S CABIN – PORCH ELEVATION

1/4" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. RETROFIT (E) 8"Ø LOG WALL BELOW W/ PINNING AS SHOWN FOR WALL TYPE "L1" PER 7/000 S501
2. (E) 7"Ø LOG PURLIN, TYP. 7 PLACES; CONNECT TO ROOF SHEATHING AT ALL INTERIOR & CANTILEVERED PURLINS PER 3/000 S500
3. 3/4" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
4. ROOF BUILDUP PER ARCH
5. (E) ROUGH SAWN 2x3 PLANKS BETWEEN (E) HORIZONTAL ROOF PLANKS & (E) LOG PURLINS. CONNECT ROOF SHEATHING PER 3/000 S500 THROUGH (E) ROUGH SAWN PLANKS WHERE OCCUR

NORTH

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E. 18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF

DRAWN: JNH

TECH REVIEW: LMB

DATE: 07/21/2026

SUB SHEET NO. 410 S202

TITLE OF SHEET
HARRYS CABIN – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 331 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-410)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EH-410-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-410-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-410-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	-	#10	3/4"

ELECTRIC HEATER SCHEDULE (HS-410)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-410-1	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12
EH-410-2	Q MARK	RCC15024C	240 - 1	1500	72	WALL	4	118	4-3/16

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEYER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
410
M001

TITLE OF SHEET
HARRY'S CABIN – MECHANICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
PMIS/PKG NO. 237343
SHEET 332 OF 371

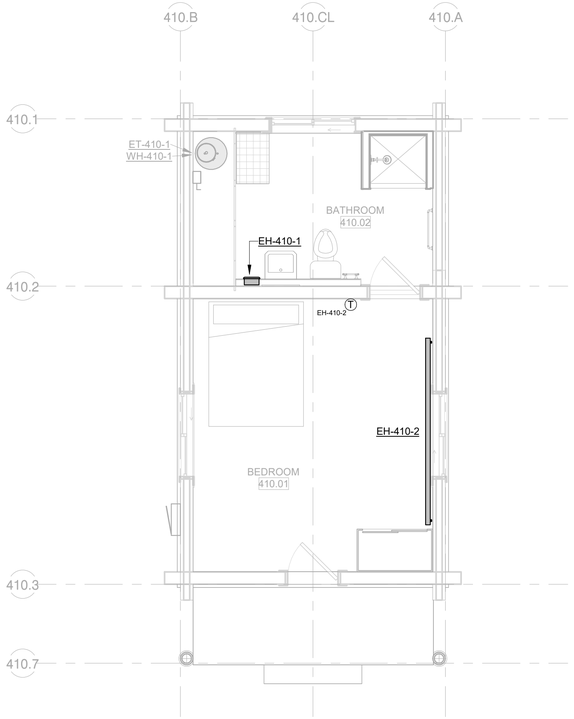

1 HARRYS CABIN – MECHANICAL PLAN

1/4" = 1'-0"

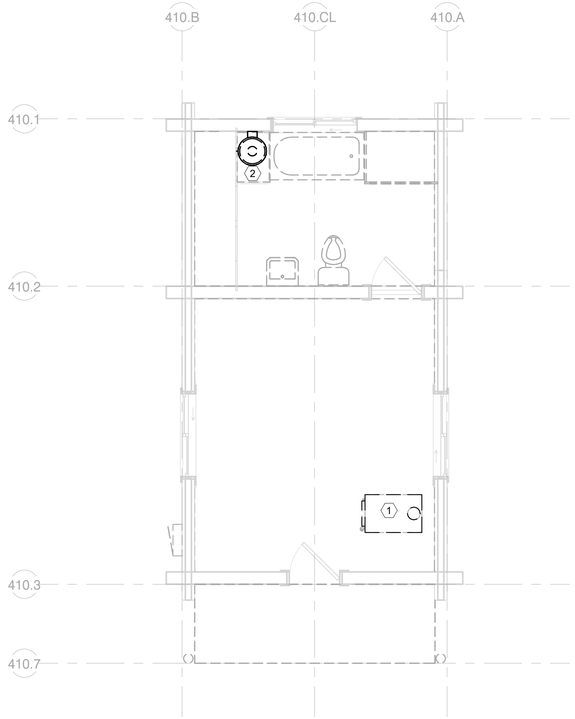

2 HARRYS CABIN – MECHANICAL DEMO PLAN

1/4" = 1'-0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

(#) KEY NOTES:

1. REMOVE EXISTING STOVE AND ASSOCIATED VENT PIPING.
2. REMOVE EXISTING VENT AND PROPANE PIPING SERVING WATER HEATER.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HOMES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
410
M201

TITLE OF SHEET
HARRY'S CABIN – MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 333 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
E1	LED	5 W	400	3000	EXTERIOR WALL SCONCE	LUMINOSO	RWL-9L30K-D38-Z-BK	WALL	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2

Branch Panel: P410

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 410 HARRY'S CABIN
Supply From: SOUTH SERVICE
Mounting: Surface
Enclosure: 3R
Volts: 120/240 Single
Phases: 1
Wires: 3
A.F.C.: 1,738
Mains Type: MCB
Mains Rating: 100 A
MCB Rating: 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	2250			2	30 A	Power		WH-410-1	2
3								--	2250						4
5	EH-410-1		Heating	20 A	1	150	360			1	20 A	Receptacle		RCPT - BATHROOM	6
7	EH-410-2		Heating	20 A	2			750	180	1	20 A	Receptacle		RCPT - EXTERIOR	8
9						750	900			1	20 A	Receptacle		RCPT - BEDROOM	10
11	LTG		Lighting	20 A	1			226	180	1	20 A	Receptacle		RCPT - FIBER PANEL	12
13	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	14
15	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	16
17	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	18
				Total Load:		4410 VA		3586 VA							
				Total Amps:		37 A		30 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Heating	1650 VA	100.00%	1650 VA		
Lighting	226 VA	125.00%	283 VA	**Total Conn. Load:**	7996 VA
Power	4500 VA	100.00%	4500 VA	**Total Est. Demand:**	8053 VA
Receptacle	1620 VA	100.00%	1620 VA	**Total Conn.:**	33 A
				Total Est. Demand:	34 A

MEP COORDINATION SCHEDULE (HS-410)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EH-410-1	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
EH-410-2	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
WH-410-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	-	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
State
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
410
E001

TITLE OF SHEET
HARRY'S CABIN – ELECTRICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 334 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

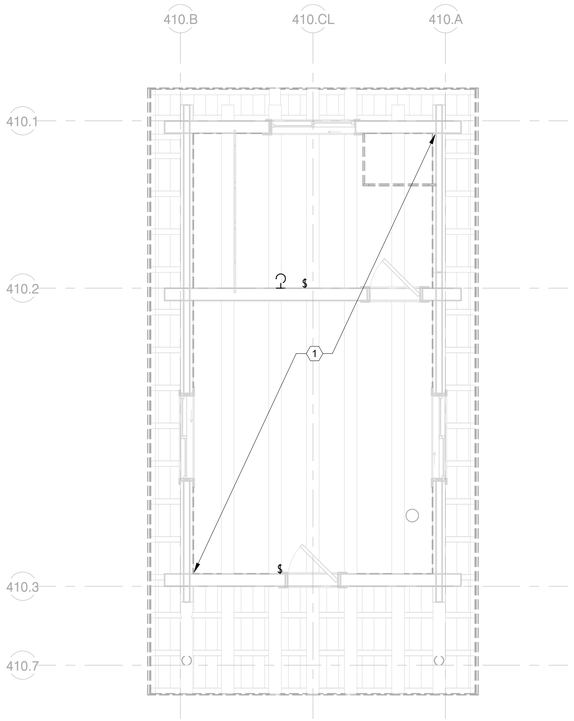

2 HARRYS CABIN – LIGHTING DEMO PLAN

1/4" = 1'-0"

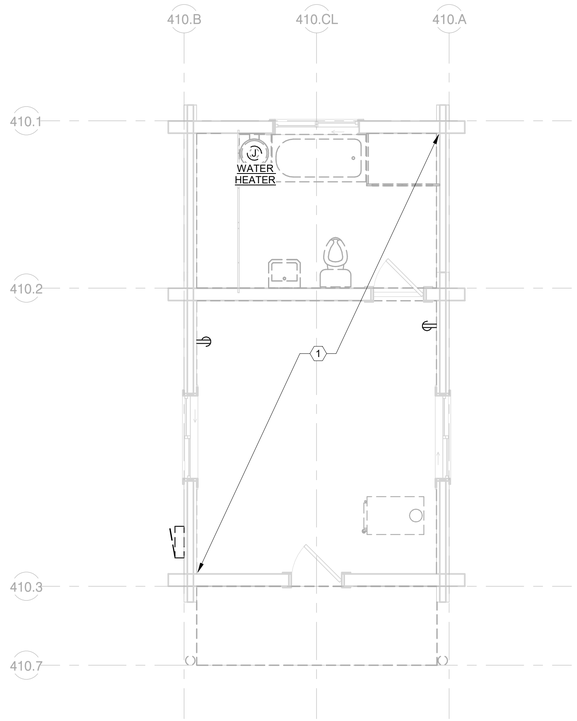

1 HARRYS CABIN – POWER DEMO PLAN

1/4" = 1'-0"

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
410
E100

TITLE OF SHEET
HARRY'S CABIN – ELECTRICAL DEMO PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 335 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

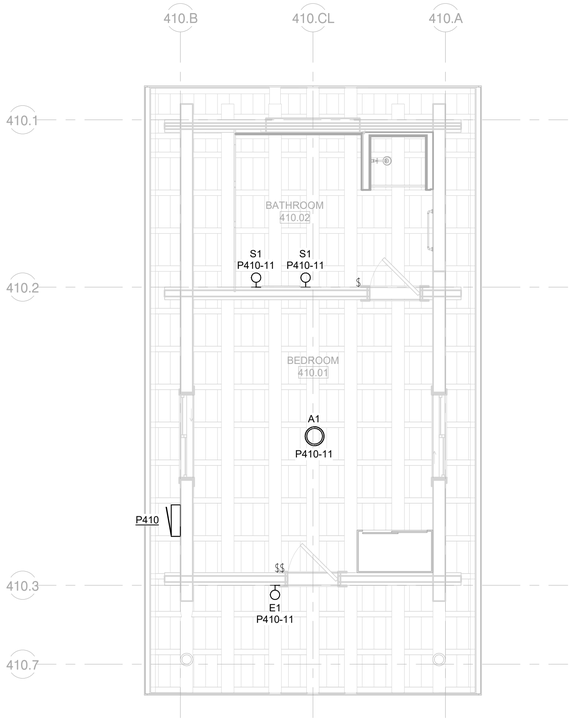

2 HARRYS CABIN – LIGHTING PLAN

1/4" = 1'-0"

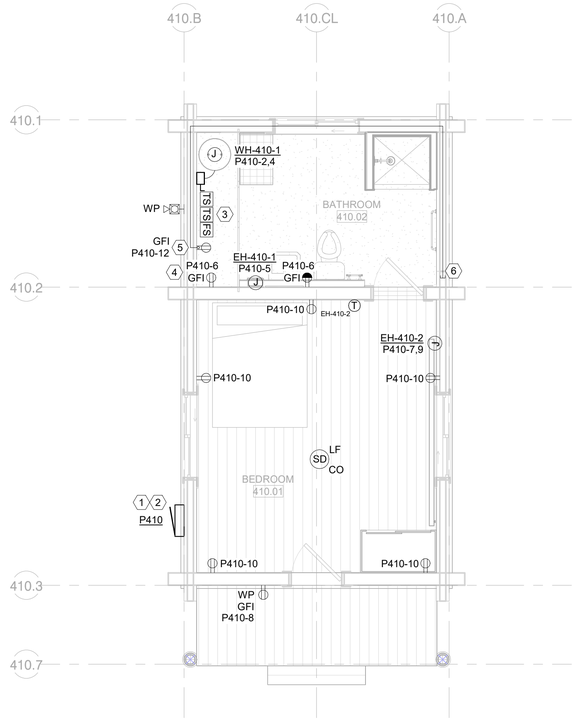

1 HARRYS CABIN – POWER AND SIGNAL PLAN

1/4" = 1'-0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
5. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
6. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
WYOMING
Date: 07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
410
E101

TITLE OF SHEET
HARRY'S CABIN – ELECTRICAL RENOVATION PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 336 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - HARRY'S CABIN (HS-410)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
4. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
FD-410-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-410-1	LAVATORY - WALL MOUNTED	YES	KOHLER	K-2868	VITREOUS CHINA	WALL / ABA HEIGHT	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE JR SMITH #700 SERIES CARRIER, WATER STOPS, ASSE 1050 AIR ADMITTANCE VALVE, AND OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
SH-410-1	SHOWER	NO	KOHLER	K-8644	ACRYLIC	FLOOR	SHOWER TRIM	KOHLER	K-TS97077-4G	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS AND GRID DRAIN.
WC-410-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-410)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
6. FIVE YEAR LIMITED TANK WARRANTY
7. ZERO INCH CLEARANCE
8. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	SHIPPING WEIGHT (LBS)
WH-410-1	RHEEM	XE40M06ST45U1	ELECTRIC TANK	40	120	4.5	0.93	53	21	48-1/4	20-1/4	106

PLUMBING EXPANSION TANK SCHEDULE (HS-410)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-410-1	TACO	PAX10-150	WH-410-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-410)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	1	3.6	3.6
			3.6
MAX. LENGTH (FT)	30		
TOTAL PEAK FLOW (GPM)	8		
WATER METER SIZE (BY UTILITY)	2"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-410)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	1	5.0	5
EMERGENCY FLOOR DRAIN	1	0.0	0
			5
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEIER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
410
P001

TITLE OF SHEET
HARRY'S CABIN – PLUMBING SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 337 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

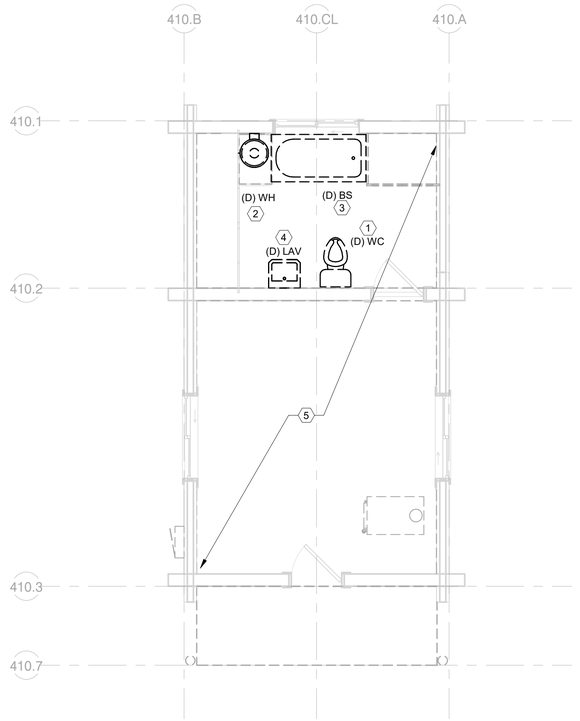

1 HARRYS CABIN – PLUMBING DEMO PLAN

1/4" = 1'-0"

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

(#) KEY NOTES:

1. REMOVE EXISTING WATER CLOSET AND ASSOCIATED PIPING.
2. REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
3. REMOVE EXISTING BATH TUB, ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
4. REMOVE EXISTING LAVATORY, ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
5. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HUGHES
16596
WYOMING
07/21/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
410
P101

TITLE OF SHEET
HARRY'S CABIN – DEMO PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 338 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

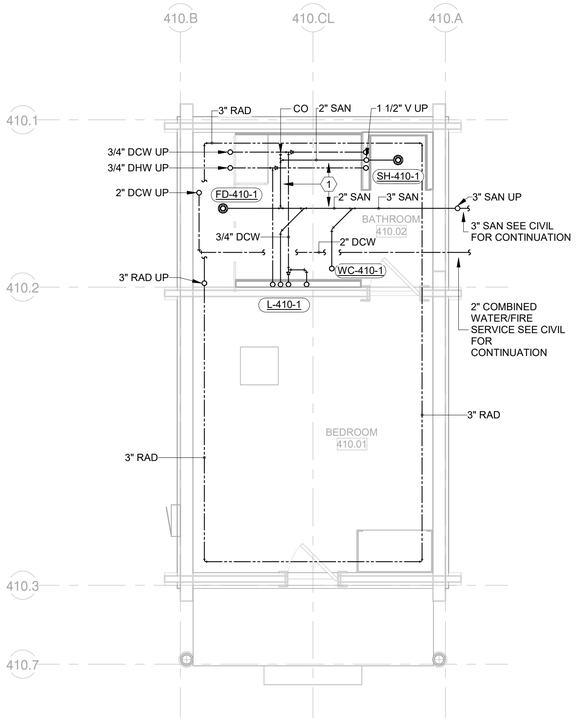

2 HARRYS CABIN – PLUMBING UNDERFLOOR PLAN

1/4" = 1'–0"

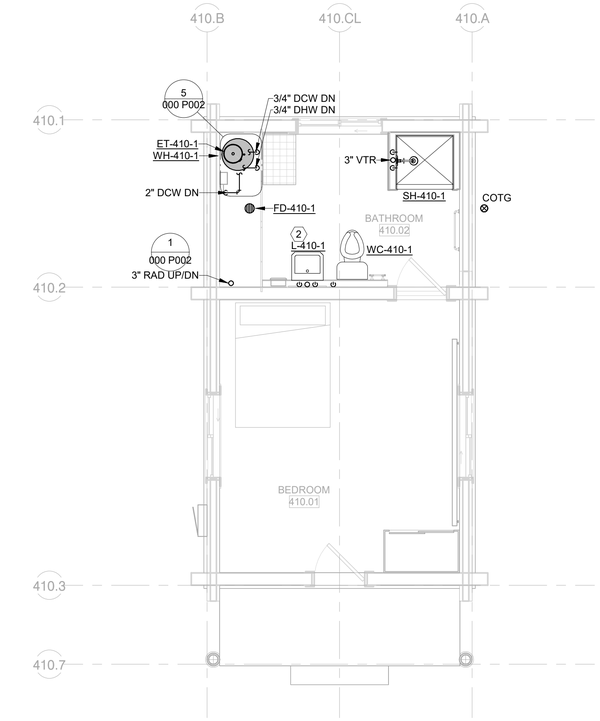

1 HARRYS CABIN – PLUMBING PLAN

1/4" = 1'–0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

(#) KEY NOTES:

1. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
2. PROVIDE 1-1/2" ASSE 1050 CERTIFIED AIR ADMITTANCE VALVE (AAV) FOR SINK VENT. INSTALL AAV 4" MINIMUM ABOVE FIXTURE DRAIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MORRIS
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
410
P201

TITLE OF SHEET
HARRY'S CABIN – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 339 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

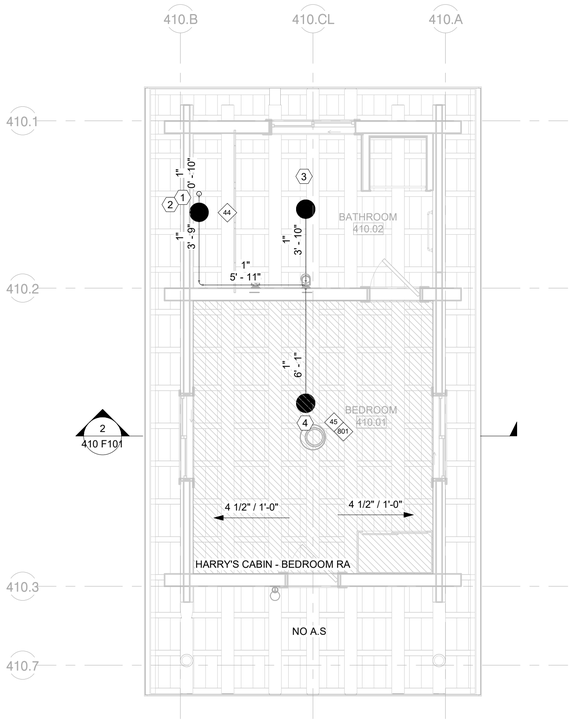

1 HARRYS CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'–0"

Hydraulic Information	
Remote Area Name	Harrys Cabin - Bedroom
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	183 SF
Total Hose Streams	0.00 GPM
Flowing Heads	1
K-Factor	4.9
Base of Riser	22.02 GPM
Base of Riser	34.60 psi
Safety Margin	+34.3 (47.04%)

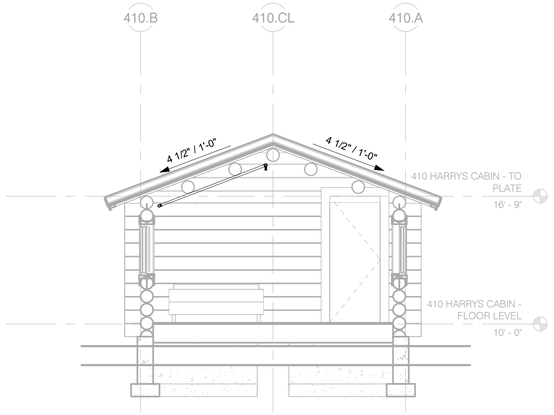

2 HARRYS CABIN – FIRE SUPPRESSION SECTION

1/4" = 1'–0"

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F004 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	3
												3

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 WYOMING Date

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
410
F101

TITLE OF SHEET
HARRY'S CABIN – MAIN LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 340 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LOOKING WEST TOWARDS 411 NEW CABIN

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

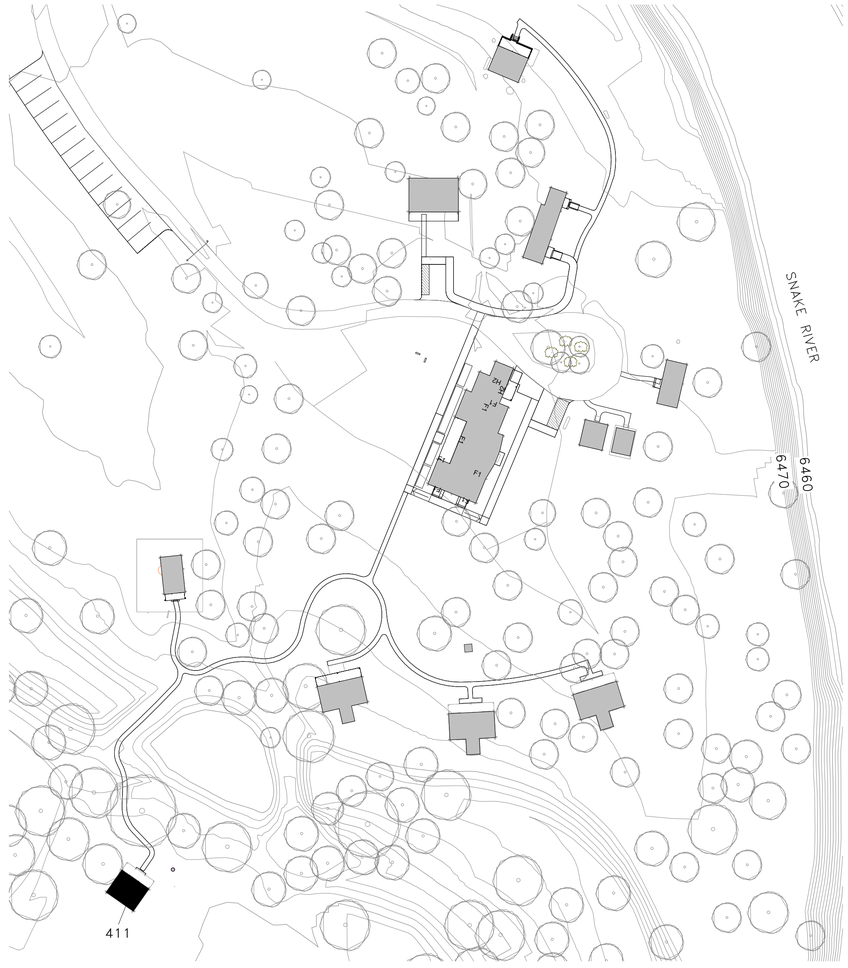

1 KEY PLAN – 411 NEW CABIN

1" = 50'-0"

50 0 50 100

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. TYLER
C-3530
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
G000

TITLE OF SHEET
NEW CABIN – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 341 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

MATCH LINE 410 C100

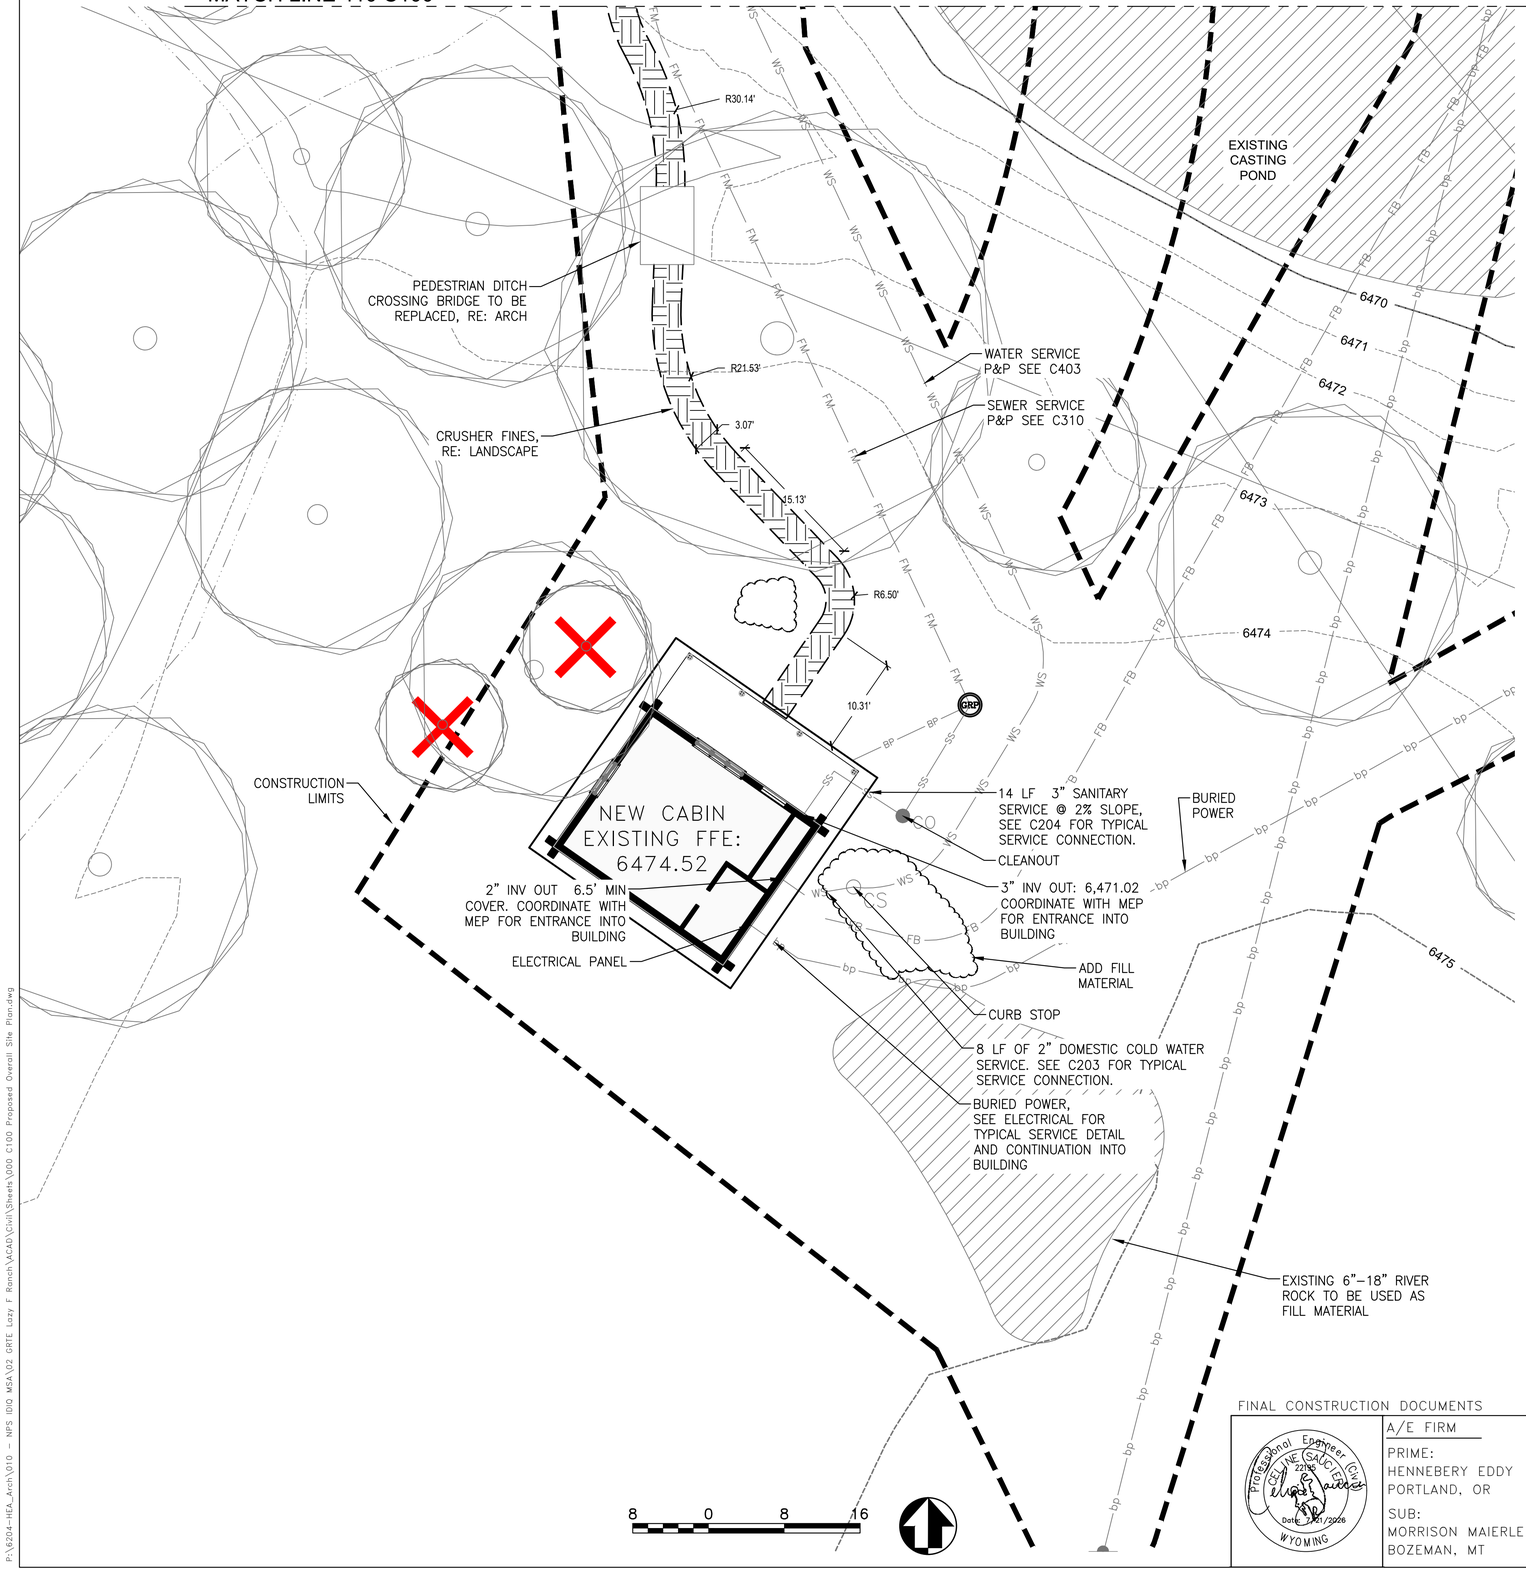

EXISTING LEGEND

- MAJOR CONTOUR
- MINOR CONTOUR
- 8"s — SEWER LINE (SIZE INDICATED)
- ss — SEWER SERVICE
- 8"w — WATER LINE (SIZE INDICATED)
- ws — WATER SERVICE
- bp — BURIED POWER
- op — OVERHEAD POWER
- bt — BURIED TELEPHONE
- X — FENCE
- FB — BURIED FIBER OPTIC COMMUNICATIONS
- COM — BURIED COMMUNICATIONS
- DITCH
- EXISTING RIVER ROCK
- EXISTING BUILDING
- GRAVEL ROAD
- PP — POWER POLE
- GATE VALVE
- BLOW-OFF HYDRANT
- FIRE HYDRANT
- EP — ELECTRICAL PANEL
- ELECTRICAL TRANSFORMER
- P — POWER METER
- PV — POWER VAULT
- CV — FIBER OPTIC COMMUNICATIONS VAULT
- S — SEWER MANHOLE
- LS — LIFT STATION
- GRP — GRINDER PUMP
- CS — WATER SERVICE CURB STOP
- CO — SEWER SERVICE CLEANOUT
- W — WATER WELL
- TREE

PROPOSED LEGEND

- 6"S — SEWER MAIN
- 4"W — WATER MAIN
- SS — SEWER SERVICE
- WS — WATER SERVICE
- COM — BURIED COMMUNICATIONS
- FB — BURIED FIBER OPTIC SERVICE
- BP — BURIED POWER
- FM — FORCE MAIN
- LIMITS OF DISTURBANCE
- RAP TRAIL (RE: LA)
- CRUSHER FINES (RE: LA)
- EXPOSED AGGREGATE CONCRETE
- GRAVEL

P:\6204-HEA_Arch\010 - NPS IDIQ MSA\02 GRTE Lazy F Ranch\CAD\Civil\Sheets\000 C100 Proposed Overall Site Plan.dwg

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Civil) CELESTINE GAUCI EVERS 22036 Date: 7/21/2026 WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED:	MMI
DRAWN:	CMS
TECH REVIEW:	CMS
DATE:	07/21/2026

SUB SHEET NO.
411
C100

TITLE OF SHEET
NEW CABIN – SITE AND UTILITY PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	342 OF 371

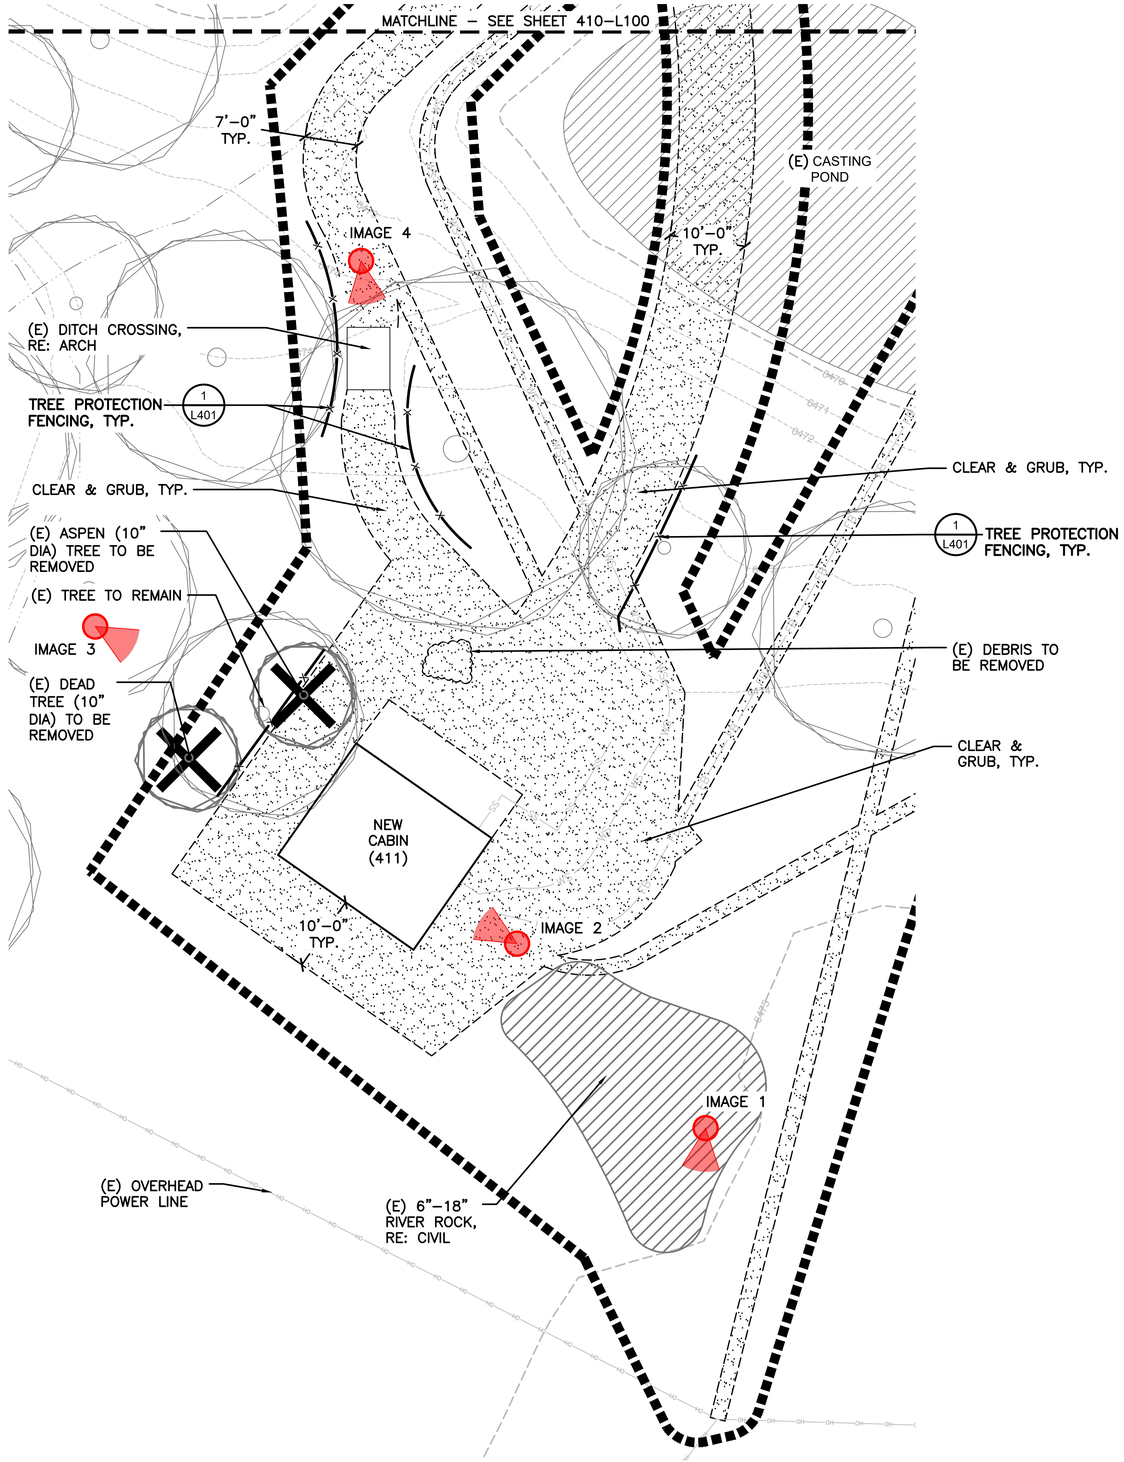

IMAGE 1: (E) VOID TO BE FILLED, RE: CIVIL

IMAGE 2: (E) VOID TO BE FILLED, RE: CIVIL.

IMAGE 3: (E) TREES TO BE REMOVED.

IMAGE 4: (E) DITCH CROSSING.

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) OVERHEAD POWER LINE
- (E) BUILDING
- (E) TREE
- (E) RIVER ROCK
- CLEAR & GRUB (CLIN 1)
- CLEAR & GRUB
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING
- (E) TREE TO BE REMOVED

KEY MAP

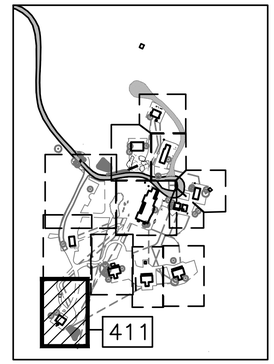

10 0 10 20
SCALE OF FEET

NOTES:
1. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

FINAL CONSTRUCTION DOCUMENTS

LICENSED LANDSCAPE ARCHITECT – EILEEN M. KEMP – LA-0212C – Date: 07/21/26 – STATE OF WYOMING

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 411 L100	TITLE OF SHEET NEW CABIN – SITE DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 / 193826 PMIS/PKG NO. 237343 SHEET 343 OF 371

File Path:
XREFS: C:\Users\KERSTIENS_R25.P\DENVER\NPS GRTE 4 LAZY F RANCH - 199539 - FINAL CD\CAD\LAU1-1.0_GRTE-L4_DEMO.DWG
XREFS: 0642_BASESS26_0308_NPS GRTE 4 Lazy F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg\NPS_Titleblock_22x34_GRTE 4 Lazy F.dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_EXISTING.dwg
IMAGES: ...\..\2_Admin\Photos\Garage\Debri-1.jpg|Debri-2.jpg|Debri-3.jpg|Debri-4.jpg|Debri.jpg|...\..\2_Admin\Photos\Gate\Gate-1.jpg|Gate.jpg|...\..\2_Admin\Photos\HarrysCabin\HarrysCabin.shrub.removes-1.jpg|...\..\2_Admin\Photos\House\Mouse and Ice .jpg|...\..\...

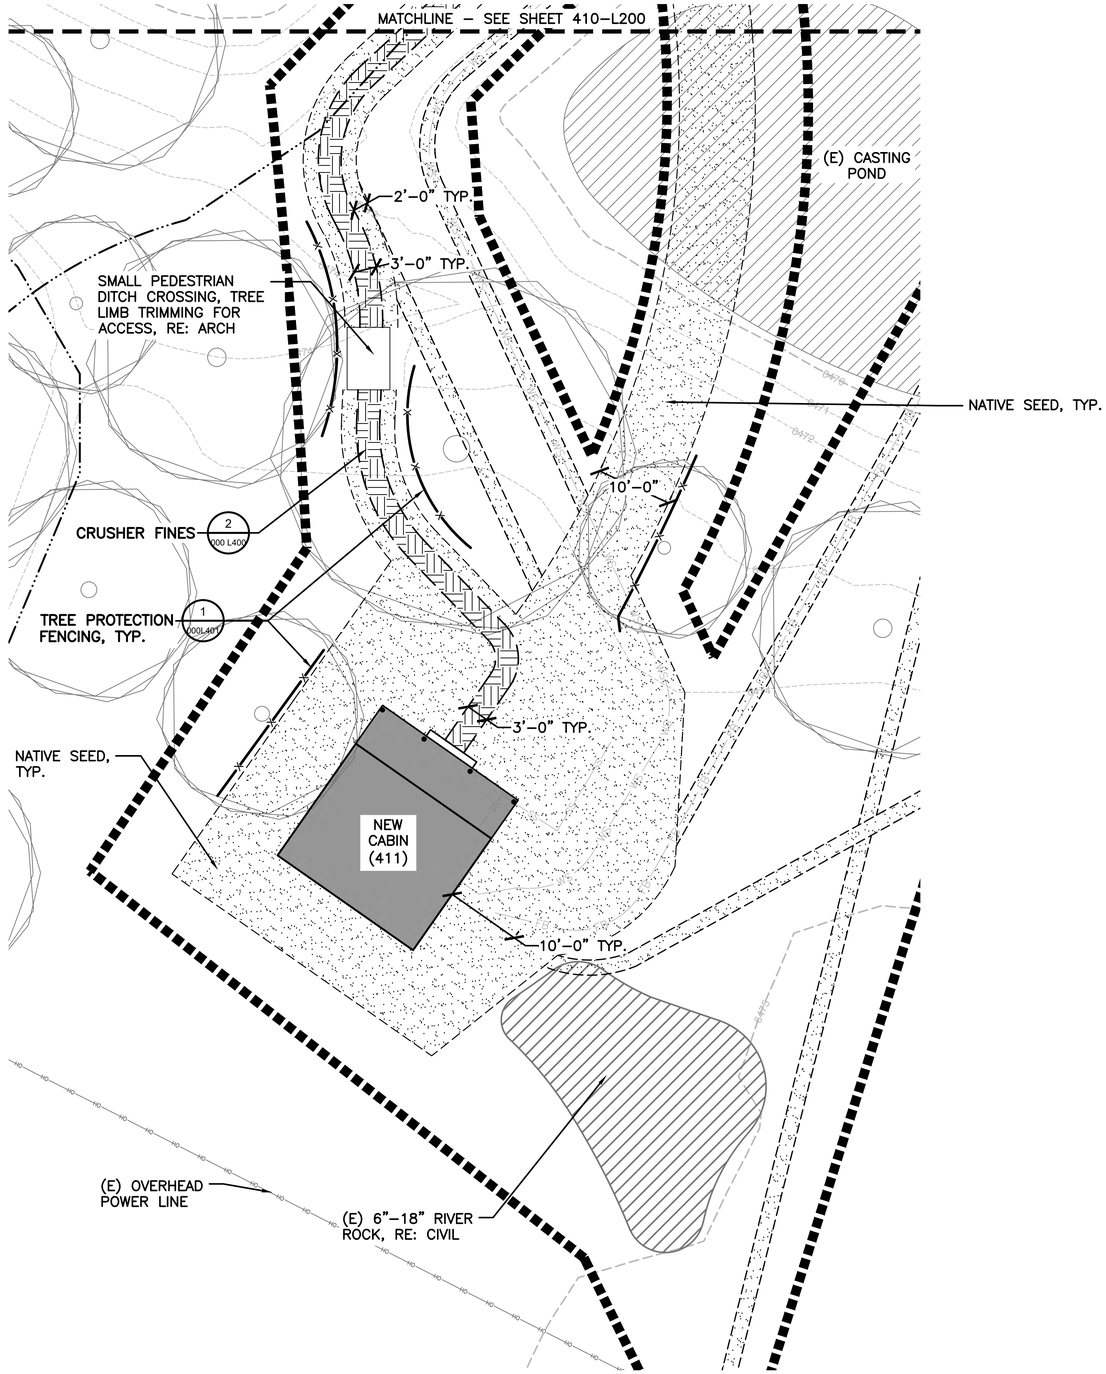

LEGEND

- (E) MAJOR CONTOUR
- (E) MINOR CONTOUR
- (E) WATER SERVICE LINE
- (E) FIBER OPTIC LINE
- (E) SANITARY SEWER LINE
- (E) OVERHEAD POWER LINE
- (E) BUILDING
- (E) TREE
- (E) FENCE
- (E) RIVER ROCK
- CRUSHER FINES
- NATIVE SEED
- LIMIT OF CONSTRUCTION
- TREE PROTECTION FENCING

KEY MAP

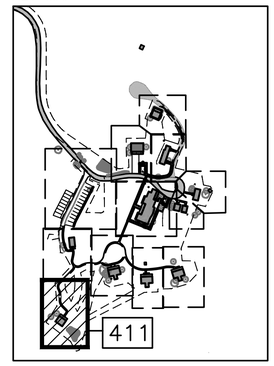

10 0 10 20
SCALE OF FEET

NOTES:

1. SECONDARY WALKWAY TO BE 3' WIDE, CRUSHER FINES.
2. FINISHED GRADE AROUND BUILDING SHALL BE GRADED TO HAVE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
3. WATER AND SEWER UTILITIES ARE BROUGHT WITHIN 5' OF THE BUILDING AS A PART OF PHASE 1. SEE PLUMBING PLANS FOR CONNECTION INTO THE BUILDING.
4. PEDESTRIAN IMPROVEMENTS WITHIN 10' OF THE BUILDING ARE TO BE RESTORED AND INSTALLED WITHIN CLIN 13.
5. REFERENCE SPECIFICATION 01 27 00 FOR CONTRACT LINE ITEM NUMBER (CLIN).

LICENSED LANDSCAPE ARCHITECT
EILEEN M. KEMP
LA-0212C
Date: 07/21/24
STATE OF WYOMING

FINAL CONSTRUCTION DOCUMENTS

A/E FIRM PRIME: HENNEBERY EDDY PORLTAND, OR SUBCONTRACTOR: DHM DESIGN DENVER, CO	DESIGNED: DHM DRAWN: DHM TECH REVIEW: DHM DATE: 07/21/2026	SUB SHEET NO. 411 L200	TITLE OF SHEET NEW CABIN – SITE PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 344 OF 371

File Path
Z:\Projects\0643_NPS\ERSTIENS_R25_P\DENVER\NPS_GRTE_4LAZY F RANCH - 198539_FINAL CD\CAD\ALI-1-0_GRTE-L4_LAYOUT.DWG
XREFS: 0643_NPS_GRTE_4LAZY_F_ARCH_PROJECT OVERVIEW SITE PLAN.dwg\NPS_TitleBlock_22x34 - GRTE 4 LAZY F dwg\XC-4LAZYF_DSGN.dwg\XC-BASE-699421_EX01.dwg\XC-EXST SITE.dwg\XC-MOOSE_AER_TOPO.dwg\XC-PLAN-PROF-FORCE MAIN 1.dwg\XC-WATR-4LAZYH.dwg\XL-GRTE-L4_AERIAL.dwg\XL-GRTE-L4_LAYOUT.dwg
IMAGES: ..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG\..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg\..\..\2_Admin\Photos\ParkingLotParking lot-4.jpg\Parking lot-4.jpg\Parking lot toc-5.jpg\..\..\2_Admin\Photos\Main Lodge\IMG_3706.JPG\..\..\2_Admin\Photos\NursesCabin\Tree to be removed.jpg\..\..\2_Admin\Photos\ParkingLotParking lot-4.jpg\Parking lot toc-5.jpg

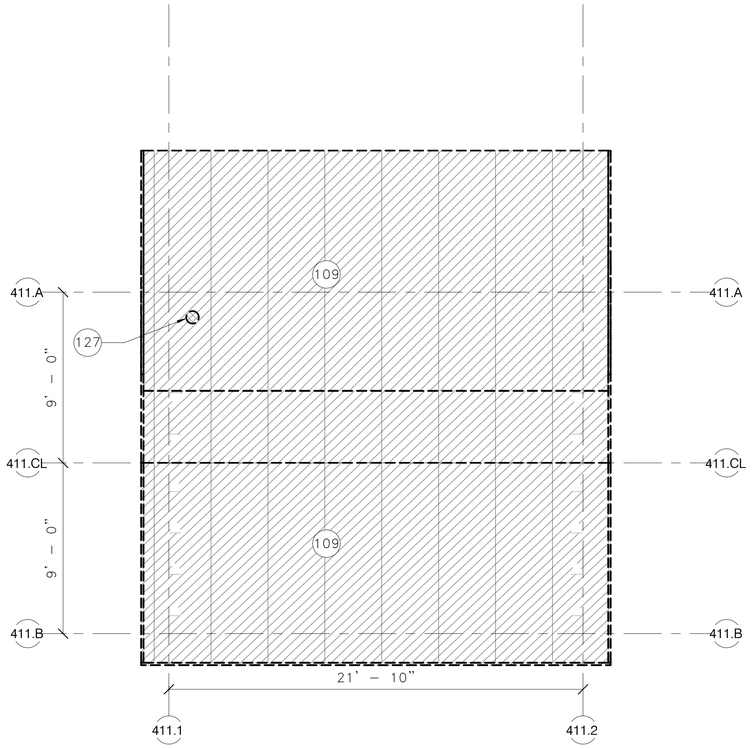

2 411 NEW CABIN – DEMO ROOF PLAN

1/4" = 1'–0"

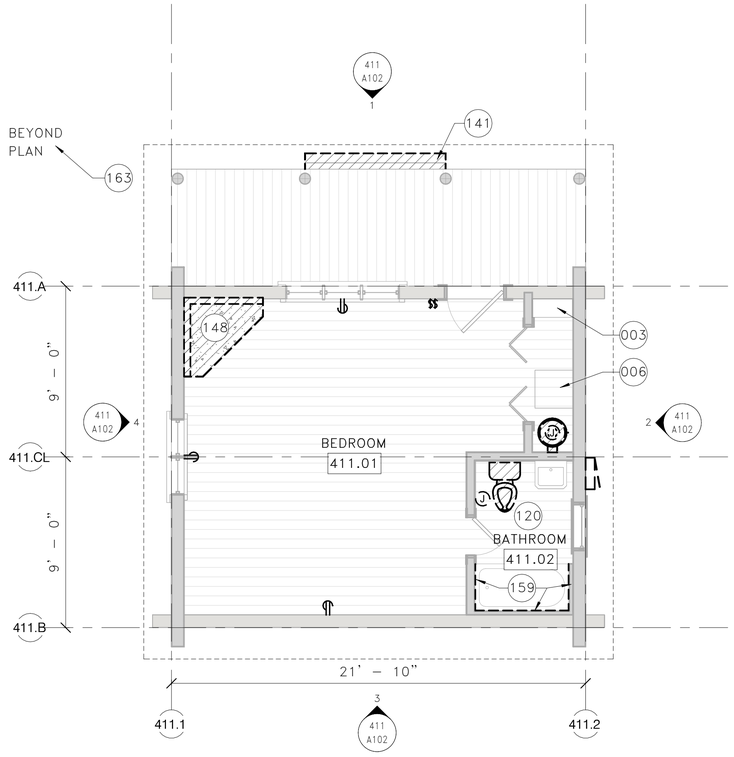

1 411 NEW CABIN – DEMO FLOOR PLAN

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.
006 (E) CRAWLSPACE ACCESS HATCH
109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
120 REMOVE (E) TOILET FIXTURE, SEE PLUMBING DRAWINGS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
141 REMOVE DETERIORATED WOOD STEP
148 REMOVE (E) BRICK HEARTH SURROUND AND CONCRETE HEARTH
159 REMOVE (E) TILE AND TILE BACKER BOARD
163 REMOVE (E) DITCH CROSSING BRIDGE, SEE LANDSCAPE PLAN

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A101

TITLE OF SHEET
NEW CABIN – DEMO PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 345 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

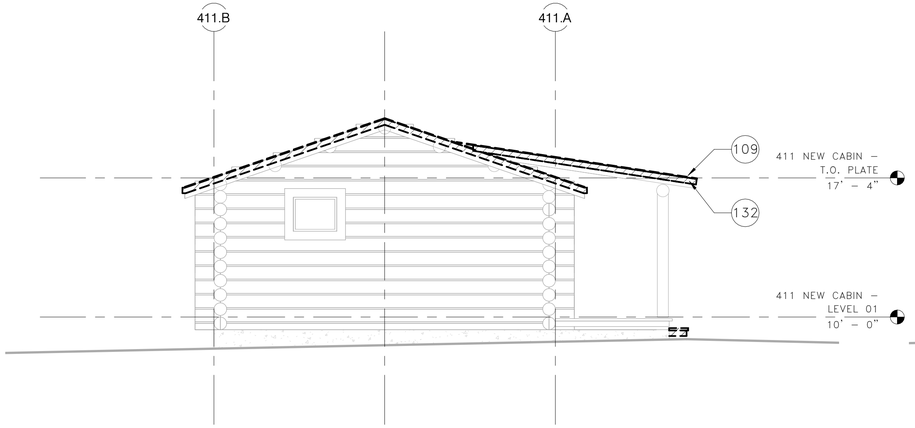

2 411 NEW CABIN – EAST DEMO

1/4" = 1'–0"

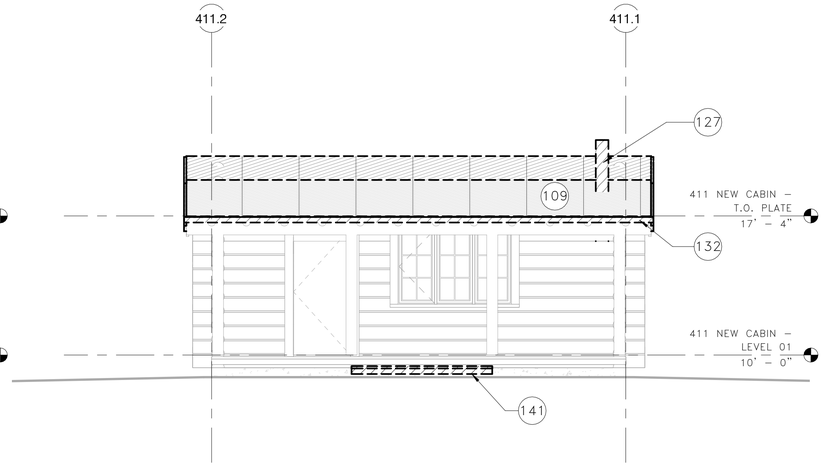

1 411 NEW CABIN – NORTH DEMO

1/4" = 1'–0"

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

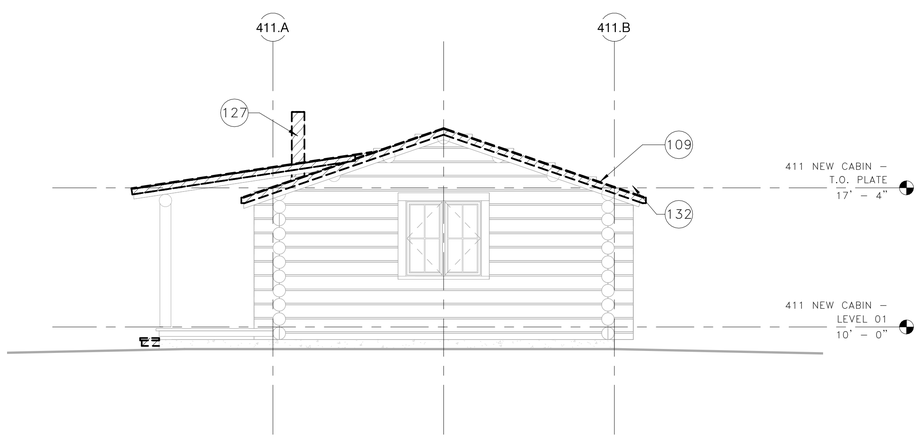

4 411 NEW CABIN – WEST DEMO

1/4" = 1'–0"

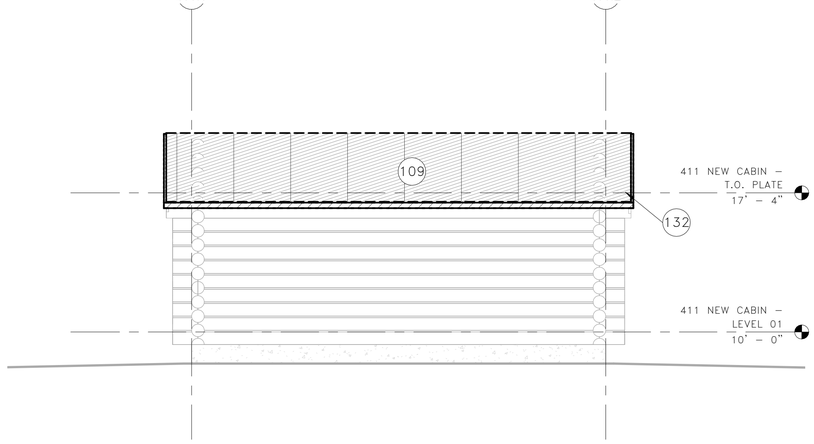

3 411 NEW CABIN – SOUTH DEMO

1/4" = 1'–0"

KEYNOTES

109 REMOVE ALL (E) ROOFING MATERIAL DOWN TO SHEATHING. REPLACE ANY DAMAGED SHEATHING. COORDINATE ROOFING REMOVAL WITH HAZARDOUS MATERIAL MITIGATION REQUIREMENTS
127 REMOVE (E) STOVE AND/OR REMOVE (E) STOVE PIPE
132 REMOVE (E) FASCIA
141 REMOVE DETERIORATED WOOD STEP

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVEY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A102

TITLE OF SHEET
NEW CABIN – DEMO ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 346 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

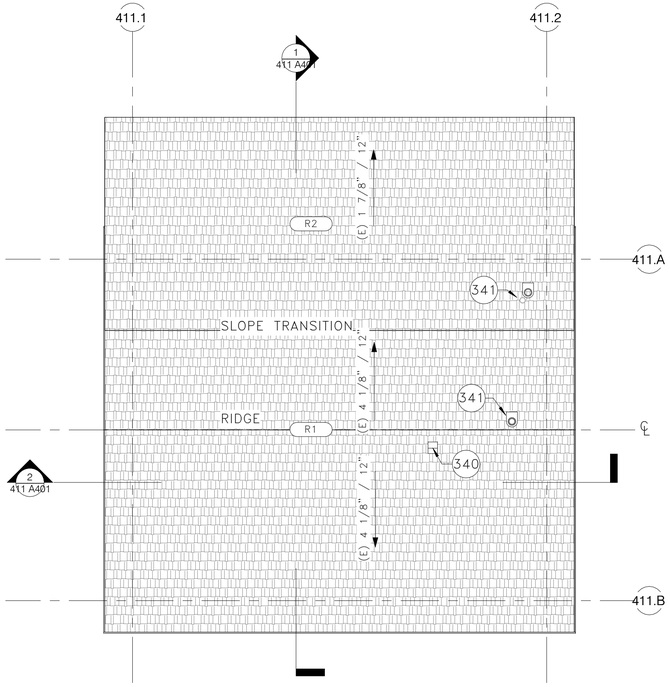

2 411 NEW CABIN – ROOF PLAN

1/4" = 1'-0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# — ROOF TAG
- ### — KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

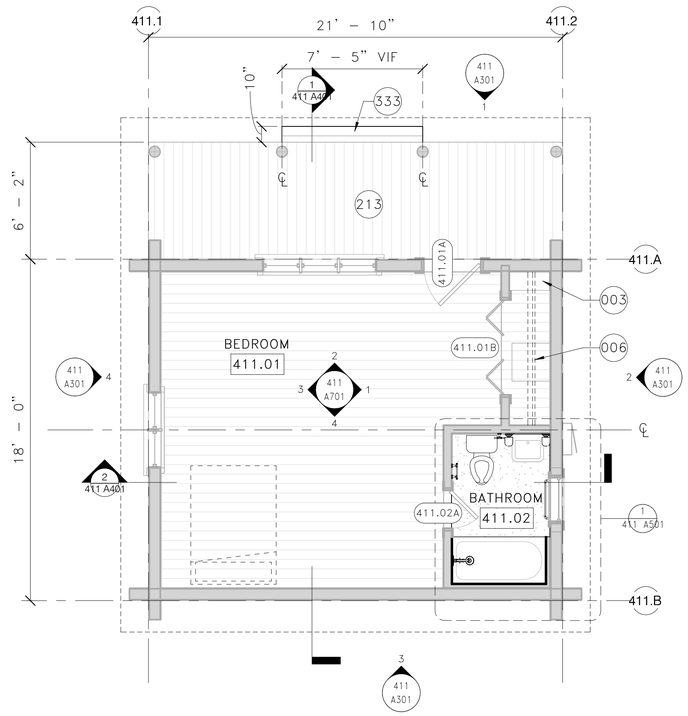

1 411 NEW CABIN – FLOOR PLAN

1/4" = 1'-0"

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## — DOOR TAG
- EXT-XX — WALL TAG
- EDGE OF ROOF ABOVE
- ### — KEYNOTE TAG

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

KEYNOTES

003 (E) WOOD SHELVING TO REMAIN. REFINISH.
006 (E) CRAWLSPACE ACCESS HATCH
213 RESTORE (E) WOOD DECK, FRAMING, AND/OR STEPS TO REMAIN
333 PROVIDE WOOD STEP
340 PROVIDE ROOF MOUNTED EXHAUST VENT; SEE MECHANICAL DRAWINGS
341 PROVIDE ROOF MOUNTED PIPE PENETRATION; SEE MECHANICAL DRAWINGS

SCALE (B) 4" 0 4' 8'
SCALE OF FEET
NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. EDDY C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A201

TITLE OF SHEET
NEW CABIN – FLOOR PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 347 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\Collaboration Cache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

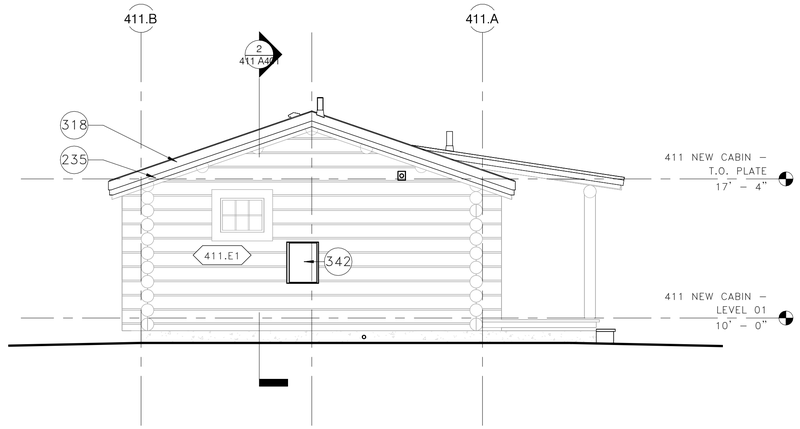

2 411 NEW CABIN – EAST

1/4" = 1'–0"

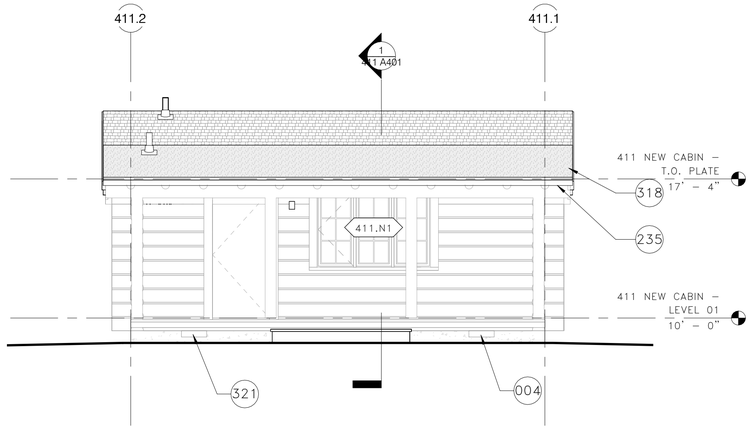

1 411 NEW CABIN – NORTH

1/4" = 1'–0"

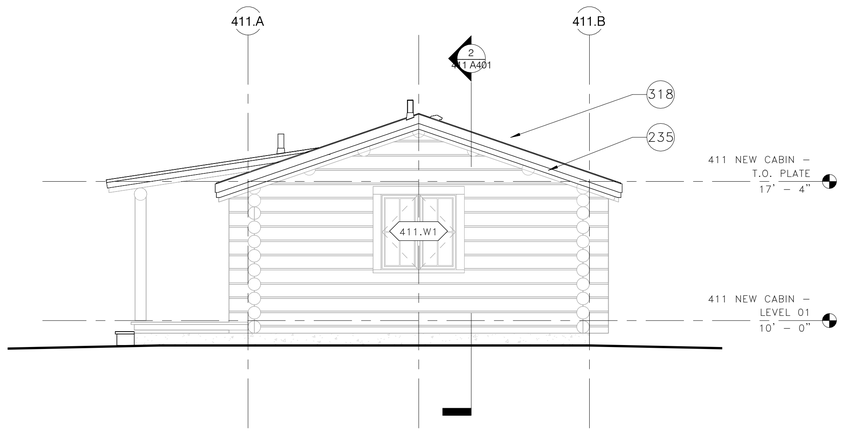

4 411 NEW CABIN – WEST

1/4" = 1'–0"

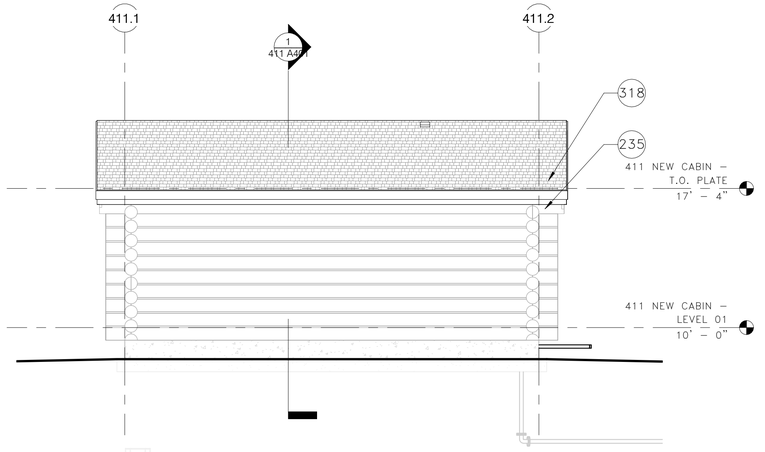

3 411 NEW CABIN – SOUTH

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS. VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

EXTERIOR ELEVATION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) LOG OR LOG SIDING WALL
- LOG OR LOG SIDING TO MATCH (E)
- (E) BOARD & BATTEN SIDING
- BOARD & BATTEN SIDING
- ROOFING
- ###.XX WINDOW TAG
- (E) RIVER ROCK CHIMNEY
- ### KEYNOTE TAG

KEYNOTES

004 (E) FOUNDATION VENT TO REMAIN; REPLACE INSECT SCREEN
235 REPLACE (E) WOOD FASCIA
318 PROVIDE SECONDARY WOOD FASCIA
321 PROVIDE FOUNDATION VENT; SEE PLUMBING DRAWINGS
342 ELECTRICAL PANEL, SEE ELECTRICAL DRAWINGS

SCALE (B) 0" 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KEYSER C-3530 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A301

TITLE OF SHEET
NEW CABIN – EXTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 348 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

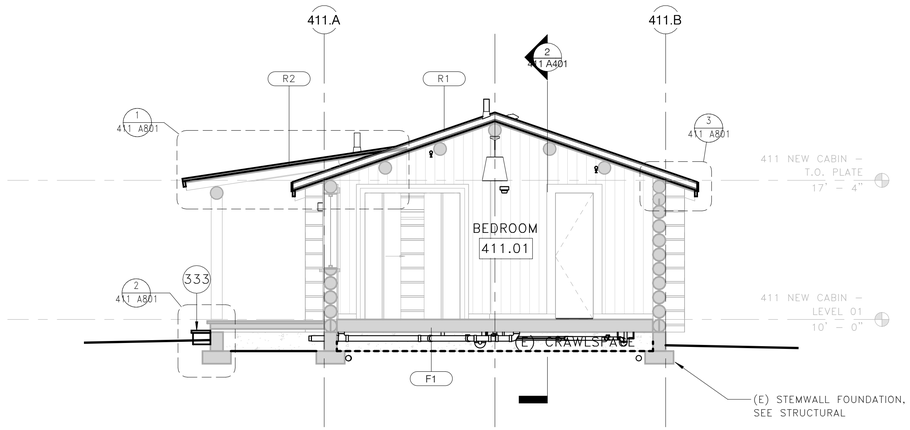

1 411 NEW CABIN – SECTION 'A'

1/4" = 1'–0"

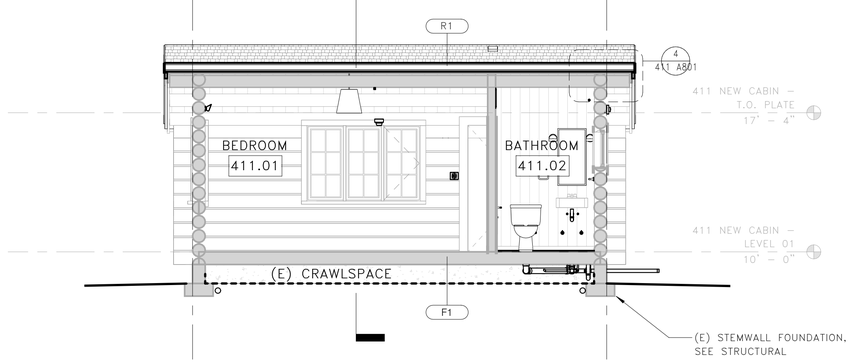

2 411 NEW CABIN – SECTION 'B'

1/4" = 1'–0"

BUILDING SECTION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
3. DEPICTION OF FOUNDATIONS ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. REFER TO STRUCTURAL DRAWINGS FOR FOOTING ELEVATIONS.
4. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.

BUILDING SECTION LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- CRAWLSPACE VAPOR BARRIER
- CONCRETE STEMWALL, SEE STRUCTURAL DRAWINGS
- CONCRETE PIER FOUNDATION, SEE STRUCTURAL DRAWINGS

KEYNOTES

333 PROVIDE WOOD STEP

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM E. AVES
C-3539
Date 7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A401

TITLE OF SHEET
NEW CABIN – BUILDING SECTIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 349 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

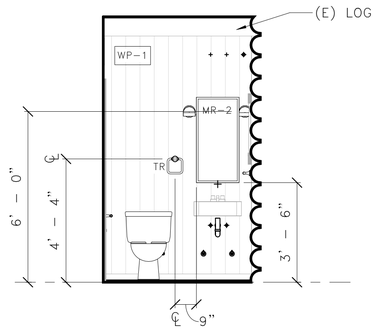

3 BATHROOM 411.05 – NORTH

3/8" = 1'-0"

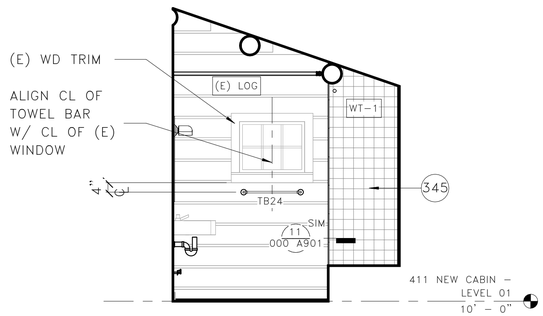

2 BATHROOM 411.05 – EAST

3/8" = 1'-0"

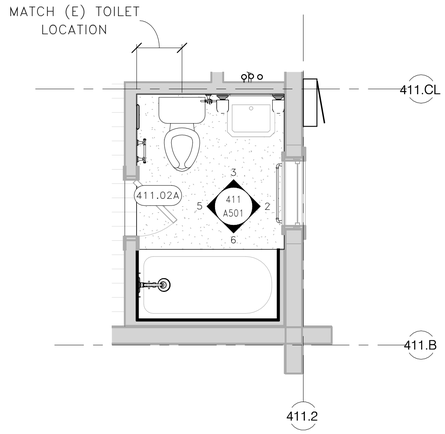

1 411 NEW CABIN – ENLARGED BATHROOM PLAN

3/8" = 1'-0"

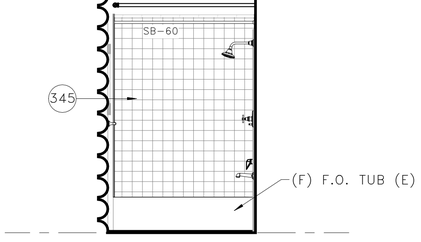

6 BATHROOM 411.05 – SOUTH

3/8" = 1'-0"

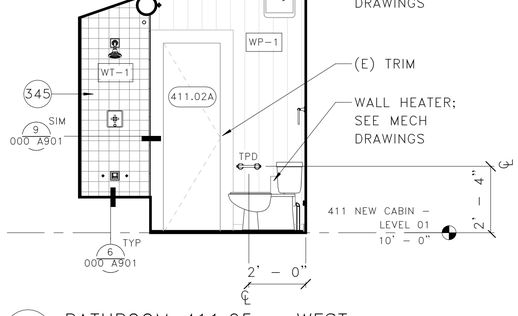

5 BATHROOM 411.05 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###-## DOOR TAG
- EXT-XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

KEYNOTES

345 PREVIDE BACKER BOARD & WATERPROOFING AT TILE LOCATIONS

SCALE (F) 4" 0 4" 8" SCALE OF FEET

SCALE (C) 2'-8" 0 2'-8" 5'-4" SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3530 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A501

TITLE OF SHEET
NEW CABIN – ENLARGED BATHROOMS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 350 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

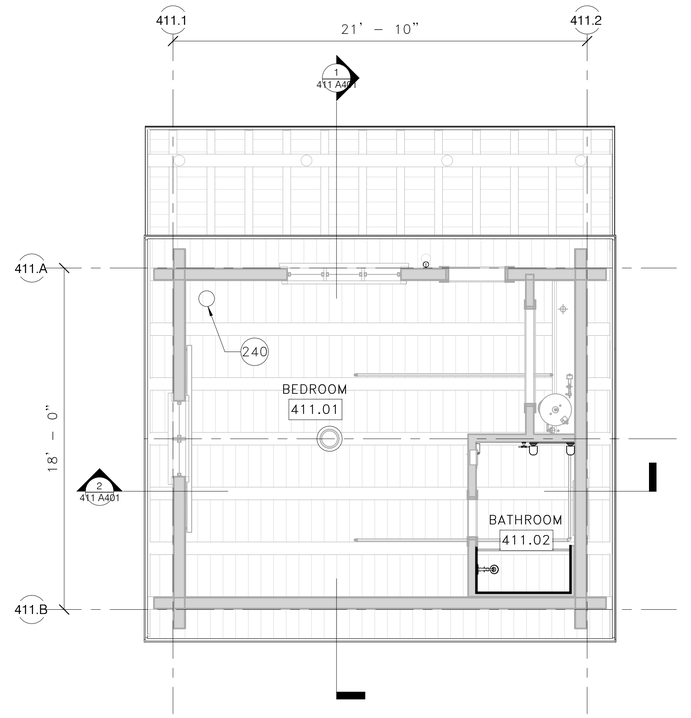

1 411 NEW CABIN – FIRST LEVEL RCP

1/4" = 1'–0"

REFLECTED CEILING PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE ELECTRICAL PLANS FOR LIGHT FIXTURES TYPES, AND OTHER CEILING–MOUNTED DEVICES. INSTALL FIXTURES AND DEVICES PER ARCHITECTURAL DRAWINGS.
3. DEVICES AS NOTED BUT NOT LIMITED TO LIGHT FIXTURES, ELECTRICAL DEVICES, AND SPRINKLER HEADS ARE SHOWN FOR OVERALL CEILING COORDINATION. NOT ALL DEVICES ARE SHOWN IN LOCATIONS WHERE CEILING LAYOUT IS LESS CRITICAL.
4. IF CEILING DEVICES ARE NOT DIMENSIONED THEIR LOCATION REQUIRES APPROVAL BY CONTRACTING OFFICER PRIOR TO INSTALLATION.
5. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
6. DIMENSIONS ARE TO FACE OF FINISH (EXISTING WALLS) AND FACE OF FRAMING (NEW WALLS), UON.
7. CLEAN AND FINISH ALL EXPOSED STRUCTURE INCLUDING BEAMS, JOIST, AND DECKING AT BUILDINGINTERIOR & EXTERIOR.

REFLECTED CEILING PLAN LEGEND

NOTE: NOT ALL ITEMS MAY BE USED

- (E) WOOD PLANK ROOF
- GYPSUM BOARD CEILING
- ACCESS PANEL
- PENDANT LIGHT FIXTURE
- CEILING LIGHT FIXTURE (SURFACE MOUNTED)
- CEILING LIGHT FIXTURE (RECESSED)
- WALL SCONCE LIGHT FIXTURE
- SUSPENDED/SURFACE MOUNTED STRIP LIGHT FIXTURE
- FIRE ALARM STROBE (CEILING MOUNTED)
- SMOKE DETECTOR
- VARIES — COVE HEATER

KEYNOTES

240 INSTALL FLUE COVER PLATE AT LOCATION OF REMOVED CHIMNEY PIPE.

SCALE (B) 4" 0 4" 8"

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM P. ECKES — C-3530 — Date 7/21/26 — STATE OF WYOMING

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.

411

A601

TITLE OF SHEET

NEW CABIN – REFLECTED CEILING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	351 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

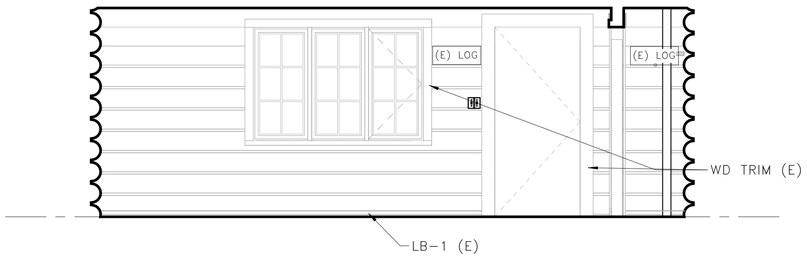

2 BEDROOM 411.1 – NORTH

3/8" = 1'-0"

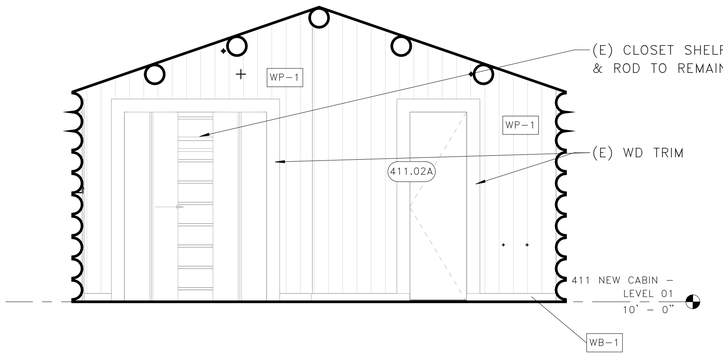

1 BEDROOM 411.1 – EAST

3/8" = 1'-0"

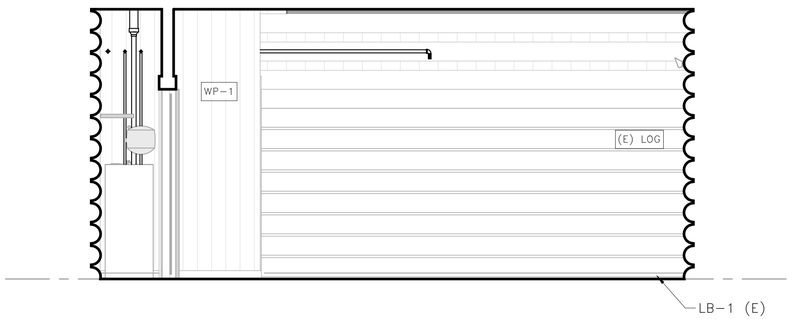

4 BEDROOM 411.1 – SOUTH

3/8" = 1'-0"

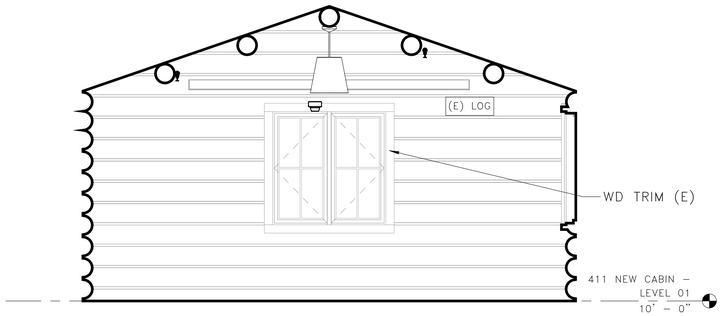

3 BEDROOM 411.1 – WEST

3/8" = 1'-0"

INTERIOR ELEVATION NOTES

1. SEE SHEET 00–G004 FOR GENERAL NOTES AND SYMBOLS
2. SEE SHEETS 00–G005 & 00–G006 FOR ACCESSIBILITY MOUNTING HEIGHTS FOR DEVICES, RESTROOM ACCESSORIES AND SIMILAR WALL MOUNTED ELEMENTS. PROVIDE 2X WOOD BLOCKING AT ALL WALL MOUNTED ITEMS.
3. MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, FIRE ALARM AND TELECOMMUNICATION DEVICES/EQUIPMENT INDICATED ON INTERIOR WALL ELEVATIONS ARE SHOWN FOR DIMENSIONAL LOCATION ONLY. REFERENCE MEPF DRAWINGS FOR TYPE, SIZE, AND QUANTITIES. NOTIFY CONTRACTING OFFICER OF ANY DISCREPANCIES.
4. VERIFY ALL DIMENSIONS IN THE FIELD.

KEYNOTES

SCALE Ⓒ 2'-6" 0 2'-8" 5'-4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. KES C-3535 Date 7/21/26 STATE OF WYOMING

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A701

TITLE OF SHEET
NEW CABIN – INTERIOR ELEVATIONS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 352 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

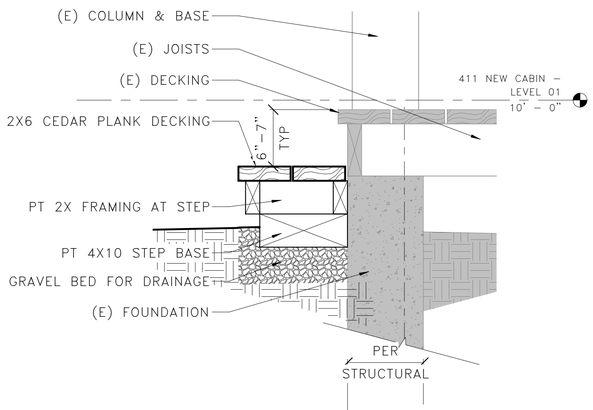

2 411 NEW CABIN – PORCH STEP DETAIL

1 1/2" = 1'–0"

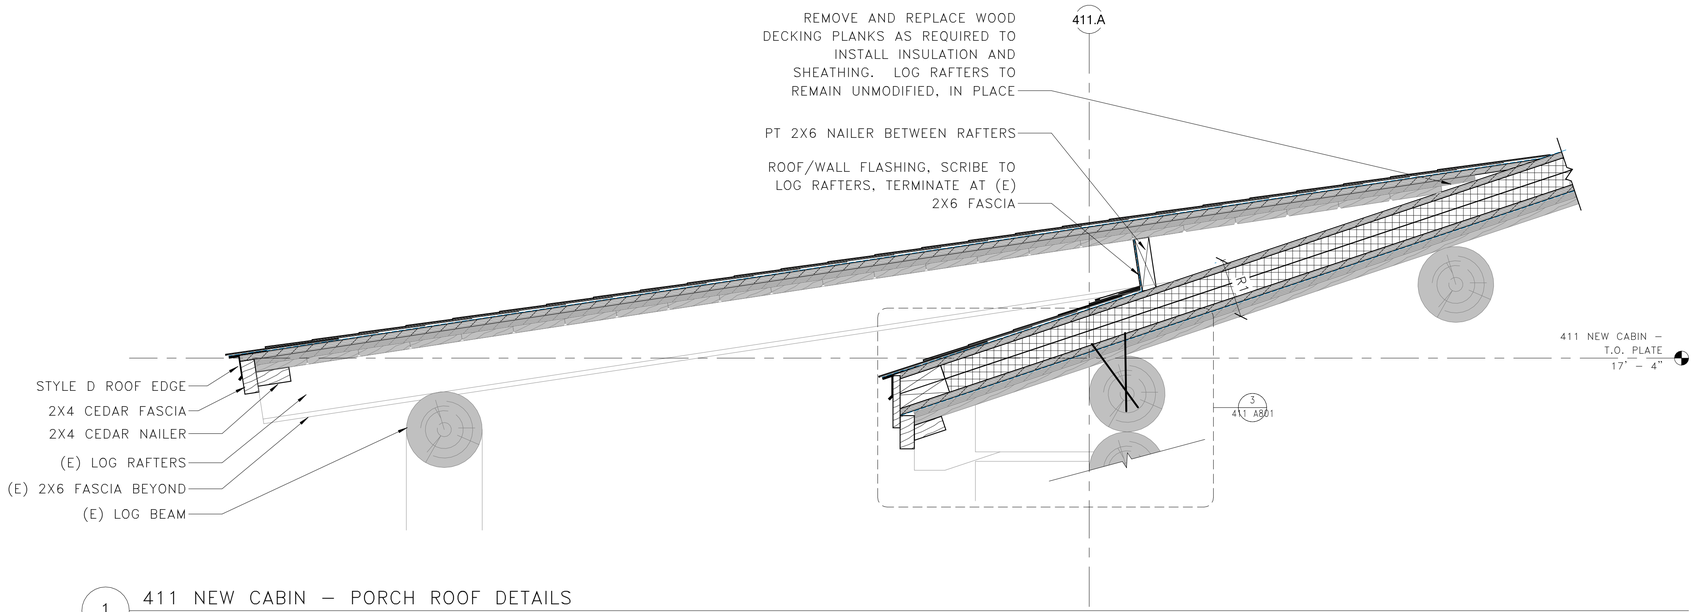

1 411 NEW CABIN – PORCH ROOF DETAILS

1 1/2" = 1'–0"

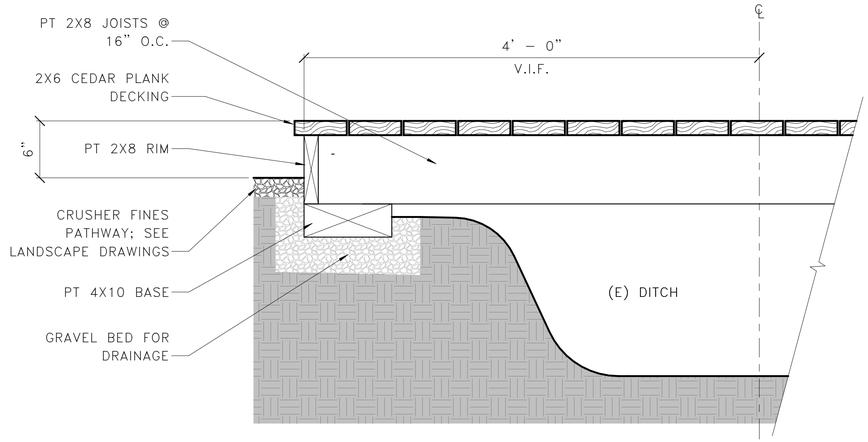

5 411 NEW CABIN – DITCH BRIDGE

1 1/2" = 1'–0"

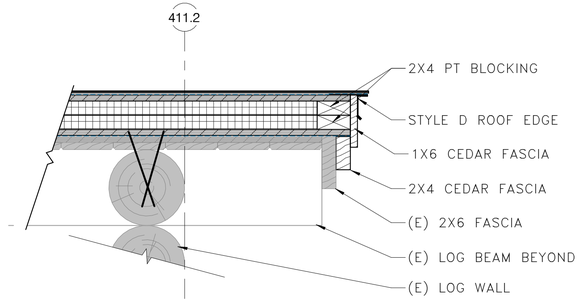

4 411 NEW CABIN – RAKE DETAIL

1 1/2" = 1'–0"

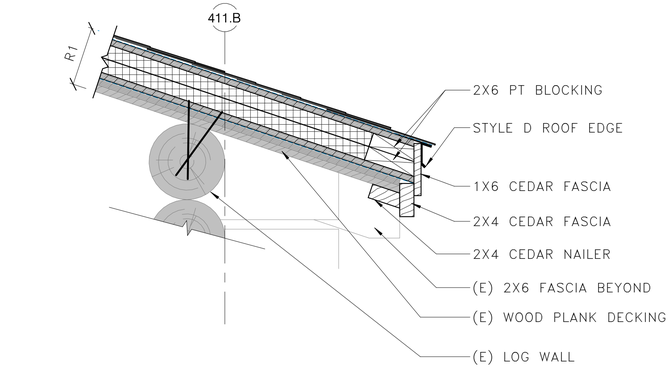

3 411 NEW CABIN – EAVE DETAIL

1 1/2" = 1'–0"

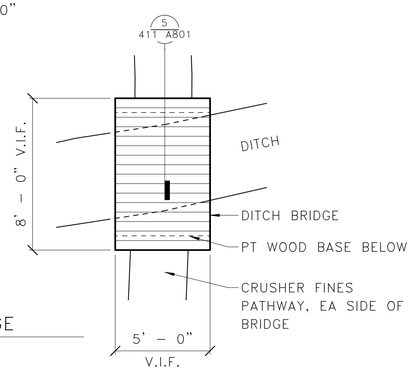

6 DITCH BRIDGE

1/4" = 1'–0"

SCALE E 8" 0 8" 1' 4"

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. REED C-3530 STATE OF WYOMING Date 7/21/26

A/E FIRM

PRIME: HENNEBERY EDDY PORTLAND, OR

DESIGNED: LL

DRAWN: LL

TECH REVIEW: KZ

DATE: 07/21/2026

SUB SHEET NO. 411 A801

TITLE OF SHEET

NEW CABIN – EXTERIOR DETAILS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826

PMIS/PKG NO. 237343

SHEET 353 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

411 NEW CABIN – WINDOW SCHEDULE							
WINDOW TYPE		APPROXIMATE DIMENSIONS		DETAILS			NOTES
MARK	OPERATION	HEIGHT	WIDTH	JAMB	EXT SILL	EXT TRIM	
411.E1		2' – 0"	2' – 6"				M.
411.N1		4' – 0"	2' – 0"				M.
411.W1		4' – 0"	2' – 0"				M.

411 NEW CABIN – DOOR SCHEDULE											
DOOR NO.	DOOR					FRAME			HARDWARE SET	SCREEN DOOR TYPE	NOTES
	TYPE	SIZE		MATERIAL	FINISH	TYPE	MATERIAL	FINISH			
		WIDTH	HEIGHT								
411.01A	(E) DR–7	3' – 0"	6' – 8"			(E)				(E) SDR–2	EXT.
411.01B	(E) DR–9	5' – 0"	6' – 8"			(E)					
411.02A	(E) DR–10	2' – 0"	6' – 8"			(E)					

411 NEW CABIN – ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR		WALL				CEILING		NOTES
		MATERIAL	FINISH	BASE		WALL		MATERIAL	FINISH	
				MATERIAL	FINISH	MATERIAL	FINISH			
411.01	BEDROOM	(E) WD–1		(E)LB–1/(E)WB–1		(E)LOG/(E)WP–1		EXP		
411.02	BATHROOM	LIN–1	N/A	(E)LB–1/(E)WB–1		(E)LOG/(E)WP–1/WT–1		EXP		

WINDOW SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. ALL WINDOWS ARE EXISTING, UNO.
3. ALL WINDOWS ARE WOOD, UNO.
4. ALL NEW WINDOWS AND FRAMES TO MATCH EXISTING IN–KIND.
5. ALL EXISTING WINDOW SASHES TO BE REMOVED, REPAIRED, AND REFINISHED BY OWNER.
6. REPAIR ALL WINDOW FRAMES, TRIMS, AND SILLS. REPLACE ANY MISSING COMPONENTS.
7. PT–1 AT ALL EXTERIOR WINDOW FRAME SURFACES, UON.
8. ST–3 AT ALL INTERIOR WINDOW FRAME AND SILL SURFACES, UON.
9. RE–INSTALL ALL WINDOW SASHES AND SCREENS AT ORIGINAL LOCATIONS.

DOOR SCHEDULE GENERAL NOTES

1. CONTRACTOR TO VIF ALL DIMENSIONS.
2. SEE SHEET 000–A903 FOR DOOR TYPES, FRAME TYPES, AND DOOR HARDWARE GENERAL NOTES.
3. ALL DOORS, FRAMES, AND SCREEN DOORS ARE WOOD, UON.
4. REPAIR ALL EXISTING DOORS, FRAMES, THRESHOLDS, AND SCREEN DOORS TO REMAIN, UON.
5. PT–1 AT ALL EXTERIOR DOOR, FRAMES, THRESHOLDS & SCREEN DOOR EXTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
6. ST–3 AT ALL WOOD DOOR AND FRAME INTERIOR SURFACES, EXCEPT AT ICE HOUSE OR UON.
7. REPLACE 100% OF MESH MATERIAL AT SCREEN DOORS.
8. REPLACE ALL (E) BROKEN DOOR GLAZING PANES. ASSUME TEN (10) PANES.
9. REPLACE 100% OF GLAZING PUTTY AT (E) DOORS WITH GLAZING.

FINISH SCHEDULE GENERAL NOTES

1. ICL–1 AT ALL (E) INTERIOR SURFACES.
2. ST–1 AT ALL INTERIOR LOG AND LB–1 SURFACES INCLUDING WALLS, COLUMNS, BEAMS, AND PERLINS. APPLY FINISH PRIOR TO ANY CONSTRUCTION THAT WOULD BLOCK ACCESS TO SUCH SURFACES.
3. ST–3 AT ALL NEW WP–1 SURFACES AND NEW CASEWORK.
4. ST–4 AT ALL WD–1 AND WB–1 SURFACES, UON.
5. PT–2 AT ALL GWB–1 SURFACES, UON.

WINDOW/DOOR/FINISH SCHEDULE KEYNOTES

A. MODIFY (E) FRAME FOR NEW OPENING WIDTH WITH IN–KIND MATERIAL.
B. MODIFY (E) FRAME FOR NEW OPENING DEPTH WITH IN–KIND MATERIAL.
C. MODIFY (E) FRAME FOR NEW DOOR ORIENTATION.
D. MODIFY (E) THRESHOLD AS NEEDED FOR ACCESSIBILITY COMPLIANCE.
E. SEAL DOOR SHUT.
F. PROVIDE METAL CURTAIN BRACKET & ROD AT DOOR.
G. SALVAGED (E) DOOR. PROVIDE NEW HARDWARE.
H. SALVAGED (E) WINDOW, FRAME, SILL, AND CASING.
I. NEW WINDOW TO MATCH (E) IN–KIND.
J. ICL–2 AT ALL (E) TO REMAIN ROOM SURFACES PRIOR TO REFINISHING.
K. ALL (E) DOOR COMPONENTS TO REMAIN. ONLY PROVIDE TREATMENT PER 1/406 A905, NO OTHER CHANGES.
L. REPAIR AND REFINISH (E) CURTAIN WOOD BRACKET & ROD.
M. PROVIDE WOOD CURTAIN BRACKET & ROD AT WINDOW TO MATCH (E) PER DETAIL 6/000 A902
N. PROVIDE GLAZING FILM.
O. REMOVE MESH & PROVIDE CLEAR ACRYLIC INSERT. INCLUDE MECHANICALLY FASTENED STOPPERS.

SCHEDULE ABBREVIATIONS

FLOOR MATERIALS:
- WD–1 PLANK WOOD FLOORING
- LIN–1 LINOLEUM SHEET
- LIN–2 LINOLEUM TILE
- CONC–1 SEALED CONCRETE
- MTL–1 METAL PANEL

WALL BASE MATERIALS:
- WB–1 WOOD BASE
- LB–1 LOG BASE
- RB–1 RESILIENT WALL BASE

WALL MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED
- LIN–1 LINOLEUM SHEET
- LOG LOG WALL
- MTL–1 METAL PANEL
- WP–1 TONGUE AND GROOVE WOOD PANELING
- WP–2 FINISH PLYWOOD WOOD PANELING
- WT–1 WALL TILE

INTERIOR TREATMENTS:
- ICL–1 GENERAL INTERIOR CLEANING TREATMENT
- ICL–2 INTERIOR GUANO CLEANING TREATMENT

CEILING MATERIALS:
- GWB–1 GYPSUM WALL BOARD, PAINTED (NEW)
- EXP EXPOSED WOOD DECKING AND STRUCTURE
- MTL–1 METAL PANEL
- WP–2 FINISH PLYWOOD WOOD PANELING

FINISHES:
- ST–1 LINSEED OIL AND TURPENTINE COAT
- ST–2 LINSEED OIL AND BLOND PINE TAR COAT
- ST–3 LINSEED OIL VARNISH COAT
- ST–4 LINSEED OIL WOOD FLOOR VARNISH COAT
- PT–1 LINSEED OIL PAINT
- PT–2 MOISTURE RESISTANT PAINT

DESIGNATION:
- (E) EXISTING MATERIAL TO REMAIN IN PLACE. CLEAN, REPAIR, AND REFINISH
- (S) SALVAGED MATERIAL TO BE REINSTALLED. PROVIDE MATCHING NEW MATERIAL AS NEEDED TO COMPLETE

(NO DESIGNATION INDICATES NEW MATERIAL)

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT – WILLIAM E. REYNOLDS – C-3530 – STATE OF WYOMING – Date 7/21/26

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A905

TITLE OF SHEET
NEW CABIN – SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 354 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

WEST AND NORTH ELEVATION, LOOKING SOUTH

NORTH AND EAST ELEVATIONS, LOOKING WEST

SOUTH AND EAST ELEVATIONS, LOOKING NORTH

WEST AND SOUTH ELEVATIONS, LOOKING EAST

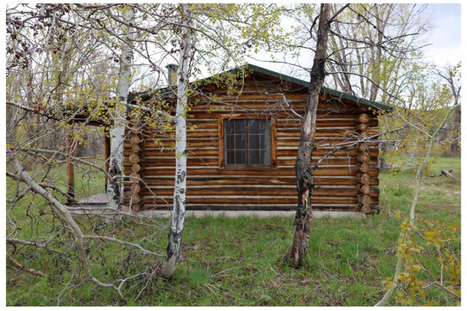

WEST ELEVATION, LOOKING SOUTHEAST

EAST ELEVATION, LOOKING NORTHWEST

NORTH ELEVATION, ENTRY PORCH FLOOR

NORTH ELEVATION, ENTRY PORCH CEILING

TYPICAL WOOD LOG CONDITION

BEDROOM 411.01, LOOKING EAST

BEDROOM 411.01, LOOKING NORTH

EXTERIOR OF DOOR 411.01A

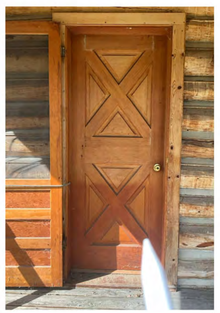

INTERIOR OF DOOR 411.01A

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.
2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.
3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.
4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT — WILLIAM E. ITALIS — C-3530 — Date 7/21/26 — STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
411
A920

TITLE OF SHEET
NEW CABIN – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 355 OF 371

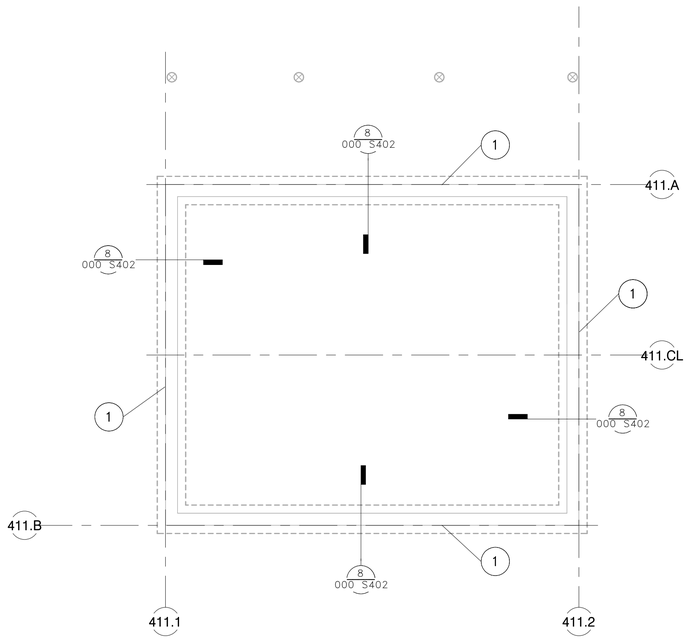

1 NEW CABIN – FOUNDATION PLAN

1/4" = 1'–0"

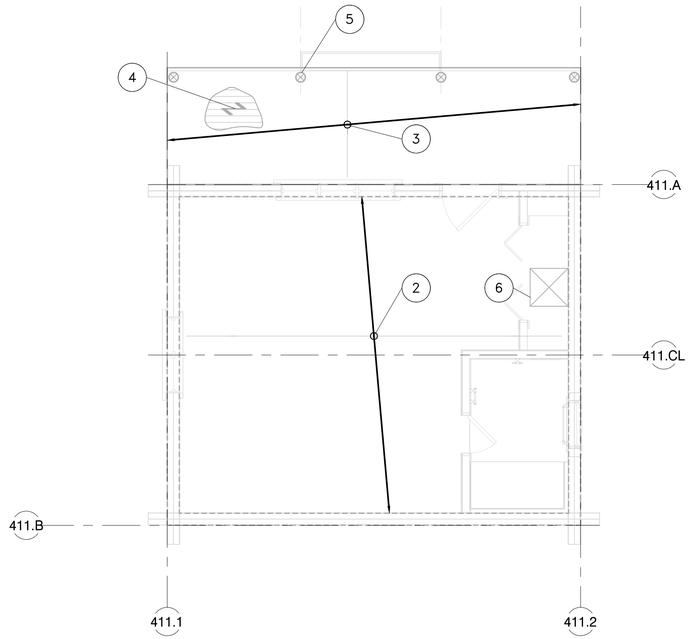

2 NEW CABIN – FLOOR FRAMING PLAN

1/4" = 1'–0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION PLAN EXTENTS PER ARCHITECTURAL PLANS.
4. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.
4. T/FINISHED FLOOR ASSUMED TO BE 10'–0", VERIFY WITH ARCHITECTURAL DRAWINGS.

KEYNOTES:

1. (E) 8" CMU BLOCK FOUNDATION WALL W/ SHALLOW CONCRETE FOOTING TO REMAIN
2. (E) 2x8 @ 16"OC FLOOR JOISTS (V)
3. (E) 2x6 @ 16"OC DECK JOISTS (V)
4. (E) 2x6 DECKING
5. (E) 6"Ø LOG POSTS, 4 TOTAL
6. (E) CRAWLSPACE ACCESS HATCH

4 0 4 8
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date: 07/21/2026
EXPIRES: 12/31/2026

A/E FIRM
PRIME: HENNEBERY EDDY PORTLAND, OR
SUB: DCI ENGINEERS BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
411
S201

TITLE OF SHEET
NEW CABIN – FDN & FLOOR FRAMING PLAN
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826 237343
SHEET 356 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

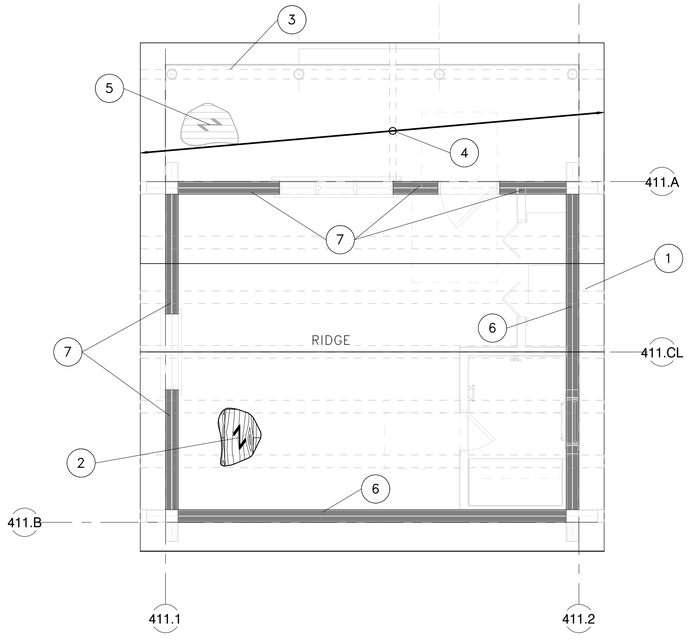

1 NEW CABIN – ROOF FRAMING PLAN

1/4" = 1'–0"

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. (E) 8"Ø LOG PURLIN, TYP. 7 PLACES; CONNECT TO ROOF SHEATHING AT ALL INTERIOR PURLINS PER 3/000 S500 .
2. 1" ROOF SHTHG ATOP (E) HORIZONTAL ROOF PLANKS PER 7/000 S500 & CONNECT TO (E) LOG PURLINS BELOW PER 3/000 S500
3. (E) 6"Ø LOG BEAM
4. (E) 4"Ø PORCH RAFTERS @ 24"OC
5. (E) 1x6 ROOF PLANKS
6. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L1" PER 7/000 S501
7. RETROFIT (E) 8"Ø LOG WALL BELOW WITH PINNING AS SHOWN FOR WALL TYPE "L2" PER 7/000 S501

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMID P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
411
S202

TITLE OF SHEET
NEW CABIN – ROOF FRAMING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 357 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt

MEP COORDINATION SCHEDULE (HS-411)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:

A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-411-1	WALL EXHAUST FAN	0.39 A	-	120 -1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-411-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-		-	#12	3/4"
EH-411-2	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
WH-411-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

EXHAUST FAN SCHEDULE (HS-411)

ACCESSORIES:
1. STANDARD DISCONNECT PREWIRED.
2. STANDARD FINISH.
3. WALL CAP WITH INTEGRAL BACKDRAFT DAMPER.

CONTROLS:
1. EXHAUST FAN SHALL BE CONTROLLED BY WALL SWITCH PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	AIRFLOW (CFM)	ESP (IN WC)	SONES	DRIVE	MOUNTING	MOUNTING HEIGHT (IN)	CONTROL
EF-411-1	PANASONIC	FV-0510VS1	100	0.25	1.3	DIRECT	WALL	90	1

ELECTRIC HEATER SCHEDULE (HS-411)

ACCESSORIES:
1. RECESSED WALL MOUNTED UNITS TO HAVE INTEGRAL THERMOSTAT.
2. RADIANT COVE HEATERS TO HAVE REMOTE MOUNTED 7-DAY PROGRAMMABLE LINE VOLTAGE THERMOSTAT.
3. INTEGRAL DISCONNECTING MEANS AND THERMAL OVERLOADS.

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELECTRICAL DATA.

MARK	MANUF.	MODEL	VOLTAGE-PH	WATTAGE	MOUNTING HEIGHT (IN)	MOUNTING	PHYSICAL DATA		
							DEPTH (IN)	WIDTH (IN)	HEIGHT (IN)
EH-411-1	Q MARK	RCC15024C	240 - 1	1500	90	WALL	4	118	4-3/16
EH-411-2	Q MARK	CWH1101DSF	120 - 1	500	12	RECESSED WALL	4	10-5/8	12

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HEINES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
411
M001

TITLE OF SHEET
NEW CABIN –
MECHANICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 358 OF 371

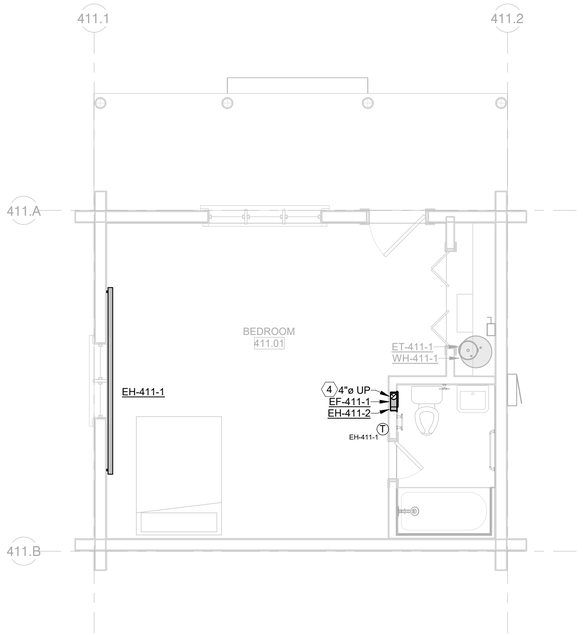

2 NEW CABIN – MECHANICAL PLAN

1/4" = 1'-0"

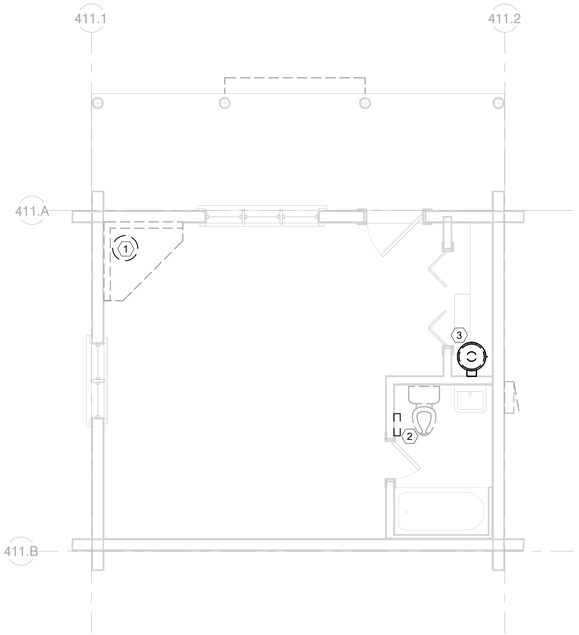

1 NEW CABIN – MECHANICAL DEMO PLAN

1/4" = 1'-0"

MECHANICAL PLAN NOTES

A. VERIFY THE LOCATION OF THERMOSTATS AND SENSORS WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION. INSTALL THERMOSTATS 48" ABOVE FINISHED FLOOR PER ABA REQUIREMENTS.
B. PROVIDE AND INSTALL SEISMIC BRACING FOR EQUIPMENT, DUCTWORK AND PIPING PER THE REQUIREMENTS OF THE CURRENTLY ADOPTED INTERNATIONAL BUILDING CODE.
C. FLEXIBLE DUCTWORK BETWEEN BRANCH DUCTS AND GRILLES, REGISTERS, OR DIFFUSERS SHALL BE LIMITED TO 5 FT. FLEXIBLE DUCT SHALL NOT BE USED IN PLACE OF ELBOWS.
D. PROVIDE AND INSTALL FIRE, SMOKE, OR COMBINATION FIRE/SMOKE DAMPERS WHERE DUCTWORK PASSES THROUGH RATED ASSEMBLIES. ASSOCIATED DUCT DETECTORS SHALL BE ADDRESSABLE. SMOKE DAMPERS AND COMBINATION SMOKE/FIRE DAMPERS SHALL INCLUDE A KEYED REMOTE TEST SWITCH LOCATED IN AN ACCESSIBLE LOCATION. FIELD COORDINATE THE LOCATION OF TEST SWITCHES WITH THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
E. SEAL DUCT AND PIPE PENETRATIONS THROUGH FIRE RATED ASSEMBLIES WITH A UL-APPROVED FIRE STOP SYSTEM.
F. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE DUCTWORK AND PIPING PENETRATE DRAFTSTOPPING MATERIALS.
G. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, DAMPERS AND DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
H. DUCTWORK DIMENSIONS INDICATE THE CLEAR WIDTH/HEIGHT AND HAVE NOT BEEN INCREASED TO ACCOMMODATE DUCT LINER. INSTALLED DUCT SHALL BE INCREASED TO ACCOMMODATE LINER THICKNESS WHERE LINER IS INDICATED IN THE DRAWINGS OR SPECIFICATIONS.
I. EXPOSED DUCTWORK TO BE HOT DIPPED GALVANIZED STEEL AND PAINTED PER ARCHITECTURAL. CONTRACTOR TO CLEAN AND DRY DUCTWORK PRIOR TO PAINTING.
J. GAS PIPING TO BE WELDED IN CONCEALED SPACES.
K. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
L. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
M. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
N. MINIMUM TERMINAL DEVICE BRANCH PIPE SIZE IS 3/4"ø UNLESS OTHERWISE NOTED.
O. PROVIDE HIGH POINT AIR VENTS, LOW POINT DRAINS (WITH CAPPED HOSE CONNECTIONS), AND SLOPE PIPING AS NECESSARY TO ALLOW FOR COMPLETE DRAINAGE OF THE HYDRONIC SYSTEMS.

MECHANICAL DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF THE DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK NECESSARY TO COMPLETE THE SCOPE OUTLINED IN THE CONSTRUCTION DOCUMENTS.
B. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE MECHANICAL CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE MECHANICAL CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE UTILITY OUTAGES WITH THE GENERAL CONTRACTOR THROUGHOUT THE DURATION OF CONSTRUCTION. NOTIFICATION MUST BE GIVEN TO THE OWNER AT LEAST A WEEK PRIOR TO ANY PLANNED OUTAGES.
E. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF, WALL, CEILING, OR FLOOR PENETRATIONS ASSOCIATED WITH THE DEMOLITION OF THE EXISTING MECHANICAL SYSTEMS.

(#) KEY NOTES:

1. REMOVE EXISTING STOVE VENT THRU ROOF.
2. REMOVE EXISTING ELECTRIC WALL HEATER.
3. REMOVE EXISTING VENT AND PROPANE PIPING SERVING WATER HEATER.
4. EXHAUST UP TO ROOF VENT. FAMCO MODEL BKXP OR EQUAL.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HICKS
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
411
M101

TITLE OF SHEET
NEW CABIN – MECHANICAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 359 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

LUMINAIRE SCHEDULE

NOTES:

1. BASIS OF DESIGN. ANY ALTERNATE LUMINAIRE REQUIRES PRIOR APPROVAL PRIOR TO BIDDING. FOR SUBSTITUTIONS, SEE SECTION 01 67 00 - PRODUCT REQUIREMENTS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.

GENERAL NOTES:

A. ALL LUMINAIRES SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) SUCH AS UL OR ETL.
B. THE ELECTRICAL CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND PROVIDE ALL MOUNTING, FIRE-RATED, AND IC-RATED ACCESSORIES AS REQUIRED. FOR FIRE-RATED CEILING ASSEMBLIES AND FOR CEILINGS WITH INSULATION, VERIFY ALL RECESSED LUMINAIRE HOUSINGS ARE RATED APPROPRIATELY OR PROVIDE DROP-OVER ENCLOSURES OR TENTS FOR LUMINAIRES. VERIFY THAT DROP-OVER ENCLOSURES OR TENTS ALLOW FOR AIR SPACE AROUND LUMINAIRE PER MANUFACTURER'S RECOMMENDATIONS.

TYPE	LAMPS	LOAD (W)	OUTPUT (LM, NOMINAL)	CCT (K)	DESCRIPTION	MFR	CATALOG NO. OR SERIES	MOUNTING	VOLTAGE	NOTES
A1	LED	21 W	2100	3000	DECORATIVE PENDANT, 18" TAPER	LUMETTA	PT1815-BLACK-F10-D88 MT WILLOW-L411-120V-3000K-STM-LTC3-LBW	PENDANT	120 V	1, 2
S1	LED	100 W	860	3000	BATHROOM WALL SCONCE	REJUVENATION	THURMAN WALL SCONCE	WALL	120 V	1, 2

Branch Panel: P411

Equipment Notes:
PROVIDE PANEL WITH INTEGRAL SURGE PROTECTION DEVICE.
ALL 20A AND LESS SINGLE POLE BREAKERS INSTALLED IN PANEL SHALL BE AFCI STYLE.

Location: 411 NEW CABIN
Supply From: SOUTH SERVICE
Mounting: Surface
Enclosure: 3R
Volts: 120/240 Single
Phases: 1
Wires: 3
A.F.C.: 1,761
Mains Type: MCB
Mains Rating: 100 A
MCB Rating: 90 A

CKT	Circuit Description	Circuit Notes	Load Classification	Trip	Poles	A		B		Poles	Trip	Load Classification	Circuit Notes	Circuit Description	CKT
1	SPD		--	--	2	--	2250			2	30 A	Heating		WH-411-1	2
3								--	2250						4
5	RCPT - BATHROOM		Receptacle	20 A	1	180	150			1	20 A	Heating		EH-411-2	6
7	EH-411-1		Heating	20 A	2			750	1260	1	20 A	Receptacle		RCPT - BEDROOM	8
9						750	360			1	20 A	Receptacle		RCPT - EXTERIOR	10
11	LTG		Lighting; Power	20 A	1			376	600	1	20 A	Motor		GRINDER PUMP	12
13	RCPT - FIBER PANEL		Receptacle	20 A	1	180	0			1	20 A	--		SPARE	14
15	SPARE		--	20 A	1			0	0	1	20 A	--		SPARE	16
17	SPARE		--	20 A	1	0	0			1	20 A	--		SPARE	18
					Total Load:	3870 VA		5236 VA							
					Total Amps:	32 A		44 A							

Circuit Notes:
Q: 30mA GFCI FOR EQUIPMENT
P: 6mA GFCI FOR PERSONNEL
S: SHUNT-TRIP
L: LOCKABLE
H: HASP

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Heating	6150 VA	100.00%	6150 VA		
Lighting	226 VA	125.00%	283 VA	**Total Conn. Load:**	9106 VA
Motor	600 VA	125.00%	750 VA	**Total Est. Demand:**	9313 VA
Power	150 VA	100.00%	150 VA	**Total Conn.:**	38 A
Receptacle	1980 VA	100.00%	1980 VA	**Total Est. Demand:**	39 A

MEP COORDINATION SCHEDULE (HS-411)

CONTROL TYPE:

BAS	BUILDING AUTOMATION SYSTEM
CO	CARBON MONOXIDE DETECTOR
CONT	CONTINUOUS OPERATION
EF	INTERLOCK WITH EXHAUST FAN
HCP	HOOD CONTROL PANEL
INT	INTEGRAL
L	LIGHT SWITCH
MS	MANUAL SWITCH
OS	OCCUPANCY SENSOR
PS	PRESSURE SWITCH
T	THERMOSTAT
TC	TIME CLOCK
UC	UNIT CONTROLLER
VE	VEHICLE EXHAUST DETECTION SYSTEM
N/A	NOT APPLICABLE

DISCONNECT/STARTER TYPE:

CB	PANELBOARD CIRCUIT BREAKER WITHIN SIGHT OF EQUIPMENT
CSFD	COMBINATION STARTER/DISCONNECT - HOA
FD	FUSED DISCONNECT
FST	FUSTAT
FW	FACTORY-WIRED SINGLE POINT CONNECTION
MOCP	MOTOR OVER-CURRENT PROTECTION
MSS	MANUAL STARTER SWITCH WITH THERMAL OVERLOADS (1-, 2- OR 3-POLE AS REQUIRED)
NFD	NON-FUSED DISCONNECT
RCPT	20A DUPLEX RECEPTACLE (GFCI PROTECTED AS REQUIRED), CORD AND PLUG
RVSS	REDUCED VOLTAGE SOLID-STATE
VFD	VARIABLE FREQUENCY DRIVE - HOA
N/A	NOT APPLICABLE

DIVISION OF RESPONSIBILITIES:

22/22	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 22
22/26	FURNISHED AND INSTALLED BY DIV. 22, WIRED BY DIV. 26
23/23	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 23
23/26	FURNISHED AND INSTALLED BY DIV. 23, WIRED BY DIV. 26
26/26	FURNISHED AND INSTALLED BY DIV. 26, WIRED BY DIV. 26

GENERAL NOTES:
A. CONTROL WIRING SHALL BE CONCEALED WITHIN WALL CONSTRUCTION, ABOVE CEILING, OR RUN IN CONDUIT. EXPOSED CONTROL WIRING IS UNACCEPTABLE.
B. UNLESS SPECIFICALLY NOTED, ALL FEEDERS SHALL INCLUDE A FULL SIZE NEUTRAL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT BEING SUPPLIED WHETHER A NEUTRAL IS REQUIRED PRIOR TO ROUGH-IN.

MARK	DESCRIPTION	ELECTRICAL DATA			CONTROL		NOTES	DISCONNECT / STARTER		DISCONNECT				FEEDER	
		LOAD	MOCP	VOLT-PHASE	TYPE	DIV		TYPE	DIV	SIZE (NEMA)	SWITCH (AMPS)	FUSE (AMPS)	ENCLOSURE (NEMA)	COPPER WIRE (AWG)	CONDUIT (INCHES)
EF-411-1	WALL EXHAUST FAN	0.39 A	-	120 -1	MS	26 / 26		N/A	26 / 26	-	-	-	-	#12	3/4"
EH-411-1	COVE HEATER	1500 W	-	240 - 1	T	23 / 26		N/A	26 / 26	-	-		-	#12	3/4"
EH-411-2	WALL HEATER	500 W	-	120 - 1	INT	23 / 23		FW	23 / 26	-	-	-	-	#12	3/4"
WH-411-1	WATER HEATER	4500 W	-	240 - 1	INT	22 / 22		NFD	26 / 26	-	30	-	1	#10	3/4"

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
411
E001

TITLE OF SHEET
NEW CABIN – ELECTRICAL SCHEDULES
REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 360 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

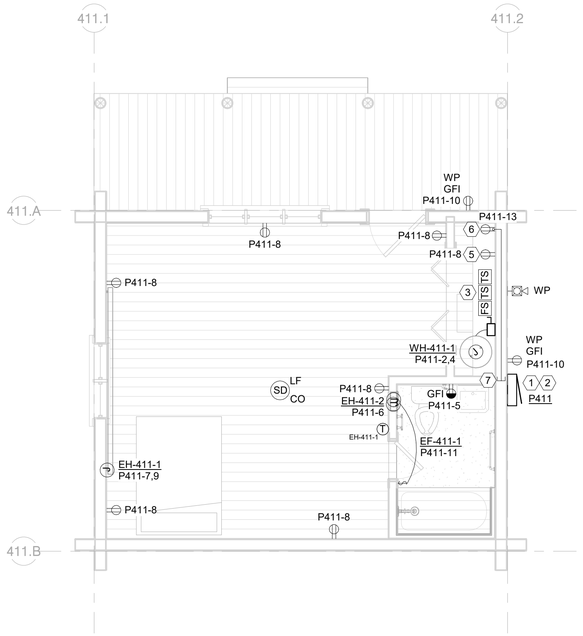

2 NEW CABIN – POWER AND SIGNAL RENOVATION PLAN

1/4" = 1'-0"

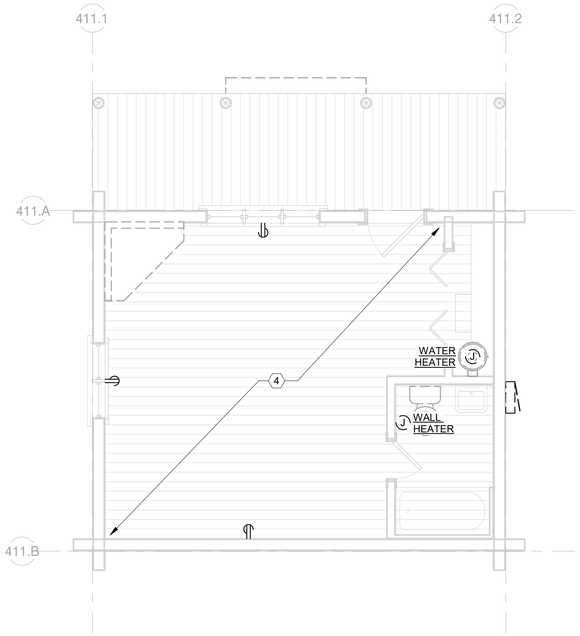

1 NEW CABIN – POWER AND SIGNAL DEMO PLAN

1/4" = 1'-0"

POWER AND SIGNAL PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL 120V RECEPTACLES UTILIZED IN THE PROJECT SHALL BE OF TAMPER RESISTIVE CONSTRUCTION REGARDLESS OF LOCATION.
D. UTILIZE AFCI BREAKERS IN PANELS FOR PROTECTING OF ALL 120V, 20A OR LESS LOADS.
E. ALL FIRE ALARM DEVICES IN PROJECT SHALL BE PART OF CENTRAL FIRE ALARM SYSTEM, SERVED BY THE FIRE ALARM CONTROL PANEL LOCATED IN MAIN LODGE.
F. ANY MECHANICAL EQUIPMENT THAT DOES NOT HAVE A DISCONNECT SHOWN AT DEVICE ON PLAN IS PROVIDED W/ A FACTORY DISCONNECT. EC TO CONNECT DISCONNECT TO CIRCUIT AS SHOWN ON PLAN.
G. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS. CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. EXISTING DIRECT BURY FEEDER IS IN PLACE FROM EXTERIOR OF CABIN BACK TO EXISTING PEDESTAL-MOUNT MAIN SERVICE DISCONNECT LOCATED ON SITE. PROVIDE NEW 1-1/2" SCH 80 PVC CONDUIT VERTICALLY FROM 12" BELOW GRADE UP TO NEW EXTERIOR PANEL. ROUTE EXISTING FEEDER UP THRU NEW CONDUIT AND CONNECT TO NEW PANEL.
2. GROUND IN ACCORDANCE WITH NEC ARTICLE 250.32 REQUIREMENTS.
3. TIE-IN TO MAIN LODGE FIRE ALARM CONTROL PANEL. IN THE EVENT OF A FIRE SPRINKLER WATERFLOW EVENT AT CABIN, A SIGNAL SHALL BE SENT TO THE FACP IN MAIN LODGE, WHICH WILL IN TURN ALERT THE CENTRAL MONITORING SYSTEM.
4. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.
5. NOTED RECEPTACLE TO SERVE FUTURE RADON FAN.
6. LOCATION RESERVED FOR 10"X10" WALL MOUNT FIBER PANEL. FIBER PANEL TO BE FURNISHED AND INSTALLED BY COMMUNICATIONS UTILITY PROVIDER (DIAMOND COMMUNICATIONS). CONTRACTOR SHALL PROVIDE DUPLEX RECEPTACLE AT 48" AFF FOR FIBER PANEL.
7. CONTRACTOR SHALL PROVIDE A 1" ENT FLEX CONDUIT FROM CRAWL SPACE AND ROUTE UP TO FIBER PANEL LOCATION. BUSH CONDUIT END AND PROVIDE WITH PULL STRING. COORDINATE CONDUIT END POINT IN CRAWL SPACE WITH FIBER CONDUIT STUB-IN FROM SITE.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
Date 07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
411
E101

TITLE OF SHEET
NEW CABIN – POWER AND SIGNAL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 361 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

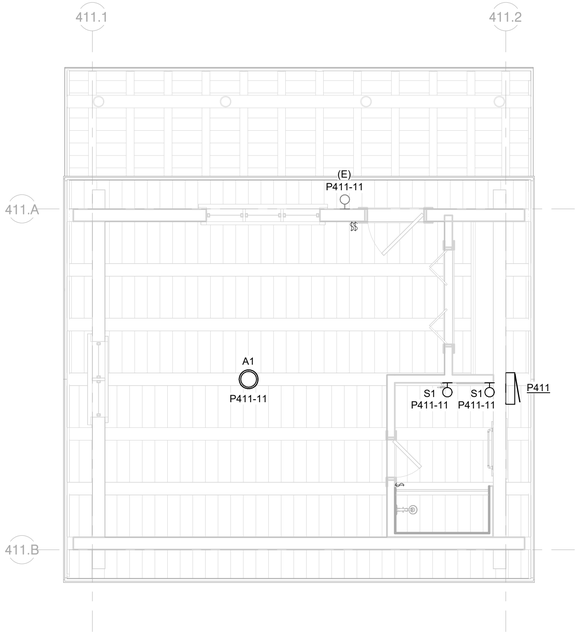

2 NEW CABIN – LIGHTING RENOVATION PLAN

1/4" = 1'-0"

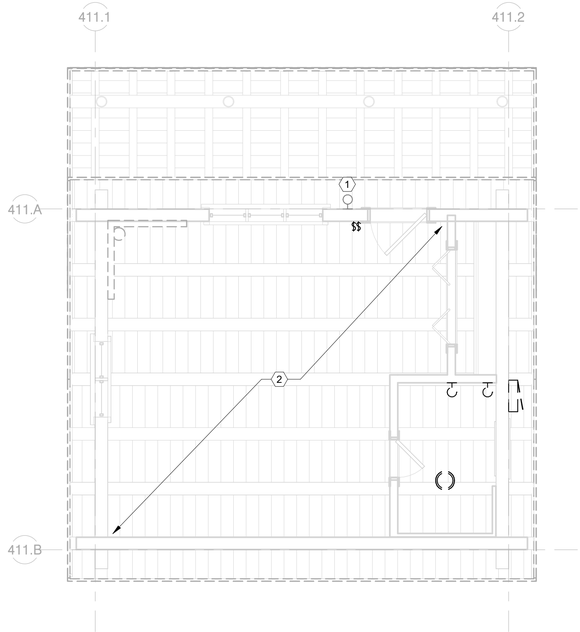

1 NEW CABIN – LIGHTING DEMO PLAN

1/4" = 1'-0"

LIGHTING PLAN GENERAL NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. NEW WIRING SHALL BE CONCEALED WITHIN WALLS, CRAWL SPACE AND CEILING CAVITY TO GREATEST EXTENT POSSIBLE. WHERE EXPOSED SURFACE MOUNT ROUTING IS NECESSARY, WIRING SHALL BE PROVIDED IN PAINTED EMT CONDUIT, RUN VERTICALLY FROM CRAWL SPACE OR CEILING.

ELECTRICAL DEMO NOTES

A. IT IS ABSOLUTELY NECESSARY FOR ALL TRADES INVOLVED TO COORDINATE WITH EACH OTHER AND VERIFY THAT THERE ARE NO CONFLICTS IN LOCATION OF DUCTS, CONDUITS, DIFFUSERS, BOXES, AND OTHER ITEMS THROUGHOUT THIS PROJECT BEFORE FINAL PLACEMENT OF MATERIALS.
B. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING OF FLOORS, WALLS, CEILINGS, AND ROOFS TO PERFORM THE REQUIRED WORK DEPICTED IN THESE DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR ALL PATCHING OF HOLES TO THE SATISFACTION OF THE ARCHITECT/ENGINEER.
C. ALL WALL REGIONS SHOWN DASHED ARE EXISTING, TO BE DEMO'D, OR IN SOME CASES ARE EXISTING DOORWAYS TO BE WALLED IN. CONTRACTOR SHALL FIELD-VERIFY AFFECTED POWER, LIGHTING AND SIGNAL, PRIOR TO BID.
D. DASHED WALLS, EQUIPMENT, FIXTURES AND DEVICES SHOWN BLACK, OR BLACK AND DASHED ARE EXISTING FOR DEMO, AND ITEMS IN GRAY AND SOLID ARE EXISTING TO REMAIN, UNLESS SPECIFICALLY NOTED OTHERWISE.
E. ALL ITEMS NOTED FOR DEMO SHALL BE COMPLETELY DEMO'D, INCLUDING DISCONNECTS, CONDUIT AND CONDUCTORS BACK TO SOURCE, UNLESS SPECIFICALLY NOTED OTHERWISE.
F. NOT ALL EXISTING DEVICE LOCATIONS HAVE BEEN VERIFIED OR SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS, PRIOR TO BID.

(#) KEY NOTES:

1. EXISTING TO REMAIN.
2. UNLESS NOTED OTHERWISE, REMOVE ALL EXISTING ELECTRICAL AT CABIN.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
RYAN P. MARONEY
18841
State
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: CDC
DRAWN: CDC
TECH REVIEW: RPM
DATE: 07/21/2026

SUB SHEET NO.
411
E201

TITLE OF SHEET
NEW CABIN – LIGHTING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 362 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

PLUMBING FIXTURE SCHEDULE - NEW CABIN (HS-411)

REMARKS:
1. PROVIDE ALL FIXTURES WITH APPROPRIATE COMMERCIAL GRADE SUPPORTS/CARRIERS, P-TRAPS, STOP VALVES, BRAIDED FLEXIBLE SUPPLIES, UNDER FIXTURE PIPING INSULATION AND HAMMER ARRESTORS.
2. FIELD COORDINATE INSTALLATION LOCATION OF WATER CLOSETS, LAVATORIES, AND URINALS FOR ABA COMPLIANCY WITH ARCHITECT/ENGINEER.

MARK	FIXTURE						TRIM				ROUGH-IN SIZE (IN)				REMARKS
	DESCRIPTION	ABA	MANUF.	MODEL	MATERIAL / FINISH	MOUNTING / HEIGHT	DESCRIPTION	MANUF.	MODEL	MATERIAL / FINISH	WASTE	VENT	COLD	HOT	
BS-411-1	SALVAGED BATH TUB	- -	- -	- -	- -	- -	SHOWER / TUB TRIM	KOHLER	K-TS97074-4G	ARCH SELECT	2"	WET VENT	1/2"	1/2"	RESTORE EXISTING BATH TUB. PROVIDE KOHLER RITE-TEMP PRESSURE BALANCING VALVE, WATER STOPS, BATHTUB DRAIN ASSEMBLY AND REQUIRED ACCESSORIES FOR COMPLETE INSTALLATION
FD-411-1	FLOOR DRAIN WITH ADJUSTABLE HEIGHT ROUND STRAINER	- -	JR SMITH	2005	CAST IRON BODY / NICKEL BRONZE STRAINER	FLOOR	- -	- -	- -	- -	2"	WET VENT	- -	- -	PROVIDE COMPLETE WITH ASSE 1072 TRAP SEAL.
L-411-1	SALVAGED LAVATORY	- -	- -	- -	- -	- -	FAUCET	KOHLER	K-13132-4A	ARCH SELECT	2"	1-1/2"	1/2"	1/2"	RESTORE EXISTING LAVATORY. PROVIDE WITH WATER STOPS, OFFSET DRAIN W/ TRUBRO LAV GUARD II PIPE INSULATION.
WC-411-1	WATER CLOSET - FLOOR MOUNTED - TANK	YES	KOHLER	K-5310	VITREOUS CHINA	FLOOR / RIM 17"	ELONGATED TOILET SEAT	KOHLER	K-4650	POLYPROPYLENE	3"	WET VENT	1/2"	- -	1.28 GALLON PER FLUSH - PROVIDE WITH WATER STOP.

DOMESTIC WATER HEATER SCHEDULE - ELECTRIC (HS-411)

REMARKS:
1. ALL PIPING WITHIN 18" OF WATER HEATER SHALL BE COPPER.
2. PROVIDE ASME TEMPERATURE AND PRESSURE RELIEF VALVES. PIPE TO NEAREST FLOOR RECEPTOR.
3. PROVIDE TEMPERATURE AND PRESSURE GAUGE.
4. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.
5. HAND HOLE CLEAN-OUT.
6. PROVIDE SHEET METAL PAN WITH 3/4" SCHEDULE 40 PVC DRAIN TO NEAREST FLOOR RECEPTOR.
7. FIVE YEAR LIMITED TANK WARRANTY
8. ZERO INCH CLEARANCE
9. MAGNESIUM ANODE RODS

ELECTRICAL DATA:
SEE MEP COORDINATION SCHEDULE FOR STARTER/DISCONNECT AND ALL OTHER ELEC. DATA.

MARK	MANUF.	MODEL	TYPE	STORAGE VOLUME (GAL)	STORAGE TEMP. (°F)	KW	ENERGY FACTOR	FIRST HOUR RATING (GAL)	RECOVERY AT 90°F (GAL/HR)	UNIT PHYSICAL DATA		
										HEIGHT (IN)	DIAMETER (IN)	WEIGHT (LBS)
WH-411-1	RHEEM	XE40M06ST45U1	ELECTRIC TANK	38	120	4.5	0.94	59	21	31-1/2	23	128

PLUMBING EXPANSION TANK SCHEDULE (HS-411)

REMARKS:
1. PROVIDE ANTIMICROBIAL LINER.
2. PROVIDE SEISMIC BRACING PER SPECIFICATIONS.

MARK	MANUF.	MODEL	ASSOCIATED EQUIPMENT	STYLE	VOLUME (GAL)	MAX. ACCEPTANCE VOLUME (GAL)	MAXIMUM WORKING PRESSURE (PSI)	SYSTEM CONNECTION (IN)	PHYSICAL DATA		
									DIAMETER (IN)	HEIGHT (IN)	WEIGHT (LBS)
ET-411-1	TACO	PAX10-150	WH-411-1	BLADDER	2.6	1.7	150	3/4	12	12	40

WATER SUPPLY FIXTURE UNITS CALCULATION (HS-411)

FIXTURE	QTY.	PRIVATE WSFU	TOTAL WSFU
BATHROOM GROUP, FLUSH TANK	1	3.6	3.6
			3.6
MAX. LENGTH (FT)	30		
TOTAL PEAK FLOW (GPM)	8		
WATER METER SIZE (BY UTILITY)	2"		
CALCULATIONS BASED ON IPC TABLE E103.3(2)			

DRAINAGE FIXTURE UNITS CALCULATION (HS-411)

FIXTURE	QTY.	DFU	TOTAL DFU
BATHROOM GROUP (1.6 GPF WATER CLOSET)	1	5.0	5
EMERGENCY FLOOR DRAIN	1	0.0	0
			5
WASTE PIPE SIZE	3"		
CALCULATIONS BASED ON IPC TABLE 709.1.			

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. MEIER
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
411
P001

TITLE OF SHEET
NEW CABIN – PLUMBING SCHEDULES

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
PMIS/PKG NO. 193826
PMIS/PKG NO. 237343
SHEET 363 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

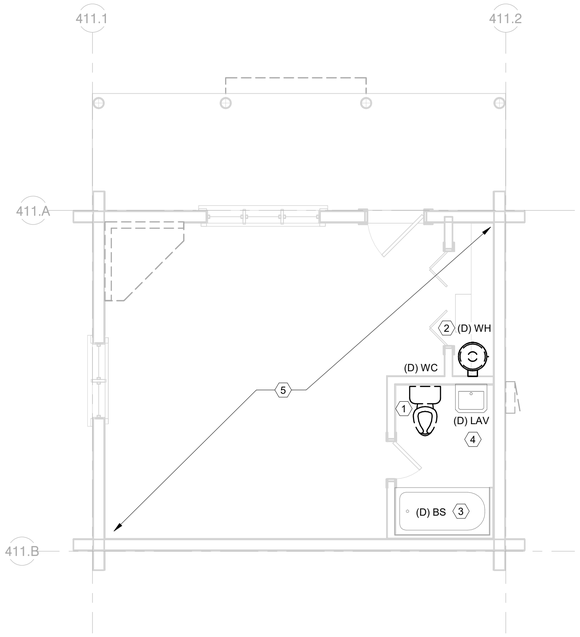

1 NEW CABIN – PLUMBING DEMO PLAN

1/4" = 1'-0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

(#) KEY NOTES:

1. REMOVE EXISTING WATER CLOSET AND ASSOCIATED PIPING.
2. REMOVE EXISTING WATER HEATER, VENT, AND ASSOCIATED PIPING.
3. RETAIN BATH TUB FOR REUSE. BATH TUB MAY REMAIN IN PLACE. REMOVE ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
4. RETAIN LAVATORY FOR REUSE. LAVATORY MAY REMAIN IN PLACE. REMOVE ASSOCIATED DRAIN CONNECTION, PIPING, AND FAUCET.
5. NO EXISTING PIPING SYSTEMS ARE TO BE REUSED.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer – Joseph R. Hawks – 16596 – WYOMING – 07/21/2026

A/E FIRM PRIME: HENNEBERY EDDY PORTLAND, OR SUB: MORRISON MAIERLE BOZEMAN, MT	DESIGNED: LAG DRAWN: LAG TECH REVIEW: JRH DATE: 07/21/2026	SUB SHEET NO. 411 P101	TITLE OF SHEET NEW CABIN – DEMO PLAN REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK	DRAWING NO. 136 193826 PMIS/PKG NO. 237343 SHEET 364 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

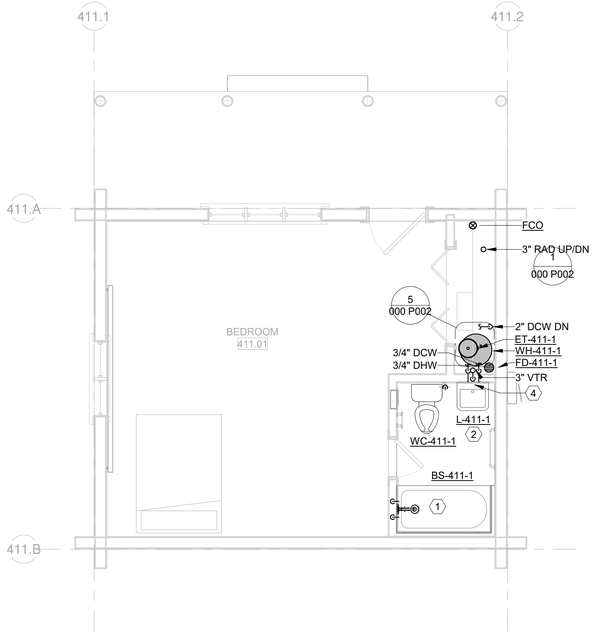

2 NEW CABIN – PLUMBING PLAN

1/4" = 1'-0"

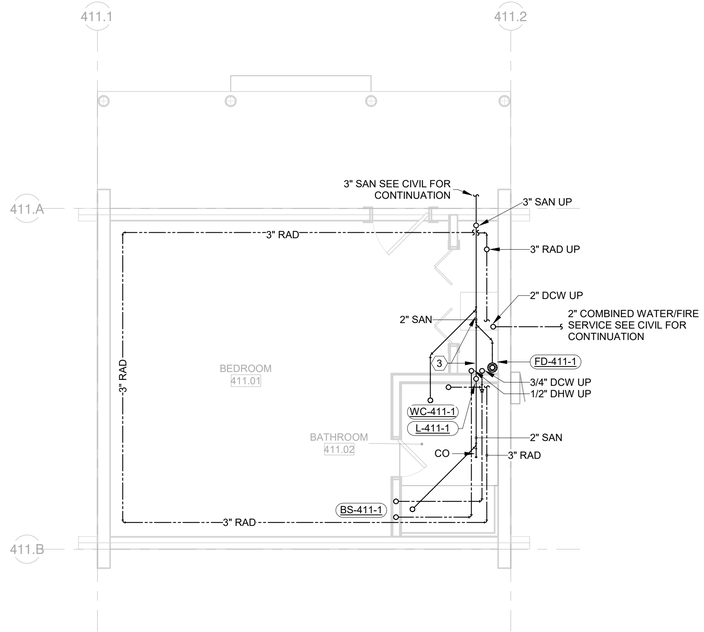

1 NEW CABIN – UNDERFLOOR PLUMBING PLAN

1/4" = 1'-0"

PLUMBING PLAN NOTES

A. PROVIDE ACCESS DOORS TO ALLOW SERVICE AND INSPECTION OF EQUIPMENT, VALVES, AND OTHER DEVICES INSTALLED IN INACCESSIBLE LOCATIONS. COORDINATE SUCH INSTALLATIONS WITH THE ARCHITECT AND ENGINEER.
B. PROVIDE TRAP SEALS AND TRAP PRIMERS FOR FLOOR DRAINS, FLOOR SINKS, AND OTHER FLOOR RECEPTORS.
C. INSTALL ACCESSIBLE PLUMBING FIXTURES IN COMPLIANCE WITH ABA REQUIREMENTS. INSULATE EXPOSED PIPING BELOW ABA ACCESSIBLE FIXTURES.
D. INSTALL FLOOR DRAIN STRAINERS AND CLEANOUT COVERS FLUSH AND LEVEL WITH FINISHED FLOOR.
E. PIPING SHALL BE IDENTIFIED WITH PIPE LABELS MARKED AT A MAXIMUM OF EVERY 25 FT. VALVES SHALL BE IDENTIFIED WITH BRASS OR ALUMINUM VALVE TAGS.
F. PROVIDE AND INSTALL PIPE GUIDES, EXPANSION JOINTS, AND HANGERS PER MANUFACTURER'S RECOMMENDATIONS.
G. PIPING WALL PENETRATIONS SHALL BE FINISHED WITH A CHROME ESCUTCHEON PLATE.
H. MAINTAIN THE INTEGRITY OF DRAFTSTOPPING WHERE PIPES PENETRATE DRAFTSTOPPING MATERIALS.
I. NO FITTINGS OR PIPING CONNECTIONS SHALL BE INSTALLED UNDERSLAB.
J. REFER TO THE PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES.
K. COORDINATE CONCRETE PENETRATIONS WITH STRUCTURAL DRAWINGS TO VERIFY HOW AND WHERE CONCRETE CAN BE CUT.
L. EXPOSED PIPING SHALL BE PAINTED PER ARCHITECTURAL OR PROVIDED WITH A PVC COATED JACKET IN THE COLOR OF THE ARCHITECT'S CHOOSING. CONTRACTOR TO CLEAN AND DRY PIPING PRIOR TO PAINTING.
M. SANITARY SEWER, RAINWATER, AND OTHER DRAIN PIPING SHALL BE INSTALLED AT A MINIMUM 1/4" PER FOOT (2%) SLOPE IN DIRECTION OF FLOW. UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
N. COORDINATE UNDERGROUND FIRE RISER STUB UP LOCATION WITH FIRE SUPPRESSION SHOP DRAWINGS.

PLUMBING DEMO NOTES

A. LOCATIONS AND DIMENSIONS OF EXISTING FACILITIES IDENTIFIED ON THIS DRAWING ARE APPROXIMATE AND REPRESENT THE BEST AVAILABLE INFORMATION BASED ON A COMBINATION OF FIELD INVESTIGATIONS AND VARIOUS DESIGN AND RECORD DRAWINGS AVAILABLE AT THE TIME OF DESIGN. FIELD VERIFY LOCATIONS AND DIMENSIONS PRIOR TO ORDERING EQUIPMENT AND DURING PERFORMANCE OF THE WORK. PROVIDE DEMOLITION WORK, NECESSARY FITTINGS, TRANSITIONS, AND OTHER COMPONENTS AS REQUIRED FOR A COMPLETE AND FUNCTIONAL INSTALLATION OF NEW SYSTEMS AT NO ADDITIONAL COST TO THE OWNER.
B. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN AS DARK AND DASHED SHALL BE DEMOLISHED. EXISTING PLUMBING EQUIPMENT, FIXTURES, AND PIPING SHOWN LIGHT SHALL REMAIN UNCHANGED.
C. THE PLUMBING CONTRACTOR SHALL COORDINATE SALVAGE OF REMOVED EQUIPMENT IN GOOD CONDITION WITH THE OWNER. THE PLUMBING CONTRACTOR SHALL DISPOSE OF UNWANTED EQUIPMENT.
D. COORDINATE WITH GENERAL CONTRACTOR TO PATCH AND REPAIR ROOF AND WALL ASSEMBLIES ASSOCIATED WITH PLUMBING DEMOLITION.
E. CONCRETE SLAB CUTTING REGIONS SHOWN ON DRAWINGS ARE APPROXIMATE AND MUST BE FIELD COORDINATED PRIOR TO THE CUTTING OF THE SLAB.
F. PROTECT EXISTING BUILDING ELEMENTS DURING DEMOLITION WORK. COORDINATE WITH OTHER TRADES TO ENSURE NO EXISTING EQUIPMENT/PIPING TO REMAIN IS DAMAGED DURING THE DEMOLITION WORK.

KEY NOTES:

1. RESTORE EXISTING BATH TUB. INSTALL NEW TRIM AND ACCESSORIES .
2. RESTORE EXISTING LAVATORY. INSTALL NEW TRIM AND ACCESSORIES .
3. SECTION OF PIPE TO BE WET VENTED. SEE IPC SECTION 912 FOR DETAILS.
4. 3/4" DCW AND 1/2" DHW DOWN. 1/2" DCW AND 1/2" DHW TO L-411-1.

NORTH

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer
JOSEPH R. HENKES
16596
07/21/2026
WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: LAG
DRAWN: LAG
TECH REVIEW: JRH
DATE: 07/21/2026

SUB SHEET NO.
411
P201

TITLE OF SHEET
NEW CABIN – PLUMBING PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 365 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

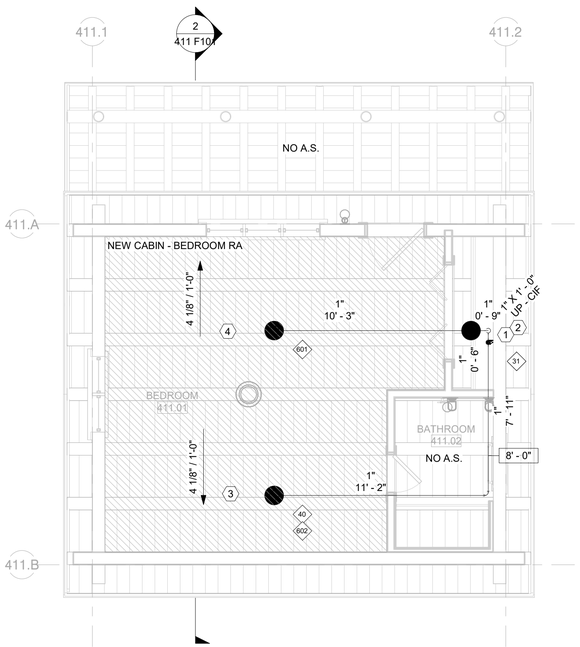

1 NEW CABIN – FIRE SUPPRESSION PLAN

1/4" = 1'-0"

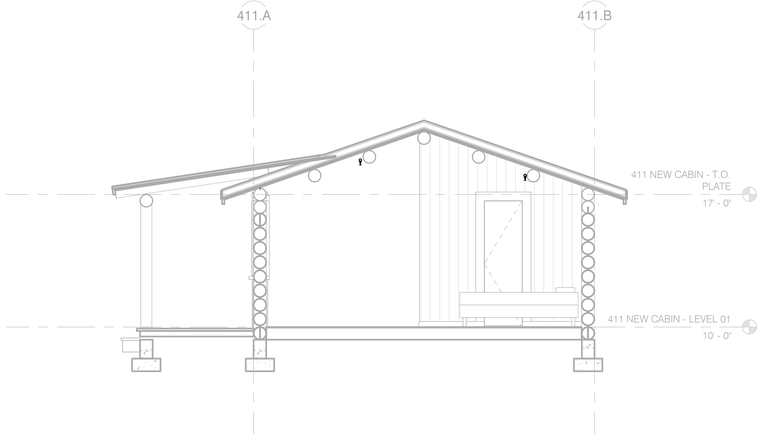

2 NEW CABIN – FIRE SUPPRESSION SECTION

1/4" = 1'-0"

Hydraulic Information	
Remote Area Name	New Cabin - Bedroom RA
Occupancy Classification	Residential
Density	0.05 GPM
Actual Area	273 SF
Total Hose Streams	0.00 GPM
Flowing Heads	2
K-Factor	4.9
Base of Riser	38.97 GPM
Base of Riser	29.34 psi
Safety Margin	+37.14 (51.02%)

FIRE SUPPRESSION PLAN NOTES:

1. IT IS THE OWNER'S RESPONSIBILITY TO MAINTAIN THE SPACES OCCUPIED BY THE WET SPRINKLER SYSTEM AT OR ABOVE 40°F.
2. FIRE SPRINKLER HEADS IN BATHROOMS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.2. SHALL BE ALLOWED TO BE OMITTED.
3. FIRE SPRINKLER HEADS IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 8.3.3. SHALL BE ALLOWED TO BE OMITTED.
4. FIRE SPRINKLER HEADS SHALL BE PROVIDED IN CLOSETS THAT MEET THE REQUIREMENTS OF NFPA 13D (2022) 6.6.4. AND SHALL HAVE AN INTERMEDIATE TEMPERATURE RATING.
5. FIRE SPRINKLER PROTECTION IS NOT REQUIRED IN THE AREAS OUTLINED IN NFPA 13D (2022) 8.3.5.
6. FIRE SPRINKLER HEADS SHALL BE SPACED AND HAVE THE APPROPRIATE TEMPERATURE RATING IN ACCORDANCE WITH NFPA 13D (2022) 7.5.6.3.
7. PENETRATIONS THROUGH FIRE RATED WALL SHALL BE FIRESTOPPED, TESTED AND INSPECTED IN ACCORDANCE WITH IBC.
8. HANGERS AND SEISMIC RESTRAINTS ARE NOT SHOWN FOR CLARITY. FOLLOW NFPA 13D REQUIREMENTS AND DETAILS SHOWN ON F003-F004.
9. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 18' X 18' COVERAGE IN ROOMS WITH MORE THAN A SINGLE SPRINKLER.
10. FIRE SPRINKLERS IN RESIDENTIAL HAZARD AREAS ARE DESIGNED FOR 20' X 20' COVERAGE IN ROOMS WITH A SINGLE SPRINKLER.
11. FIRE SPRINKLER PROTECTION SHALL BE REQUIRED THROUGHOUT BUILDING UNLESS OMITTED BY NFPA 13D

(#) KEY NOTES:

1. COMBINED DOMESTIC AND FIRE SERVICE LINE. REFER TO 000 F001 FOR MORE DETAILS.
2. RISER DRAIN TO BE ROUTED TO FLOOR SINK. REFER TO PLUMBING SHEETS FOR MORE DETAILS.
3. PROVIDE TEE WITH A PLUG AT THE END OF LINES TO FACILITATE WINTERIZATION WITH COMPRESSED AIR.
4. PROVIDE MANUAL HIGH POINT VENT.

FIRE SPRINKLER SCHEDULE

Symbol	Manufacturer	Model	SIN Number	K-Factor	Response	Orientation	Connection Size	Temperature Rating	Escutcheon	Finish	Description	Count
●	Reliable	F1Res49	R3516	4.9	Quick	Pendent	1/2"	175 °F	Model F1	Black	Residential Pendent	3

*EQUIVALENT SPRIKLERS WILL BE ACCEPTED 3

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer TRENT J. PEARSON 20707 Date WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR
SUB:
MORRISON MAIERLE
BOZEMAN, MT

DESIGNED: TJP
DRAWN: RJM
TECH REVIEW: RJW
DATE: 07/21/2026

SUB SHEET NO.
411
F101

TITLE OF SHEET
NEW CABIN – MAIN LEVEL PLAN

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 366 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/6204.010_NPS GRTE 4 Lazy F_MEPF_R26.rvt

COLLAPSED 416 WELL HOUSE

FOR DRAWING SHEET INDEX, REFERENCE 000 G001 THRU 000 G003

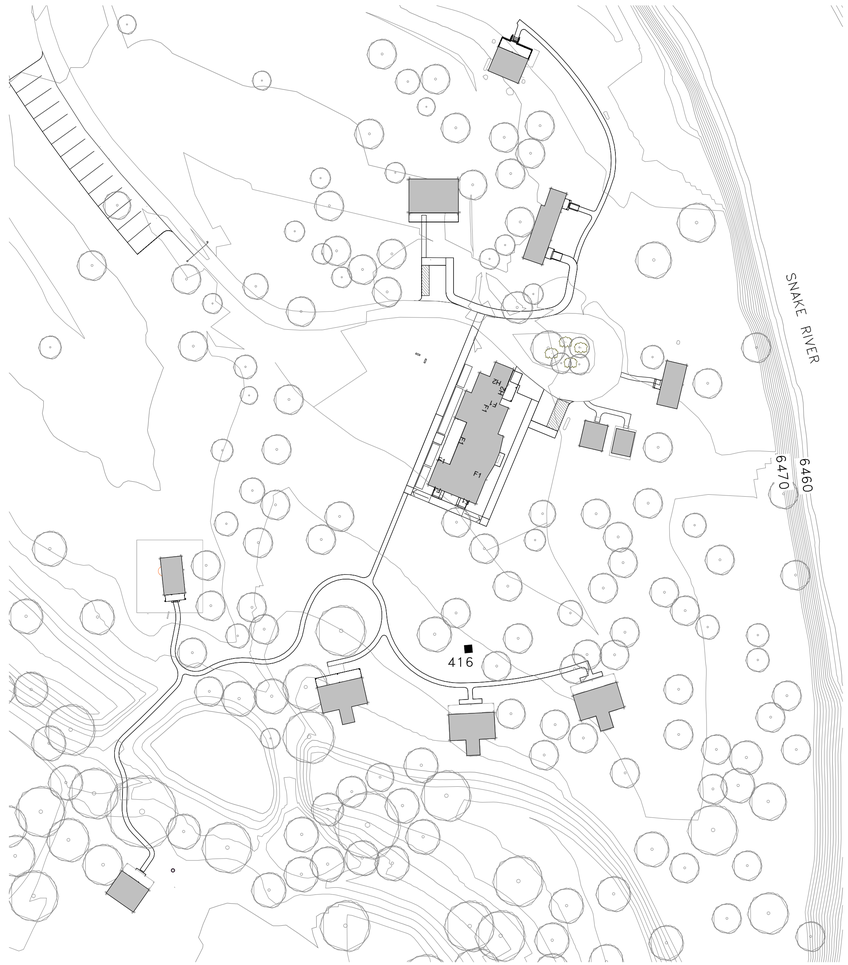

1 KEY PLAN – 416 WELL HOUSE

1" = 50'-0"

50 0 50 100

SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT
WILLIAM F. KEYSER
C-3530
7/21/26
STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
416
G000

TITLE OF SHEET
WELL HOUSE – COVER

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 367 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

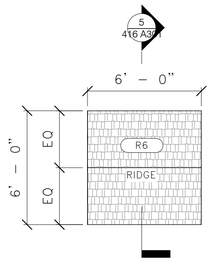

2 416 WELL HOUSE – ROOF PLAN

1/4" = 1'–0"

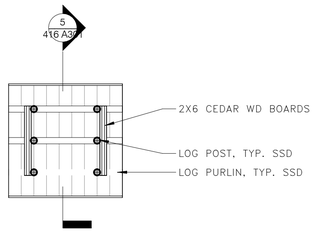

1 416 WELL HOUSE – FIRST LEVEL RCP

1/4" = 1'–0"

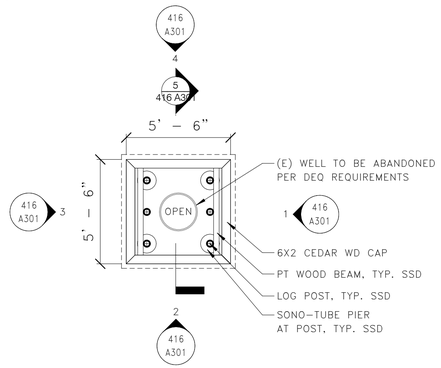

4 416 WELL HOUSE – FLOOR PLAN

1/4" = 1'–0"



NOTE: STRUCTURE IS COLLAPSED. REMOVE PILE OF MATERIAL

3 416 WELL HOUSE – DEMO FLOOR PLAN

1/4" = 1'–0"

ROOF PLAN LEGEND

- ROOFING
- (E) RIVER ROCK CHIMNEY
- R# ROOF TAG
- ### KEYNOTE TAG

ROOF PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. LOCATION OF ROOF RIDGES, VALLEYS, AND EDGES TO MATCH (E). ROOF SLOPES TO MATCH (E). CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
3. REPAIR (E) WOOD ROOF DECKING TO REMAIN. ASSUME 20% REPLACEMENT.
4. CONTRACTOR TO VERIFY EXISTENCE OF ROOF SHEATHING. IF SO, REPAIR AND MODIFY PER STRUCTURAL DWGS. FOR PRICING, ASSUME 100% SHEATHING REPLACEMENT.
5. SEE 000 A801 FOR ROOF ASSEMBLY DESCRIPTIONS.

DEMOLITION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G007 FOR REQUIREMENTS RELATED TO THE REMOVAL OF HAZARDOUS MATERIALS.
3. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
4. WHERE NOTES IN THE DRAWINGS REQUIRE THE REMOVAL OF A BUILDING ELEMENT OR SYSTEM OR A COMPLETE COMPONENT COMPRISED OF MULTIPLE ELEMENTS, THE CONTRACTOR SHALL DISASSEMBLE AND COMPLETELY REMOVE FROM THE SITE EACH ITEM IN ITS ENTIRETY SO AS TO ACCOMMODATE THE INSTALLATION OF THE NEW WORK TO FOLLOW.
5. VENT TERMINATIONS, CONDUITS, DUCTS, PANELS, AND PIPES LOCATED ON OR IN WALLS SCHEDULED FOR DEMOLITION AND/OR REPAIR SHALL BE REMOVED AS PART OF THE WORK UNLESS OTHERWISE NOTED. REINSTALL ACTIVE SYSTEM ITEMS AT COMPLETION OF DEMOLITION/REPAIR WORK IN LOCATION INDICATED ON DRAWINGS. IF NEW LOCATION IS NOT PROVIDED, REINSTALL IN SAME LOCATION.
6. SEE EXTERIOR ELEVATIONS FOR AREAS OF LOG REPAIR AND REPLACEMENT.
7. REMOVE ALL LOOSE, RUSTED, AND CORRODED FASTENERS WHERE ABLE TO ACCESS HEAD, AND REPLACE WITH NEW SS FASTENERS.

DEMOLITION PLAN LEGEND

- REMOVE (E) BUILDING COMPONENT (HATCH VARIES PER MATERIAL)
- (E) WOOD FRAMED WALL OR LOG WALL TO REMAIN
- (E) COLUMN TO REMAIN
- (E) DOOR TO REMAIN
- SALVAGE (E) DOOR
- (E) WINDOW TO REMAIN
- (E) EDGE OF ROOF OR WALL ABOVE

FLOOR PLAN NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE PROJECT OVERVIEW SITE PLAN AND BUILDING SCHEDULE FOR FOUNDATION WORK REQUIREMENTS.
3. COORDINATE WORK SHOWN ON OTHER DISCIPLINE DRAWINGS WITH ARCHITECTURAL LAYOUTS AND DETAILS FOR FINAL LOCATIONS.
4. DIMENSIONS ARE TO GRIDLINE, FACE OF FINISH (EXISTING WALLS), OR FACE OF FRAMING (NEW WALLS), UON. CONTRACTOR TO VIF ALL DIMENSION WITH (E) CONDITIONS.
5. DIMENSIONS AND REFERENCE TAGS ARE SHOWN ON ENLARGED PLANS WHEN ENLARGED PLANS ARE PROVIDED.
6. NEW PARTITION WALLS FRAMED EITHER TO UNDERSIDE OF CEILING FRAMING OR UP TO STRUCTURE WHERE THERE IS NO CEILING, UON.
7. FURNISHINGS NIC AND SHOWN FOR VERIFICATION OF SPACE LAYOUTS ONLY.
8. PROVIDE VAPOR BARRIER AT ALL CRAWLSPACES.
9. SEE SCHEDULES FOR FINISH TREATMENTS.

FLOOR PLAN LEGEND

- (E) WOOD FRAMED, CONCRETE, OR LOG WALL
- WALL PER WALL TYPE
- DOOR PER SCHEDULE
- (E) OR (S) DOOR PER SCHEDULE
- (E) WINDOW PER SCHEDULE
- ###.## DOOR TAG
- EXT–XX WALL TAG
- EDGE OF ROOF ABOVE
- ### KEYNOTE TAG

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

NORTH

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM F. REED C-3536 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED:	LL
DRAWN:	LL
TECH REVIEW:	KZ
DATE:	07/21/2026

SUB SHEET NO.
416
A201

TITLE OF SHEET
WELL HOUSE – DEMO PLAN & PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO.	136 193826
PMIS/PKG NO.	237343
SHEET	368 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

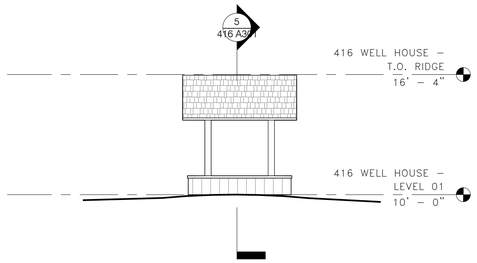

2 WELL HOUSE (HS–416) – SOUTH ELEVATION

1/4" = 1'–0"

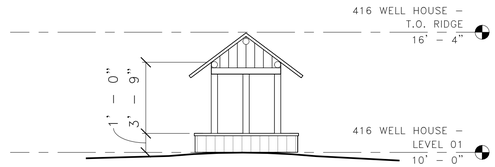

1 WELL HOUSE (HS–416) – EAST ELEVATION

1/4" = 1'–0"

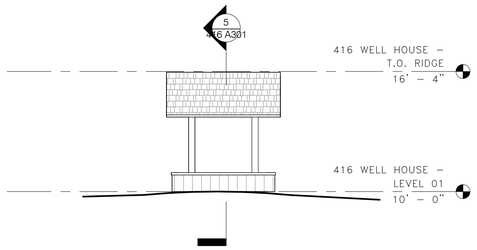

4 WELL HOUSE (HS–416) – NORTH ELEVATION

1/4" = 1'–0"

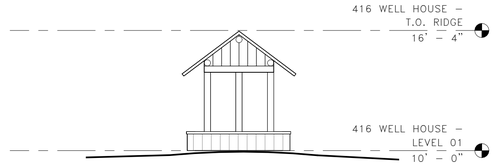

3 WELL HOUSE (HS–416) – WEST ELEVATION

1/4" = 1'–0"

EXTERIOR ELEVATION NOTES

1. SEE "000 GENERAL" SERIES FOR GENERAL INFORMATION APPLICABLE TO ALL STRUCTURES, INCLUDING GENERAL NOTES, SYMBOLS, ASSEMBLIES, AND DETAILS.
2. SEE 000 G008 FOR EXISTING VS PROPOSED FLOOR ELEVATIONS FOR EACH STRUCTURE.
3. GRADE LINES INDICATED ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY. SEE CIVIL AND LANDSCAPE DRAWINGS FOR GRADING INFORMATION.
4. LINE OF FOUNDATIONS (SHOWN DASHED OR GRAYED OUT WHERE OCCURS) ARE APPROXIMATE AND SHOWN FOR REFERENCE ONLY.
5. DIMENSIONS ARE SHOWN TO DIMENSION POINT OF REFERENCED DETAIL WHERE APPLICABLE.
6. ALIGN MATERIAL, CONTROL AND EXPANSION JOINTS VERTICALLY AND HORIZONTALLY WITH ADJACENT JOINTS AND DOOR, WINDOW AND LOUVER HEADS/JAMBS/SILLS. VERIFY DIMENSIONS WITH DETAIL CONDITIONS. VERIFY LOCATION AND ALIGNMENT WITH CONTRACTING OFFICER.
7. MOUNTING LOCATION OF DEVICES AS INDICATED ON DRAWINGS, VERIFY WITH CONTRACTING OFFICER IF NOT INDICATED.
8. COORDINATE WORK HIDDEN FROM VIEW ON EXTERIOR ELEVATIONS WITH PLAN VIEW DRAWINGS.
9. GENERAL CLEANING (CL–1) AT 100% OF EXTERIOR SURFACES.
10. BIOGROWTH CLEANING (CL–2) AT 30% OF EXTERIOR SURFACES.
11. REPAIR ALL (E) BOARD & BATTEN SIDING TO REMAIN. ASSUME 25% IN–KIND REPLACEMENT.
12. ST–2 AT 100% OF EXTERIOR LOG SURFACES; EXTERIOR BOARD & BATTEN SURFACES; WOOD DECKING/RAILING; AND EXPOSED ROOF ASSEMBLY WOOD COMPONENTS, UON.

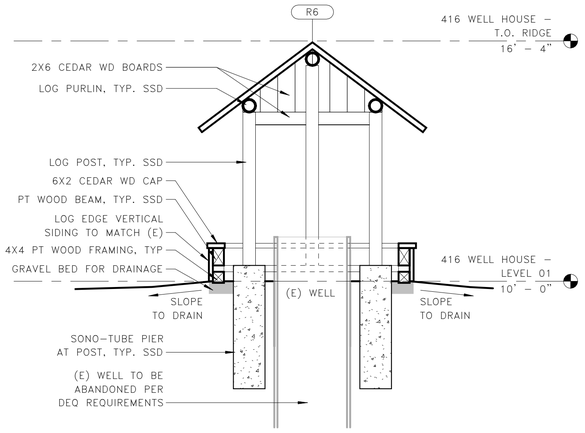

5 416 WELL HOUSE – SECTION 'A'

1/2" = 1'–0"

SCALE (D) 2" 0 2" 4"
SCALE OF FEET

SCALE (B) 4" 0 4" 8"
SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 Date 7/21/26 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
416
A301

TITLE OF SHEET
WELL HOUSE – EXTERIOR ELEVATIONS & SECTION

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136 193826
PMIS/PKG NO. 237343
SHEET 369 OF 371

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

COLLAPSED WELL

COLLAPSED WELL

COLLAPSED WELL

COLLAPSED WELL, LOOKING WEST

(E) CONDITION PHOTOS NOTES

1. PHOTOGRAPHS ARE FOR GENERAL REFERENCE ONLY. THEY ARE NOT TO BE CONSIDERED AN ACCURATE OR CURRENT REPRESENTATION OF EXISTING CONDITIONS ON SITE. CONTRACTOR TO VERIFY ALL CONDITIONS IN FIELD.

2. PHOTOGRAPHS INCLUDED WERE TAKEN DURING THE TEAM'S VARIOUS SITE VISITS.

3. CONDITIONS PRESENTED ARE EXAMPLES ONLY AND DO NOT CAPTURE ALL EXISTING CONDITIONS.

4. CONDITIONS PRESENTED ARE TO BE UTILIZED AS A SUPPLEMENT FOR REPAIR AND REPLACEMENT STRATEGIES. SEE DRAWINGS FOR ADDITIONAL INFORMATION.

C:\Users\kelliott\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\RYH2MJVNM9R2YKQ3\66849993-78fe-47d3-9961-a35d9e3691a7\85ccdf7c-2db3-4c18-8662-ac7f3386a545.rvt

FINAL CONSTRUCTION DOCUMENTS

LICENSED ARCHITECT WILLIAM E. IVES C-3538 STATE OF WYOMING

A/E FIRM
PRIME:
HENNEBERY EDDY
PORTLAND, OR

DESIGNED: LL
DRAWN: LL
TECH REVIEW: KZ
DATE: 07/21/2026

SUB SHEET NO.
416
A920

TITLE OF SHEET
WELL HOUSE – (E) CONDITION PHOTOS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 370 OF 371

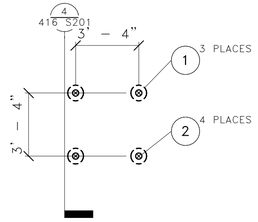

1 WELL HOUSE – FOUNDATION PLAN

1/4" = 1'–0"



2 WELL HOUSE – MAIN PLAN

1/4" = 1'–0"

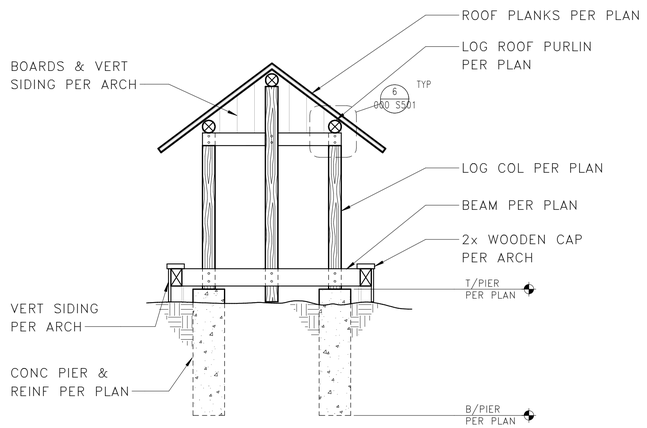

4 WELL HOUSE – SECTION VIEW

1/2" = 1'–0"

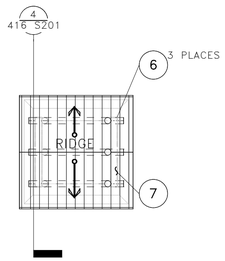

3 WELL HOUSE – ROOF FRAMING PLAN

1/4" = 1'–0"

FOUNDATION PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. LIFTING/MOVING OF (E) BUILDINGS & CONCRETE WALL ELEVATIONS PER ARCH FOUNDATION SHEETS.

FLOOR FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. T/FINISHED FLOOR ASSUMED TO BE 10'–0", VERIFY WITH ARCHITECTURAL DRAWINGS.

ROOF FRAMING PLAN NOTES:

1. STRUCTURAL GENERAL NOTES, DESIGN CRITERIA, ABBREVIATIONS AND LEGEND PER 000 S001, 000 S002 & 000 S003.
2. VERIFY ALL DIMENSIONS AND ELEVATIONS WITH THE ARCHITECTURAL DRAWINGS. ALL EXISTING DIMENSIONS SHALL BE FIELD VERIFIED.
3. DEMOLITION EXTENTS PER ARCHITECTURAL PLANS.

KEYNOTES:

1. 10"Ø SONO–TUBE PIER W/ (4) #4 VERT & #3 TIES @ 8"OC & (3) #3 TIES @ 3"OC AT TOP OF FOOTING, TYP 4 PLACES. T/PIER = 6" ABV FINISHED GRADE & B/PIER = 2'–10" BELOW FIN GRADE
2. 4"Ø LOG POST W/ POST BASE PER 7/000 S404, TYP 4 PLACES
3. PT 4x6 W/ (2) 5/8"Ø THRU BOLTS AT EA LOG CONNECTION; OKAY TO SHARE BOLTS BETWEEN BASE CONNECTION AND BEAM CONNECTIONS
4. PT 4x6 AT PERIMETER W/ (2) #12x3" TIMBERSCREW INTO ENDGRAIN OF SUPPORTING BEAMS; MIN 3" EMBED
5. (2) ADDITIONAL 4"Ø LOG POSTS, SUPPORTED FROM BEAMS ON EACH SIDE W/ (2) 5/8"Ø THRU BOLTS
6. 4"Ø LOG PURLIN, TYP 3 PLACES
7. 2x6 CEDAR ROOF PLANKS W/ (2) #10 WOOD SCREWS TO EACH LOG PURLIN

NORTH

4 0 4 8

SCALE OF FEET

FINAL CONSTRUCTION DOCUMENTS

Professional Engineer (Structural) MATTHEW SCHMIDT P.E.18351 WYOMING Date 07/21/2026

EXPIRES: 12/31/2026

A/E FIRM

PRIME:
HENNEBERY EDDY
PORTLAND, OR

SUB:
DCI ENGINEERS
BOZEMAN, MT

DESIGNED: ACF
DRAWN: JNH
TECH REVIEW: LMB
DATE: 07/21/2026

SUB SHEET NO.
416
S201

TITLE OF SHEET
WELL HOUSE – FRAMING PLANS

REHABILITATE "4 LAZY F RANCH" CABINS FOR HOUSING – GRAND TETON NATIONAL PARK

DRAWING NO. 136
193826
PMIS/PKG NO. 237343
SHEET 371 OF 371

Autodesk Docs://24_041-01T NPS GRTE 4 Lazy F/Struct_25151-0013 NPS GRTE Lazy F Ranch_R26.rvt