U.S. FISH & WILDLIFE SERVICE

FERGUS FALLS WMD

PRAIRIE WETLANDS LEARNING CENTER (PWLC)

REPLACE DECK HANDRAIL AND STAIRS



SITE PLAN



VICINITY MAP
NO SCALE

DRAWING INDEX

SHEET NO.	SHEET TITLE
1	VICINITY MAP/SITE PLAN/DRAWING INDEX
2	ELEVATION/PLAN/RAILING DETAIL
3	GENERAL NOTES/PHOTOS/PREFAB STAIRS
4	HANRAILING ELEVATION/FASCIA CONNECTION

NOTE TO BIDDERS:

ANY PRINT ACCOMPANYING THIS INVITATION TO BID MAY BE A REDUCED REPRODUCTION OF THE WORKING DRAWINGS. IF LINE BELOW DOES NOT MEASURE SIX INCHES IN LENGTH, THE INDICATED SCALES ARE TO BE ADJUSTED ACCORDINGLY.


UNITED STATES DEPARTMENT OF THE INTERIOR
FISH AND WILDLIFE SERVICE
REGION 3 & 6 ENGINEERING

FERGUS FALLS
WETLAND MANAGEMENT DISTRICT

OTTER TAIL COUNTY MINNESOTA

PWLC – REPLACE DECK HANDRAIL AND STAIRS
VICINITY MAP/SITE PLAN/DRAWING INDEX


DESIGNED: EM	DRAWN: MAW	CHECKED: EM	
DATE: 2026	DRAWING NO. 3R-MN-602-104		SHEET 1 OF 4

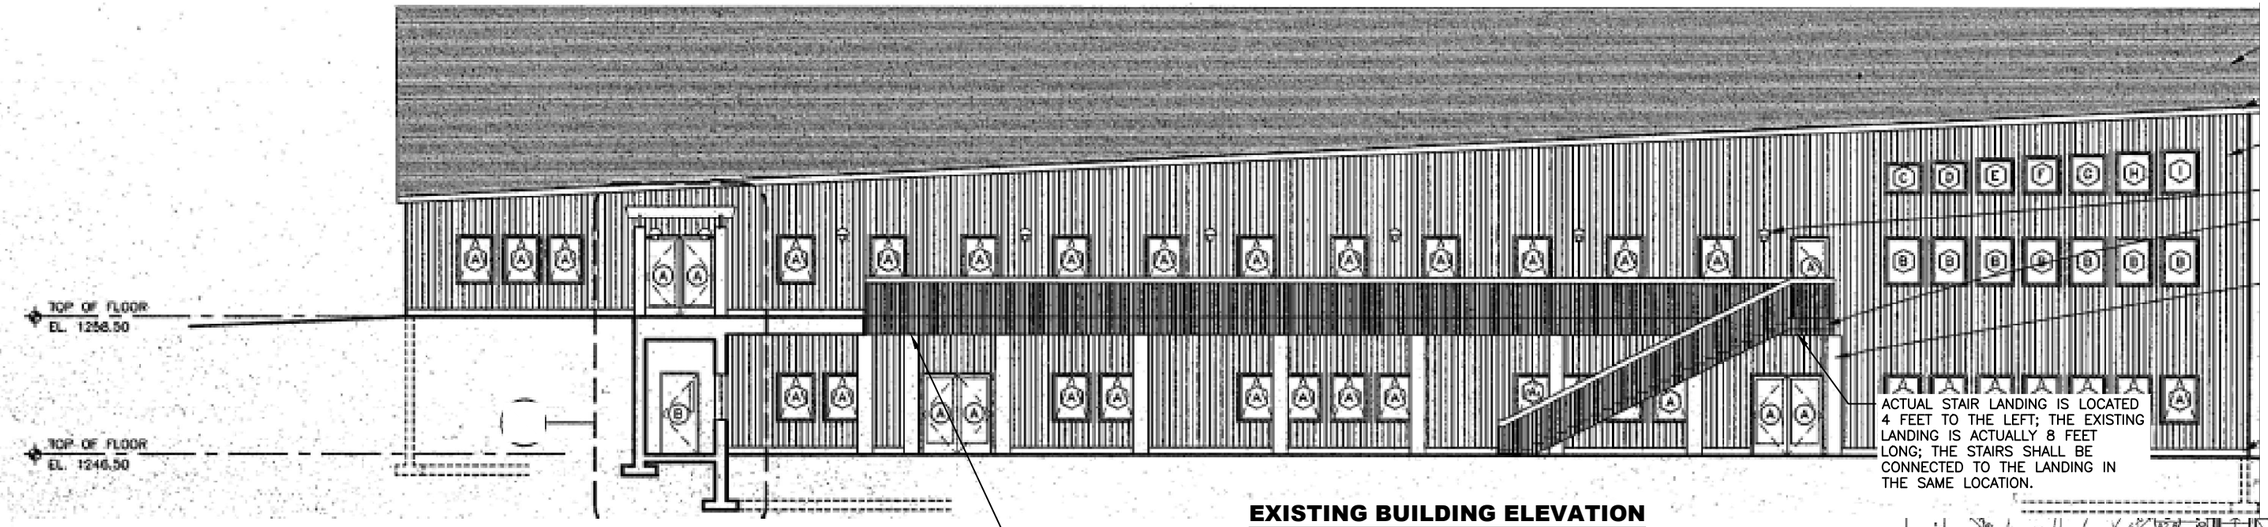

EXISTING BUILDING ELEVATION
NOT TO SCALE

ACTUAL STAIR LANDING IS LOCATED 4 FEET TO THE LEFT; THE EXISTING LANDING IS ACTUALLY 8 FEET LONG; THE STAIRS SHALL BE CONNECTED TO THE LANDING IN THE SAME LOCATION.


THE CONTRACTOR SHALL REMOVE THE EXISTING RAILING AND STAIRWAY SHOWN. NEW PREFABRICATED STAIR SYSTEM AND DECK HANDRAILING SHALL BE INSTALLED AS SPECIFIED IN SPECIFICATION SECTION 05200, PREFABRICATED STAIR SYSTEM, AND SPECIFICATION SECTION 05300, ALUMINUM HANDRAIL. SEE EXISTING RAILING DETAIL, THIS SHEET SHOWING RAILING ITEMS TO BE REMOVED.

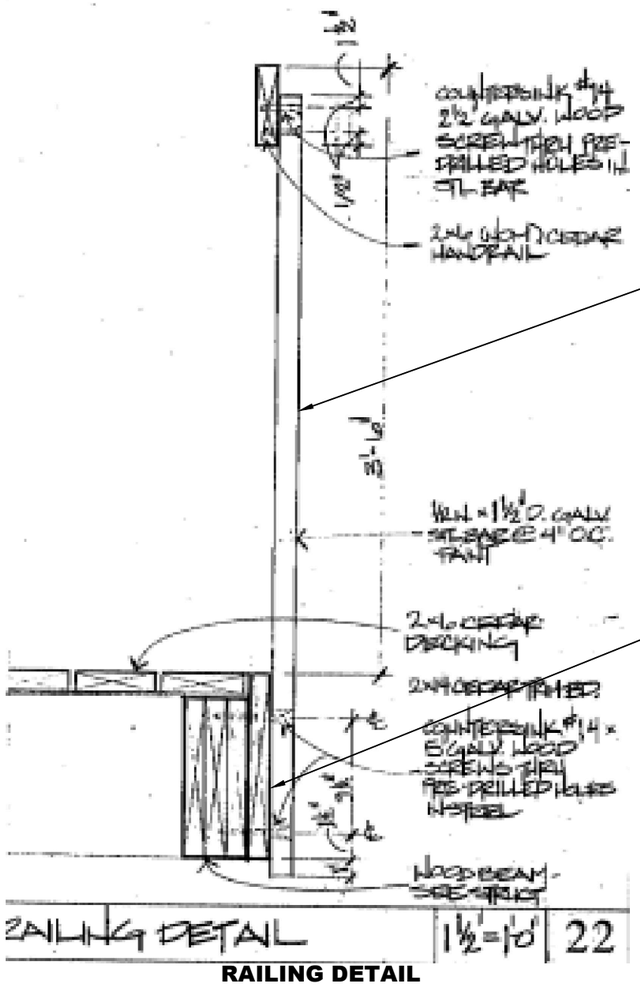

CONTRACTOR SHALL REMOVE EXISTING WOOD HANDRAIL AND 1/2" BY 1-1/2" GALVANIZED STEEL BARS AT 4-IN ON CENTER BY UNSCREWING #14 BY 5-IN GALVANIZED WOOD SCREWS.

REMOVE EXISTING 2X14 CEDAR DECK FASCIA BOARD AND REPLACE WITH NEW STAINED CEDAR WOOD FASCIA PIECE OF THE SAME SIZE. STAIN TO MATCH EXISTING WOOD MEMBERS.

RAILING DETAIL
NOT TO SCALE

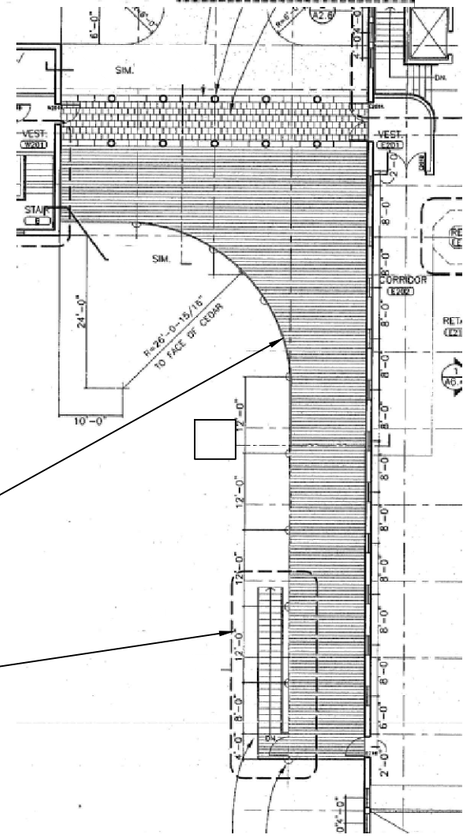

REMOVE APPROXIMATELY 130LF OF EXISTING WOOD AND METAL HANDRAIL; REPLACE WITH NEW GALVANIZED ALUMINUM HANDRAIL, AS SHOWN ON SHEET 4, NEW HANDRAIL ELEVATION DETAIL


EXISTING 23 FEET LONG BY 4 FEET WIDE WOOD STAIRWAY WITH METAL TREADS AND RAIL POSTS TO BE REMOVED BY THE CONTRACTOR. ALL MATERIALS REMOVED INCLUDING ANY FOUNDATION SUPPORT FOOTINGS OR ASPHALT PAVING AT GROUND LANDING SHALL BECOME PROPERTY OF THE CONTRACTOR AND DISPOSED OF ACCORDING TO STATE AND LOCAL CODES

RAILING PLAN DETAIL
NOT TO SCALE


FERGUS FALLS WMD ELEVATION/PLAN/RAILING DETAIL PWLC – REPLACE DECK HANDRAIL AND STAIRS					SUB-SHEET
DESIGNED EM	DRAWN MAW	CHECKED EM	DATE 2026	DRAWING NO. 3R-MN-602-104	SHEET 2 OF 4

GENERAL NOTES


1. THE CONTRACTOR SHALL VISIT THE SITE TO DETERMINE ACTUAL SITE CONDITIONS PRIOR TO SUBMITTING BIDS.
2. SHOULD SITE DISCREPANCIES BE IDENTIFIED BY THE CONTRACTOR, THEY SHALL IMMEDIATELY BE BROUGHT TO THE ATTENTION OF THE CONTRACTING OFFICER.
3. THE CONTRACTOR SHALL CONTACT GOPHER STATE ONE CALL (GSOC) PRIOR TO ANY CONSTRUCTION ACTIVITIES. 800-252-1166
4. THE VIEWFINDER AND INFORMATION PANEL LOCATED ON THE DECK SHALL BE REMOVED BY GOVERNMENT STAFF PRIOR TO CONSTRUCTION OPERATIONS.
5. ASPHALT UNDER THE EXISTING STAIRWAY AND DECK SHALL BE PRESERVED TO THE EXTENT PRACTICABLE. SHOULD ASPHALT BE DAMAGED DURING CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL INSTALL NEW ASPHALT TO MATCH EXISTING. ASPHALT REMOVED FOR INSTALLATION OF CONCRETE SLABS TO SUPPORT THE NEW STAIR SYSTEM SHALL BE NEATLY SAW CUT AND REMOVED FROM THE SITE.

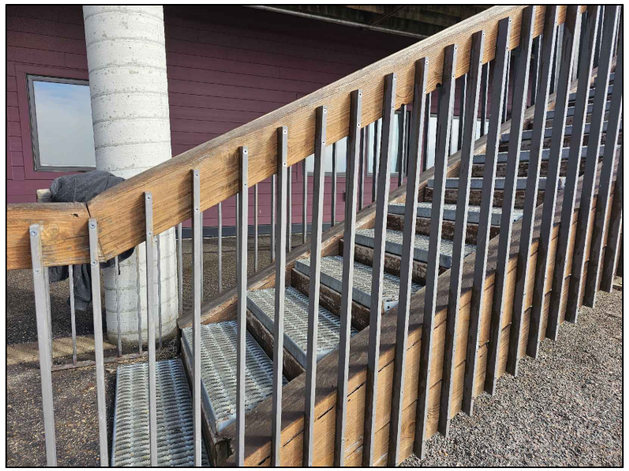

EXISTING STAIRS TO REMOVE
NOT TO SCALE

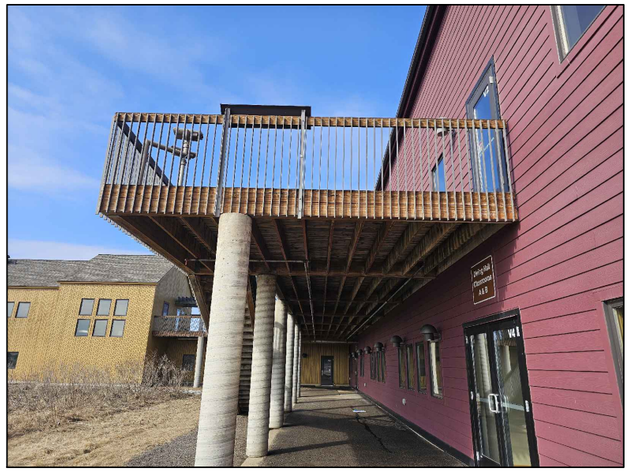


EXISTING HANDRAIL TO REMOVE
NOT TO SCALE

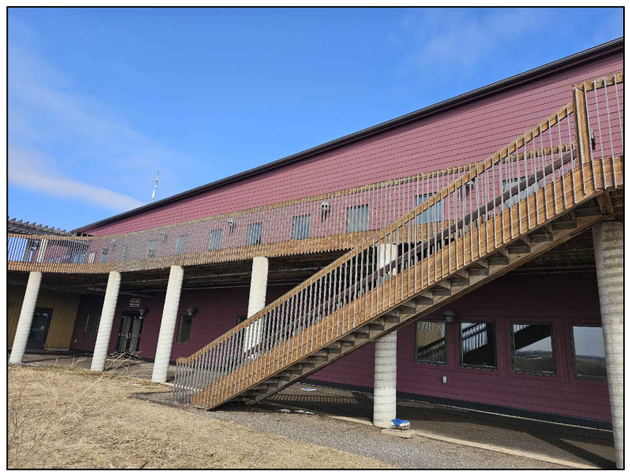

EXISTING HANDRAIL AND STAIRS TO REMOVE
NOT TO SCALE


PREFABRICATED STAIR SYSTEM NOTES

1. THE HEIGHT FROM GROUND ELEVATION TO TOP OF WOOD DECKING IS ASSUMED TO BE 12 FEET. CONTRACTOR TO VERIFY ALL SITE ELEVATIONS AND DIMENSIONS FOR STAIR SYSTEM INSTALLED PRIOR TO ORDERING.
2. STAIR TREADS SHALL BE 11W4 – 11-3/4 BLACK BAR GRATING TREADS WITH 3 INCH TOE KICK AND 1X3/16 BEARING BAR SIZE SPACED ON 11/16 INCH CENTERS (1/2" OPENING)
3. TREAD WIDTH: MINIMUM 48 INCH CLEAR OPENING
4. STAIR ANGLE SHALL BE 32 DEGREE COMFORT ANGLE CONFORMING TO OSHA 2017 STANDARD.
5. FINISH: TWO PART SYSTEM WITH A POWDER COAT OVER A HOT DIPPED GALVANIZED UNDERCOAT. MANUFACTURER TO PROVIDE COLOR SELECTION TO GOVERNMENT.
6. DIMENSIONS AND CONNECTIONS SHOWN IN EXAMPLE VIEW WILL VARY ACCORDING TO THE MANUFACTURER'S STAIR SYSTEM USED.
7. PREFABRICATED STAIR SYSTEM SHALL BE ADA COMPLIANT AND MEET ALL IBC AND BOCA CODES.
8. ALL PREFABRICATED STAIR POST SUPPORT CONNECTIONS AND LOADINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER.

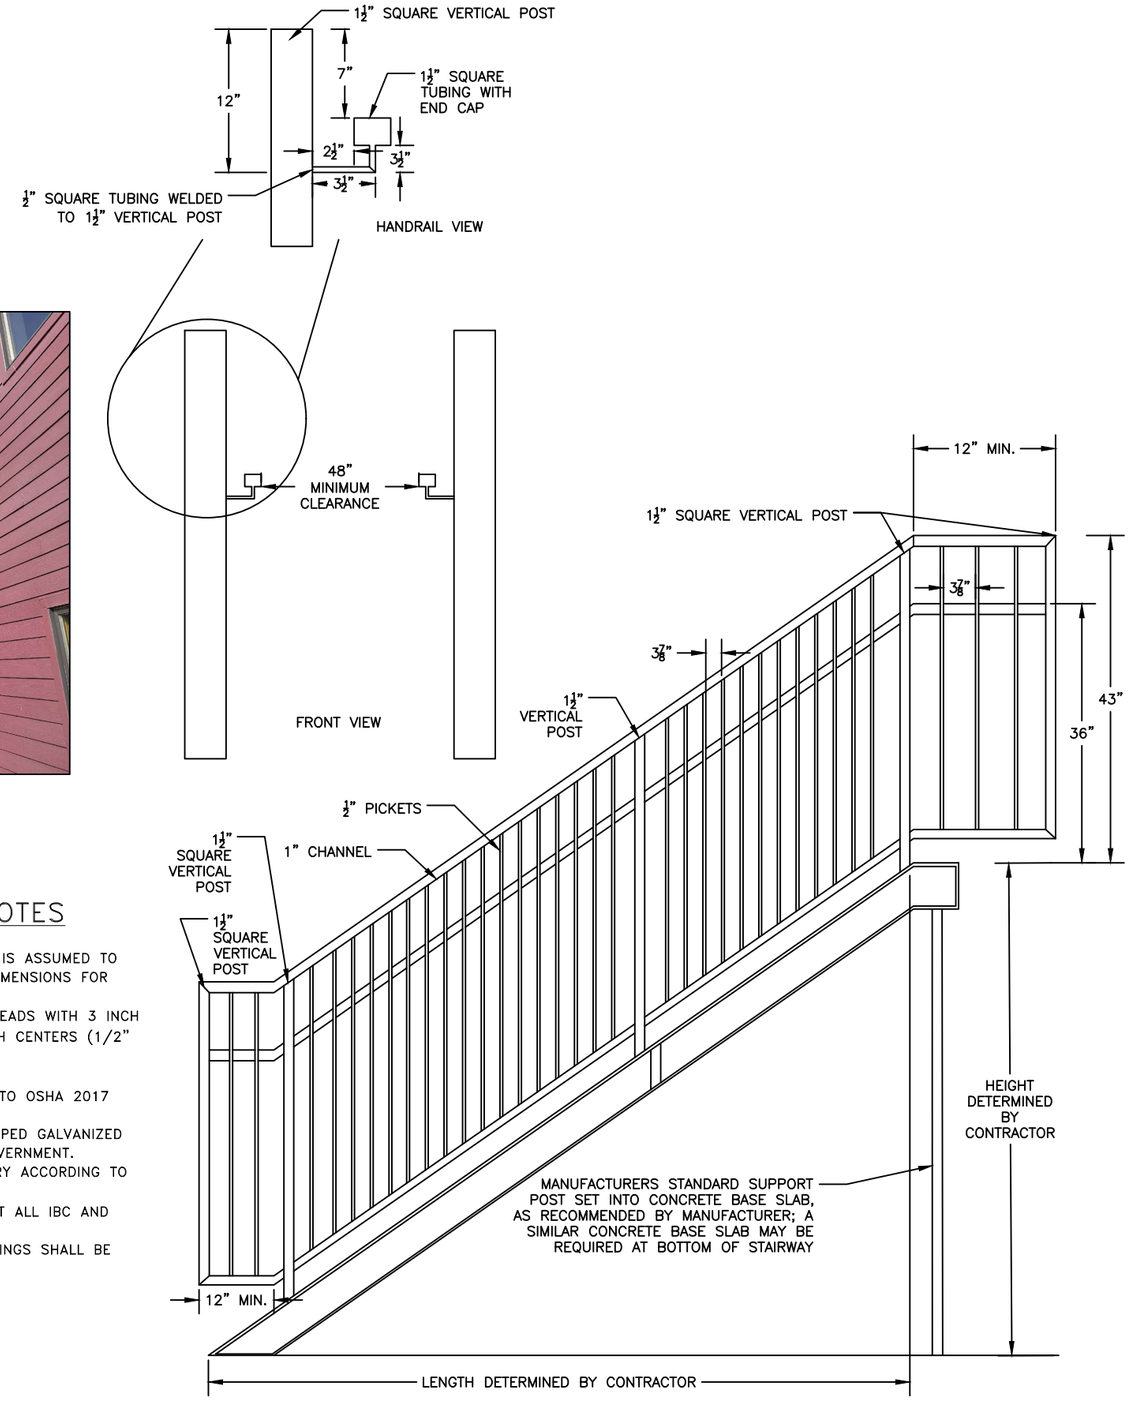


PRE-FABRICATED STEEL STAIR SYSTEM EXAMPLE
NOT TO SCALE

FERGUS FALLS WMD GENERAL NOTES/PHOTOS/PREFAB STAIRS PWLC – REPLACE DECK HANDRAIL AND STAIRS					SUB-SHEET
DESIGNED EM	DRAWN MAW	CHECKED EM	DATE 2026	DRAWING NO. 3R-MN-602-104	SHEET 3 OF 4

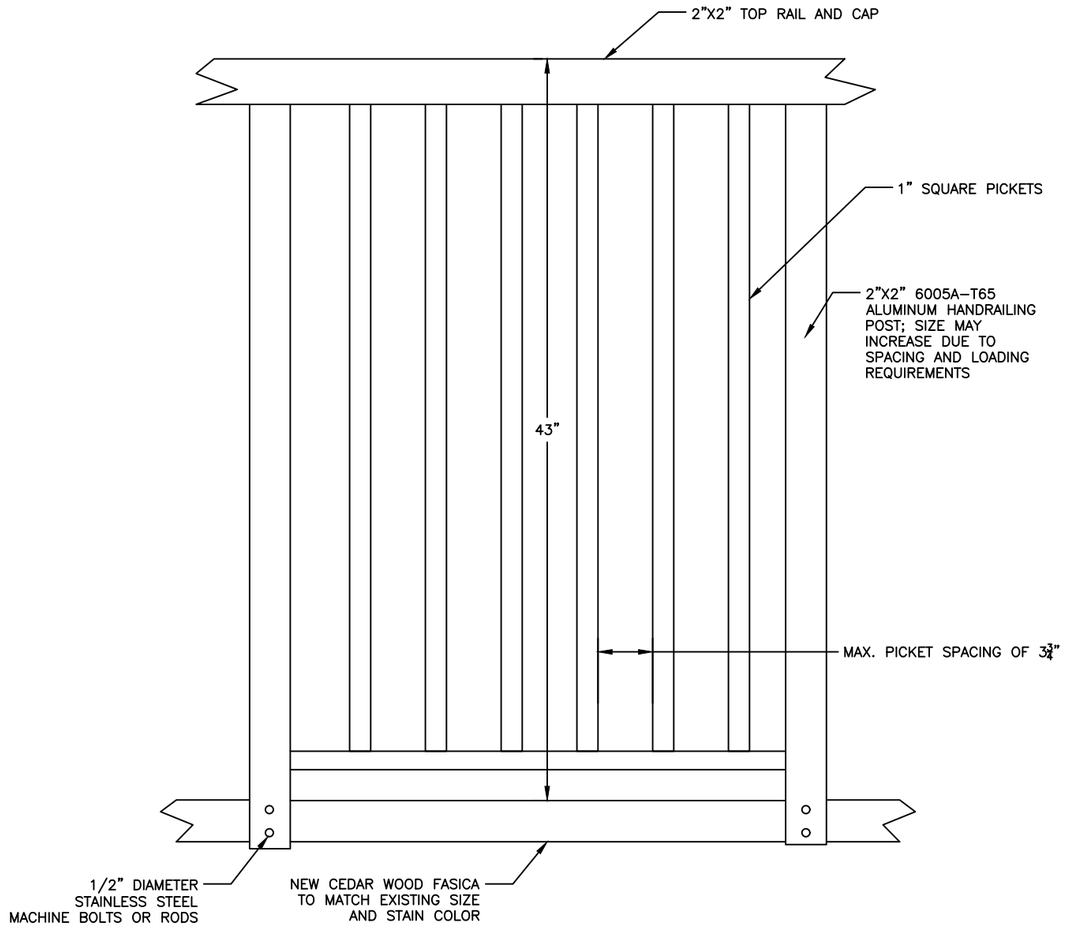

NEW HANDRAILING ELEVATION DETAIL
NOT TO SCALE

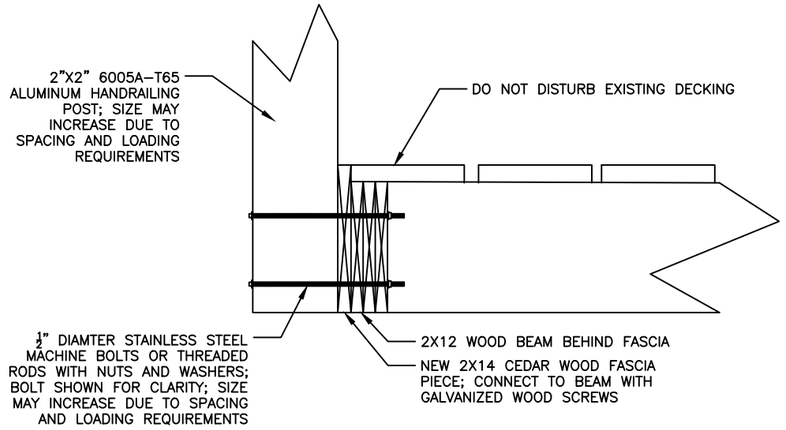

FASCIA MOUNT HANDRAILING CONNECTION DETAIL
NOT TO SCALE

HANDRAILING NOTES

1. THE CONTRACTOR SHALL SELECT A HANDRAILING MANUFACTURER THAT APPROXIMATES THE DIMENSIONS SHOWN FOR THE TOP RAIL, PICKETS, AND POSTS SHOWN IN THE HANDRAIL ELEVATION EXAMPLE.
2. FOR HANDRAIL LOADING REQUIREMENTS AND MATERIAL FINISHES, PLEASE REFERENCE SPECIFICATION SECTION 05300, ALUMINUM HANDRAILS.
3. A CURVED HANDRAIL SECTION IS REQUIRED AND THE LOCATION IS SHOWN ON DRAWING SHEET 2.

FERGUS FALLS WMD HANDRAILING ELEVATION/FASCIA CONNECTION PWLC – REPLACE DECK HANDRAIL AND STAIRS					SUB–SHEET
DESIGNED EM	DRAWN MAW	CHECKED EM	DATE 2026	DRAWING NO. 3R–MN–602–104	SHEET 4 OF 4