
| LEVEL 1 OCCUPANT LOADING | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| EXIT ELEMENT | DOOR CLEAR WIDTH (IN) | HORIZONTAL FACTOR (IN/OCC) | STAIRWAY FACTOR (WIDTH/PERSON) | AREAS USING EXIT | | | | CAPACITY (OCCUPANTS) |
| | | | | SMOKE ZONE H-1 | SMOKE ZONE H-2 | SMOKE ZONE H-3 | SMOKE ZONE H-4 | |
| 1-1 | 41 | 0.2 | X | X | | | | 205 |
| 1-2 | 55 | 0.2 | X | X | | | | 275 |
| 1-3 | 31 | 0.2 | X | | X | | | 155 |
| 1-4 | 31 | 0.2 | X | | X | | | 155 |
| 1-5 | 31 | 0.2 | X | | X | | | 155 |
| 1-6 | 31 | 0.2 | X | | X | | | 155 |
| LEVEL 1 EXIT CAPACITY | | | | | | | | 1100 |
| 2-1 | 41 | 0.2 | X | | | X | X | 205 |
| 2-2 | 42 | X | 0.3 | | | X | X | 140 |
| 2-3 | 34 | 0.2 | X | | | | X | 170 |
| LEVEL 2 EXIT CAPACITY | | | | | | | | 515 |

| PENETRATION SCHEDULE * | | |
|---|---|---|
| PENETRATION | WALL TYPE | DAMPER TYPE |
| DUCT | 2-HR FIRE/SMOKE | FIRE/SMOKE DAMPER |
| | 1-HR FIRE/SMOKE | NO DAMPER |
| | 0-HR SMOKE | NO DAMPER |
| | 2-HR FIRE | FIRE DAMPER |
| | 1-HR FIRE | NO DAMPER |
| TRANSFER OPENING | 2-HR FIRE/SMOKE | FIRE/SMOKE DAMPER |
| | 1-HR FIRE/SMOKE | FIRE/SMOKE DAMPER |
| | 0-HR SMOKE | SMOKE DAMPER |
| | 2-HR FIRE | FIRE DAMPER |
| | 1-HR FIRE | FIRE DAMPER |

* ASSUMES FULLY SPRINKLERED BUILDING.


| OCCUPANT LOAD CALCULATIONS | | | | | |
|---|---|---|---|---|---|
| LEVEL | COMPARTMENT | USE | AREA (SQ. FT.) | OCCUPANT LOAD FACTOR (SQ.FT./PERSON) | OCCUPANT LOAD (PERSONS) |
| LEVEL 1 | H-1 | AMBULATORY HEALTH CARE | 8,609 | 100 | 86 |
| | | | | | |
| | | MECHANICAL / STORAGE USE | 735 | 240 | 3 |
| | LEVEL 1 OCCUPANT LOAD | | | | 86.090 |
| LEVEL 2 | H-2 | INPATIENT HEALTH CARE | 7,116 | 240 | 30 |
| | | UTILITY / STORAGE | 313 | 240 | 1 |
| | LEVEL 2 OCCUPANT LOAD | | | | 31 |

| RATED DOOR SCHEDULE | |
|---|---|
| DOOR | RATING (MINUTES) |
| B.90.01 | 90 |
| B.90.02 | 90 |
| B.90.03 | 90 |
| B.45.01 | 45 |
| B.45.02 | 45 |
| B.45.03 | 45 |
| B.45.04 | 45 |
| B.45.06 | 45 |

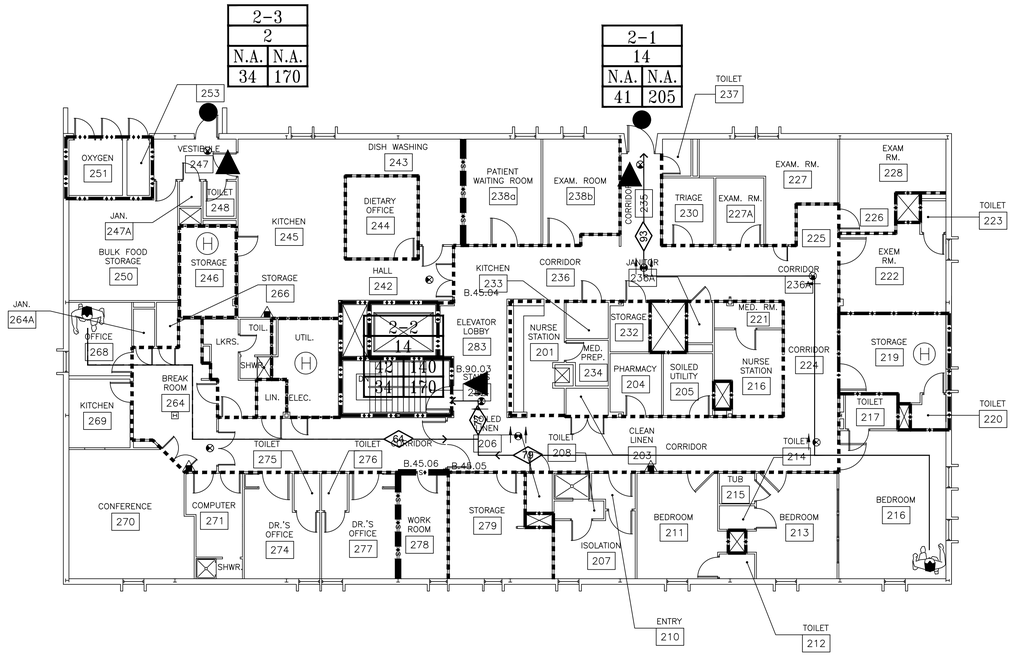



| INPT. H.C. | H-2 |
|---|---|
| | 7,116 |
| STOR./UTIL. | 313 |


2 LS-1 LIFE SAFETY PLAN - SECOND FLOOR
NTS




4 LS-1 OCCUPANCY CLASSIFICATION - SECOND FLOOR
SCALE :1/64" = 1'-0"

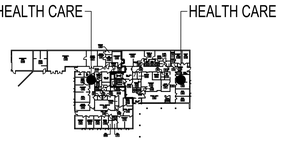


3 LS-1 OCCUPANCY CLASSIFICATION - FIRST FLOOR
SCALE :1/64" = 1'-0"

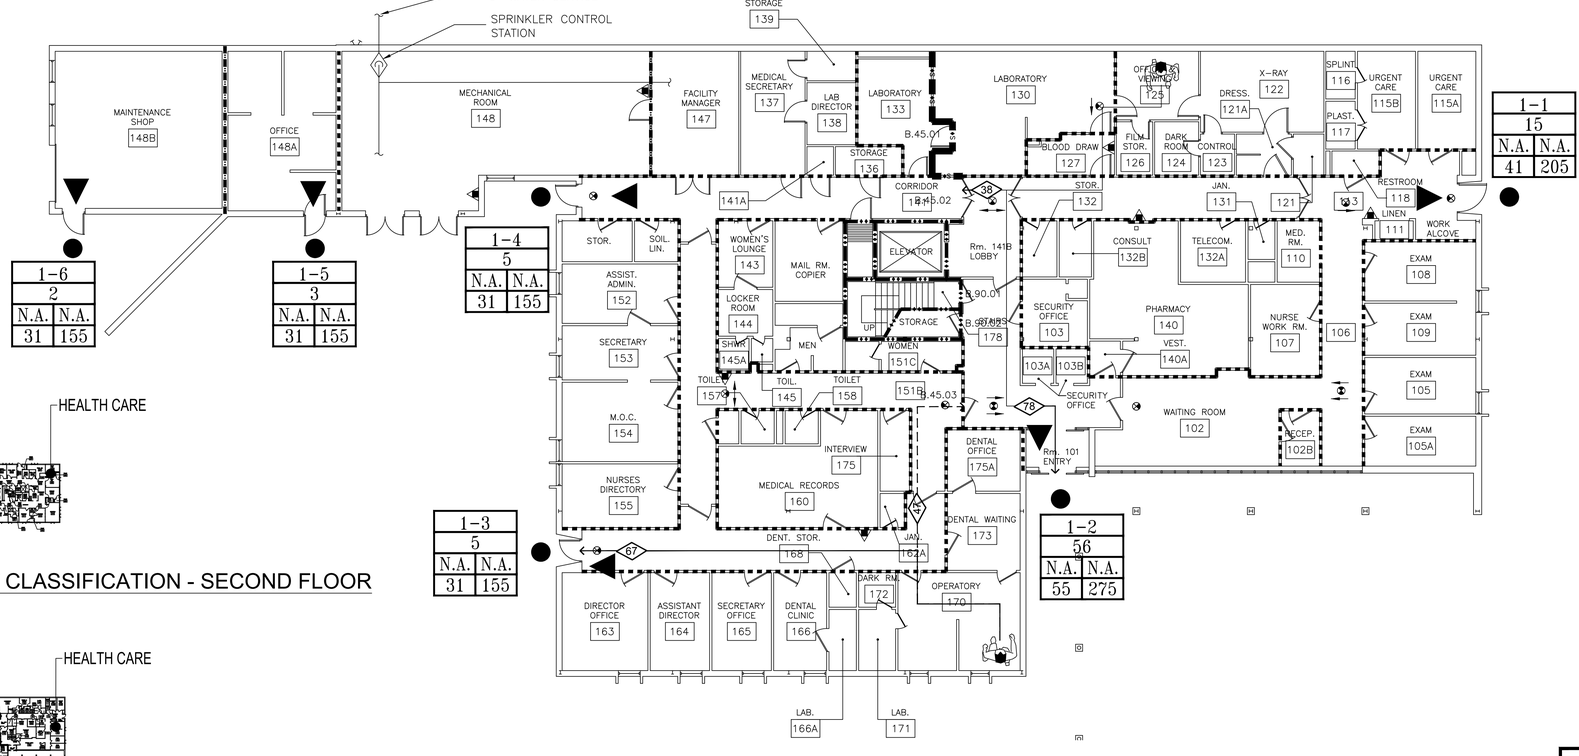


| AMB. H.C. | H-1 |
|---|---|
| | 8,609 |
| STOR./UTIL. | 735 |

1 LS-1 LIFE SAFETY PLAN - FIRST FLOOR
NTS

LIFE SAFETY LEGEND:

- 150 — TRAVEL DISTANCE
- STARTING POINT AND TRAVEL PATH TO EXIT
- EXIT LOCATION
- EXIT DISCHARGE
- FIRE EXTINGUISHER
- EXIT SIGN
- H — HAZARDOUS ROOM

| A |
|---|
| B |
| C D |
| E F |

A = EXIT I.D NUMBER
B = NO. OCCUPANTS USING EXIT
C = ACTUAL STAIR/RAMP WIDTH, IN
D = STAIR/RAMP CAPACITY
E = ACTUAL DOOR CLEAR WIDTH, IN
F = DOOR CAPACITY

- NON-RATED SMOKE PARTITION FLOOR TO CEILING
- 1-HOUR SMOKE BARRIER
- 2-HOUR SMOKE BARRIER
- 1-HOUR FIRE BARRIER
- 2-HOUR FIRE BARRIER

| A |
|---|
| B |
| C |
| D |

A = SMOKE ZONE IDENTIFICATION
B = SMOKE ZONE SQUARE FOOTAGE
C = MAX. TRAVEL DISTANCE TO SMOKE BARRIER
D = MAX. TRAVEL DISTANCE

seal

project manager: Jeffrey LaSalle
project engineer: Sean Lebel
project designer: Sean Lebel

general notes:

1. CODE OF REFERENCE: 2000 LIFE SAFETY CODE, NFPA 101.
2. THE INTENT OF THIS DRAWING IS TO SHOW GENERAL COMPLIANCE WITH THE 2000 LIFE SAFETY CODE REQUIREMENTS AND IDENTIFY ANY DEFICIENCIES REQUIRING UPGRADES / REPAIRS TO ENSURE COMPLIANCE.
3. FIRE RESISTANCE RATINGS ARE LISTED ON EACH DRAWING SHEET FOR THE SPECIFIC BUILDING OCCUPANCY AND NFPA 101 CRITERIA WHICH APPLIES. EXISTING NFPA 101 OCCUPANCY CLASSIFICATIONS HAVE BEEN NOTED.

key plan

| no. | by | description | date |
|---|---|---|---|
| | TP | Revised to correct field review | 3/01/19 |

revisions


LASALLE ENGINEERING, LLC
1000 YORK ROAD
WILLOW GROVE, PA 19090
PHONE: 215-658-1770
WWW.LASALLEENG.COM


..\Xrefs\HHS_Logo_large.gif

Albuquerque Area - Indian Health Service
Office of Enviromental Health and Engineering
Department of Health Facilities
4101 Indian School Road NE, Ste 225
Albuquerque, NM 87110
owners name and address

MESCALERO SERVICE UNIT
P.O. BOX 210
Mescalero, New Mexico 88340
project title

LIFE SAFETY PLANS
drawing name

scale AS NOTED
date 08/31/2012
reference files
drawn by SDL
project no. LE-12010
1&2 floor/section
LS-1 drawing no.