
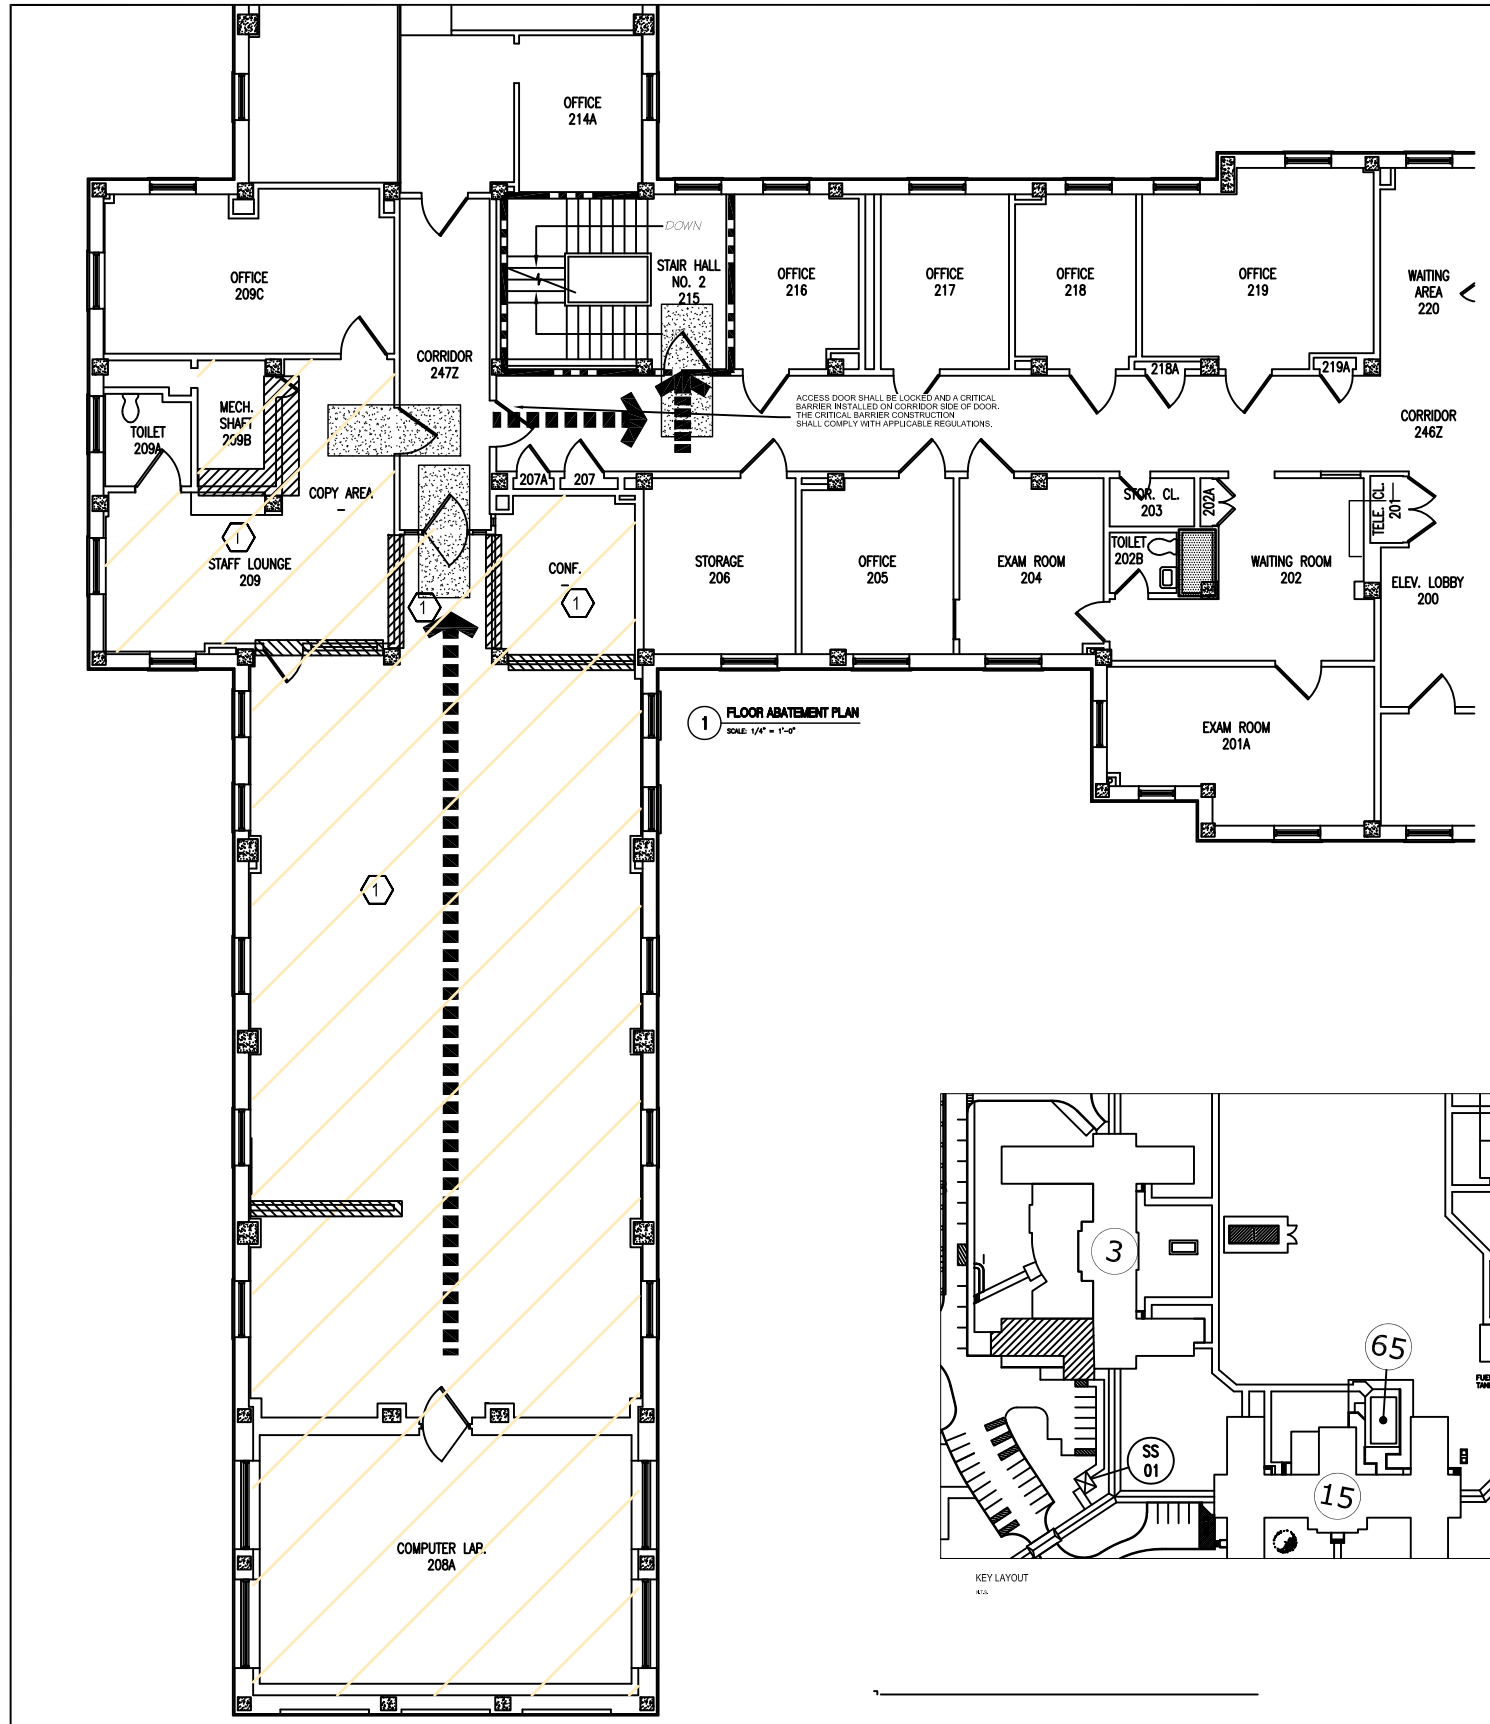


1 FLOOR ABATEMENT PLAN
SCALE: 1/4" = 1'-0"

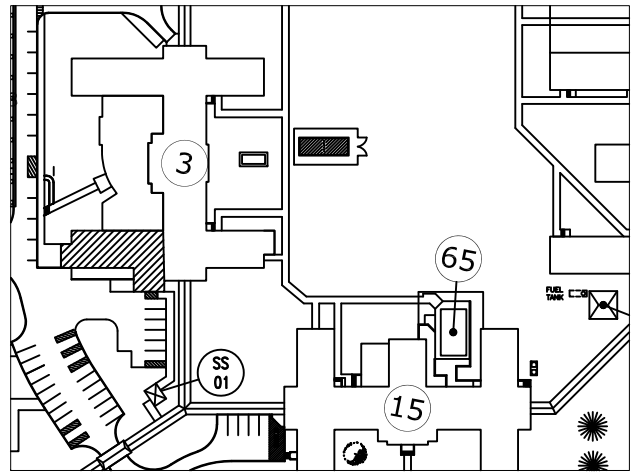

KEY LAYOUT

ABATEMENT KEYNOTES:


(1) THE ABATEMENT CONTRACTOR SHALL REMOVE AND DISPOSE OF ALL LAYERS OF ASBESTOS CONTAINING FLOORING, INCLUDING TILE, SHEET FLOORING, CARPET, MASTIC, ADHESIVES AND LEVELERS, AS ACM.

SYMBOL LEGEND


	TO BE ABATED
REMOVAL PATH	PATH INDICATED IS PROVIDED FOR INTENT ONLY. COORDINATE FINAL REMOVAL PATHWAYS, PHASING, AND METHODS WITH GENERAL CONTRACTOR AND COR.
	INFECTION CONTROL / DUST CONTROL PARTITION / BARRIER
	INFECTION CONTROL/DUST CONTROL EGRESS DOOR NON-TRANSFERRING MULTI-SHEETED ADHESIVE FLOOR PADS

QUANTITIES - ACM MATERIALS

3000 SF ±	TOTAL OF ALL FLOOR FINISH MATERIAL TO BE ABATED
100 SF ±	RADIATOR PANELS INSULATION

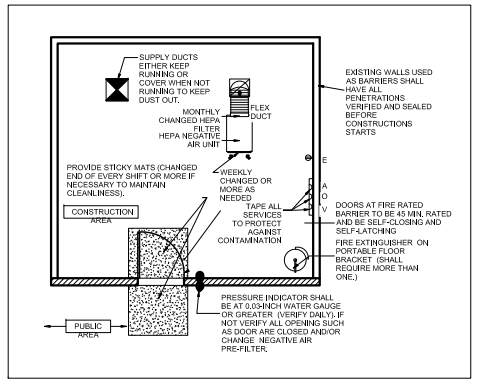

TYPICAL ANTE ROOM

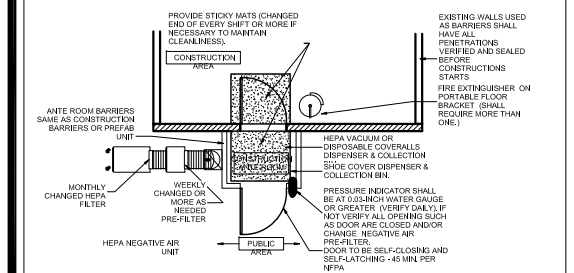

TYPICAL CONSTRUCTION LAYOUT-

GENERAL ABATEMENT NOTES:

1. ASBESTOS ABATEMENT WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE GOVERNMENT REGULATIONS. THE CONTRACTOR SHALL USE MANUAL WET METHODS TO CONTROL THE RELEASE OF DUST WHEN PERFORMING THE REMOVAL OF ALL ASBESTOS AND NON-ASBESTOS MATERIALS FROM THE WORK AREA.

2. INTERIOR ASBESTOS REMOVAL WORK SHALL BE CONDUCTED WITHIN A NEGATIVE PRESSURE ENCLOSURE. A NEGATIVE AIR PRESSURE OF AT LEAST -0.02 INCHES OF WATER COLUMN, AS MEASURED AT ANY WORK AREA PERIMETER LOCATION, SHALL BE PROVIDED DURING ASBESTOS REMOVAL. NEGATIVE AIR PRESSURE SHALL BE CREATED IN THE WORK AREA USING HEPA FILTERED EXHAUST AND EXHAUSTED TO THE OUTDOORS. THESE HEPA FILTERED EXHAUST UNITS WILL BE USED TO GENERATE AT LEAST FOUR AIR CHANGES PER HOUR INSIDE THE WORK AREA. NEGATIVE AIR PRESSURE IN THE WORK AREA SHALL BE CONTINUOUSLY MONITORED THROUGH THE USE OF DIGITAL MANOMETERS POSTED OUTSIDE THE WORK AREA.

3. THE CONTRACTOR SHALL REMOVE HAZARDOUS MATERIALS THAT EXIST WITHIN WORK AREAS PRIOR TO DISTURBANCE. REFER TO PROJECT DESIGN DOCUMENTS FOR FURTHER INFORMATION. REFER TO SPECIFICATIONS FOR REMOVAL REQUIREMENTS.

4. SYMBOLS SHOWING LOCATIONS OF ASBESTOS CONTAINING MATERIALS ARE APPROXIMATE AND NOT TO SCALE. THEY ARE FOR REFERENCE ONLY.

5. ALL HAZARDOUS MATERIAL REMOVAL SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS AND ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS, REGULATIONS, ORDERS AND DIRECTIVES INCLUDING WITHOUT LIMITATIONS THOSE OF THE RESPONSIBLE STATE OF NEW YORK AGENCIES, U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA), U.S. DEPARTMENT OF LABOR (DOL), OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA), NATIONAL INSTITUTE OF OCCUPATIONAL SAFETY AND HEALTH STATE OF NEW YORK DEPARTMENT OF PUBLIC HEALTH (NYDPH), AND THE STATE OF NEW YORK DEPARTMENT OF ENERGY AND ENVIRONMENTAL PROTECTION (NYDEEP).

6. OSHA LEAD REGULATIONS WILL APPLY TO ANY DEMOLITION OPERATION (I.E. SANDING, SCRAPING, CUTTING, AND WELDING) THAT WOULD DISTURB PAINTED SURFACES WHICH CONTAIN LEAD. OCCUPATIONAL EXPOSURE TO LEAD IS REGULATED BY OSHA (29 CFR 1910.1025) AS WELL AS APPLICABLE STATE REGULATIONS. DISPOSAL OF MATERIALS COATED WITH PAINT CONTAINING LEAD IS SUBJECT TO THE USEPA RESOURCE CONSERVATION AND RECOVERY ACT (RCRA) REGULATIONS. REFER TO SPECIFICATIONS FOR FURTHER INFORMATION.

7. CONTRACTOR SHALL USE EXTREME CARE AND CAUTION DURING ALL ABATEMENT PROCEDURES, CONTRACTOR SHALL CONDUCT REMOVAL OF ALL MATERIALS FROM THE SITE WITH A MINIMUM DISTURBANCE AND PROVIDE REGULAR MAINTENANCE AND PROTECTION OF THE BUILDING, PREMISES, STAGING AREA, TRANSPORTATION ROUTES ETC. THROUGHOUT THE BUILDING, REFER TO THE ICRA PLANS FOR GUIDANCE ON PLANNED DEBRIS TRANSPORT PATHS. COORDINATE PHASING OF WORK AND HAZARDOUS MATERIAL CONTAINMENT WITH THE COR. COORDINATE USAGE OF STAIRS VS USAGE OF CHUTE FOR DISPOSAL OF REMOVED HAZARDOUS MATERIAL ON THE FIRST FLOOR. THE ABATEMENT CONTRACTOR SHALL PREPARE THE OVERLAPS OCCUR THE MOST STRINGENT REQUIREMENTS APPLY.

8. THE ABATEMENT CONTRACTOR SHALL INSTALL TEMPORARY CONSTRUCTION FENCE ON THE EXTERIOR OF THE BUILDING TO PREVENT ACCESS TO THE AREA IMMEDIATELY ADJACENT TO THE NEGATIVE AIR MACHINE EXHAUST LOCATIONS.

9. THE ASBESTOS WASTE DUMPSTER SHALL BE PLACED IN THE PARKING LOT PER VA APPROVAL. ANY REQUESTS FOR AN ALTERNATIVE LOCATION MUST BE APPROVED BY THE VAMC. THE DUMPSTER SHALL BE A FULLY ENCLOSED LOCKING DUMPSTER AND SHALL BE LINED AND MARKED WITH SIGNAGE IN ACCORDANCE WITH ALL APPLICABLE REGULATIONS.

10. THE ABATEMENT CONTRACTOR SHALL BE RESPONSIBLE FOR THE PREPARATION AND SUBMITTAL OF ANY VARIANCES REQUIRED TO PERFORM THE ABATEMENT WORK INDICATED.

11. ALL WORK REQUIRING THE USE OF CHIPPING GUNS, GRINDERS, ANY OTHER MECHANICAL EQUIPMENT, OR MASTIC REMOVERS/SOLVENTS SHALL BE APPROVED BY THE VAMC PRIOR TO THEIR USE AND SHALL TAKE PLACE BETWEEN THE HOURS OF 5 PM AND 8 AM PER VAMC REQUIREMENTS.

12. MAINTAIN STICKY MATS ON INTERIOR AND CORRIDOR SIDE OF BARRIER. CHANGE MATS DAILY OR INCREASE FREQUENCY AS NEEDED. MAINTAIN .01 NEGATIVE AIR PRESSURE AND INSTALL MANOMETER ON CORRIDOR SIDE OF BARRIER.

Revisions	Date	CONSULTANTS:	ARCHITECT/ENGINEERS:	NORTH:		Drawing Title: DEMOLITION PLAN 2ND FLOOR 1/4" = 1'-0"	Project Title: PT Relocation Asbestos Removal	Project Number:
								Building(s) Number: 3
						Approved Director , VAHHCS	Location: MONTROSE, NEW YORK	Drawing Number: HA-101
						Approved Chief of Engineering	Date: 12/20/2025 / Checked: / Drawn: CM	SHEET 1 of 1

Office of Facilities Management

VA FORM 08-6231, OCT 1978