DESIGN INTENT DRAWINGS (DIDs) FOR:

SSC - *Paso Robles, CA*

3551 Combine St.
PASO ROBLES, CA 93446



PROJECT TEAM

CLIENT:

CONTACT:
PHONE:
EMAIL:

ARCHITECT:

LEIDOS
9800 HILLWOOD PARKWAY, SUITE 170
FORT WORTH, TX 76177
CONTACT: TROY PELIAS
PHONE (OFFICE): (214) 223-3067
E-MAIL: Troy.B.Pelias@leidos.com

GENERAL CONTRACTOR:

XXCONTACT: x
PHONE (CELL): x
E-MAIL: x

MEP ENGINEER:

TBD
CONTACT: x
PHONE (OFFICE): x
E-MAIL: x

GENERAL CONDITIONS

01 ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, ORDINANCES AND STANDARDS HAVING JURISDICTION. IF THERE ARE ANY QUESTIONS OR CONFLICTS CONCERNING COMPLIANCE WITH SUCH CODES, ORDINANCES OR STANDARDS, THE CONTRACTOR IS RESPONSIBLE FOR NOTIFYING THE ARCHITECT BEFORE PROCEEDING WITH THE WORK IN QUESTION. ALL NECESSARY PERMITS, LICENSES, CERTIFICATES, TESTS, ETC. SHALL BE PROCURED AND PAID FOR BY THE CONTRACTOR. (OR OWNER, IF HE DESIGNATES)

02 CONTRACTOR IS RESPONSIBLE FOR CHECKING ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS FOR ACCURACY AND CONFIRMING THAT THE WORK IS BUILDABLE AS SHOWN AND MEETS ALL APPLICABLE CODES BEFORE PROCEEDING WITH CONSTRUCTION. IF THERE ARE ANY QUESTIONS REGARDING THESE OR OTHER COORDINATION ISSUES, THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING A CLARIFICATION FROM THE ARCHITECT BEFORE PROCEEDING WITH THE WORK IN QUESTION OR RELATED WORK.

03 DIMENSIONS SHOWN ARE TO FINISHED FACE OF PARTITION. CONSTRUCTION NOT SHOWN ON PLAN WILL BE SHOWN ON DETAIL DRAWINGS. CONSULT ARCHITECT FOR ANY DIMENSIONAL CONFLICTS OR OMISSIONS FOR RESOLUTION PRIOR TO LAYOUT AND CONSTRUCTION.

04 DOOR JAMBS ARE TO BE LOCATED 4" FROM ADJACENT PARTITIONS (U.N.O.).

05 DOOR JAMBS IN THOSE AREAS TO RECEIVE CASING ARE TO BE AS DETAILED.

06 VERIFY RELATIONSHIP BETWEEN EXISTING CONSTRUCTION AND NEW CONSTRUCTION AS SHOWN IN THESE DRAWINGS. REPORT ANY DISCREPANCIES TO ARCHITECT OR OWNER PRIOR TO EXECUTION OF ANY CONSTRUCTION AFFECTING THESE AREAS.

07 ALL WORK SHALL CONFORM IN QUALITY TO ACCEPTED INDUSTRY STANDARDS. ANY QUESTIONS REGARDING THIS REQUIREMENT SHALL BE DIRECTED TO THE ARCHITECT FOR INTERPRETATION.

08 SCOPE OF WORK OF ALL TRADES IS TO INCLUDE ALL MATERIALS, EQUIPMENT AND LABOR AS REQUIRED TO TOTALLY COMPLETE PROJECT (FROM INTERFACE WITH EXISTING CONSTRUCTION THROUGH CONFIGURATION AS INDICATED IN THE CONSTRUCTION DOCUMENTS).

09 ALL FINISHED WORK SHALL BE COMPLETE AND FUNCTIONALLY CONSISTENT WITH THE DESIGN INTENT AS EXPRESSED IN THESE DOCUMENTS (WHETHER SPECIFICALLY ADDRESSED IN THESE DOCUMENTS OR NOT). ANY QUESTIONS CONCERNING THE COMPLETENESS OF THE WORK SHALL BE DIRECTED TO THE ARCHITECT.

10 THE WORK OF ALL TRADES OWNER'S CONTRACTORS ARE TO BE COORDINATED BY THE DESIGNATED GENERAL CONTRACTOR.

11 CONFIGURATIONS OF MATERIALS SHOWN ON DETAIL DRAWINGS TAKE PRECEDENCE OVER CONFIGURATION OF MATERIALS INDICATED ON DRAWINGS OF SMALLER SCALE. CONSULT THE ARCHITECT AS NEEDED FOR ADDITIONAL INFORMATION AND CLARIFICATION.

12 IN THE EVENT THAT ANY CONTRADICTION OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS OR EXISTING CONDITIONS, IMMEDIATELY NOTIFY THE ARCHITECT FOR INTERPRETATION AND RESOLUTION.

13 ANY WORK UNDERTAKEN PRIOR TO THE AFOREMENTIONED NOTIFICATION WILL BE AT THE CONTRACTOR'S SOLE EXPENSE AND RESPONSIBILITY IF FOUND LATER TO BE IN ERROR AND REQUIRE REMOVAL AND REPLACEMENT.

14 EXISTING CONDITIONS TAKE PRECEDENCE OVER DESIGN DIMENSIONS. UPON DISCOVERY OF SUCH CONFLICTS, IMMEDIATELY NOTIFY THE ARCHITECT PRIOR TO PROCEEDING.

15 NOISE IN CONSTRUCTION AREAS IS TO BE KEPT TO A MINIMUM. SHOULD NOISE LEVELS BECOME PROBLEMATIC, THE OWNER/TENANT RESERVES THE RIGHT TO REQUIRE ALL RESPONSIBLE PERSONS TO BE REMOVED FROM THE PREMISES AND ALL WORK TO BE DONE AFTER HOURS AT NO ADDITIONAL COST. ALL NOISY ACTIVITIES AND AFTER HOURS WORK IS TO BE COORDINATED WITH THE OWNER/TENANT.

16 CONSTRUCTION ACTIVITY AREAS SHALL BE CLEANED DAILY WITH TRASH AND DEBRIS BEING REMOVED FROM THE PREMISES OR TO A DUMPSTER DEDICATED TO CONSTRUCTION REFUSE. FAILURE TO DO SO WILL RESULT IN THE OWNER/TENANT'S REMOVAL OF SAID DEBRIS WITH THE GENERAL CONTRACTOR BEING BACK CHARGED FOR THE SERVICE.

17 CONTRACTOR SHALL ABIDE BY ALL CONSTRUCTION AND PROPERTY RULES AND REGULATIONS SET FORTH BY THE OWNER/TENANT AND THEIR DULY APPOINTED REPRESENTATIVES.

18 CONTRACTOR SHALL BE RESPONSIBLE FOR REVISIONS TO ALL LIFE SAFETY ITEMS (I.E.: SPRINKLER HEADS, FIRE ALARM PULLS, ENUNCIATORS , EXIT LIGHTS, ETC.) IN ORDER TO MAINTAIN COMPLIANCE WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.

19 ALL PATHS OF EMERGENCY EGRESS ARE TO REMAIN OPEN AND FREE OF OBSTRUCTION AT ALL TIMES.

20 CONTRACTOR PROVIDED, CONTRACTOR INSTALLED (C.P.C.I.) ITEMS DEFINED: CONTRACTOR SHALL PROVIDE ALL MATERIALS, PARTS, EQUIPMENT AND LABOR REQUIRED FOR ACCEPTABLE COMPLETION OF ITEM IN QUESTION.

21 OWNER FURNISHED, OWNER INSTALLED (O.F.O.I.) ITEMS DEFINED: OWNER/TENANT OR THEIR SUBCONTRACTING AGENT IS RESPONSIBLE FOR ACCEPTABLE COMPLETION OF ITEM IN QUESTION.

22 ALL MISCELLANEOUS FRAMING AND ASSOCIATED SUPPORT BLOCKING WITHIN WALL ASSEMBLIES ARE TO BE IN FULL COMPLIANCE WITH ACCEPTED AND APPROVED FIRE CODES AND RATED CONSTRUCTION STANDARDS. NO EXCEPTIONS.

23 ALL CONSTRUCTION TO REMAIN IS SHOWN AS "LIGHT LINES" AND IS NOT NOTED, SCHEDULED, DIMENSIONED, ETC., (U.N.O.).

24 ALL DEMOLITION AND NEW CONSTRUCTION IS SHOWN AS "HEAVY LINES" AND IS NOTED, SCHEDULED, DIMENSIONED, AND REFERENCED WITHIN LEGENDS.

25 THE CONTRACTOR SHALL CERTIFY SIZE AND LOCATION OF ALL REQUIRED OPENINGS, CONDUIT/PIPING RUNS AND JUNCTION BOX OPENING LOCATIONS FOR STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING WORK AND EQUIPMENT WITH TRADES INVOLVED.

26 THE GENERAL CONTRACTOR AND EACH SUBCONTRACTOR SHALL BE RESPONSIBLE FOR CHECKING EXISTING CONDITIONS AT THE JOB SITE BEFORE SUBMITTING PROPOSALS. SUBMISSION OF PROPOSALS SHALL BE TAKEN AS EVIDENCE THAT SUCH INSPECTIONS HAVE BEEN MADE. CLAIMS FOR EXTRA COMPENSATION FOR WORK THAT COULD HAVE BEEN FORESEEN BY SUCH INSPECTION, WHETHER SHOWN ON CONTRACT DOCUMENTS OR NOT, SHALL NOT BE ACCEPTED OR PAID.

GENERAL CONDITIONS continued

27 ALL MATERIALS FURNISHED UNDER THIS CONTRACT SHALL BE NEW UNLESS OTHERWISE NOTED. ALL WORK SHALL BE GUARANTEED AGAINST DEFECTIVE MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR AFTER THE DATE OF SUBSTANTIAL COMPLETION OR ACCEPTANCE OF THE WORK. THE CONTRACTOR SHALL REPAIR OR REPLACE, AT HIS OWN EXPENSE WHEN ORDERED TO DO SO, ALL WORK THAT MAY DEVELOP DEFECTS IN MATERIAL OR WORKMANSHIP WITHIN SAID PERIOD OF TIME.

28 ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED RECOMMENDATIONS FOR SERVICE INTENDED, AS INTERPRETED BY THE ENGINEER/ARCHITECT. THE INSTALLATION OF ALL EQUIPMENT SHALL BE MADE BY EXPERIENCED CRAFTSMEN IN A NEAT, WORKMANLIKE MANNER. ALL MATERIALS, TOOLS, COSTS AND SERVICES NECESSARY TO COMPLETELY INSTALL ALL MECHANICAL, ELECTRICAL AND PLUMBING WORK SHALL BE PROVIDED BY THE CONTRACTOR.

29 CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK DURING CONSTRUCTION AGAINST DAMAGE, BREAKAGE, COLLAPSE AND MISALIGNMENT ACCORDING TO APPLICABLE CODES, STANDARDS, AND GOOD CONSTRUCTION PRACTICES. CONTRACTOR SHALL TAKE PROPER PRECAUTIONS TO PROTECT ALL EXISTING OPERATIONS AND PROPERTY ADJACENT, WITH WHICH WORK COMES IN CONTACT, OR OVER OR UNDER WHICH HE MAY TRANSPORT, HOIST, OR MOVE MATERIALS, EQUIPMENT, DEBRIS, ETC., AND SHALL REPAIR SATISFACTORILY ALL DAMAGES CAUSED BY HIM DURING CONSTRUCTION. CONFIRM ALL ON-SITE MATERIAL STORAGE OR CONSTRUCTION ACCESS & STAGING LOCATIONS WITH THE OWNER PRIOR TO COMMENCING WORK.

30 THE CONTRACTOR SHALL VERIFY AND COORDINATE SIZES, LOCATIONS AND CHARACTERISTICS OF ALL WORK AND EQUIPMENT TO BE FURNISHED BY THE OWNER, OR OTHERS WITH THE MANUFACTURER OR SUPPLIER BEFORE ANY CONSTRUCTION IS BEGUN.

31 THE CONTRACTOR SHALL SUBMIT TO THE ARCHITECT/OWNER CONFIRMATIONS OF ORDERS, INCLUDING DELIVERY DATES, FOR ALL MATERIALS AND EQUIPMENT WHOSE TIMELY DELIVERY IS REQUIRED TO AVOID CHANGES IN THE CONSTRUCTION DOCUMENTS OR IN THE CONSTRUCTION SCHEDULE.

32 REGARDING SHOP DRAWINGS; THE CONTRACTOR MUST SUBMIT TO THE OWNER/ARCHITECT FOR APPROVAL BEFORE PROCEEDING WITH FABRICATIONS. THE CONTRACTOR REMAINS RESPONSIBLE FOR; DETAILS, ACCURACY, CONFIRMING & CORRELATING ALL QUANTITIES & DIMENSIONS, SELECTING FABRICATION PROCESSES, TECHNIQUES OR ASSEMBLY, PERFORMING WORK IN A SAFE MANNER, & ADHERING TO ALL APPLICABLE CODES & STANDARDS.
REGARDING SUBMITTALS; SUBMITTALS ARE NOT REQUIRED FOR MATERIALS AND EQUIPMENT EXACTLY AS SPECIFIED ON THE DRAWINGS (WITH NO DEVIATIONS). ALWAYS PROVIDE SUBMITTALS FOR ELECTRICAL PANELS, SWITCHGEAR, STRUCTURAL ITEMS, AIR CONDITIONERS, HEATERS, AND SUBSTITUTIONS.

33 PROTECT ON-SITE UTILITIES, FENCE, POOL, LANDSCAPING & OWNER'S SAFE USE OF THE PROPERTY/ BUILDING AT ALL TIMES DURING CONSTRUCTION.

34 IT IS THE INTENT AND MEANING OF THE CONTRACT DOCUMENTS THAT THE CONTRACTOR SHALL PROVIDE A MECHANICAL, ELECTRICAL, AND PLUMBING INSTALLATION THAT IS COMPLETE. ALL ITEMS AND APPURTENANCES NECESSARY, REASONABLY INCIDENTAL, OR CUSTOMARILY INCLUDED, EVEN THOUGH EACH AND EVERY ITEM IS NOT SPECIFICALLY CALLED OUT OR SHOWN IN THE CONSTRUCTION DOCUMENTS SHALL BE PROVIDED.

35 USE OF PUBLIC WAYS & DESIGNATED ON-SITE PARKING ON THE PROPERTY CAN ONLY BE USED FOR EQUIPMENT/MATERIAL AND UNLOADING AND ONLY WITH ADVANCED WRITTEN NOTICE TO THE BUILDING OWNER, SUBJECT TO HIS APPROVAL.

36 WRITTEN DIMENSIONS SHALL HAVE PRECEDENCE. DO NOT SCALE DIMENSIONS.. IF NO DIMENSION IS LISTED, CONTACT ARCHITECT FOR CLARIFICATION.

37 ALL WORK NOTED "N.I.C." OR "NOT IN CONTRACT" IS TO BE ACCOMPLISHED BY A CONTRACTOR OTHER THAN THE GENERAL CONTRACTOR AND IS NOT TO BE PART OF THE CONSTRUCTION AGREEMENT.

38 "ALIGN" AS USED IN THESE DOCUMENTS SHALL MEAN TO ACCURATELY LOCATE FINISH FACES IN THE SAME PLANE.

39 "TYPICAL" OR "TYP." AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS THE SAME OR REPRESENTATIVE FOR ALL SIMILAR CONDITIONS THROUGHOUT, UNLESS OTHERWISE NOTED.

40 "SIMILAR" OR "SIM." AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS SIMILAR TO A CONDITION DETAILED FOR ANOTHER LOCATION.

41 THE CONTRACTOR SHALL PROVIDE UPDATED RECORD DOCUMENTS OF AS-BUILT CONDITIONS ON-SITE WHEN DIFFERENT FROM CONSTRUCTION DOCUMENTS, AND SHALL PROVIDE SAID DOCUMENTATION TO ARCHITECT UPON COMPLETION OF CONSTRUCTION.

42 THIS COVER SHEET IS A MASTER INDEX. NOT ALL SYMBOLS/ITEMS WILL BE INCLUDED IN DRAWINGS.

43 DO NOT DISASSEMBLE THIS SET OR DISTRIBUTE PARTIAL SETS TO SUBCONTRACTORS. COVER SHEET AND OTHER SHEETS CONTAIN MUTUALLY USED DATA PERTINENT TO ALL SHEETS INDIVIDUALLY. COORDINATE/USE SHEETS AS A WHOLE FOR DESCRIBED "SCOPE OF WORK"

44 REFER TO ADDITIONAL INFORMATION FOR ADDITIONAL GENERAL NOTES, IF ANY.

45 WORK NOTED AS "BID ALTERNATE" REQUIRES SEPARATE PRICING IDENTIFIED FROM THE REMAINDER OF THE SCOPE OF WORK (KNOWN AS "BASE BID WORK"). OWNER WILL DETERMINE WITHIN 30 DAYS FROM THE DATE OF BID OPENING IF HE SHALL ACCEPT THE "BID ALTERNATE" WORK/BID AND NOTIFY THE CONTRACTOR TO INCLUDE THE WORK IN HIS OVERALL SCOPE/CONTRACT. BID ALTERNATE PRICING WILL BE GUARANTEED BY THE CONTRACTOR FOR THIS 30 DAY PERIOD.

46 CONTRACTOR IS TO DETERMINE SCOPE OF ANY DEMOLITION WHICH MIGHT BE REQUIRED BASED UPON INFORMATION CONTAINED IN THE CONSTRUCTION DOCUMENTS AS WELL AS SITE INSPECTIONS TO IDENTIFY SPECIFIC REQUIREMENTS.

47 CONTRACTOR SHALL PROVIDE LIST OF LONG LEAD TIME ITEMS. EQUAL ALTERNATES TO ITEMS SPECIFIED MUST BE REVIEWED BY ARCHITECT OR OWNER PRIOR TO SUBSTITUTION.

48 THESE NOTES APPLY TO ALL DOCUMENTS WITHIN THIS CONSTRUCTION SET, ALL CONTRACTORS AND SUB CONTRACTORS, AND ALL SCOPE OF WORK ITEMS INCLUDED IN THE CONSTRUCTION CONTRACT.

SHEET INDEX

○ ISSUED FOR REFERENCE ONLY
● ISSUED
▲ EXCERPT FROM THIS SHEET WAS ISSUED IN 8 1/2 X 11 FORMAT. COVER SHEET WAS NOT RE-ISSUED AT THIS TIME.

		DESCRIPTION	ORIGINAL ISSUED DATE	DATE	06.02.26 DES. SET
COVER					
A000	COVER SHEET; SHEET INDEX; BUILDING CODES; GENERAL CONDITIONS		06.02.26		●
ARCHITECTURAL					
A200	DEMO FLOOR PLAN & PHOTOS		06.02.26		●
A201	ANNOTATION FLOOR PLAN		06.02.26		●
A401	REFLECTED CEILING PLAN		06.02.26		●
A501	DOOR SCHEDULE AND DETAILS		06.02.26		●
A801	MILLWORK AND INTERIOR ELEVATIONS		06.02.26		●
MECHANICAL					
ELECTRICAL					
PLUMBING					


APPLICABLE BUILDING CODES

CONTRACTOR'S NOTE:

ALL BUILDING WITHIN THE CITY OF PASO ROBLES WILL COMPLY WITH THE FOLLOWING CODES (AS WELL AS ANY AND ALL APPLICABLE COUNTY ORDINANCES):


CITY OF PASO ROBLES/ LOCAL FIRE DEPARTMENT HAS ADOPTED THE FOLLOWING APPLICABLE CODES & REGULATIONS TO THE PROJECT:

2022 CALIFORNIA BUILDING CODE
2022 CALIFORNIA MECHANICAL CODE
2022 CALIFORNIA PLUMBING CODE
2022 CALIFORNIA EXISTING BUILDING CODE
2022 CALIFORNIA FIRE CODE
2022 CALIFORNIA ENERGY CODE
2022 CALIFORNIA ELECTRICAL CODE
ANSI A117.1-2009 EDITION ACCESSIBLE AND USABLE BUILDINGS & FACILITIES

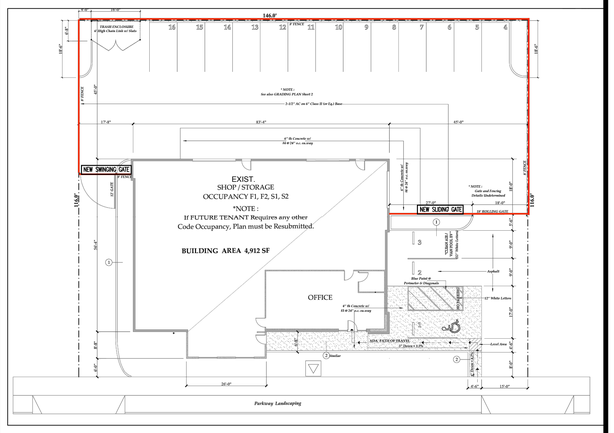

SITE PLAN (NOT TO SCALE) - SEE A201 FOR FENCE PHOTOS/SPECIFICATIONS

VICINITY MAP

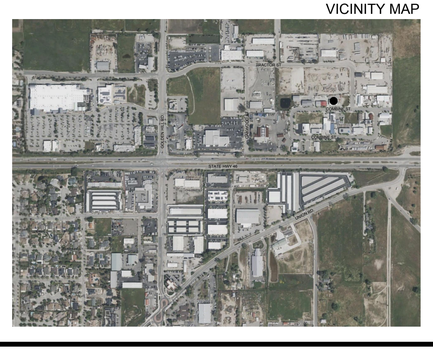

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	DESIGN INTENT DRAWINGS (DIDs) SET			

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) PASO ROBLES, CA

ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
COVER SHEET
3551 Combine St., PASO ROBLES CA 93446

leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO.	REV
	DATE	A000	

8 7 6 5 4 3 2 1


DEMO NOTES

THE FOLLOWING DEMO NOTES ARE GENERAL, AND ARE APPLICABLE WHEREVER THE SUBJECT MATTER OCCURS THROUGHOUT THE SCOPE OF THIS PROJECT. REFERENCE THE DEMOLITION PLANS, ELEVATIONS AND SECTIONS FOR ADDITIONAL DIRECTIONS WHICH ARE SPECIFIC TO PARTICULAR LOCATIONS. REFERENCE THE GENERAL NOTES ON A201 FOR REMARKS WHICH MAY RELATE WITH, OR MAKE ADDITIONAL DEMOLITION REQUIREMENTS NECESSARY, THAT MAY NOT BE ADDRESSED BELOW.

A. ALL ITEMS INDICATED WITH A DASHED LINE IN THE DEMOLITION DRAWINGS SHALL BE REMOVED IN THEIR ENTIRETY, INCLUDING WALLS, DOORS, FRAMES, ETC. ITEMS TO BE SALVAGED, IF ANY, ARE NOTED.
B. ALL MATERIAL DEVELOPED AND ACCUMULATED IN DEMOTION, UNLESS SPECIFICALLY NOTED TO BE REUSED OR SALVAGED AND TURNED OVER TO THE OWNER, SHALL BECOME PROPERTY OF THE CONTRACTOR AND BE LEGALLY DISPOSED OF OFF-SITE.
C. REFERENCE THE REMAINDER OF THE DRAWINGS, INCLUDING MEP, TO LOCATE NEW WORK INSTALLATIONS OF EQUIPMENT, CABINETS, CONDUIT, FIRE SPRINKLER SYSTEM PIPES AND PARTS, ETC. THAT REQUIRE ADDITIONAL DEMOLITION WORK TO COMPLETE THEIR INSTALLATION, THAT MAY NOT BE SPECIFICALLY ADDRESSED IN THE DEMOLITION NOTES AND DRAWINGS.
D. DURING DEMOLITION, PROVIDE PROTECTION FOR ALL EXISTING TO-REMAIN SURFACES, ON THE INTERIOR, THIS WOULD INCLUDE BUT IS NOT LIMITED TO DUST PARTITIONS BETWEEN THE CONSTRUCTION AREAS AND THE NON-CONSTRUCTION AREAS.
E. BRACE ALL EXISTING PARTITIONS SHOW TO REMAIN TO MAINTAIN THEIR STRUCTURAL INTEGRITY DURING AND AFTER PARTITION DEMOLITION.
F. ALL EXISTING FLOOR FINISHES IN AREAS TO RECEIVE NEW FINISHES SHALL BE REMOVED DOWN TO THE CONCRETE SLAB SUBSTRATE. REMOVE ANY REMAINING FLOORING ADHESIVES SO THE FLOOR IS SUITABLE TO RECEIVE NEW FINISHES.
G. FIELD VERIFY ALL DIMENSIONS, AND VERIFY EXISTING WITH NEW PROPOSED WALLS AND CEILING.
H. REFERENCE MEP DRAWINGS FOR ALL LIGHT AND POWER DEMOLITION AS WELL AS LIGHTS AND POWER TO REMAIN.

DEMO PLAN KEY NOTES

1. ALL WALLS SHOWN DASHED TO BE REMOVED AS WELL AS GYP. BD. CEILINGS AND FLOORING IN THIS AREA. EXIST. SPRINKLER HEADS WILL BE RAISED TO ALIGN WIH NEW CEILING HEIGHTS.
2. EXIST. SINK IN THIS AREA TO BE REMOVED AND PLUMBING LINES CAPPED OR RELOCATED FOR NEW PLUMBING FIXTURES.
3. SLAB IN HATCHED AREA TO BE REMOVED AS NEEDED TO ACCOMODATE NEW PLUMBING LINES AND FIXTURE LOCATIONS. VERIFY SLAB TYPE BEFORE CUTTING TO AVOID ANY POST TENSIONING.
4. TOILET, SINK AND BATHROOM ACCESSORIES TO BE REMOVED AND SAVED FOR NEW LAYOUT. PLUMBING LINES TO BE REWORK FOR NEW LOCATION.
5. ALL DOOR AND FRAMES SHOWN DASHED TO BE REMOVED.
6. EXIST. WALL THAT ENCLOSES COLUMN TO BE REMOVED. COLUMN WILL REMAIN.
7. EXIST. MILLWORK IN THIS ROOM TO BE REMOVED. IF ANY PLUMBING FIXTURES ARE FOUND, THEY ARE TO BE REMOVED AS WELL AND ANY PLUMBING LINES CAPPED.
8. EXISTING FLOORING IN THE AREAS TO RECEIVE NEW FLOORING (SEE A201) TO BE REMOVED AND PREPPED FOR NEW FLOORING
9. DEMO SLAB TO ALLOW FOR ELECTRICAL/AND TELE/DATA BOX IN THE FLOOR AT CONFERENCE ROOM. ACCESS ELECTRICAL WHERE BEST DETERMINED

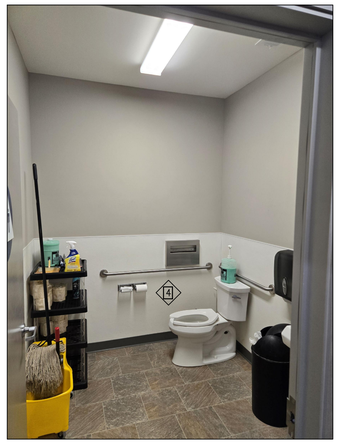

EXIST TOILET ROOM 7
SCALE: NTS




EXIST. BREAK ROOM 5
SCALE: NTS



FRONT AREA NEAR FRONT DR 7
SCALE: NTS



FRONT AREA PHOTO 6
SCALE: NTS

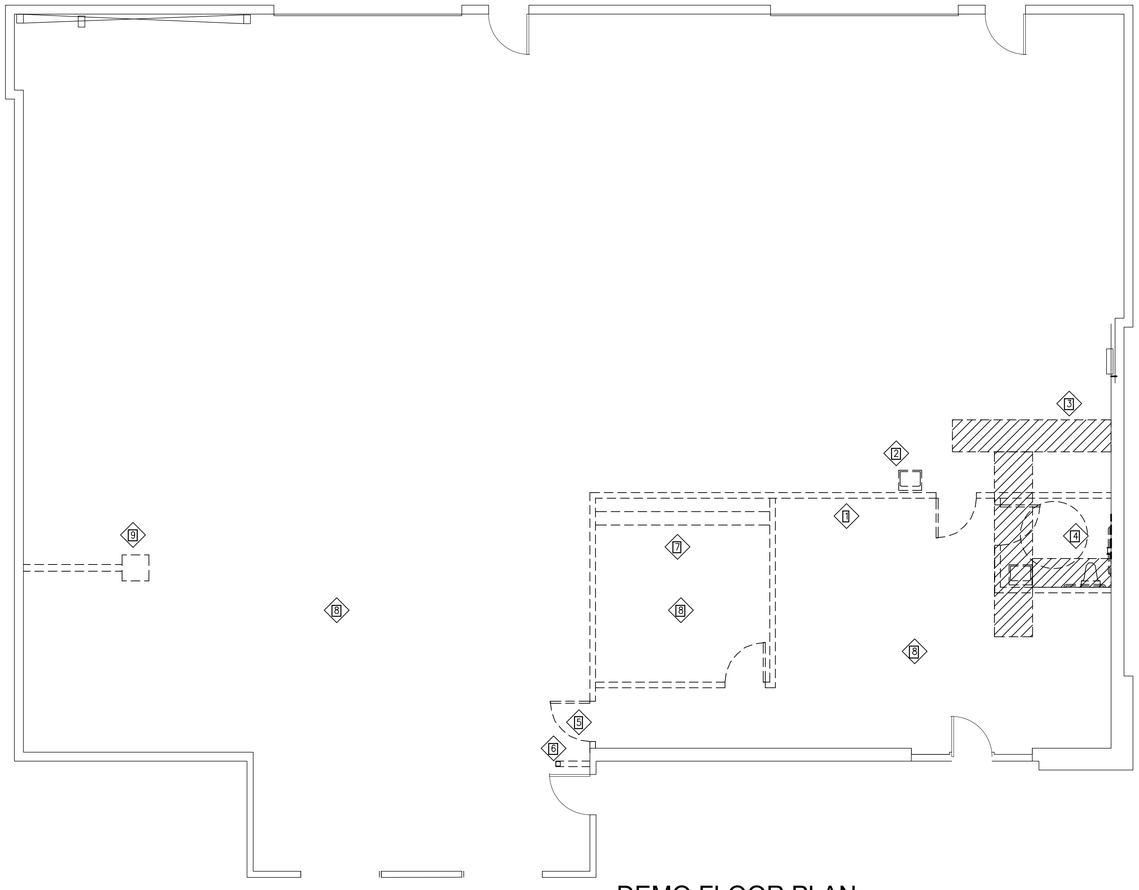

DEMO FLOOR PLAN 1
SCALE: 3/16"=1'-0"



FRONT WINDOW PHOTO 2
SCALE: NTS

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	DESIGN INTENT DRAWINGS (DIDs) SET			

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) PASO ROBLES, CA

ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
DEMO PLAN
3551 Combine St., PASO ROBLES CA 93446

leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO.	REV
	DATE	A200	

NEW FENCE NOTES

A. THE FENCE PER FAA ORDER 1600.69D IS CONSIST OF A 7 FT. HIGH, 9 GAUGE WOVEN ALUMINUM-COATED STEEL OR GALVANIZED STEEL WIRE FABRIC WITH MESH OPENINGS NOT LARGER THAN 2 INCHES PER SIDE AND A 1 FT. HIGH OUTWARD-FACING TOP GUARD CONSISTING OF 3 STRANDS OF GALVAINED BARBED WIRE SET AT AN OUTWARD ANGLE OF 45 DEGREES FOR A TOTAL OF 8 FT. ABOVE GRADE.CCONSTRUCTION OF FAA SECURITY FENCES AND GATES WILL COMPLY WITH FEDERAL SUPPLY SERVICE, FEDERAL SPECIFICATION RR-F-191K, FENCING, WIRE, AND POST METAL (AND GATES, CHAIN-LINK FENCE FABRIC, AND ACCESSORIES)(GENERAL SPECIFCATION) FEDERAL SPECIFCATION SHEETS RR-F-191-1E THROUGH 4E, AND AMERICAN SOCIETY FOR TESTING AND MATERIALS 9ASTM) F567-07, STANDARD PRACTICE FOR INSTALLATION OF CHAIN-LINK FENCE.

NEW FENCE NOTES

1. NEW 12 FT. AUTOMATED GATE, SWINGING COUNTERCLOCKWISE 90 DEGREES
2. EXTENT OF NEW FENCE AS DESCRIBED IN FAA ORDER 1600.69D LISTED ABOVE
3. NEW AUTOMATED 18 FT. AUTOMATED GATE, SLIDING TOWARDS THE BUILDING

FLOORING KEY NOTES


1. F1 LVT (LUXURY VINYL TILE) TO BE INSTALLED FOR FLOORING IN THIS AREA. SELECTION TBD.
2. F2 CARPET TO BE INSTALLED FOR FLOORING IN THIS AREA. SELECTION TBD.
3. F3 TILE FLOOR & WALL AS REQUIRED BY CODE TO BE INSTALLED FOR IN THIS AREA. SELECTION TBD.
4. F4 FLOORING IN THIS AREA TO REMAIN EXIST. CONCRETE, CLEANED AND POLISHED AS NEEDED



EAST FENCE LINE




EAST BACK FENCE CORNER

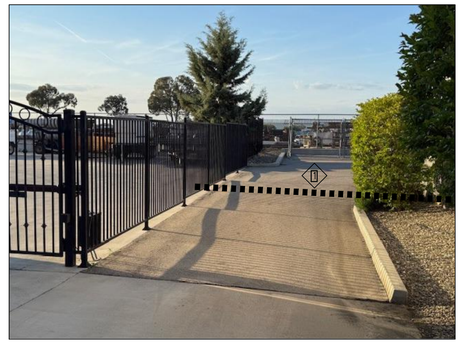

WEST GATE

EXISTING PHOTOS -FENCE AREA 2

SCALE: NO SCALE

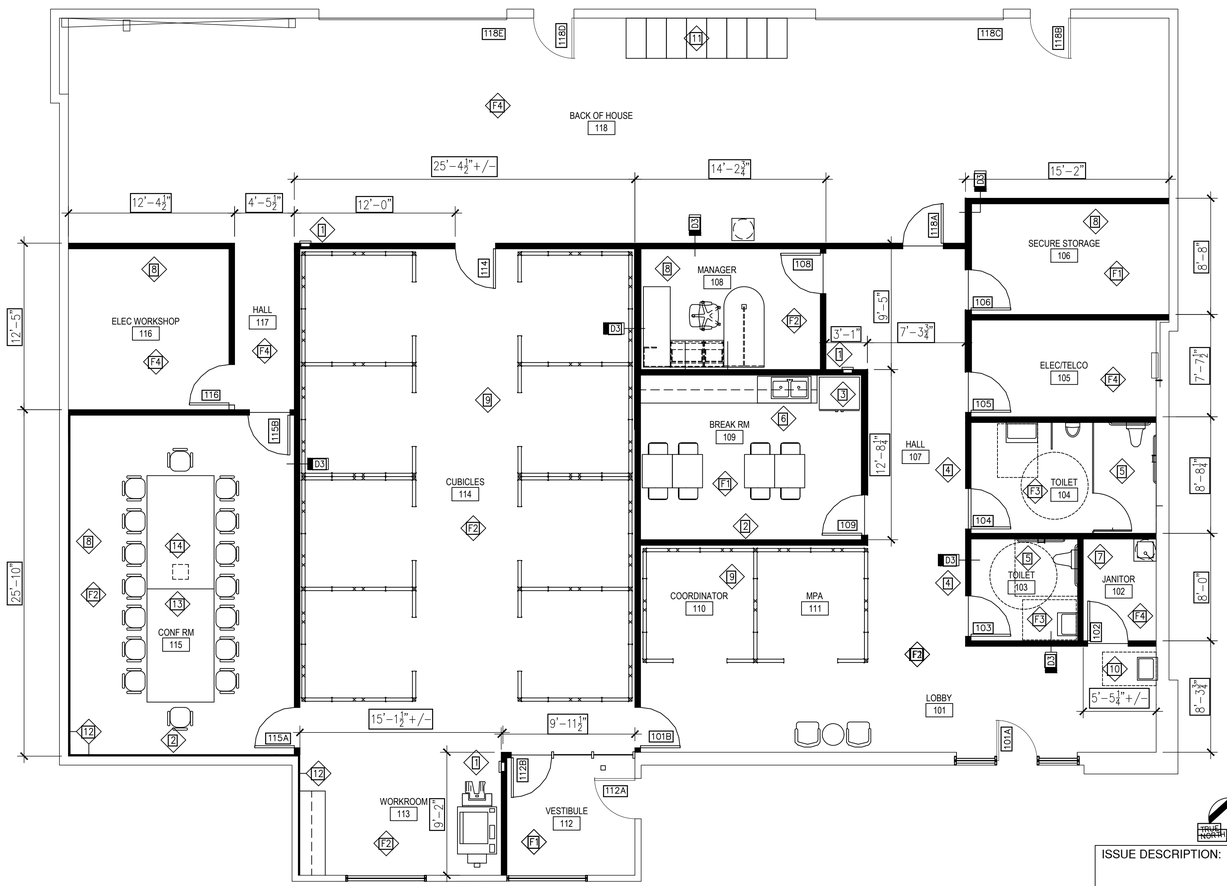

FLOOR PLAN - NEW 1

SCALE: 3/16"=1'-0"

GENERAL NOTES

A. PROVIDE AND INSTALL 1 FIRE EXTINGUISHER WITH SEMI-RECESSED CABINETS AT EACH LOCATION SHOWN IN KEY NOTE 1 BELOW. VERIFY ARCHITECTS PROPOSED LOCATIONS WITH FIRE MARSHALL PRIOR TO INSTALLATION. (FC) MIN FIRE EXTINGUISHER SIZE IS 2A-10BC. TRAVEL DISTANCE TO NEAREST FIRE EXTINGUISHER CAN NOT EXCEED 75 FEET, REFER KEYNOTE BELOW FOR LOCATIONS.

B. ALL DIMENSIONS ARE FROM FACE OF MASONRY, FACE OF CONCRETE AND FACE OF GYP. UNLESS NOTED OTHERWISE (U.N.O.)

C. ALL WALLS U.N.O. ARE FINISHED WITH ⅝" ' TYPE X' GYPSUM BOARD.

D. ALL DOOR OPENINGS TO BE 4" MINIMUM FROM CORNER OF SPACE UNLESS NOTED OTHERWISE.

E. ALL WALLS ARE TO BE PARTITION TYPE 'DS' U.N.O.

F. HARDWARE ON ALL DOORS TO BE TAS/ADA COMPLIANT INCLUDING THRESHOLDS.


G. PROVIDE ACCESSIBLE FIXTURES WITH REQUIRED A.D.A. & T.A.S. ACCESSORIES & CLEARANCES. REFER TO SHEETS A001, A002 & A003.

H. PROVIDE LIGHTING CONTROLS (I.E. MOTION SWITCHES) AS REQUIRED BY THE INTERNATIONAL ENERGY CONSERVATION CODE, REFER ELECTRICAL.

I. COMPLETELY FILL ALL TOILET PLUMBING WALL CAVITIES WITH ACOUSTIC BATT INSULATION TO DECK OR BOTTOM OF STRUCTURE.

FLOOR PLAN KEY NOTES

1. NEW FIRE EXTINGUISHERS CABINET, REF. 2/A201 FOR MOUNTING DETAILS. VERIFY LOCATIONS WITH FIRE MARSHALL BEFORE INSTALLING.
2. TELEVISION BY OWNER. BLOCKING & CONNECTIONS BY G.C. REFER ELECTRICAL. COORDINATE REQUIREMENTS WITH OWNER. CENTER MILLWORK ON WALL.
3. NEW APPLIANCE: ONE REFRIGERATOR (66" MAX HT.) WITH WATER CONNECTION TO BE PROVIDED BY OWNER (NIC)
4. PROVIDE ADA COMPLIANT (SECTION 703) SIGNAGE AT APPLICABLE RESTROOM DOOR.
5. EACH RESTROOM WILL CONTAIN TOILET ACCESSORIES INCLUDING, BUT NOT LIMITED TO: PAPER TOWEL DISPENSER/TRASH RECEPTACLE, SOAP DISPENSER, GRAB BARS, COAT HOOKS, TOILET ROLL DISPENSER, MIRROR. REF. 800 SHEETS FOR WHAT WILL BE NEW VS REUSED EXIST. SELECTIONS AND LOCATIONS.
6. UNDERCOUNTER GARBAGE DISPOSAL AS SELECTED ON MEP DRAWINGS.
7. NEW WATER HEATER LOCATION, LOCATION TBD.
8. ADD DUPLEX OUTLETS AT EACH WALL IN NEW ROOMS.
9. PROVIDE ELECTRICAL OUTLETS AND DATA AS NEEDED FOR EACH CUBICLE LOCATION. CUBICLES SHOWN FOR REFERENCE AND WILL BE FURNISHED BY OWNER AFTER COMPLETION OF PROJECT.
10. NEW WATER FOUNTAIN (EWC) INSTALLED AT THIS LOCATION. NEW WATER LINE TO BE PROVIDED.
11. NEW EMPLOYEE LOCKERS TO BE FURNISHED/INSTALLED BY CONTRACTOR
12. 5/8" GYP. BD. ON 7/8" FURRING STRIPS ADDED TO EXIST EXPOSED WALL STRUCTURE
13. ADD QUAD ELEC. OUTLET AND TELE/DATA IN THE FLOOR CENTERED UNDER CONFERENCE ROOM TABLE
14. NEW QUAD FLOOR OUTLET WITH TELE/DATA TO BE INSTALLED

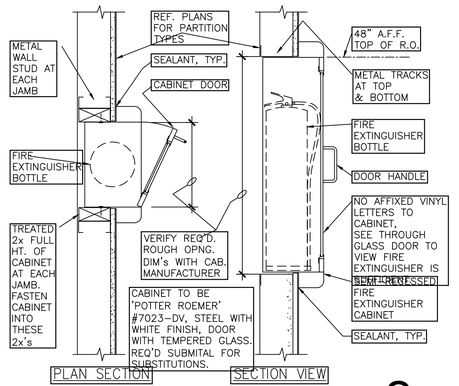

FIRE CABINET 2

SCALE: 1 1/2"=1'-0"

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	DESIGN INTENT DRAWINGS (DIDs) SET			


DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) PASO ROBLES, CA

ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
FLOOR PLAN
3551 Combine St., PASO ROBLES CA 93446


leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO. A201	REV
	DATE		

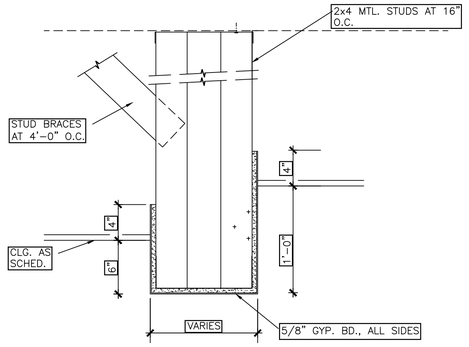

CEILING TRANSITION 4

SCALE: 1 1/2"=1'-0"

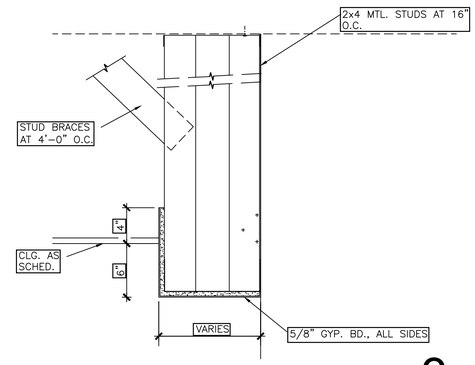

CEILING TRANSITION 3

SCALE: 1 1/2"=1'-0"

RCP KEY NOTES

1. NO CEILING IN THIS AREA – EXPOSED ROOF DECK/INSULATION TO BE PAINTED, COLOR TBD.
2. CEILING IN THESE ROOMS TO BE AT 9'-0" H., SUSPENDED GRID WITH ACOUSTIC TILES
3. CEILING IN THESE ROOMS TO BE AT 10'-0" H., SUSPENDED GRID WITH ACOUSTIC TILES

RCP GENERAL NOTES

1. VERIFY EXIT SIGN's NUMBER, TYPE & LOCATIONS WITH FIRE MARSHAL PRIOR TO INSTALLATION.
2. USE TYPE 'X' ACOUSTICAL GYP. BD. AT ALL ROOMS.
3. ALL CEILING HEIGHTS TO BE 9'-0" A.F.F. UNLESS NOTED OTHERWISE.
4. REFER TO MECHANICAL DRAWINGS FOR LOCATIONS OF HVAC GRILLES AND DIFFUSERS.
5. ALL LIGHT FIXTURES TO BE CENTERED ON EACH AXIS OF EACH ROOM OR SPACE UNLESS NOTED OTHERWISE.

RCP LEGEND

(ALL CEILING ITEMS SHOWN HERE MAY NOT APPLY TO THIS PROJECT)

- A — 2x2 RECESSED VOLUMETRIC LED TROFFER
- B — 2x4 RECESSED VOLUMETRIC LED TROFFER
- C — 1'X7' LED PENDANT
- D — 18" LED DRUM PENDANT
- E — 4" SQUARE CAN LED LIGHT TRIMLESS
- F — 2x4 RECESSED LED ACRYLIC LENS TROFFER
- G — 2x2 RECESSED LED ACRYLIC LENS TROFFER
- 5A — EXTERIOR SEMI RECESSED FULL CUT OFF LED CANOPY LIGHT
- 5B — LENSED EXTERIOR LED LANE LIGHT
- 5C — EXTERIOR LED SOFFIT DOWNLIGHT
- 5F — EXTERIOR LED WALL PACK
- 5S — LED SITE LIGHT AND POLE
- 12 — WALL/CEILING MOUNTED EXIT LIGHTS; FLAT PANEL TELEVISION WALL MOUNT AND BLOCKING

SOFFIT OR CEILING HEIGHTS A.F.F. (± INDICATES IT IS NOMINAL, THAT THE AC ACTUAL ELEVATION WILL RESULT FROM CONSTRUCTION OF FRAMING)

- 'X'-X" — ARMSTRONG' ACOUSTICAL LAY-IN CEILING SYSTEM; 'SUPRAFINE, XL' 2x2x9/16" WITH 'DUNE TEGULAR' TILE, BOTH WHITE.
- 'X'-X" — EIFS (EXTERIOR INSULATED FINISH SYSTEM) 3/4" THICK U.N.O. ON GALVANIZED SUSPENSION SYSTEM. JOINTS AS SHOWN.
- 'X'-X" — GYPSUM BOARD, TYPE 'X', ACOUSTICAL GYP. BD. IN LOBBY CLERESTORY WALLS & CLG.



REFLECTED CEILING PLAN 1

SCALE: 1/8"=1'-0"

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	DESIGN INTENT DRAWINGS (DIDs) SET			

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) — PASO ROBLES, CA

ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
REFLECTED CEILING PLAN
3551 Combine St., PASO ROBLES CA 93446

leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO.	REV
	DATE	A401	

INTERIOR PARTITION TYPES GENERAL NOTES

THE FOLLOWING INTERIOR PARTITION TYPES NOTES ARE GENERAL, AND ARE APPLICABLE WHEREVER THE SUBJECT MATTER OCCURS.

1. ALL GYPSUM BOARD SHALL BE 5/8" THICK FIRE CODE (TYPE 'X').
2. REFERENCE THE SPECIFICATIONS FOR REQUIREMENTS REGARDING THE GAUGE OF WALL AND PARTITION STUDS.
3. ALL WOOD STUDS SHALL BE SPACED 16" O.C., UNLESS SHOWN OTHERWISE AT THE PARTITION TYPE DETAILS.
4. REQUIRED LOCATIONS OF WATER RESISTANT GYPSUM WALL BOARD SHALL BE DEFINED BY ROOM NAME ASSOCIATION. THOSE ROOM NAMES INCLUDE THE WORD(S) TOILET; MEN; WOMEN; SHOWER; JANITOR.
5. SOUND INSULATION FOR WALLS WITH 3 1/2" STUDS SHALL BE 3" THICK, SOUND INSULATION SHALL BE INSTALLED THE FULL HEIGHT OF THE PARTITION.
6. DIAGONALLY BRACE TO THE STRUCTURE ABOVE, OR TO A NEARBY WALL OR STRUCTURAL MEMBER, ALL PARTITIONS THAT TERMINATE ABOVE THE CEILING.
7. FIRE RATINGS AND TEST NUMBERS SHOWN BELOW SOME PARTITION TYPES APPLY ONLY WHERE A FIRE RATING IS DESIGNATED FOR THAT WALL ON THE FLOOR PLAN(S).
8. THESE PARTITION TYPE DETAILS SHOW THE SYMBOL FOR A RUBBER BASE. REFERENCE THE ROOM FINISH SCHEDULE FOR THE ACTUAL BASE REQUIRED.
9. PARTITION TYPE SYMBOLS AT DOORS AND STOREFRONTS ON THE PLAN ARE INDICATING THE PARTITION TYPE DIRECTLY ABOVE THAT DOOR OR STOREFRONT.

NOTES BY NUMBER

APPLICABLE WHERE SHOWN ON THE DOOR SCHEDULE.


11. EXISTING STOREFRONT GLASS DOOR TO REMAIN AS IS, REPLACE CYLINDER LOCK
12. SEE SHEET A900'S FOR DOOR FINISH SELECTIONS
13. PROVIDE AN ADA & TAS COMPLIANT CLOSER.
14. EXISTING HOL. MTL. EXIT DOOR, TO BE REPAINTED, COLOR TBD
15. DOOR HARDWARE TO ACCEPT BEST LOCKS 7 PIN SET
16. DOOR TO HAVE AN INSET GRILL TO ALLOW EQUIPMENT TO VENT.

DR. SCHED. ABBREVIATIONS

ALUM.	ALUMINUM
AL-GLASS	ALUMINUM / GLASS
AL-RACO	ALUMINUM RACO EQUIVALENT
AA	ANODIZED ALUMINUM - BRONZE
HOL. MET.	HOLLOW METAL
INSUL. STL.	INSULATED STEEL
PT	PAINT
PLAM	PLASTIC LAMINATE
PWR	PWR
SC. WD.	SOLID CORE WOOD
STL. CHNL.	STEEL CHANNEL
CA	CLEAR ANODIZED

PARTITIONS TYPE DESIGNATION SYMBOL

ALL DESIGNATIONS SHOWN HERE MAY, OR MAY NOT, APPLY TO THIS PROJECT

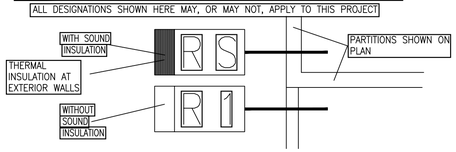

GLASS SCHEDULE


G1	1/4" CLEAR PLATE GLASS.
G2	1/4" CLEAR TEMPERED GLASS.
G3	1/4" TEMPERED GLASS, TINTED.
G4	1" INSULATED GLASS, PER SPECIFICATIONS.
G5	1" INSULATED TEMPERED GLASS, PER SPECIFICATIONS.

DOOR SCHEDULE

DOOR NO.	DOOR OPENING SIZE PR.	WDTH.	HT.	DOOR TYPE	THICK-NESS	MATERIAL	FINISH	MISC. GLASS TYPE	MISC. HDWR. SET NO.	RATING (IN MINUTES)	FRAME TYPE	MATERIAL	FINISH	MISC. ELEC. STRIKE WITH CARD READER	REF. FRAME ELEV. FOR REFERENCES	DETAILS HEAD	JAMB	JAMB	SILL	NOTES BY NUMBER
					1 3/4" U.N.O.															
101A																				11 5
101B		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
102		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
103		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
104		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
105		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2 5
106		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
108		3'-0"	7'-0"	D2		WOOD	PLAM				F1	ALUM.	CA							2 13 15
109		3'-0"	7'-0"	D2		WOOD	PLAM				F1	ALUM.	CA							2 13
112A																				2 15
112B		3'-0"	7'-0"	D1		WOOD	PLAM				F2	ALUM.	CA							2
114		3'-0"	7'-0"	D1		STL.	PTD.				F1	ALUM.	CA							2
115A		3'-0"	7'-0"	D2		WOOD	PLAM				F1	ALUM.	CA							2
115B		3'-0"	7'-0"	D2		STL.	PTD.				F1	ALUM.	CA							2 5
116		3'-0"	7'-0"	D1		WOOD	PLAM				F1	ALUM.	CA							2
118A		3'-0"	7'-0"	D1		STL.	PTD.				F1	ALUM.	CA							2
118B																				14
118C																				
118D																				
118E																				

INT. DOOR HEAD 5

SCALE: 3"=1'-0"

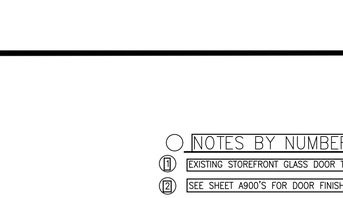


INT. DOOR JAMB 4

SCALE: 3"=1'-0"


WINDOW & DOOR FRAME ELEVATIONS NOTES:

1. DETAILS FOR THE EXTERIOR ALUMINUM STOREFRONTS AND WINDOWS ARE BASED ON KAWNEER TRIFAB VG 451 SERIES. REFER TO SPECIFICATIONS. FRAME FINISH SHALL BE DETERMINED.
2. DETAILS FOR THE INTERIOR ALUMINUM STOREFRONTS AND WINDOWS ARE BASED ON KAWNEER TRIFAB 400. REFER TO SPECIFICATIONS. FRAME FINISH SHALL BE DETERMINED.
3. DETAILS FOR THE INTERIOR ALUMINUM FRAMES AND WINDOWS ARE BASED ON FRAMEWORKS TYPE II 2" TRIM 487. FRAME FINISH SHALL BE CLEAR ANODIZED.
4. MANUFACTURER'S MODEL NUMBERS ARE SHOWN FOR FUNCTIONAL DESCRIPTION PURPOSES ONLY. THEY ARE NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS TO A SINGLE SUPPLIER.
5. FIELD VERIFY ALL ROUGH OPENING DIMENSIONS PRIOR TO WINDOW FABRICATION. ALLOW ½" MAX SHIM/SEALANT GAP BETWEEN WINDOW FRAME AND ROUGH OPENINGS.
6. PREPARE ROUGH OPENINGS AT EXTERIOR DOORS AND WINDOWS AS DETAILED AT THE 'OPENING PREPARATION DETAIL', REFER 17/A702.
7. SAFETY GLASS AS DEFINED BY BUILDING CODE. ALL EXTERIOR DOORS AND WINDOWS SHALL MEET THE PROVISIONS OF SECTION 1609.1.2 OF THE 2009 IBC FOR OPENING PROTECTION.

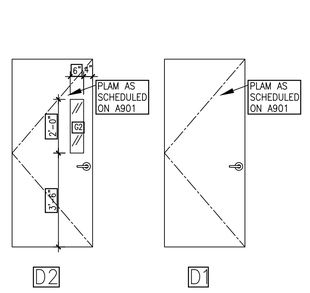


DOOR TYPES 3

SCALE: 3/8"=1'-0"

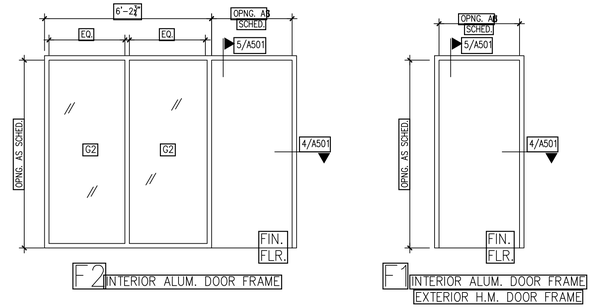

DOOR SCHEDULE 2

SCALE: 3/8"=1'-0"

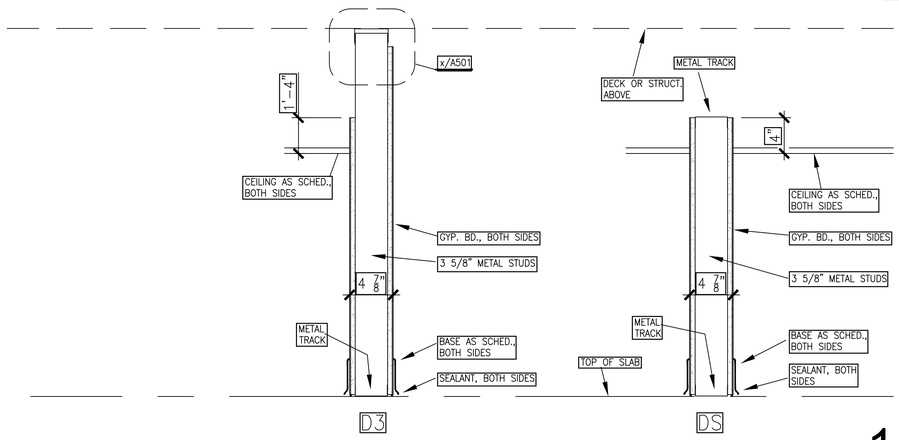

PARTITION TYPES 1

SCALE: 3/8"=1'-0"

HARDWARE SCHEDULE

A. HARDWARE EQUAL TO SCHLAGE AL-JUPITER, STD. DUTY COMMERCIAL SERIES, CLASS 2
B. USE SATIN CHROME 626 FINISH OR CLOSEST MATCH, VERIFY WITH OWNER.
C. ALL HANDLES TO BE ACCESSIBLE. PROVIDE MASTER AND KEYING AS DIRECTED BY OWNER.
D. ALLOW FOR 1 METAL/RUBBER DOOR STOP PER DOOR.

	ANSI FUNCTION NAME
S1	Non-keyed locks, levers, PASSAGE LATCH (both always unlocked)
S2	Non-keyed locks, levers, EXIT LOCK (outside lever fixed, inside unlocks)
S3	Non-keyed locks, levers, PRIVACY LOCK (push button locking)
S6	Keyed locks, levers, ENTRANCE LOCK (key unlocks outside, inside always unlocked)
S7	Keyed locks, levers, OFFICE LOCK (button locks outside lever until turned inside)
S8	Key unlocks outside, STOREROOM LOCK (outside always locked, inside always unlocked).
S9	Key punchcode lock, levers, ELECTRICALLY UNLOCKED (continuously locked outside, unlocked by entering code on locks keypad).

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	100% CONSTRUCTION SET			

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) PASO ROBLES, CA


ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
DOORS SCHEDULE & DETAILS
3551 Combine St., PASO ROBLES CA 93446

leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO. A501	REV
	DATE		

CABINET SYMBOL KEY:

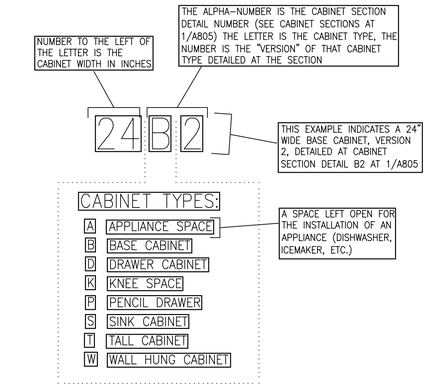




EXIST. SIDE/BACK 5


SCALE: NTS




EXIST. ENTRANCE 4

SCALE: NTS

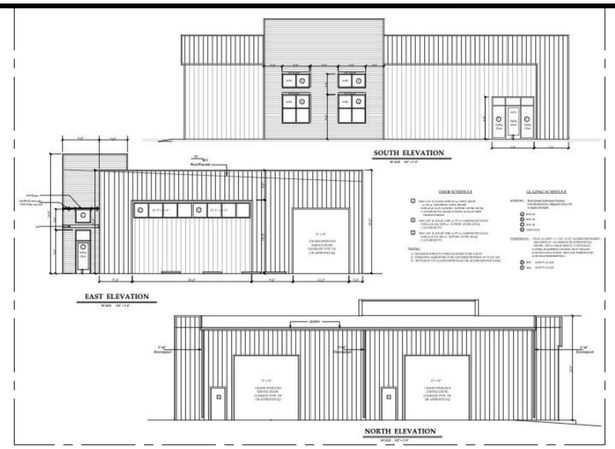


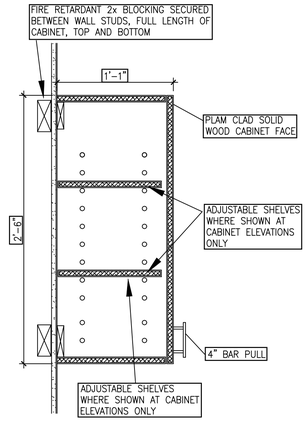

W1 WALL CABINET

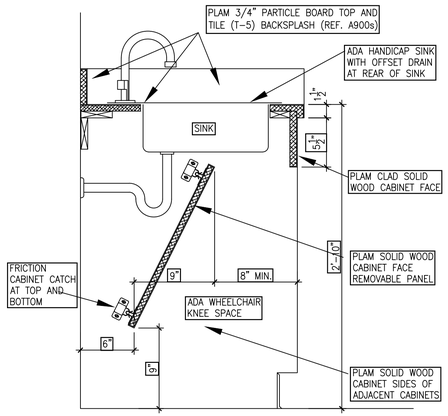



S1 SINK CABINET

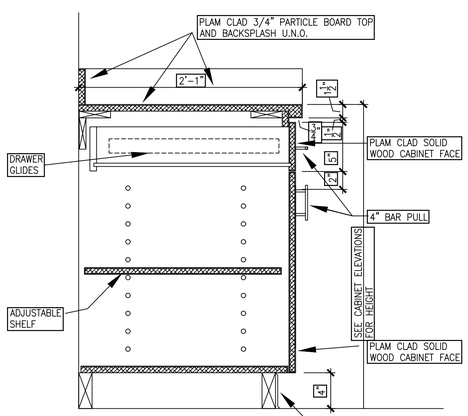

B2 BASE CABINET


ACCESSORIES SCHEDULE (REF. PLANS AND ELEVS FOR APPLICABLE LOCATIONS)		
NO.	DESCRIPTION	MFR / MODEL NO.
GB36	GRAB BAR, 36" LONG - STAINLESS STEEL	BRADLEY 812-1836***
GB42	GRAB BAR, 42" LONG - STAINLESS STEEL	BRADLEY 812-1842***
SND1	SANITARY NAPKIN DISPOSAL, RECESSED	BRADLEY 4779-***
LSD1	LIQUID SOAP DISPENSER - HORIZ., WALL MOUNTED	BRADLEY 6262
PTR	TOWEL DISP / WASTE RECEPTACLE RECESSED	BRADLEY 4399
TT02	TOILET TISSUE DISPENSER - SURFACE MOUNTED-DBL	BRADLEY 5241
MI	STAINLESS STEEL FRAMED GLASS MIRROR, NO SHELF	BRADLEY 780-***
RH4	PAIR, ROBE HOOKS MOUNTED 21 44" & 66"	BRADLEY 72-***
MANUFACTURER'S MODEL NUMBERS ARE SHOWN FOR FUNCTIONAL DESCRIPTION PURPOSES ONLY. THEY ARE NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS TO A SINGLE SUPPLIER. ALL SKIN FINISH.		

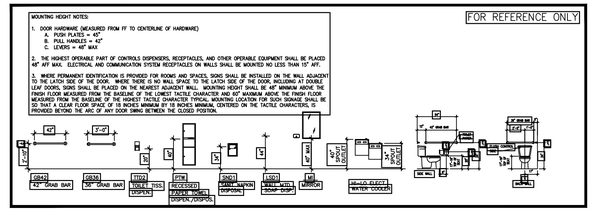

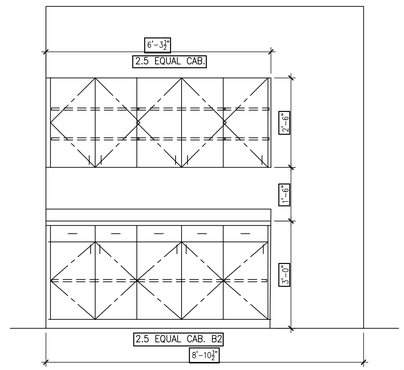


ELEV - WORKROOM 113 3

SCALE: 1/2"=1'-0"

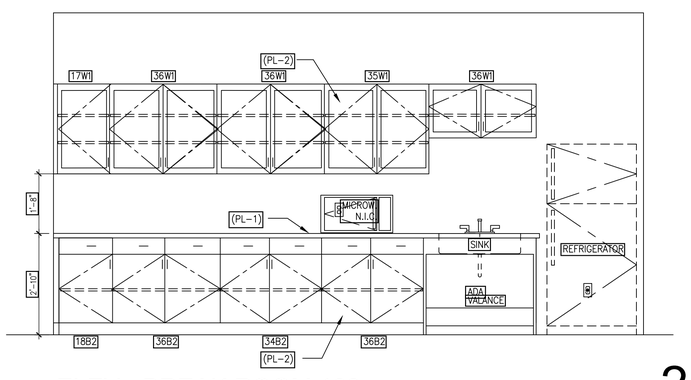

ELEV - BREAK ROOM 109 2

SCALE: 1/2"=1'-0"

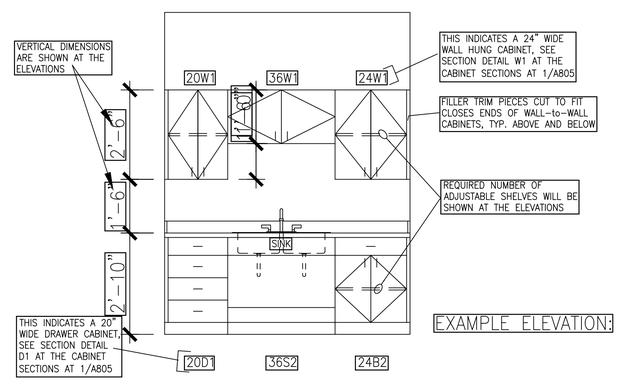

CABINET ELEVATIONS SYMBOL KEY 1

SCALE: 1/2"=1'-0"

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
	06.02.26	DESIGN INTENT DRAWINGS (DIDs) SET			

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
FAA (SSC) PASO ROBLES, CA

TRUE NORTH

ISSUE DESCRIPTION:

Paso Robles, CA - SSC
BUILDING RENOVATION -DID SET
FAA SYSTEM SUPPORT CENTER
MILLWORK ELEVATIONS
3551 Combine St., PASO ROBLES CA 93446

leidos
9800 HILLWOOD PARKWAY
SUITE 170
FORT WORTH, TX 76177

REVIEWED BY	SUBMITTED BY		
	APPROVED BY		
	ISSUED BY	DRAWING NO.	REV
	DATE	A801	

H G F E D C B A

8 7 6 5 4 3 2 1