PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A1

U. S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

PLANS FOR PROPOSED PROJECT

CO OMAD 300(71)

MINUTEMAN MISSILE ACCESS ROADS

LOGAN & WELD COUNTIES; COLORADO
KIMBALL COUNTY: NEBRASKA
LARAMIE COUNTY: WYOMING

SCHEDULE A LENGTH 29.02 MILES
SCHEDULE B LENGTH 39.73 MILES
SCHEDULE C LENGTH 45.36 MILES

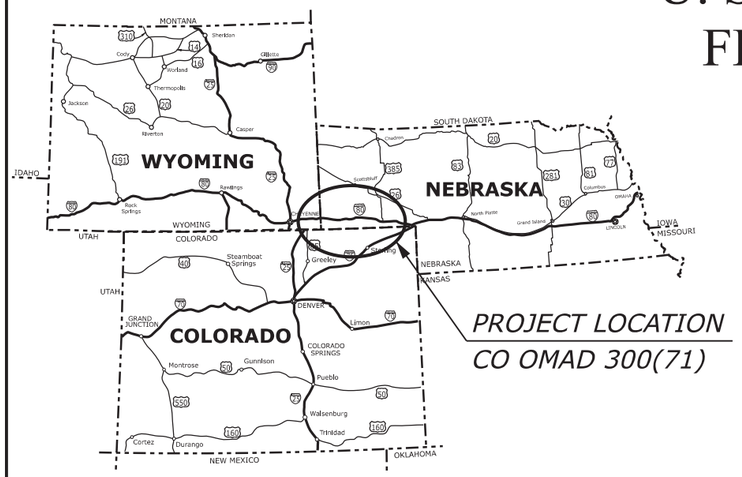

KEY MAP

TYPE OF CONSTRUCTION:
Aggregate surface course,
aggregate surface reconditioning,
drainage improvements, signage

SPECIFICATIONS:
"STANDARD SPECIFICATIONS FOR CONSTRUCTION OF ROADS AND BRIDGES ON FEDERAL HIGHWAY PROJECTS, FP-24"

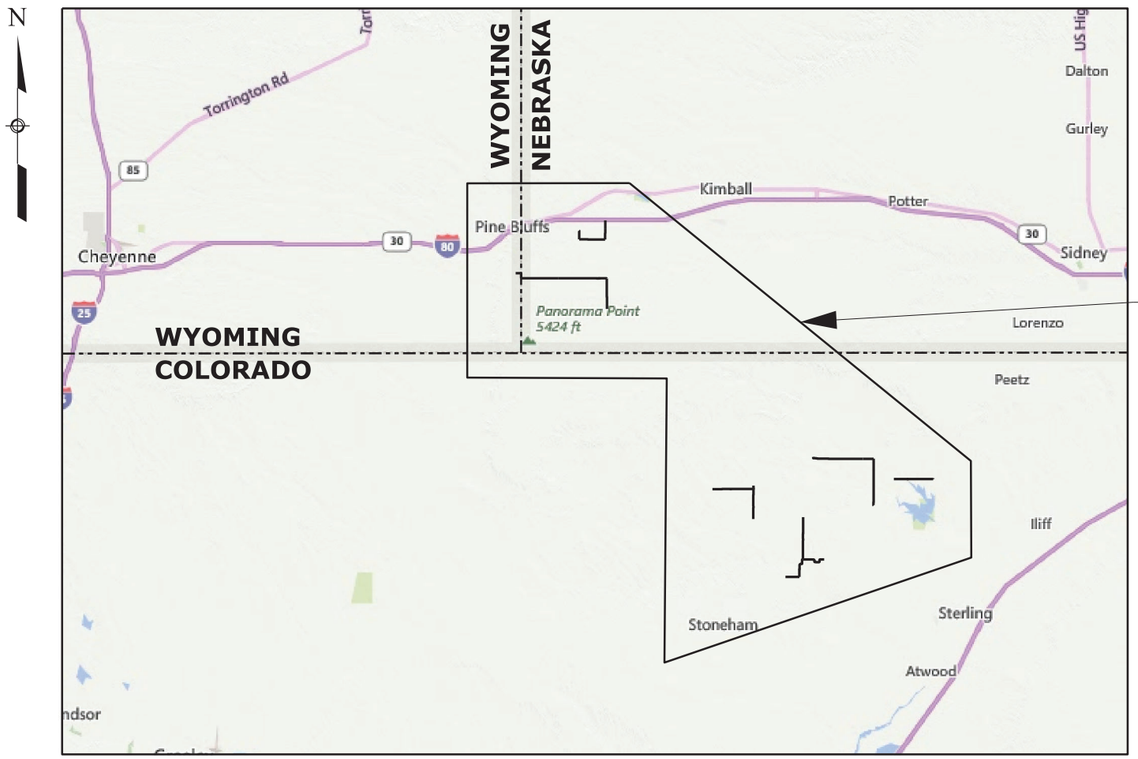

Project Location
CO OMAD 300(71)

INDEX TO SHEETS	
SHEET NUMBER	**DESCRIPTION**
A1	TITLE SHEET
A2 - A3	CONVENTIONAL PLAN SYMBOLS AND ABBREVIATIONS
A4	KEY MAP
A5	TYPICAL SECTION
B1 - B3	SUMMARY OF QUANTITIES
B4	ROUTE IMPROVEMENT SUMMARY
B5	SURFACING SUMMARY
B6 - B8	DRAINAGE SUMMARY
C1 - C22	PLAN SHEETS
F1	SPECIAL 203-A CULVERT CUTTING DETAIL
T1	602-1 METAL PIPE CULVERT
T2	602-2 METAL PIPE CULVERT COUPLING BAND
T3	602-3 METAL AND PLASTIC PIPE CULVERT BEDDING
T4	602-4 METAL END SECTIONS
T5	SPECIAL 607-A CLEANING DRAINAGE STRUCTURE
T6	SPECIAL 633-A OBJECT MARKER DETAIL
T7 - T9	635 STANDARDS - TEMPORARY TRAFFIC CONTROL

PLANS PREPARED BY:

AtkinsRéalis

FOR

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
CENTRAL FEDERAL LANDS HIGHWAY DIVISION
DENVER, CO

811 Know what's **below.** **Call** before you dig.
www.call811.com

PROJECT MANAGER
N. MASCARENAS

Professional Engineer
CODY BURCH
20272
Date 08/24/2026
WYOMING

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

APPROVED:

CURTIS R SCOTT Digitally signed by CURTIS R SCOTT
Date: 2026.09.08 10:16:40 -06'00'

Chief of Engineering, *DATE*
Central Federal Lands Highway Division

Per letter signed 8/18/2026
Warren Air Force Base *DATE*

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27416\TTL(MAIN)_CO OMAD 300(71).dgn [TTL-FS]
13 July 2026 5:27 PM
© 2026 Microsoft Corporation © 2026 TomTom

	℄	centerline
	Δ	curve delta
	Ø	diameter
A	abut.	abutment
	ADT	average daily traffic
	aggr.	aggregate
	AH	ahead
	alt.	alternate
	appr.	approach
	asph.	asphalt
B	b.f.	both faces
	beg.	beginning, begin
	BK	back
	BM	bench mark
	BP	balance point
	br.	bridge
	brg.	bearing
C	CBC	concrete box culvert
	c-c	center to center
	clr.	clear
	CMP	corrugated metal pipe
	Co.	county
	col.	column
	conc.	concrete
	constr.	construction
	constr. jt.	construction joint
	cont.	continuous
	corr.	corrugated
	cr.	creek
	CS	point of curve to spiral
	ctrs.	centers
	CTSM	contingent sum
	culv.	culvert
D	decr.	decrement
	DHV	design hour volume
	DI	drop inlet
	dia. or D	diameter
	diag.	diagonal
	diaph.	diaphragm
	dist.	distance
	Dist.	district
	DLC	donation land claim
	dwg(s).	drawing(s)
E	E	east
	e	superelevation rate
	El. 94.066	elevation with number
	elev.	elevation
	emb.	embankment
	engr(s).	Engineer(s)
	EOP	edge of pavement
	EQ or eq.	equation
	ER	edge of road
	et al	and others
	et ux	and wife
	EW	edge of water
	exc.	excavation
	exp. jt.	expansion joint
	ext.	exterior
F	f.f.	fill face
	Fed.	federal
	FES	flared end section
	fin.	finish
	ftg.	footing
G	ga.	gage (gauge)
	galv.	galvanized
	gdr.	girder

H	hdwl.	headwall
	HES	homestead entry survey
	hex.	hexagon
	horiz.	horizontal
	HW	high water
	hwy.	highway
I	ID	inside diameter
	incl.	inclusive, including
	int.	interior
J	jt.	joint
L	L	length of curve
	lam.	lamination
	lat.	latitude
	long.	longitude
	LPSM	lump sum
	Lt. or LT	left
	LW	low water
M	mag.	magnetic
	maint.	maintenance
	matl.	material
	max.	maximum
	MGS	Midwest Guardrail System
	min.	minimum
	mon.	monument
	mtn(s).	mountain(s)
N	N	north
	NC	normal crown
	neg.	negative
	no. or #	number
O	o.c.	on centers
	o.f.	other face
	OD	outside diameter
P	PC	point of curve
	PCC	point of compound curve
	perf.	perforate
	PI	point of intersection
	pl.	plate
	POC	point on curve
	POS	point on spiral
	POT	point on tangent
	proj.	project
	psi	pounds per square inch
	PT	point of tangent
	pvmt.	pavement
Q	quant., Qty	quantities
R	R	radius
	R.	range
	R/W	right-of-way
	rd.	road
	rdwy.	roadway
	reconst.	reconstruction
	reinf.	reinforcement
	reqd.	required
	res.	reservoir
	Res.	Reservation
	ret. wall	retaining wall
	RH	reference hub
	Rt. or RT	right
	rte.	route

S	S	south
	SADT	seasonal average daily traffic
	SC	point of spiral to curve
	sec.	section
	shldr.	shoulder
	spa.	spacing, spaces or spaced
	spec.	specification
	st.	street
	ST	point of spiral to tangent
	sta.	station
	std.	standard
	stiff.	stiffener
	str.	straight
	struc.	structural
	sym.	symmetrical
T	T	tangent length
	T.	township
	tan.	tangent
	TBM	temporary bench mark
	TCE	temporary construction easement
	transv.	transverse
	TS	point of tangent to spiral
	typ.	typical
V	V	design speed
	vert.	vertical
	vph	vehicles per hour
	VPI	vertical point of intersection
W	W	West

DRAINAGE SYMBOLS

Ditch (existing, proposed)

Flow Arrow

Drainage or Small Creek

Lake, Pond or Reservoir

Large Creek

Wetland

River

Spring

Bridge (existing, proposed)

Box culvert (existing, proposed)

Pipe culvert (existing, proposed)

With end sections (existing, proposed)

With headwalls (existing, proposed)

With drop inlet (existing, proposed)

Underdrain (existing, proposed)

Riprap apron (proposed)

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A2

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

CONVENTIONAL PLAN SYMBOLS AND ABBREVIATIONS

Sheet 1 of 2

...\SYM(MAIN)_CO OMAD 300(71).dgn [Design Int(Ft)]

7/16/2026

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A3

FENCE & CATTLE GUARD SYMBOLS

- Fence (existing, proposed)
- Fence with gate (existing, proposed)
- Cattle guard (existing, proposed)

GEOLOGIC SYMBOLS

- Boring location
- Material source

LANDSCAPING & VEGETATION SYMBOLS

- Tree
- Tree line

MAPPING SYMBOLS

- Building (existing, proposed)
- Coordinate Grid Tick
- North arrow
- Railroad
  - Single Track
  - Double Track
- Spot elevation
- Trail
- Survey control point

GUARDRAIL, BARRIER & WALL SYMBOLS

- Guardrail (existing, proposed)
- Guardwall (proposed)
- Median & Side Barrier (existing, proposed)
- Retaining Wall (existing, proposed)

ROADWAY SYMBOLS

- Clearing/construction limits
- Slope stake limits
  - Top of Cut
  - Transition
  - Toe of fill
- Edge of roadway (existing, proposed)
- Roadway centerline (with station ticks)
- Roadway obliteration

RIGHT-OF-WAY SYMBOLS

- Boundaries
  - National
  - State
  - County
  - City
  - Township or Range line
  - Section
  - 1/4 Section
  - 1/16 Section
  - Bureau of Indian Affairs
  - Bureau of Land Management
  - National Forest
  - National Park
  - National Wildlife Refuge
- Easements
  - Permanent (existing)
  - Permanent (proposed)
  - Temporary (proposed)
- Monument (as described)
- Parcel number
- Property line
- Right-of-way line (existing)
- Right-of-way line (proposed)
- Section corner (found, projected)
  - 1/4 Section corner (found, projected)
  - 1/16 Section corner (found, projected)

SIGN SYMBOLS

- Signs
  - Commercial (existing, proposed)
  - Delineator (existing, proposed)
  - Portable (proposed)
  - Post mounted (existing, proposed)

UTILITY SYMBOLS

- Irrigation ditch
  - Underground (existing, proposed)
  - Surface (existing, proposed)
- Support pole (existing, proposed)
- Support pole anchor (existing, proposed)
- Street light (existing, proposed)
- Telephone pedestal (existing, proposed)
- Underground utility
  - CATV (existing, proposed)
  - Fiber optic (existing, proposed)
  - Gas (existing, proposed)
  - Oil (existing, proposed)
  - Power (existing, proposed)
  - Sanitary sewer (existing, proposed)
  - Telephone (existing, proposed)
  - Water (existing, proposed)
- Overhead utility
  - CATV (existing, proposed)
  - Fiber optic (existing, proposed)
  - Power (existing, proposed)
  - Telephone (existing, proposed)

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

CONVENTIONAL PLAN SYMBOLS AND ABBREVIATIONS

Sheet 2 of 2

...\SYM(MAIN)_CO OMAD 300(71).dgn [Design IntEft]

7/16/2026

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A4

Goshen

WYOMING

Banner

NEBRASKA

WARREN AIR FORCE BASE

Laramie

Cheyenne

Kimball

Cheyenne

C21

C22

C2

C17

C1

C18

C3

COLORADO

PAWNEE NATIONAL GRASSLAND

Weld

Logan

Sterling

C6

C7

C8

C4

C9

C15

C16

C10

C20

C5

C19

C12

C13

C11

C14

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

LEGEND

- C# — Schedule A/B/C
- C# — Schedule B/C
- C# — Schedule C
- National Grassland Area
- County Boundary
- State Boundary

Transportation

- Interstate
- Highways
- Local Road

N

0 4.2 8.4 16.8 Miles

Coordinate System: GCS WGS 1984

KEY MAP

G:\O_POMAD\OMAD_7113_Project_Execution\geo\OMAD_71_Routes\OMAD_71_Routes.aprx

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A5

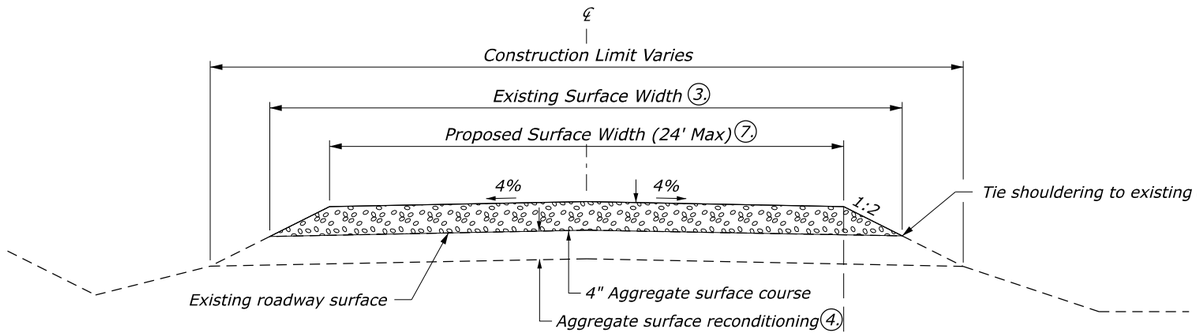

TYPICAL SECTION 1 - SURFACING

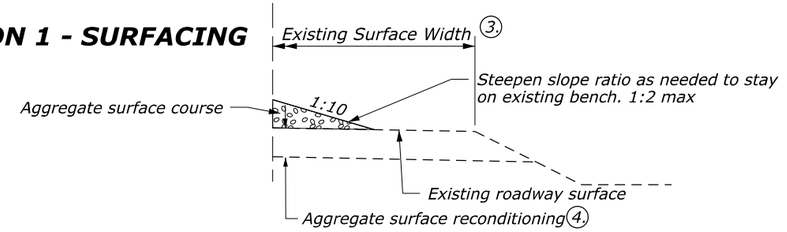

SHOULDERING ALTERNATIVE

NOTE:

1. Extend surfacing and reconditioning a minimum of 150 feet beyond the missile silo's approach when road continues.
2. Eliminate 4% crown within intersection at uncontrolled public roadway intersections unless approved to remain. See Intersection Details on this sheet. Begin transition 100 feet from intersection on each intersection approach.
3. See Sheet B5 for existing roadway widths.
4. Perform aggregate surface reconditioning per Section 303. Meet the crown requirements as shown in Typical Section 1 or as approved.
5. Adjust field entrances and approach roads identified during construction to tie to the proposed mainline construction. Match the existing vertical grade. Do not exceed ±10% grade or as approved. Match mainline structural section depth and existing field entrance or approach road width. Locations are not shown in the plans.
6. Transition proposed top of grade to match existing where proposed surfacing terminates. See Detail A. Work is incidental to Aggregate Surface Reconditioning.
7. Provide the maximum surfacing width feasibile using the proposed aggregate depth and side slope ratios shown on this sheet. Adjust the proposed width to stay on the existing bench.

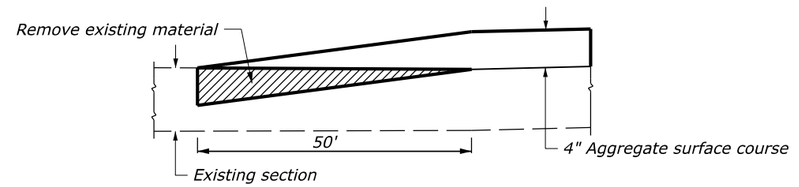

DETAIL A - PROPOSED SURFACE TRANSITION (6.)

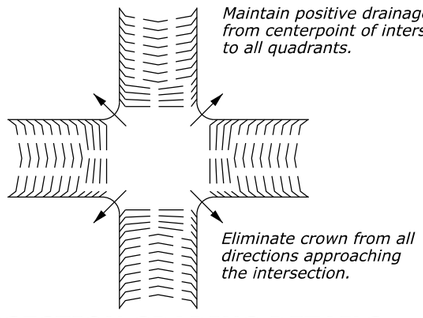

INTERSECTION GRADING DETAILS UNCONTROLLED INTERSECTION (2.)



INTERSECTION GRADING DETAILS CONTROLLED INTERSECTION (2.)





TYPICAL SECTION

...\TYP(MAIN)_CO OMAD 300(71).dgn [Design Int(Ft)]

8/26/2026

SUMMARY OF QUANTITIES - Schedule A

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B1

AMEND	LINE ITEM NO.	PAY ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT	Sheet and Description		ALLOWANCE	Estimated Quantities	Remarks and/or Determination of Estimated Quantity
					B5	B6 - B8			
					Surfacing Summary	Drainage Summary		BID SCHEDULE	
	A0020	15101-0000	MOBILIZATION	LPSM				ALL	
	A0040	15215-3000	SURVEY AND STAKING, DRAINAGE STRUCTURE	EACH		8		8	
	A0060	15301-0000	CONTRACTOR QUALITY CONTROL	LPSM				ALL	
	A0080	15401-0000	CONTRACTOR TESTING	LPSM				ALL	
	A0100	15501-0000	CONSTRUCTION SCHEDULE	LPSM				ALL	
	A0120	15701-0000	SOIL EROSION CONTROL	LPSM				ALL	
	A0140	15802-0000	WATERING FOR DUST CONTROL	LPSM				ALL	
	A0160	20301-2000	REMOVAL OF PIPE END SECTION	EACH		1		1	
	A0180	20302-2100	REMOVAL OF PIPE CULVERT	LNFT		284	11	295	
	A0200	20402-0000	SUBEXCAVATION	CUYD				75	As approved
	A0220	20420-0000	EMBANKMENT CONSTRUCTION	CUYD		15		15	
	A0240	30110-0000	AGGREGATE SURFACE COURSE	TON	93410		2790	96200	
	A0260	30110-0000	AGGREGATE SURFACE COURSE,(HAUL ROADS)	TON				500	As approved
	A0280	30301-5000	AGGREGATE SURFACE RECONDITIONING	MILE	29.25			29.25	
	A0300	60201-0600	18-INCH PIPE CULVERT	LNFT		7	3	10	
	A0320	60201-0700	21-INCH PIPE CULVERT	LNFT		8	2	10	
	A0340	60201-0800	24-INCH PIPE CULVERT	LNFT		16	4	20	
	A0360	60202-0400	24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		87	3	90	
	A0380	60202-0500	30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		120	5	125	
	A0400	60210-0600	END SECTION FOR 18-INCH PIPE CULVERT	EACH		4		4	
	A0420	60210-0700	END SECTION FOR 21-INCH PIPE CULVERT	EACH		2		2	
	A0440	60210-0800	END SECTION FOR 24-INCH PIPE CULVERT	EACH		4		4	
	A0460	60210-1200	END SECTION FOR 48-INCH PIPE CULVERT	EACH		2		2	
	A0480	60211-0800	END SECTION FOR 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		8		8	
	A0500	60211-0900	END SECTION FOR 30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		8		8	
	A0520	60704-0000	CLEANING CULVERT IN PLACE	EACH		11		11	
	A0540	62201-0200	DUMP TRUCK, 8 CUBIC YARD MINIMUM CAPACITY	HOUR				10	
	A0560	62201-0950	WHEEL LOADER, 3 CUBIC YARD MINIMUM RATED CAPACITY	HOUR				10	
	A0580	62201-2850	MOTOR GRADER, 12 FOOT MINIMUM BLADE	HOUR				20	
	A0600	62201-3150	HYDRAULIC EXCAVATOR, 1.0 CUBIC YARD MINIMUM CAPACITY WITH THUMB ATTACHMENT	HOUR				10	
	A0620	62301-0000	GENERAL LABOR	HOUR				15	
	A0640	62302-1100	SPECIAL LABOR, HIRED SURVEY SERVICES	HOUR				20	
	A0660	63308-2000	OBJECT MARKER, TYPE 2,(OM2-2V)	EACH		14		14	
	A0680	63309-0200	DELINEATOR, TYPE 2	EACH		14		14	
	A0700	63501-0000	TEMPORARY TRAFFIC CONTROL	LPSM				ALL	

Milestone: 100%
Date Completed: 9/3/2026
Report date: 9/3/2026

COLORADO LICENSED
CODY ALLEN BURCH
52402
PROFESSIONAL ENGINEER
08/24/2026

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27418\{MW - SOQ for DGN.xlsm}Sheet
3-Sep-2026 3:46 PM

SUMMARY OF QUANTITIES - Schedule B

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B2

AMEND	LINE ITEM NO.	PAY ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT	Sheet and Description		ALLOWANCE	Estimated Quantities	Remarks and/or Determination of Estimated Quantity
					B5	B6 - B8			
					Surfacing Summary	Drainage Summary		BID SCHEDULE	
	B0020	15101-0000	MOBILIZATION	LPSM				ALL	
	B0040	15215-3000	SURVEY AND STAKING, DRAINAGE STRUCTURE	EACH		12		12	
	B0060	15301-0000	CONTRACTOR QUALITY CONTROL	LPSM				ALL	
	B0080	15401-0000	CONTRACTOR TESTING	LPSM				ALL	
	B0100	15501-0000	CONSTRUCTION SCHEDULE	LPSM				ALL	
	B0120	15701-0000	SOIL EROSION CONTROL	LPSM				ALL	
	B0140	15802-0000	WATERING FOR DUST CONTROL	LPSM				ALL	
	B0160	20301-2000	REMOVAL OF PIPE END SECTION	EACH		1		1	
	B0180	20302-2100	REMOVAL OF PIPE CULVERT	LNFT		380	10	390	
	B0200	20402-0000	SUBEXCAVATION	CUYD				75	As approved
	B0220	20420-0000	EMBANKMENT CONSTRUCTION	CUYD		19		19	
	B0240	30110-0000	AGGREGATE SURFACE COURSE	TON	128011		3989	132000	
	B0260	30110-0000	AGGREGATE SURFACE COURSE,(HAUL ROADS)	TON				850	As approved
	B0280	30301-5000	AGGREGATE SURFACE RECONDITIONING	MILE	40.01			40.01	
	B0300	60201-0600	18-INCH PIPE CULVERT	LNFT		7	3	10	
	B0320	60201-0700	21-INCH PIPE CULVERT	LNFT		8	2	10	
	B0340	60201-0800	24-INCH PIPE CULVERT	LNFT		16	4	20	
	B0360	60202-0400	24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		204	6	210	
	B0380	60202-0500	30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		120	5	125	
	B0400	60210-0600	END SECTION FOR 18-INCH PIPE CULVERT	EACH		4		4	
	B0420	60210-0700	END SECTION FOR 21-INCH PIPE CULVERT	EACH		2		2	
	B0440	60210-0800	END SECTION FOR 24-INCH PIPE CULVERT	EACH		4		4	
	B0460	60210-1200	END SECTION FOR 48-INCH PIPE CULVERT	EACH		2		2	
	B0480	60211-0800	END SECTION FOR 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		16		16	
	B0500	60211-0900	END SECTION FOR 30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		8		8	
	B0520	60704-0000	CLEANING CULVERT IN PLACE	EACH		12		12	
	B0540	62201-0200	DUMP TRUCK, 8 CUBIC YARD MINIMUM CAPACITY	HOUR				15	
	B0560	62201-0950	WHEEL LOADER, 3 CUBIC YARD MINIMUM RATED CAPACITY	HOUR				15	
	B0580	62201-2850	MOTOR GRADER, 12 FOOT MINIMUM BLADE	HOUR				30	
	B0600	62201-3150	HYDRAULIC EXCAVATOR, 1.0 CUBIC YARD MINIMUM CAPACITY WITH THUMB ATTACHMENT	HOUR				15	
	B0620	62301-0000	GENERAL LABOR	HOUR				20	
	B0640	62302-1100	SPECIAL LABOR, HIRED SURVEY SERVICES	HOUR				30	
	B0660	63308-2000	OBJECT MARKER, TYPE 2,(OM2-2V)	EACH		22		22	
	B0680	63309-0200	DELINEATOR, TYPE 2	EACH		14		14	
	B0700	63501-0000	TEMPORARY TRAFFIC CONTROL	LPSM				ALL	

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

Milestone: 100%
Date Completed: 9/3/2026
Report date: 9/3/2026

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27418\{MW - SOQ for DGN.xlsm}Sheet (2)
3-Sep-2026 3:46 PM

SUMMARY OF QUANTITIES - Schedule C

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B3

AMEND	LINE ITEM NO.	PAY ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT	Sheet and Description		ALLOWANCE	Estimated Quantities	Remarks and/or Determination of Estimated Quantity
					B5	B6 - B8			
					Surfacing Summary	Drainage Summary		BID SCHEDULE	
	C0020	15101-0000	MOBILIZATION	LPSM				ALL	
	C0040	15215-3000	SURVEY AND STAKING, DRAINAGE STRUCTURE	EACH		16		16	
	C0060	15301-0000	CONTRACTOR QUALITY CONTROL	LPSM				ALL	
	C0080	15401-0000	CONTRACTOR TESTING	LPSM				ALL	
	C0100	15501-0000	CONSTRUCTION SCHEDULE	LPSM				ALL	
	C0120	15701-0000	SOIL EROSION CONTROL	LPSM				ALL	
	C0140	15802-0000	WATERING FOR DUST CONTROL	LPSM				ALL	
	C0160	20301-2000	REMOVAL OF PIPE END SECTION	EACH		1		1	
	C0180	20302-2100	REMOVAL OF PIPE CULVERT	LNFT		523	17	540	
	C0200	20402-0000	SUBEXCAVATION	CUYD				85	As approved
	C0220	20420-0000	EMBANKMENT CONSTRUCTION	CUYD		25		25	
	C0240	30110-0000	AGGREGATE SURFACE COURSE	TON	145882		4418	150300	
	C0260	30110-0000	AGGREGATE SURFACE COURSE,(HAUL ROADS)	TON				1000	As approved
	C0280	30301-5000	AGGREGATE SURFACE RECONDITIONING	MILE	45.67			45.67	
	C0300	60201-0600	18-INCH PIPE CULVERT	LNFT		7	3	10	
	C0320	60201-0700	21-INCH PIPE CULVERT	LNFT		8	2	10	
	C0340	60201-0800	24-INCH PIPE CULVERT	LNFT		16	4	20	
	C0360	60202-0400	24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		288	12	300	
	C0380	60202-0500	30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		170	10	180	
	C0400	60202-1000	60-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	LNFT		6	2	8	
	C0420	60210-0600	END SECTION FOR 18-INCH PIPE CULVERT	EACH		4		4	
	C0440	60210-0700	END SECTION FOR 21-INCH PIPE CULVERT	EACH		2		2	
	C0460	60210-0800	END SECTION FOR 24-INCH PIPE CULVERT	EACH		4		4	
	C0480	60210-1200	END SECTION FOR 48-INCH PIPE CULVERT	EACH		2		2	
	C0500	60211-0800	END SECTION FOR 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		22		22	
	C0520	60211-0900	END SECTION FOR 30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	EACH		10		10	
	C0540	60704-0000	CLEANING CULVERT IN PLACE	EACH		14		14	
	C0560	60706-0000	CLEANING DRAINAGE STRUCTURE	EACH		1		1	
	C0580	62201-0200	DUMP TRUCK, 8 CUBIC YARD MINIMUM CAPACITY	HOUR				20	
	C0600	62201-0950	WHEEL LOADER, 3 CUBIC YARD MINIMUM RATED CAPACITY	HOUR				20	
	C0620	62201-2850	MOTOR GRADER, 12 FOOT MINIMUM BLADE	HOUR				35	
	C0640	62201-3150	HYDRAULIC EXCAVATOR, 1.0 CUBIC YARD MINIMUM CAPACITY WITH THUMB ATTACHMENT	HOUR				20	
	C0660	62301-0000	GENERAL LABOR	HOUR				25	
	C0680	62302-1100	SPECIAL LABOR, HIRED SURVEY SERVICES	HOUR				35	
	C0700	63308-2000	OBJECT MARKER, TYPE 2,(OM2-2V)	EACH		34		34	
	C0720	63309-0200	DELINEATOR, TYPE 2	EACH		14		14	
	C0740	63501-0000	TEMPORARY TRAFFIC CONTROL	LPSM				ALL	

Milestone: 100%
Date Completed: 9/3/2026
Report date: 9/3/2026

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27418\{MW - SOQ for DGN.xlsm}Sheet (3)
3-Sep-2026 3:46 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B4

Route Improvement Summary

Schedule	Priority No.	Sheet No.	Route Segment ID	State	County	Road No.	Segment Length (Miles) (See Note 1)	Proposed Work	Surfacing (See Sheet B5)	Drainage improvements and Signage (See Sheets B6 - B8)	REMARKS
SCHEDULE A											
A/B/C	1	C1	WAAB-E-02(a)	NE	Kimball	17	1.10	Surfacing	X		
A/B/C	2	C2	WAAB-E-03(a)	NE	Kimball	17	0.78	Surfacing	X		
A/B/C	3	C3	WAAB-E-06(a)	NE	Kimball	17	3.93	Drainage improvements, Surfacing, Signage	X	X	
A/B/C	4	C4	WAAB-M-02	CO	Logan	9/58	N/A	Drainage improvements, Signage		X	
A/B/C	5	C5	WAAB-M-02(a)	CO	Logan	21	4.72	Surfacing	X		
A/B/C	6	C6	WAAB-M-02(b)	CO	Logan	58	1.08	Surfacing	X		
A/B/C	7	C7	WAAB-M-04(a)	CO	Logan	58	N/A	Drainage improvements, Signage		X	
A/B/C	8	C8	WAAB-J-06	CO	Logan	25	3.10	Surfacing	X		
A/B/C	9	C9	WAAB-M-04(c)	CO	Logan	54	3.01	Surfacing	X		
A/B/C	10	C10	WAAB-M-04(d)	CO	Logan	31	0.09	Surfacing	X		
A/B/C	11	C11	WAAB-M-08(a)	CO	Logan	38	2.75	Drainage improvements, Surfacing, Signage	X	X	
A/B/C	12	C12	WAAB-M-03	CO	Logan	21	N/A	Drainage improvements, Signage		X	
A/B/C	13	C13	WAAB-M-08(b)	CO	Logan	7/38	2.58	Drainage improvements, Surfacing, Signage	X	X	
A/B/C	14	C14	WAAB-M-08(c)	CO	Logan	34	1.40	Surfacing	X		
A/B/C	15	C15	WAAB-M-09(a)	CO	Weld	112	4.05	Drainage improvements, Surfacing, Signage	X	X	
A/B/C	16	C16	WAAB-M-10	CO	Weld	153	0.43	Surfacing	X		
	SCHEDULE A TOTALS						**29.02**				
SCHEDULE B											
B/C	17	C17	WAAB-E-01(a)	WY	Laramie	208	0.55	Surfacing	X		
B/C	18	C18	WAAB-E-01(b)	NE	Kimball	1	0.63	Surfacing	X		
B/C	19	C19	WAAB-M-09(b)	CO	Weld	153	3.92	Drainage improvements, Surfacing, Signage	X	X	
B/C	20	C20	WAAB-M-11	CO	Logan	7	5.61	Surfacing	X		
SCHEDULE B TOTALS							**39.73**				
SCHEDULE C											
C	21	C21	WAAB-E-02(b)	NE	Kimball	24	1.97	Surfacing	X		
C	22	C22	WAAB-E-01(c)	NE	Kimball	16	3.66	Drainage improvements, Surfacing, Signage	X	X	
SCHEDULE C TOTALS							**45.36**				

NOTE:

1. Segment lengths are shown for routes containing surfacing improvements. Routes containing only drainage improvements have a segment length shown as "N/A"





IMPROVEMENT SUMMARY

...\TAB(MAIN)_CO OMAD 300(71).dgn [Design IntlFt]
8/21/2026

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B5

ROADWAY SURFACING SUMMARY

Schedule	Priority No.	Sheet No.	Route ID	Road	Begin	End	Segment Length (See Notes 1 & 2)	Average Existing Surface Width (See Note 3)	30110-0000 AGGREGATE SURFACE COURSE	30301-5000 AGGREGATE SURFACE RECONDITIONING	REMARKS
							MILE	FEET	TON	MILE	
SCHEDULE A											
A/B/C	1	C1	WAAB-E-02(a)	17	24	26	1.10	24'+	3,535	1.10	
A/B/C	2	C2	WAAB-E-03(a)	17	26	I-80	0.78	24'+	2,507	0.78	End work at gravel/asphalt transition.
A/B/C	3	C3	WAAB-E-06(a)	17	8	E-04 (Silo)	3.93	24'+	12,721	3.96	
A/B/C	5	C5	WAAB-M-02(a)	21	M-03 (Silo)	58	4.72	24'+	15,260	4.75	
A/B/C	6	C6	WAAB-M-02(b)	58	M-02 (Silo)	21	1.08	24'+	3,562	1.11	
A/B/C	8	C8	WAAB-J-06	25	58	J-06 (Silo)	3.10	22.6	9,518	3.13	
A/B/C	9	C9	WAAB-M-04(c)	54	25	31	3.01	24'+	9,673	3.01	
A/B/C	10	C10	WAAB-M-04(d)	31	54	M-04 (Silo)	0.09	20.8	334	0.12	
A/B/C	11	C11	WAAB-M-08(a)	38	7	M-01 (Silo)	2.75	24'+	8,929	2.78	
A/B/C	13	C13	WAAB-M-08(b)	7/38	34	7	2.58	24'+	8,291	2.58	Perform no work on existing concrete bridge deck near MP 2.2.
A/B/C	14	C14	WAAB-M-08(c)	34	M-08 (Silo)	7	1.40	24'+	4,590	1.43	
A/B/C	15	C15	WAAB-M-09(a)	112	HWY 71	153	4.05	24'+	13,015	4.05	Begin work at asphalt/gravel transition.
A/B/C	16	C16	WAAB-M-10	153	112	M-10 (Silo)	0.43	24'+	1,473	0.46	
SCHEDULE A TOTALS									**93,410**	**29.25**	
SCHEDULE B											
B/C	17	C17	WAAB-E-01(a)	208	164	1	0.55	24'+	1,768	0.55	Begin work at asphalt/gravel transition.
B/C	18	C18	WAAB-E-01(b)	1	16	208	0.63	24'+	2,025	0.63	
B/C	19	C19	WAAB-M-09(b)	153	M-09 (Silo)	112	3.92	24'+	12,689	3.95	
B/C	20	C20	WAAB-M-11	7	38	M-11 (Silo)	5.61	24'+	18,120	5.64	
SCHEDULE B TOTALS									**128,011**	**40.01**	
SCHEDULE C											
C	21	C21	WAAB-E-02(b)	24	13	17	1.97	24'+	6,018	1.97	
C	22	C22	WAAB-E-01(c)	16	1	E-01 (Silo)	3.66	22.7	11,853	3.69	
SCHEDULE C TOTALS									**145,882**	**45.67**	

VALUES USED FOR ESTIMATING PURPOSES
Aggregate Surface Course (Dry unit weight)----------139.0 lb/ft3

NOTE:
1. Per Note 1 on Sheet A5, extend resurfacing and reconditioning a minimum of 150 feet beyond the missile site's approach when road continues. Length is not included in the 'Segment Length' shown in the plans. Length included in Aggregate Surface Course and Aggregate Surfacing Reconditioning.
2. Segment Length shown is an approximate length measured along the route centerline and is to be used for information only. Perform required work to the begin and end locations as shown in this table and the C-sheets.
3. Existing surface widths are shown for information only. Proposed aggregate width is 24-feet maximum.
4. Shouldering wedges are included in aggregate quantities. See typical section on Sheet A5 for more information.

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

SURFACING SUMMARY

...\TAB(MAIN)_CO OMAD 300(71).dgn [Design IntlFt]
9/3/2026

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	B6

DRAINAGE SUMMARY

Schedule	Priority No.	Sheet No.	Route Segment ID	Culvert ID	SEGMENT MILEPOST	COUNTY	EXISTING CULVERT (See Note 2 and 3)			15215-3000 SURVEY AND STAKING, DRAINAGE STRUCTURE	20301-2000 REMOVAL OF PIPE END SECTION	20302-2100 REMOVAL OF PIPE CULVERT	20420-0000 EMBANKMENT CONSTRUCTION (See Note 9)	60201-0600 18-INCH PIPE CULVERT	60201-0700 21-INCH PIPE CULVERT	60201-0800 24-INCH PIPE CULVERT	60202-0400 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT
							Type	Diameter	Length	EACH	EACH	LNFT	CUYD	LNFT	LNFT	LNFT	LNFT
SCHEDULE A																	
A/B/C	3	C3	WAAB-E-06(a)	C-0649	0.74	Kimball	CMP	Assumed 24" Equiv.	Assumed 35'				1				
A/B/C	3	C3	WAAB-E-06(a)	C-0647	2.59	Kimball	CMP	30" Equiv.	38.3'				1				
A/B/C	3	C3	WAAB-E-06(a)	C-0646	3.19	Kimball	CMP	4 - Assumed 30"	43.8'	1		175	1				
A/B/C	3	C3	WAAB-E-06(a)	C-0645	3.92	Kimball	CMP	18"	45.5'				1				
A/B/C	4	C4	WAAB-M-02	C-0202	4.52	Logan	CMP	24"	40'	1		10	1			8	
A/B/C	7	C7	WAAB-M-04(a)	C-0214	0.15	Logan	CMP	Assumed 18"	Assumed 40'	1		40	1				37
A/B/C	11	C11	WAAB-M-08(a)	C-0178	1.48	Logan	CMP	24"	46'	1	1	8	1			8	
A/B/C	11	C11	WAAB-M-08(a)	C-0179	1.60	Logan	CMP	18"	44'				1				
A/B/C	12	C12	WAAB-M-03	Null - MP 4.98	4.98	Logan	N/A	N/A	N/A	1			1				43
A/B/C	13	C13	WAAB-M-08(b)	C-0162	0.39	Logan	CMP	21"	42'	1		8	1		8		
A/B/C	13	C13	WAAB-M-08(b)	C-0163	2.08	Logan	CMP	48"	40'				1				
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 0.01	0.01	Weld	CMP	Assumed 24" Equiv.	32.7'				1				
A/B/C	15	C15	WAAB-M-09(a)	C-0106	2.78	Weld	CMP	24" Equiv.	Assumed 40'	1		2	1				7
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 2.9	2.90	Weld	CMP	18"	Assumed 40'	1		2	1	7			
A/B/C	15	C15	WAAB-M-09(a)	C-0096	4.04	Weld	CMP	24" Equiv.	39'			39	1				
SCHEDULE A TOTALS										**8**	**1**	**284**	**15**	**7**	**8**	**16**	**87**
SCHEDULE B																	
B/C	19	C19	WAAB-M-09(b)	C-0100	2.91	Weld	CMP	24" Equiv.	Assumed 34'	1		34	1				38
B/C	19	C19	WAAB-M-09(b)	C-0101	3.36	Weld	CMP	24" Equiv.	Assumed 32'	1		32	1				36
B/C	19	C19	WAAB-M-09(b)	C-0102	3.79	Weld	CMP	24" Equiv.	Assumed 28'	1		28	1				31
B/C	19	C19	WAAB-M-09(b)	C-0103	3.85	Weld	CMP	24" Equiv.	Assumed 32'	1		2	1				12
SCHEDULE B TOTALS										**12**	**1**	**380**	**19**	**7**	**8**	**16**	**204**
SCHEDULE C																	
C	22	C22	WAAB-E-01(c)	Null - MP 0.16	0.16	Kimball	CMP	Assumed 24" Equiv.	Assumed 36'	1		36	1				40
C	22	C22	WAAB-E-01(c)	C-0896	0.28	Kimball	CMP	Assumed 24" Equiv.	47.7'	1		48	1				44
C	22	C22	WAAB-E-01(c)	C-0892	0.64	Kimball	CMP	Assumed 24" Equiv.	66'			4	1				
C	22	C22	WAAB-E-01(c)	C-0893	1.72	Kimball	CMP	30" Equiv.	55'	1		55	1				
C	22	C22	WAAB-E-01(c)	C-0629	2.37	Kimball	CBC	Assumed 3-10' X 8' Cells	N/A				1				
C	22	C22	WAAB-E-01(c)	C-0630	3.01	Kimball	CMP	2 - 60" Equiv.	53.1'	1			1				
SCHEDULE C TOTALS										**16**	**1**	**523**	**25**	**7**	**8**	**16**	**288**

NOTE:

1. All proposed culverts are corrugated metal pipes (CMP).
2. Assumed dimensions shown for culverts that could not be field verified.
3. Existing culvert information is for information only. Survey was not completed as part of this project.
4. Clearing and grubbing is included in the cost of the culvert work and not measured for payment. Clear the minimal amount necessary for culvert maintenance work.
5. Mileposts are measured from route begin locations as shown on C-sheets.
6. Object Marker and delineator installation includes the cost of removing conflicting signage. See Special 633-A.
7. Adjust culvert flowline elevations, as approved, to maintain adequate pipe cover material.
8. 15215-3000 Survey and Staking Drainage Structure is only shown for culverts requiring pipe plots in accordance with Section 152.
9. Embankment Construction quantity shown for use to backfill and grade eroded existing ground areas outside of the culvert limits. Use as approved to create positive drainage at the culvert inlet and outlet.



DRAINAGE SUMMARY

Sheet 1 of 3

...\TAB(MAIN)_CO OMAD 300(71).dgn [Design IntlFt]

9/4/2026

DRAINAGE SUMMARY

Schedule	Priority No.	Sheet No.	Route Segment ID	Culvert ID	SEGMENT MILEPOST	COUNTY	EXISTING CULVERT (See Note 2 and 3)			60202-0500 30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	60202-1000 60-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	60210-0600 END SECTION FOR 18-INCH PIPE CULVERT	60210-0700 END SECTION FOR 21-INCH PIPE CULVERT	60210-0800 END SECTION FOR 24-INCH PIPE CULVERT	60210-1200 END SECTION FOR 48-INCH PIPE CULVERT
							Type	Diameter	Length	LNFT	LNFT	EACH	EACH	EACH	EACH
SCHEDULE A															
A/B/C	3	C3	WAAB-E-06(a)	C-0649	0.74	Kimball	CMP	Assumed 24" Equiv.	Assumed 35'						
A/B/C	3	C3	WAAB-E-06(a)	C-0647	2.59	Kimball	CMP	30" Equiv.	38.3'						
A/B/C	3	C3	WAAB-E-06(a)	C-0646	3.19	Kimball	CMP	4 - Assumed 30"	43.8'	120					
A/B/C	3	C3	WAAB-E-06(a)	C-0645	3.92	Kimball	CMP	18"	45.5'						
A/B/C	4	C4	WAAB-M-02	C-0202	4.52	Logan	CMP	24"	40'					2	
A/B/C	7	C7	WAAB-M-04(a)	C-0214	0.15	Logan	CMP	Assumed 18"	Assumed 40'						
A/B/C	11	C11	WAAB-M-08(a)	C-0178	1.48	Logan	CMP	24"	46'					2	
A/B/C	11	C11	WAAB-M-08(a)	C-0179	1.60	Logan	CMP	18"	44'			2			
A/B/C	12	C12	WAAB-M-03	Null - MP 4.98	4.98	Logan	N/A	N/A	N/A						
A/B/C	13	C13	WAAB-M-08(b)	C-0162	0.39	Logan	CMP	21"	42'				2		
A/B/C	13	C13	WAAB-M-08(b)	C-0163	2.08	Logan	CMP	48"	40'						2
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 0.01	0.01	Weld	CMP	Assumed 24" Equiv.	32.7'						
A/B/C	15	C15	WAAB-M-09(a)	C-0106	2.78	Weld	CMP	24" Equiv.	Assumed 40'						
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 2.9	2.90	Weld	CMP	18"	Assumed 40'			2			
A/B/C	15	C15	WAAB-M-09(a)	C-0096	4.04	Weld	CMP	24" Equiv.	39'						
SCHEDULE A TOTALS										**120**		**4**	**2**	**4**	**2**
SCHEDULE B															
B/C	19	C19	WAAB-M-09(b)	C-0100	2.91	Weld	CMP	24" Equiv.	Assumed 34'						
B/C	19	C19	WAAB-M-09(b)	C-0101	3.36	Weld	CMP	24" Equiv.	Assumed 32'						
B/C	19	C19	WAAB-M-09(b)	C-0102	3.79	Weld	CMP	24" Equiv.	Assumed 28'						
B/C	19	C19	WAAB-M-09(b)	C-0103	3.85	Weld	CMP	24" Equiv.	Assumed 32'						
SCHEDULE B TOTALS										**120**		**4**	**2**	**4**	**2**
SCHEDULE C															
C	22	C22	WAAB-E-01(c)	Null - MP 0.16	0.16	Kimball	CMP	Assumed 24" Equiv.	Assumed 36'						
C	22	C22	WAAB-E-01(c)	C-0896	0.28	Kimball	CMP	Assumed 24" Equiv.	47.7'						
C	22	C22	WAAB-E-01(c)	C-0892	0.64	Kimball	CMP	Assumed 24" Equiv.	66'						
C	22	C22	WAAB-E-01(c)	C-0893	1.72	Kimball	CMP	30" Equiv.	55'	50					
C	22	C22	WAAB-E-01(c)	C-0629	2.37	Kimball	CBC	Assumed 3-10' X 8' Cells	N/A						
C	22	C22	WAAB-E-01(c)	C-0630	3.01	Kimball	CMP	2 - 60" Equiv.	53.1'		6				
SCHEDULE C TOTALS										**170**	**6**	**4**	**2**	**4**	**2**

NOTE:

1. All proposed culverts are corrugated metal pipes (CMP).
2. Assumed dimensions shown for culverts that could not be field verified.
3. Existing culvert information is for information only. Survey was not completed as part of this project.
4. Clearing and grubbing is included in the cost of the culvert work and not measured for payment. Clear the minimal amount necessary for culvert maintenance work.
5. Mileposts are measured from route begin locations as shown on C-sheets.
6. Object Marker and delineator installation includes the cost of removing conflicting signage. See Special 633-A.
7. Adjust culvert flowline elevations, as approved, to maintain adequate pipe cover material.
8. 15215-3000 Survey and Staking Drainage Structure is only shown for culverts requiring pipe plots in accordance with Section 152.
9. Embankment Construction quantity shown for use to backfill and grade eroded existing ground areas outside of the culvert limits. Use as approved to create positive drainage at the culvert inlet and outlet.



DRAINAGE SUMMARY

Sheet 2 of 3

...\TAB(MAIN)_CO OMAD 300(71).dgn [Design IntPt]
9/2/2026

DRAINAGE SUMMARY

Schedule	Priority No.	Sheet No.	Route Segment ID	Culvert ID	SEGMENT MILEPOST	COUNTY	EXISTING CULVERT (See Note 2 and 3)			60211-0800 END SECTION FOR 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	60211-0900 END SECTION FOR 30-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT	60704-0000 CLEANING CULVERT IN PLACE	60706-0000 CLEANING DRAINAGE STRUCTURE	63308-2000 OBJECT MARKER, TYPE 2 (OM2-2V)	63309-0200 DELINEATOR, TYPE 2
							Type	Diameter	Length	EACH	EACH	EACH	EACH	EACH	EACH
SCHEDULE A															
A/B/C	3	C3	WAAB-E-06(a)	C-0649	0.74	Kimball	CMP	Assumed 24" Equiv.	Assumed 35'			1		2	
A/B/C	3	C3	WAAB-E-06(a)	C-0647	2.59	Kimball	CMP	30" Equiv.	38.3'			1		2	
A/B/C	3	C3	WAAB-E-06(a)	C-0646	3.19	Kimball	CMP	4 - Assumed 30"	43.8'		8			2	
A/B/C	3	C3	WAAB-E-06(a)	C-0645	3.92	Kimball	CMP	18"	45.5'			1		2	
A/B/C	4	C4	WAAB-M-02	C-0202	4.52	Logan	CMP	24"	40'			1			2
A/B/C	7	C7	WAAB-M-04(a)	C-0214	0.15	Logan	CMP	Assumed 18"	Assumed 40'	2					2
A/B/C	11	C11	WAAB-M-08(a)	C-0178	1.48	Logan	CMP	24"	46'			1			2
A/B/C	11	C11	WAAB-M-08(a)	C-0179	1.60	Logan	CMP	18"	44'			1			2
A/B/C	12	C12	WAAB-M-03	Null - MP 4.98	4.98	Logan	N/A	N/A	N/A	2					2
A/B/C	13	C13	WAAB-M-08(b)	C-0162	0.39	Logan	CMP	21"	42'			1			2
A/B/C	13	C13	WAAB-M-08(b)	C-0163	2.08	Logan	CMP	48"	40'			1			2
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 0.01	0.01	Weld	CMP	Assumed 24" Equiv.	32.7'	2		1		2	
A/B/C	15	C15	WAAB-M-09(a)	C-0106	2.78	Weld	CMP	24" Equiv.	Assumed 40'	2		1		2	
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 2.9	2.90	Weld	CMP	18"	Assumed 40'			1		2	
A/B/C	15	C15	WAAB-M-09(a)	C-0096	4.04	Weld	CMP	24" Equiv.	39'						
SCHEDULE A TOTALS										**8**	**8**	**11**		**14**	**14**
SCHEDULE B															
B/C	19	C19	WAAB-M-09(b)	C-0100	2.91	Weld	CMP	24" Equiv.	Assumed 34'	2				2	
B/C	19	C19	WAAB-M-09(b)	C-0101	3.36	Weld	CMP	24" Equiv.	Assumed 32'	2				2	
B/C	19	C19	WAAB-M-09(b)	C-0102	3.79	Weld	CMP	24" Equiv.	Assumed 28'	2				2	
B/C	19	C19	WAAB-M-09(b)	C-0103	3.85	Weld	CMP	24" Equiv.	Assumed 32'	2		1		2	
SCHEDULE B TOTALS										**16**	**8**	**12**		**22**	**14**
SCHEDULE C															
C	22	C22	WAAB-E-01(c)	Null - MP 0.16	0.16	Kimball	CMP	Assumed 24" Equiv.	Assumed 36'	2				2	
C	22	C22	WAAB-E-01(c)	C-0896	0.28	Kimball	CMP	Assumed 24" Equiv.	47.7'	2				2	
C	22	C22	WAAB-E-01(c)	C-0892	0.64	Kimball	CMP	Assumed 24" Equiv.	66'	2		1		2	
C	22	C22	WAAB-E-01(c)	C-0893	1.72	Kimball	CMP	30" Equiv.	55'		2			2	
C	22	C22	WAAB-E-01(c)	C-0629	2.37	Kimball	CBC	Assumed 3-10' X 8' Cells	N/A				1	2	
C	22	C22	WAAB-E-01(c)	C-0630	3.01	Kimball	CMP	2 - 60" Equiv.	53.1'			1		2	
SCHEDULE C TOTALS										**22**	**10**	**14**	**1**	**34**	**14**

NOTE:

1. All proposed culverts are corrugated metal pipes (CMP).
2. Assumed dimensions shown for culverts that could not be field verified.
3. Existing culvert information is for information only. Survey was not completed as part of this project.
4. Clearing and grubbing is included in the cost of the culvert work and not measured for payment. Clear the minimal amount necessary for culvert maintenance work.
5. Mileposts are measured from route begin locations as shown on C-sheets.
6. Object Marker and delineator installation includes the cost of removing conflicting signage. See Special 633-A.
7. Adjust culvert flowline elevations, as approved, to maintain adequate pipe cover material.
8. 15215-3000 Survey and Staking Drainage Structure is only shown for culverts requiring pipe plots in accordance with Section 152.
9. Embankment Construction quantity shown for use to backfill and grade eroded existing ground areas outside of the culvert limits. Use as approved to create positive drainage at the culvert inlet and outlet.



DRAINAGE SUMMARY

Sheet 3 of 3

...\TAB(MAIN)_CO OMAD 300(71).dgn [Design IntlFt]
9/2/2026

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C1

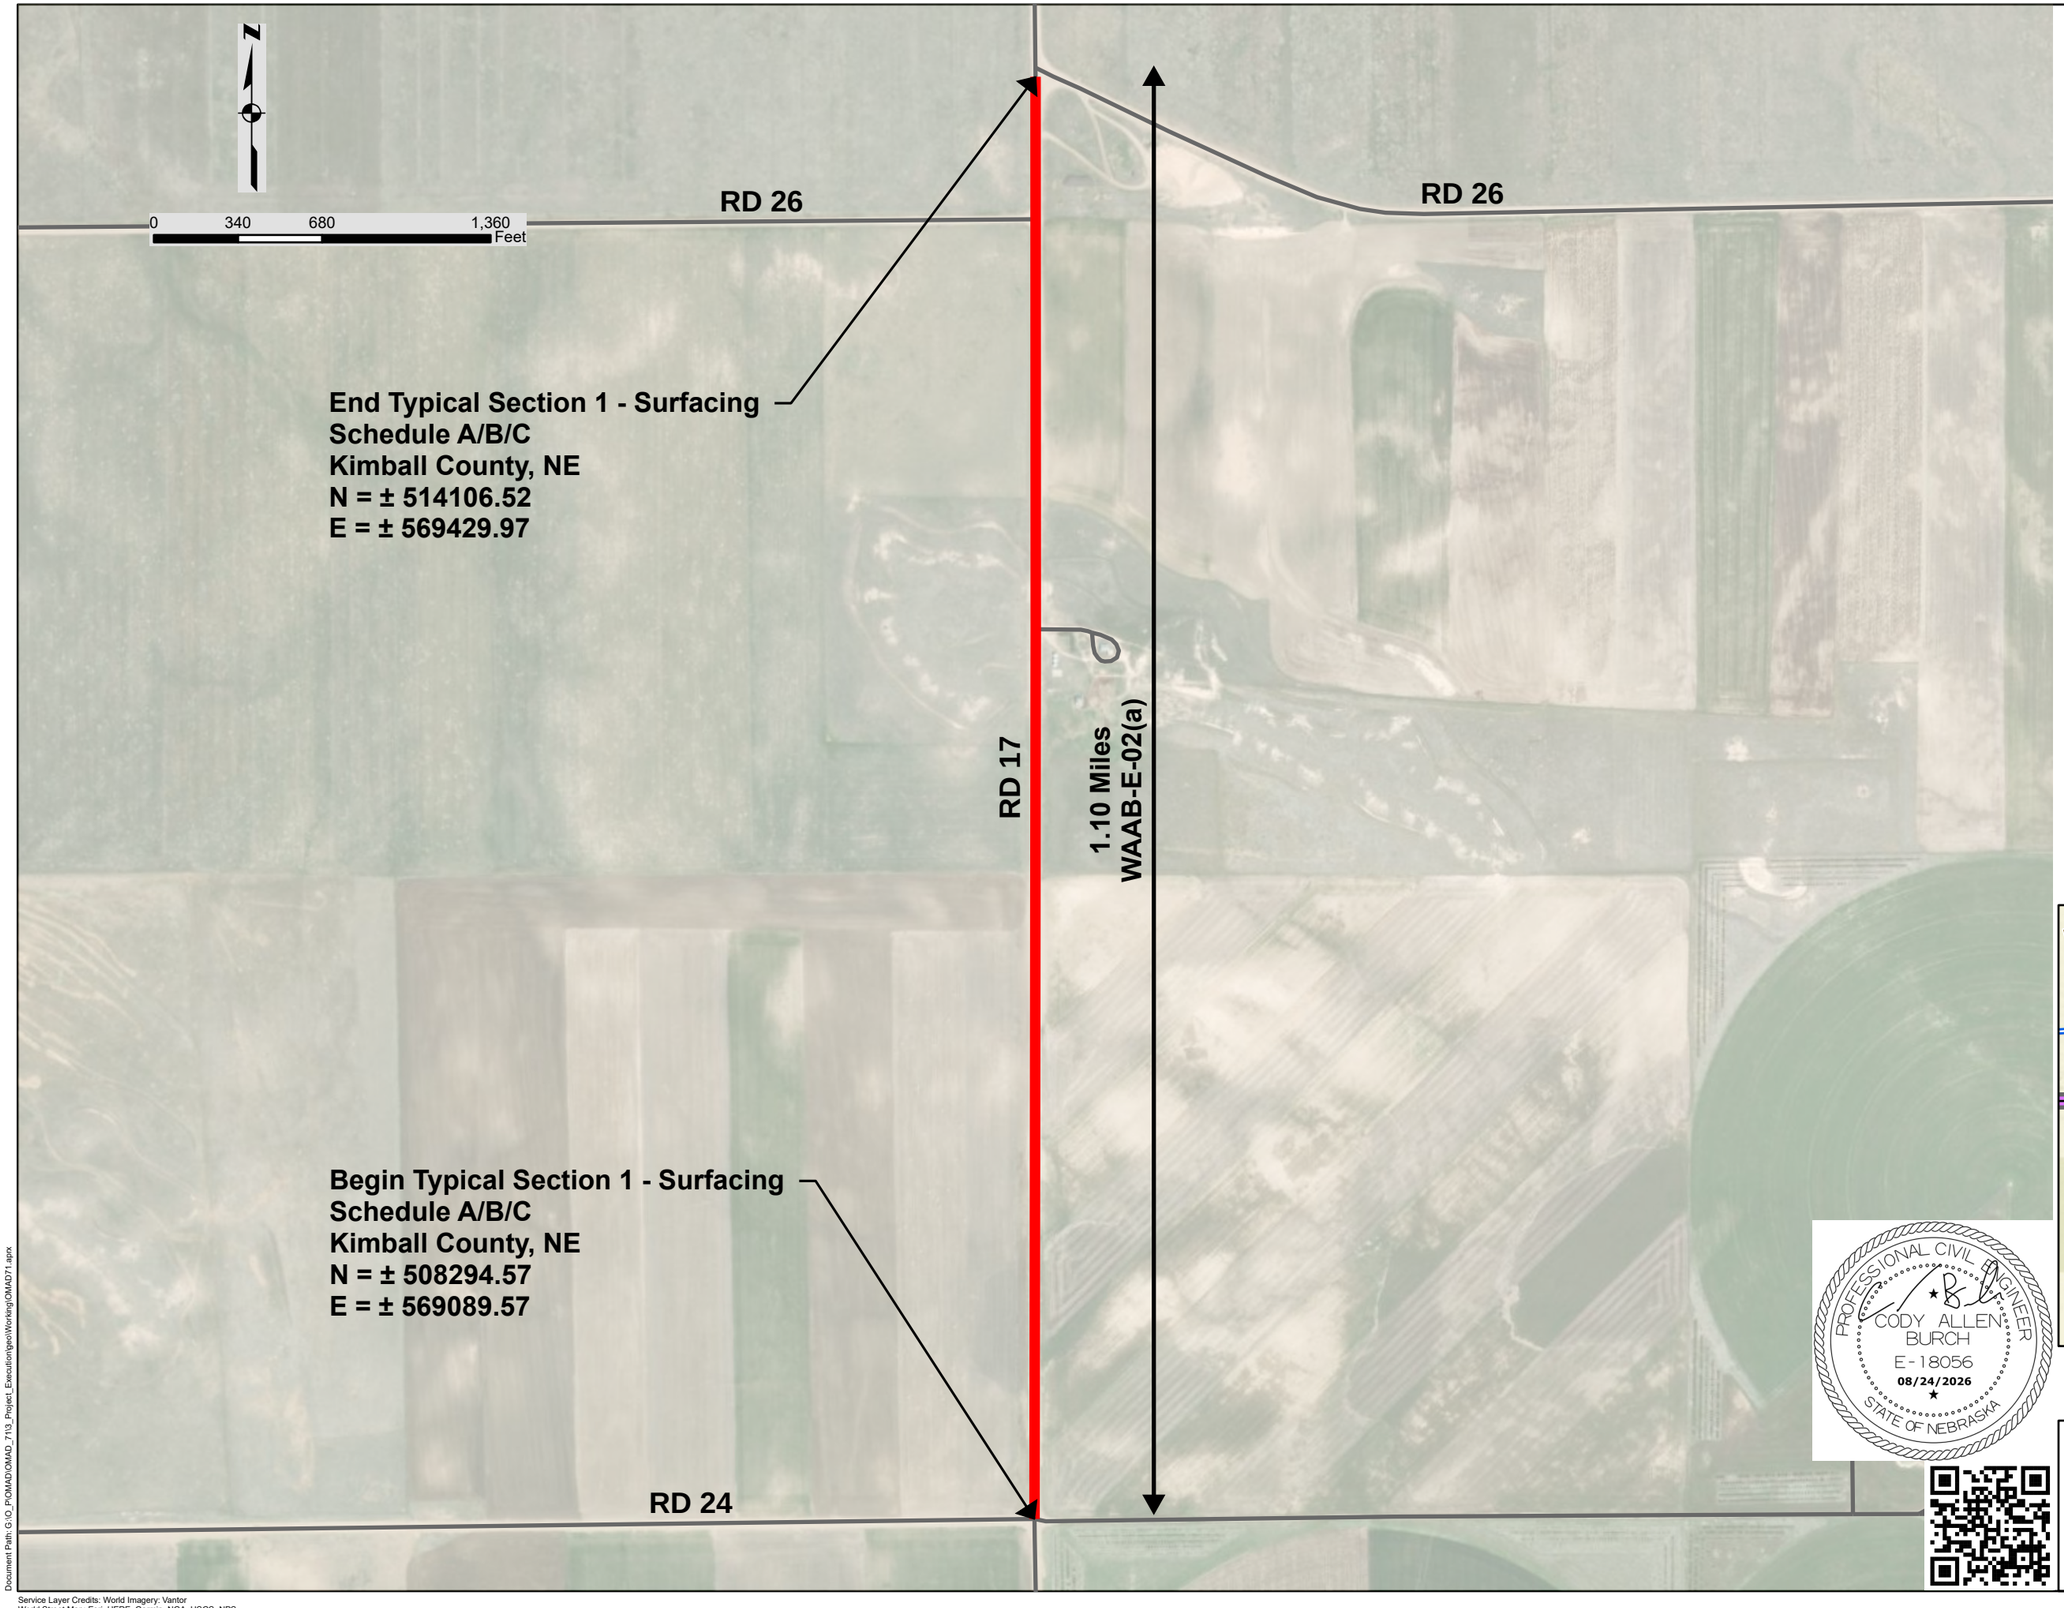

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Nebraska FIPS 2600 Feet

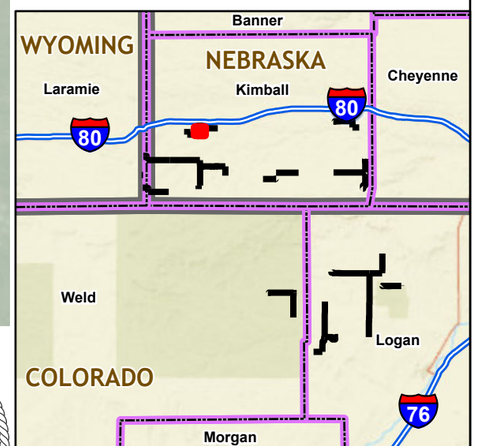

ROUTE ID
WAAB-E-02(a)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7113_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C2

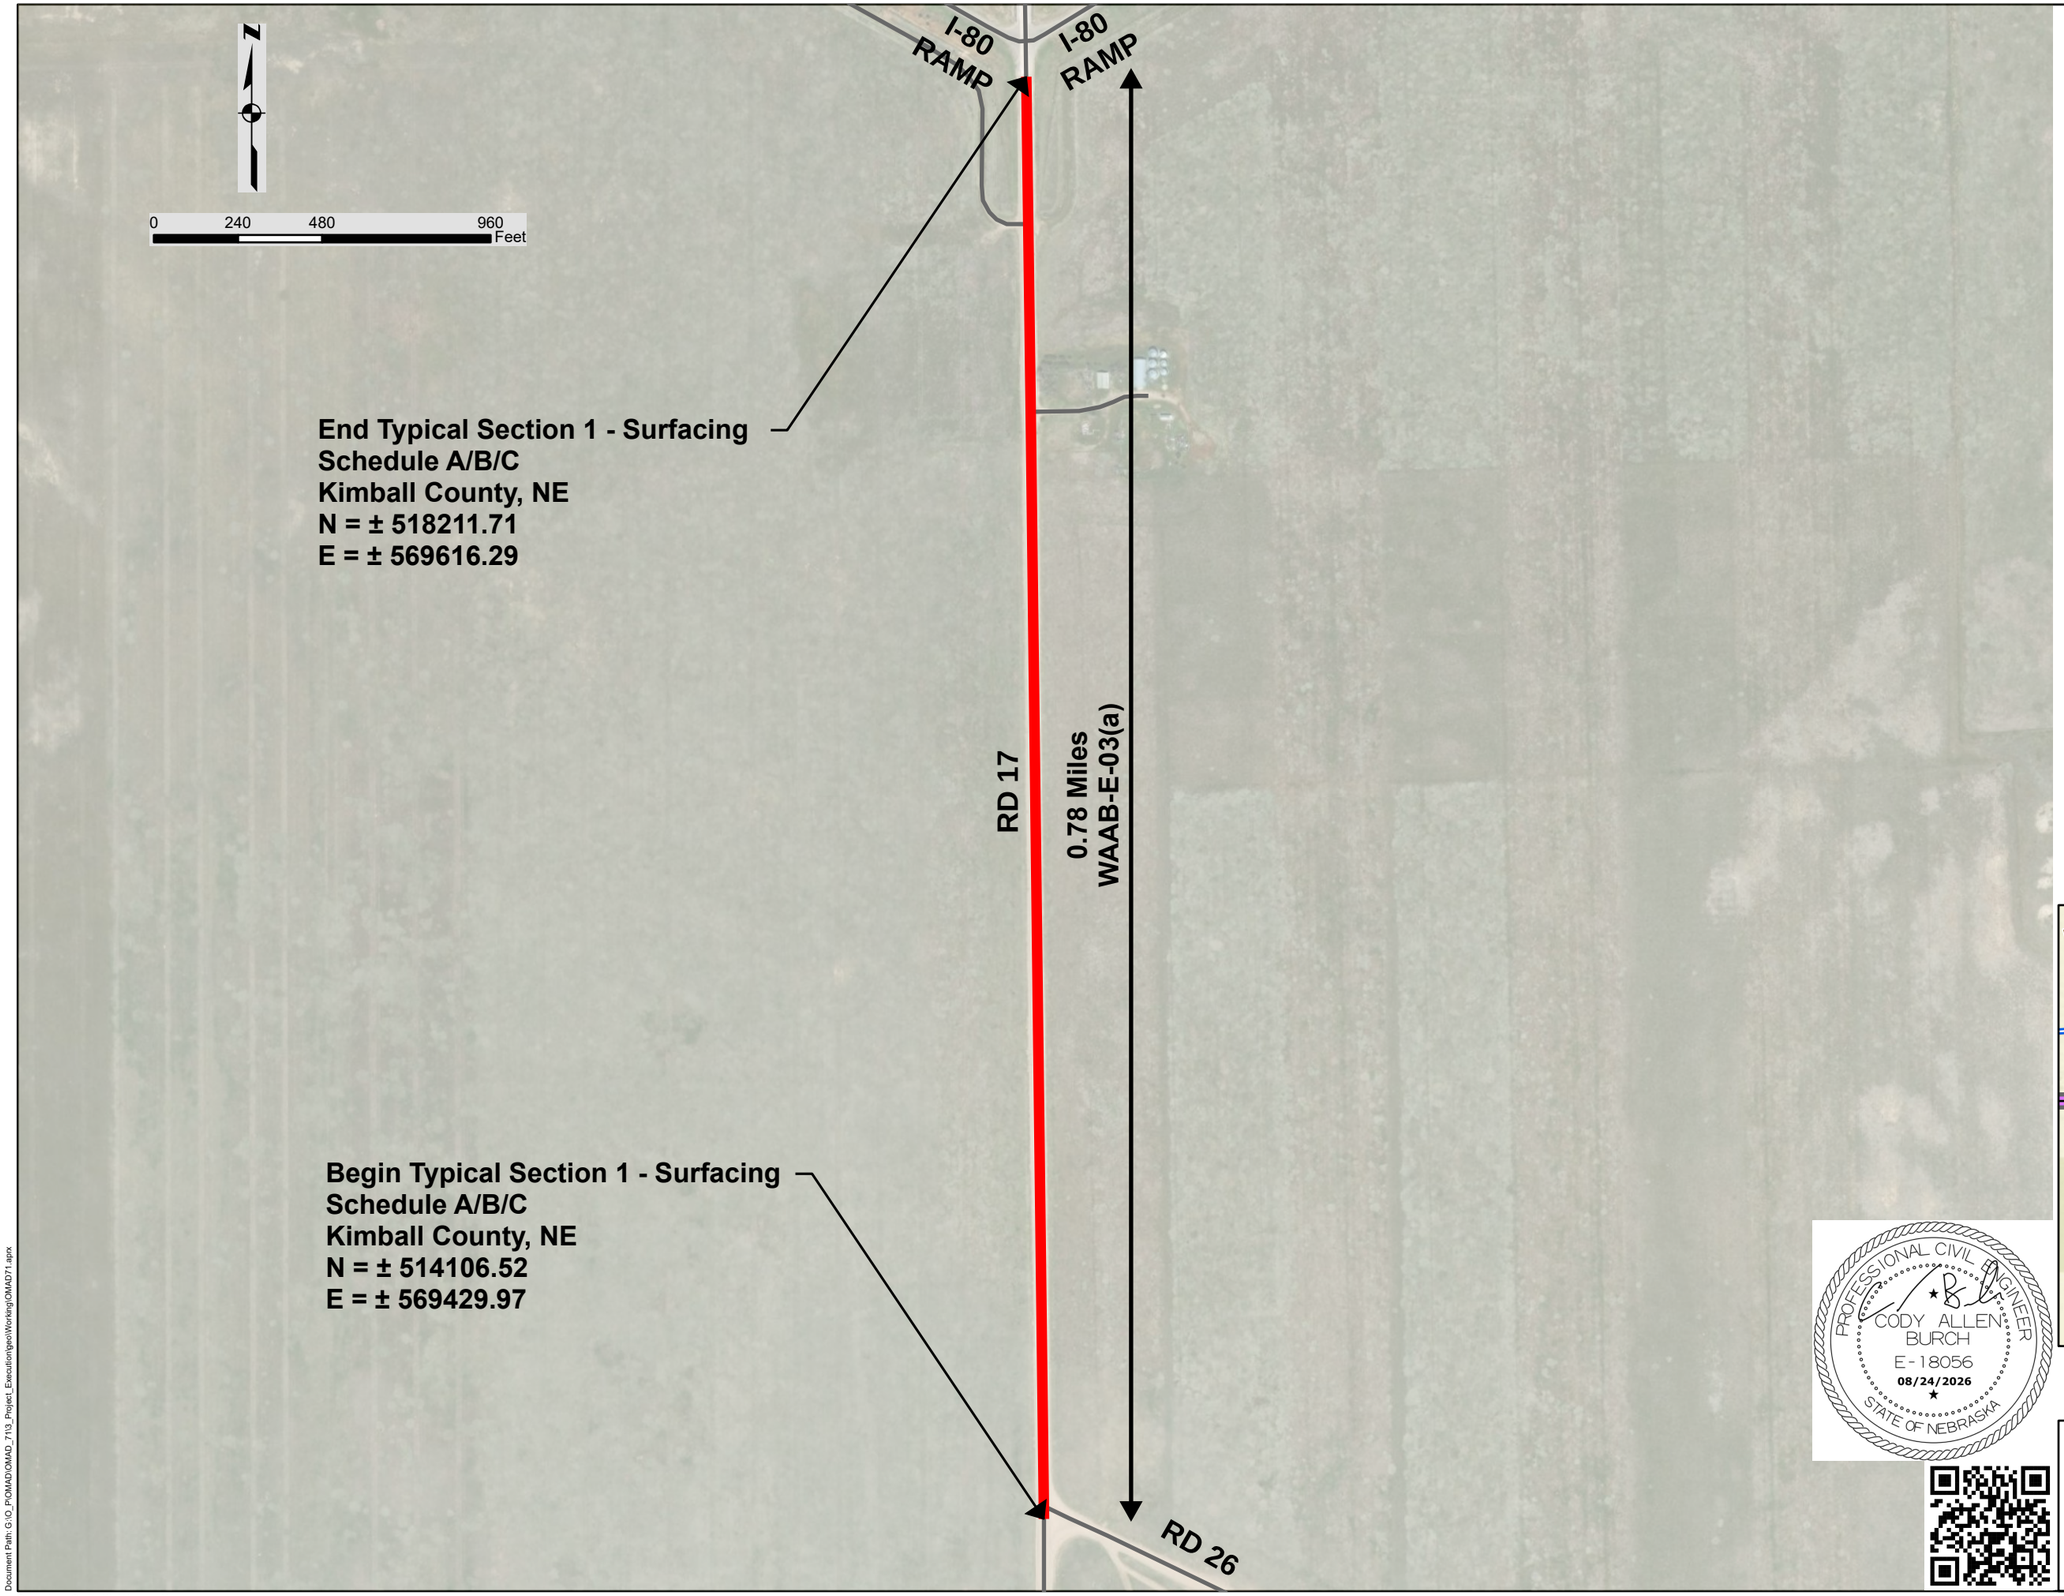

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983 StatePlane Nebraska FIPS 2600 Feet

End work at gravel/asphalt transition.

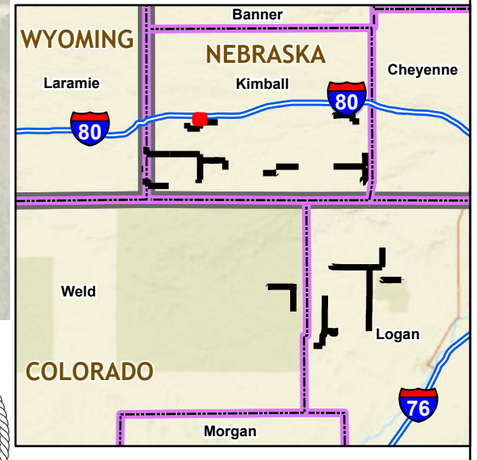

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

ROUTE ID
WAAB-E-03(a)
(SCHEDULE A/B/C)

Document Path: G:\O_PIOMAD\OMAD_7113_Project_Executions\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C3

RD 16

E-04

C-0645

MP 3.92 (located on silo approach road)
Clean culvert in place
Install object markers (x2)

0 1,000 2,000 4,000 Feet

End Typical Section 1 - Surfacing
Schedule A/B/C
Kimball County, NE
N = ± 487045.13
E = ± 568257.75

C-0646

RD 14

MP 3.19
Remove 4 existing CMP
Install 4 - 30" equiv. x 30' CMP
Install end sections (x8)
Install object markers (x2)

C-0647

MP 2.59
Clean culvert in place
Install object markers (x2)

RD 12

RD 17

3.93 Miles
WAAB-E-06(a)

RD 19

RD 10

MP 0.74
Clean culvert in place
Install object markers (x2)

C-0649

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Kimball County, NE
N = ± 466344.69
E = ± 567389.09

RD 8

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983 StatePlane Nebraska FIPS 2600 Feet

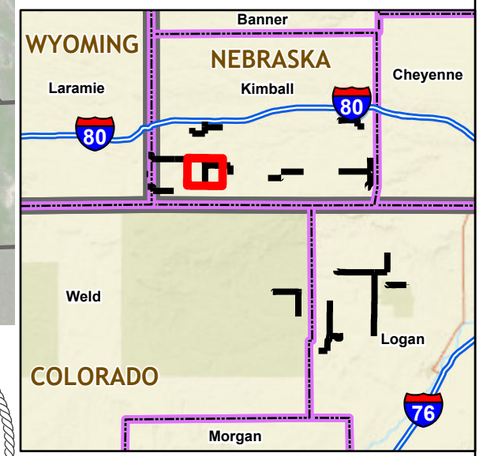

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

ROUTE ID
WAAB-E-06(a)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Execution\gis\Working\OMAD71.aprx

Service Layer Credits: World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS
World Imagery: Earthstar Geographics

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C4

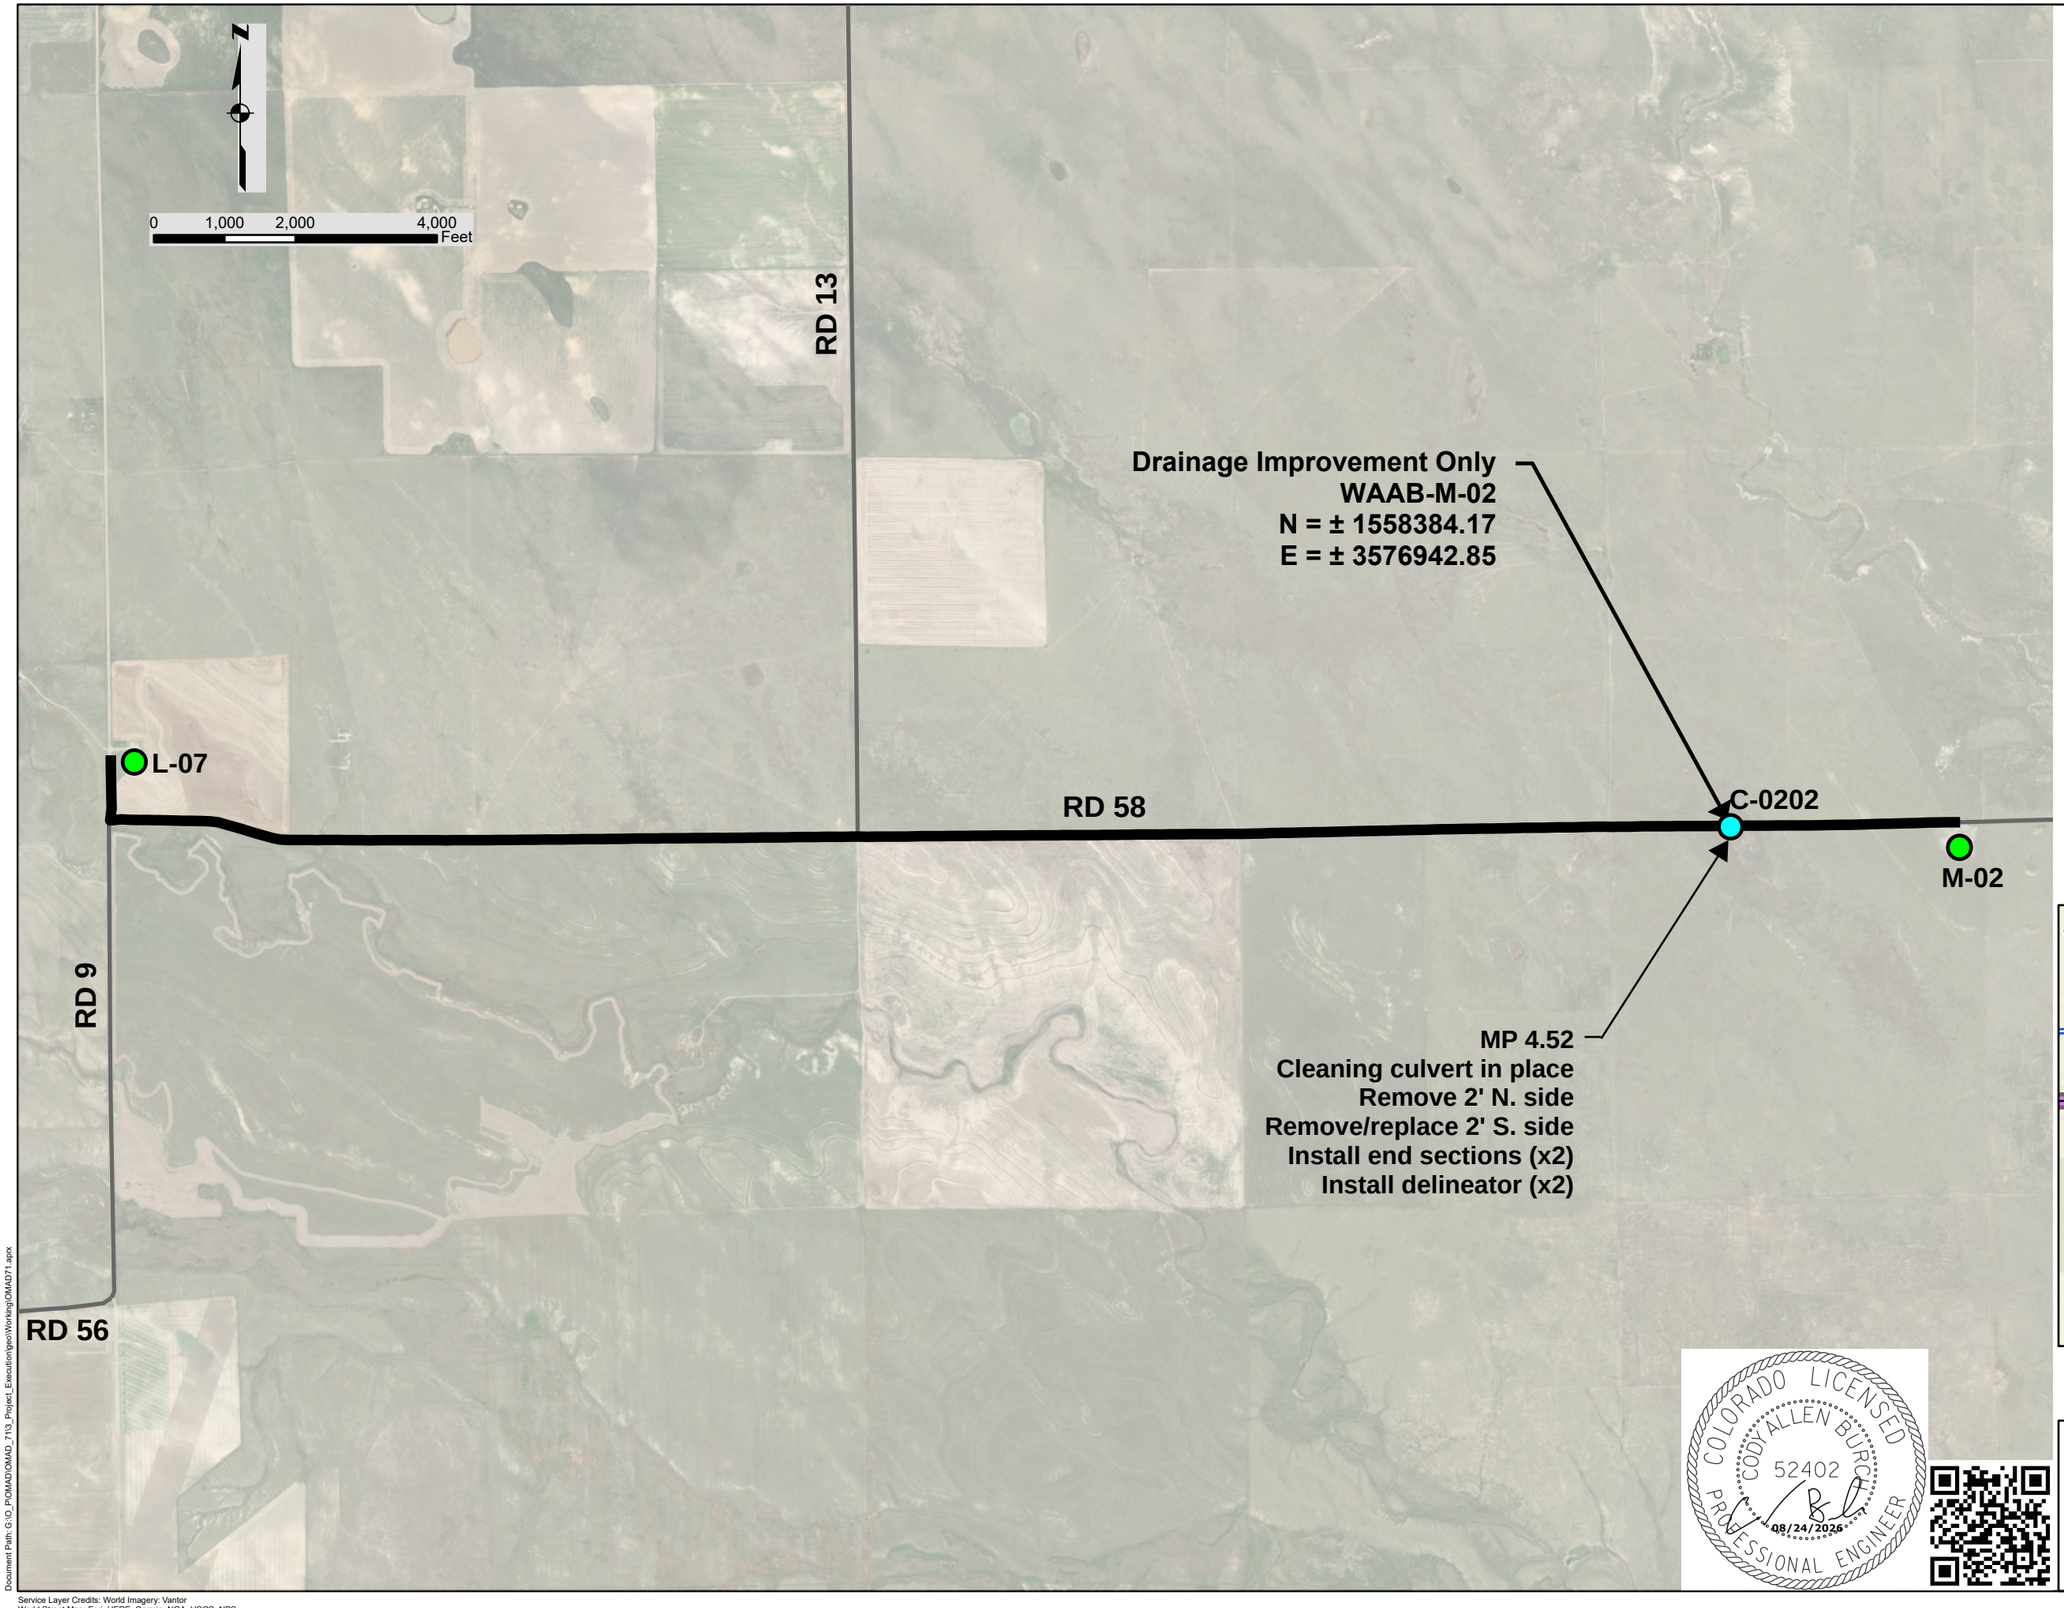

LEGEND

Proposed Route

- Typical Section 1 Surfacing
- Drainage Improvement Route

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

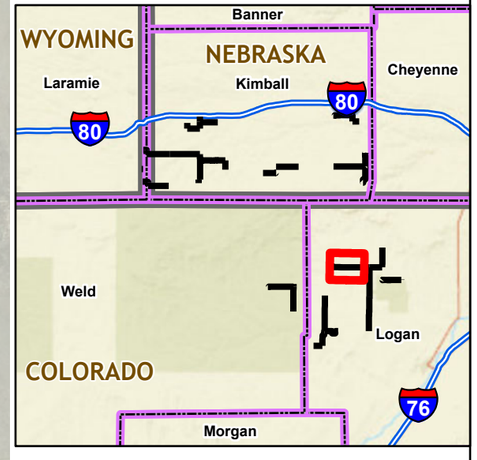

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-02
(SCHEDULE A/B/C)

Document Path: G:\O_PIOMAD\OMAD_7\13_Project_Executions\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C5

N

0 1,250 2,500 5,000 Feet

End Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1558651.32
E = ± 3585868.59

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1533753.57
E = ± 3586403.95

RD 58
RD 21
4.72 Miles
WAAB-M-02(a)
RD 26
RD 50.7
RD 50
RD 23
M-03

LEGEND

Proposed Route

Typical Section 1 Surfacing

Transportation

Interstate
Highway
Local Road
County Boundary
State Boundary
Missile Silo
Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

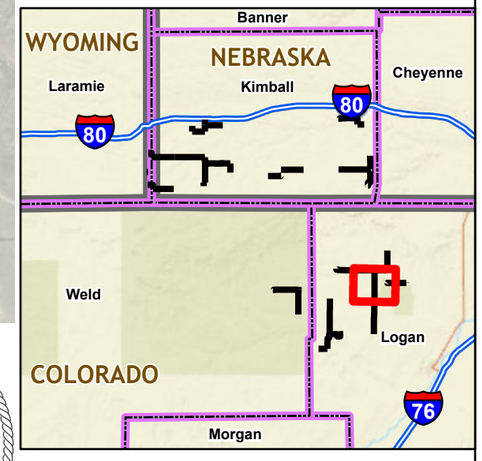

COLORADO LICENSED
CODYALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-02(a)
(SCHEDULE A/B/C)

Document Path: G:\O_PIOMAD\OMAD_713_Project_Executions\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C6

0 260 520 1,040 Feet

RD 21

1.08 Miles
WAAB-M-02(b)

RD 58

M-02

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1558447.53
E = ± 3580186.51

End Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1558651.32
E = ± 3585868.59

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

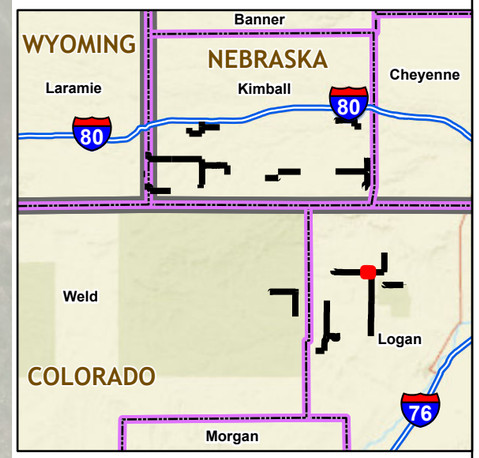

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-02(b)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7113_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C7

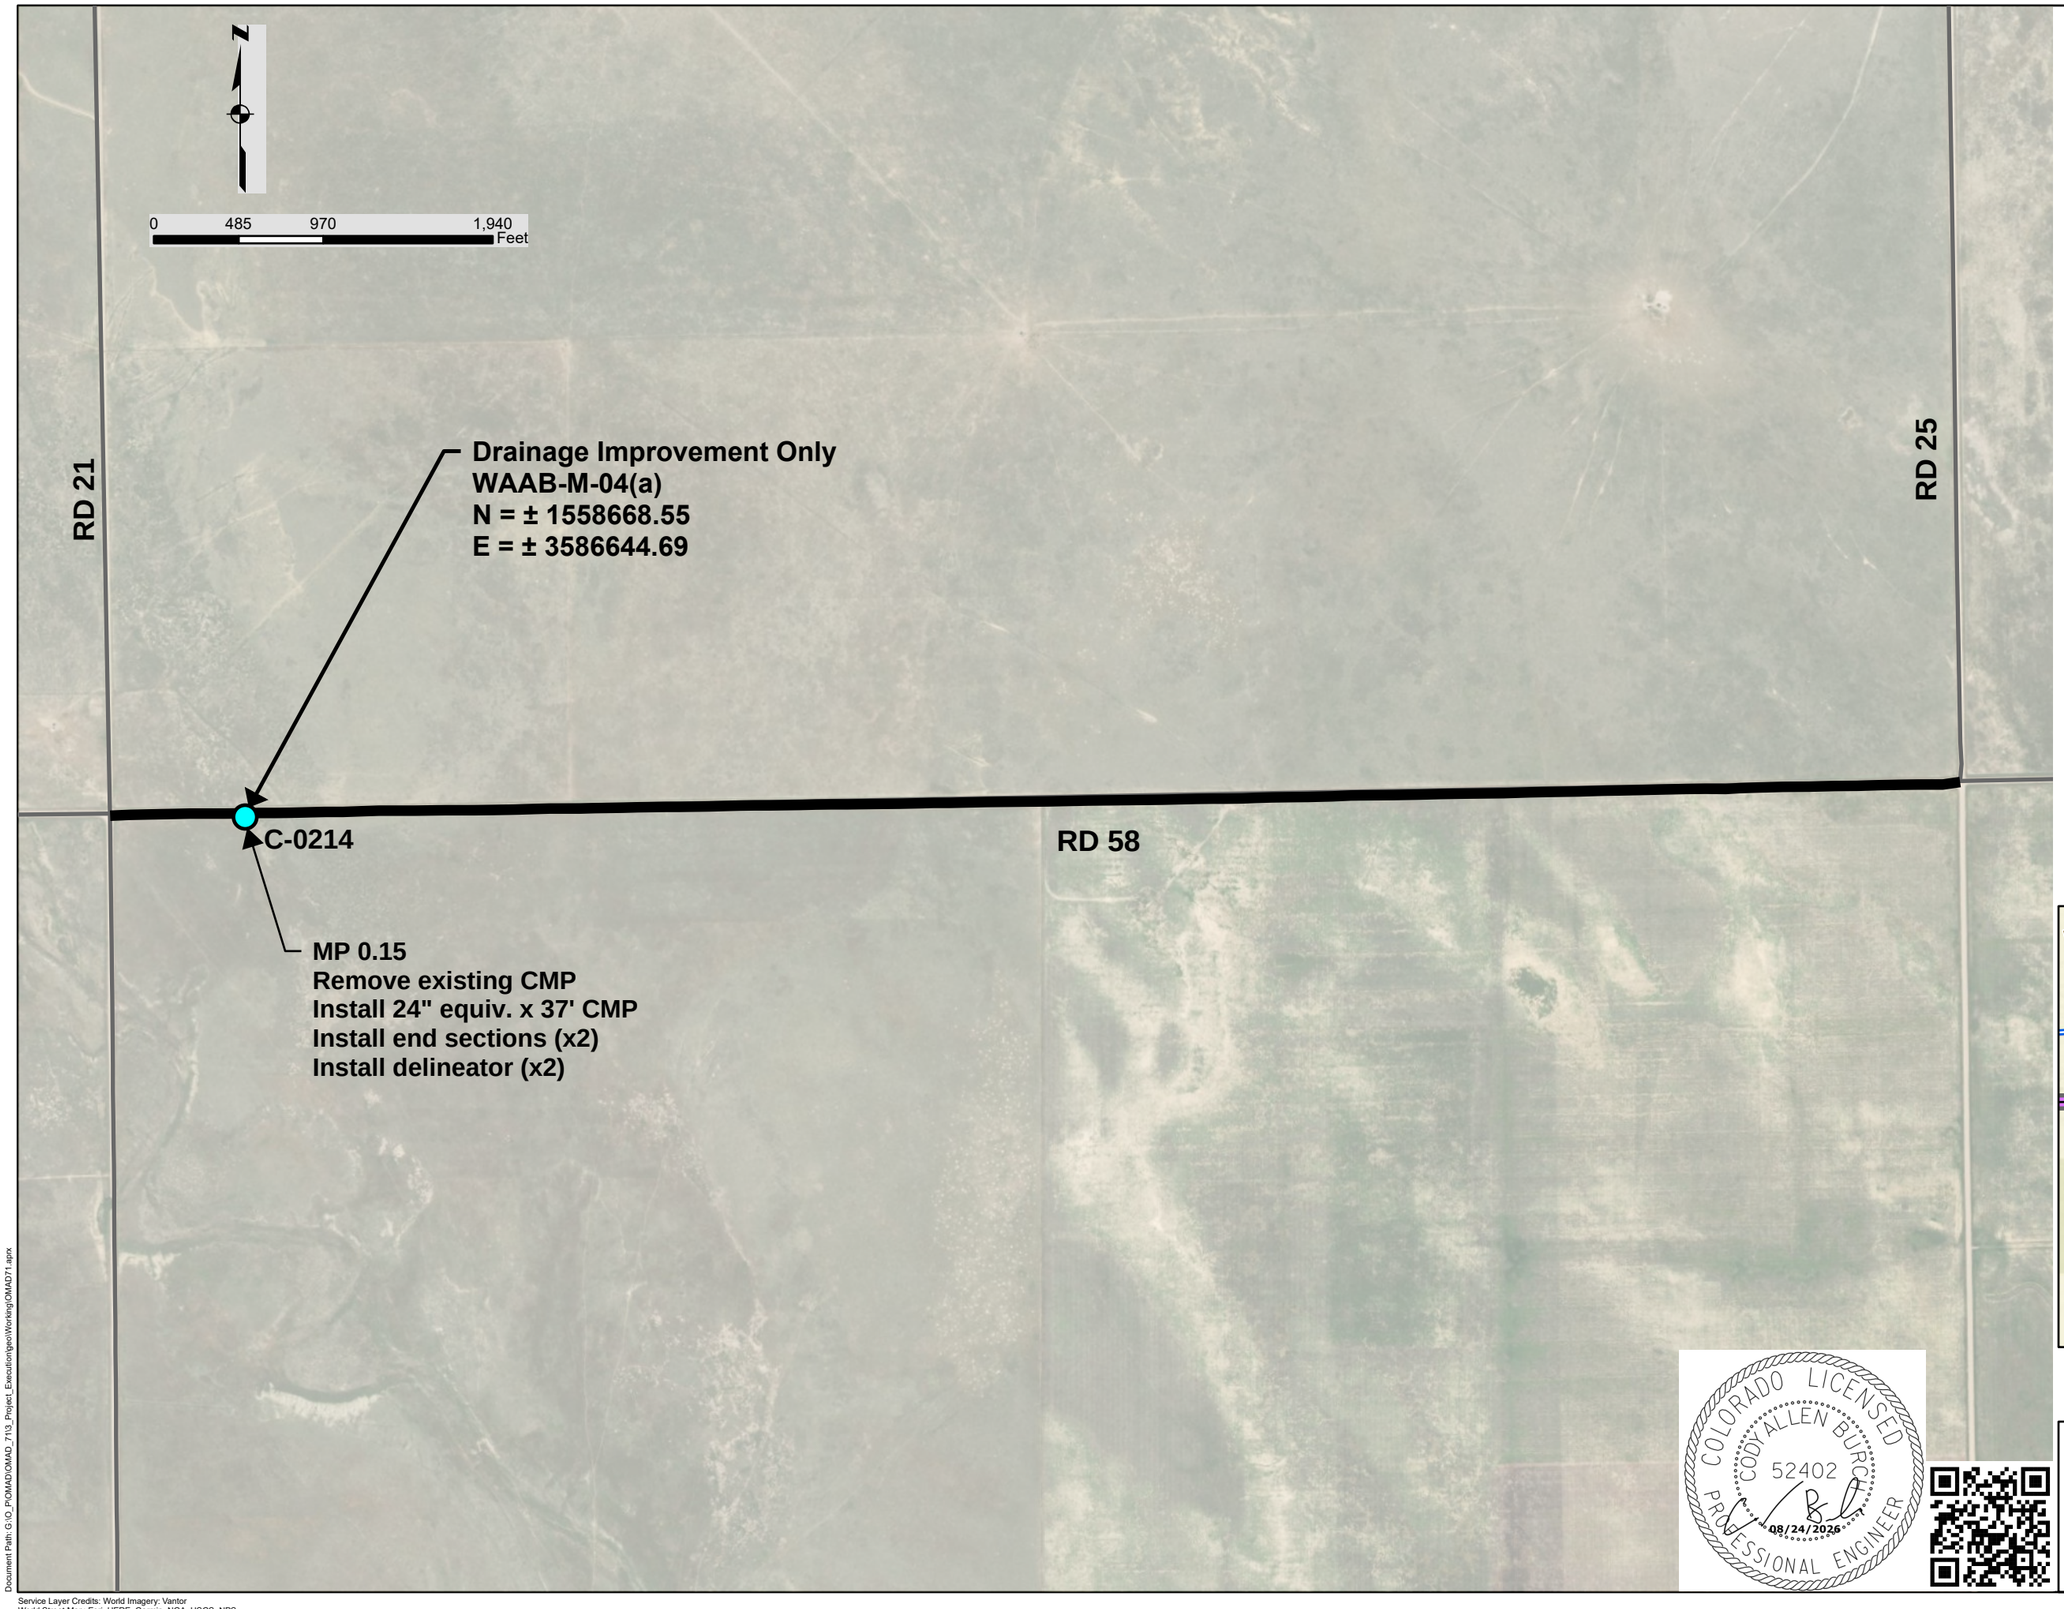

LEGEND

Proposed Route

- Typical Section 1 Surfacing
- Drainage Improvement Route

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

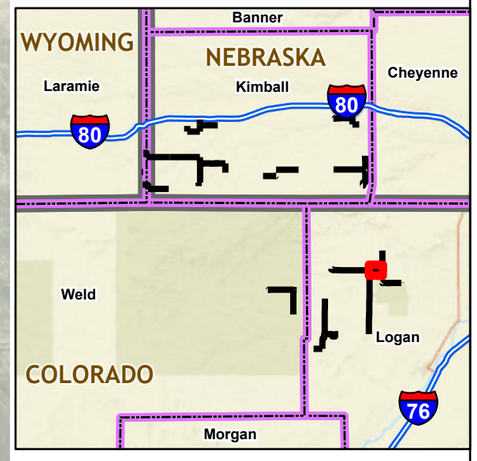

COLORADO LICENSED
CODY ALLEN BURCH
52402
PROFESSIONAL ENGINEER
08/24/2026

ROUTE ID
WAAB-M-04(a)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_713_Project_Executing\eo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C8

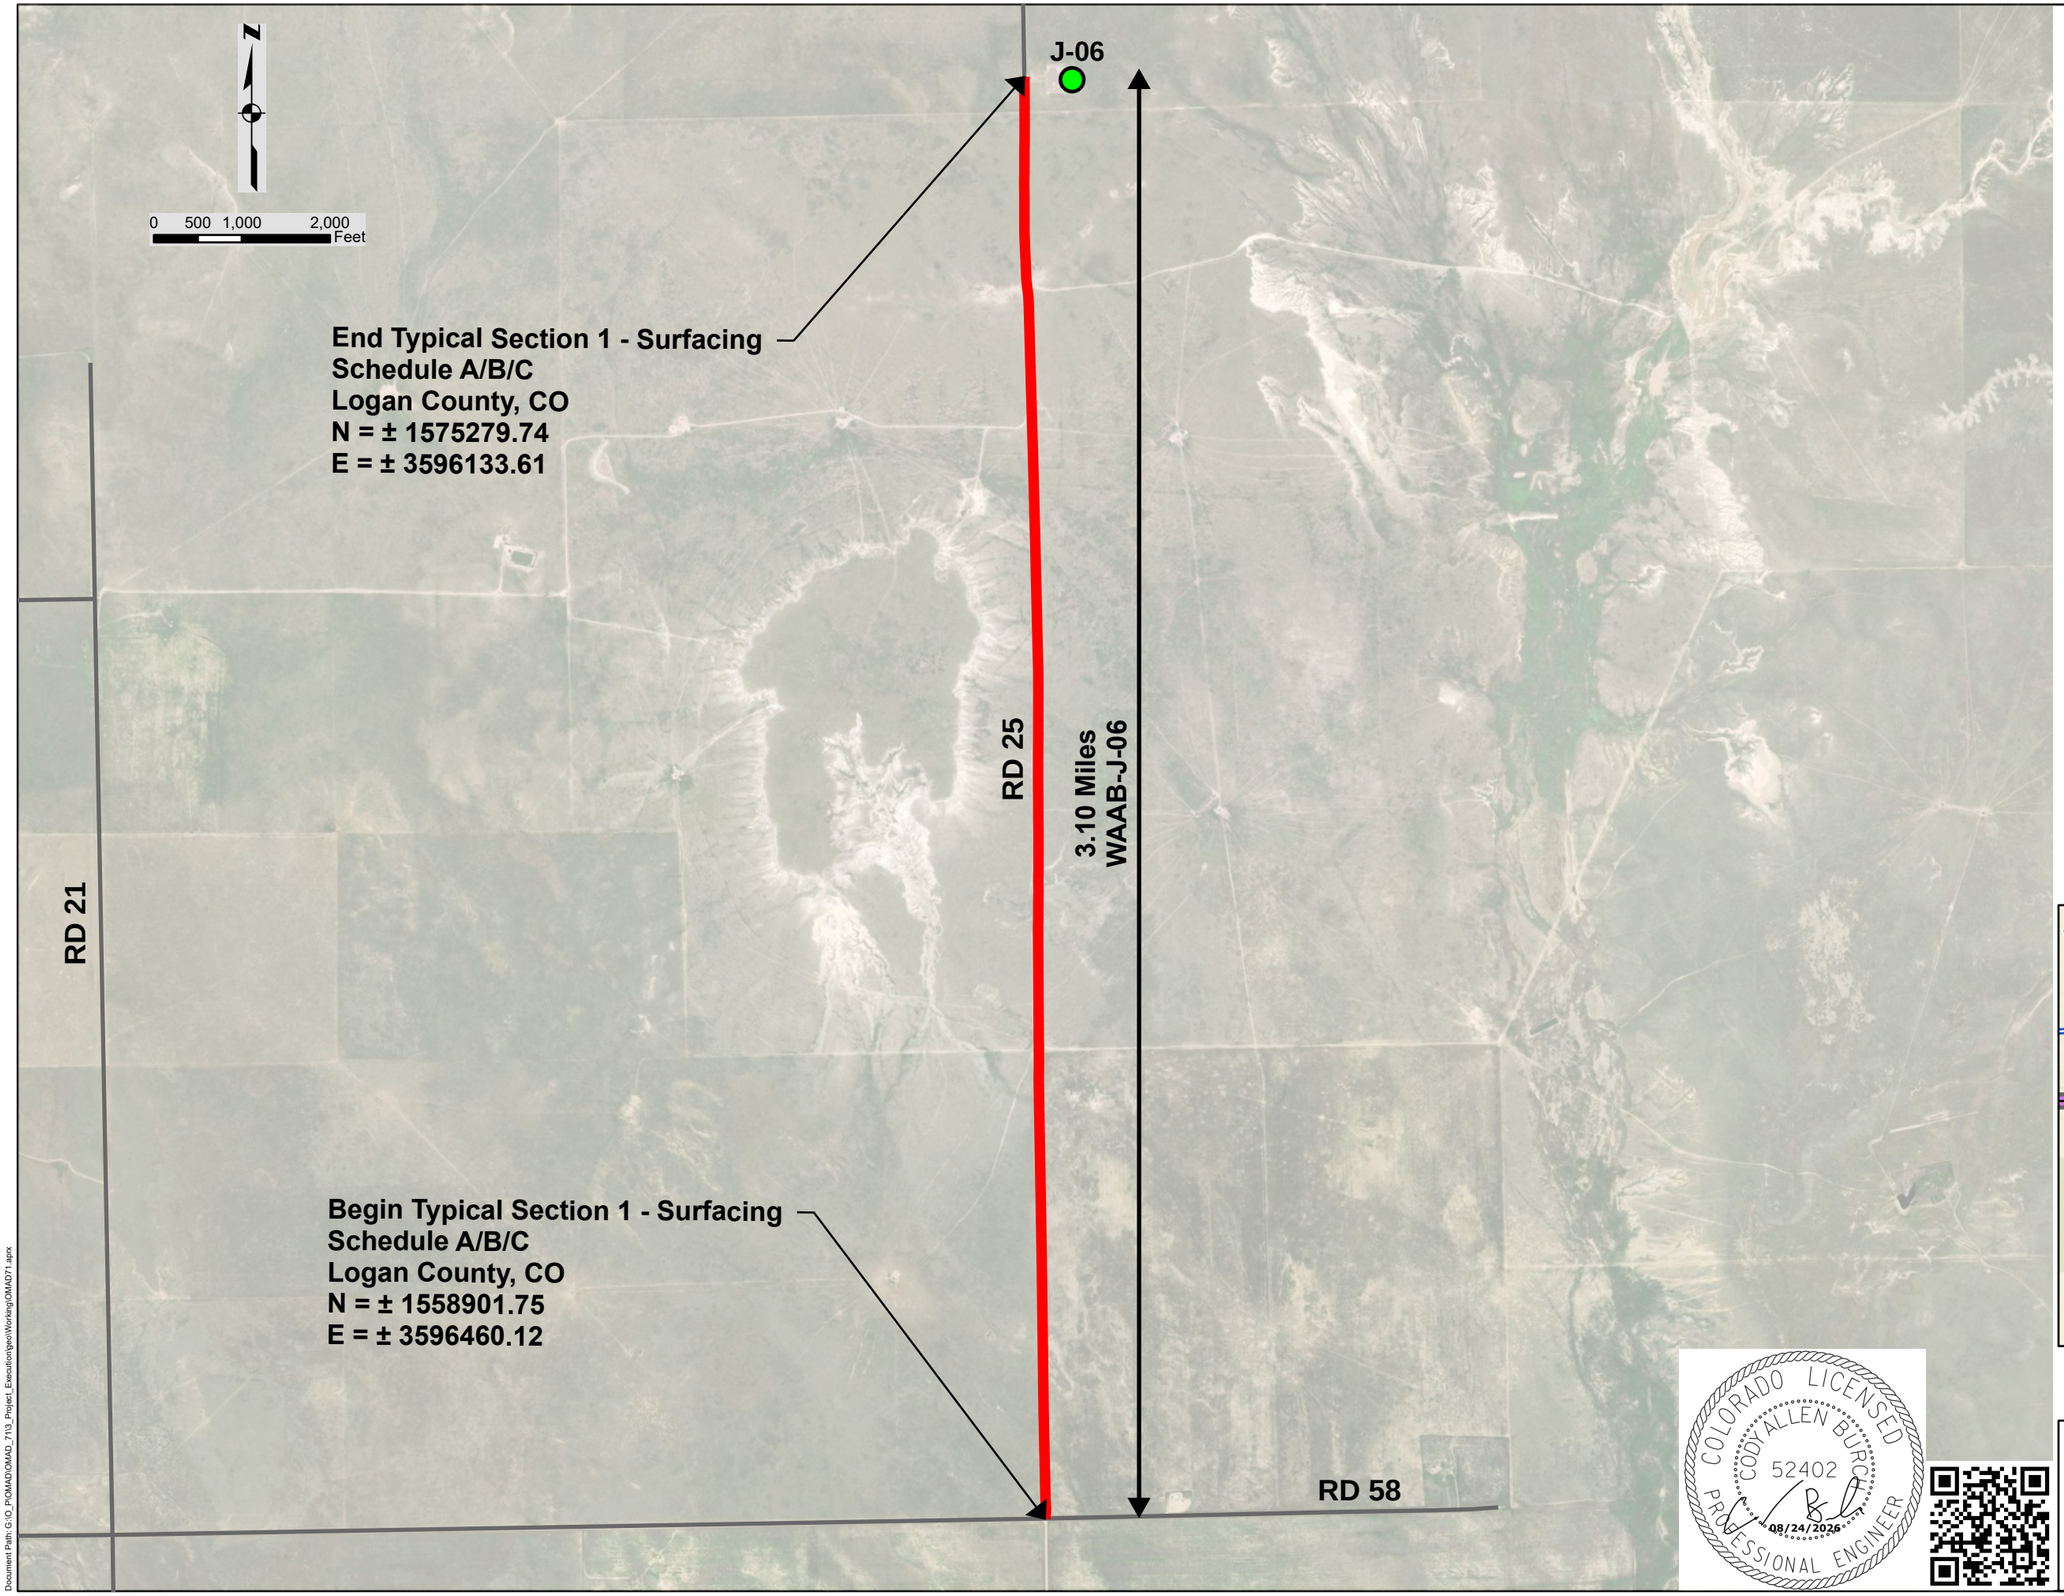

LEGEND

Proposed Route

- *Typical Section 1 Surfacing*

Transportation

- *Interstate*
- *Highway*
- *Local Road*
- *County Boundary*
- *State Boundary*
- *Missile Silo*
- *Project Culvert*

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

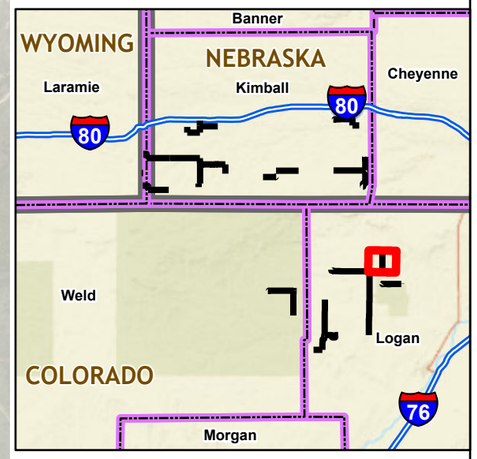

ROUTE ID
WAAB-J-06
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7113_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C9

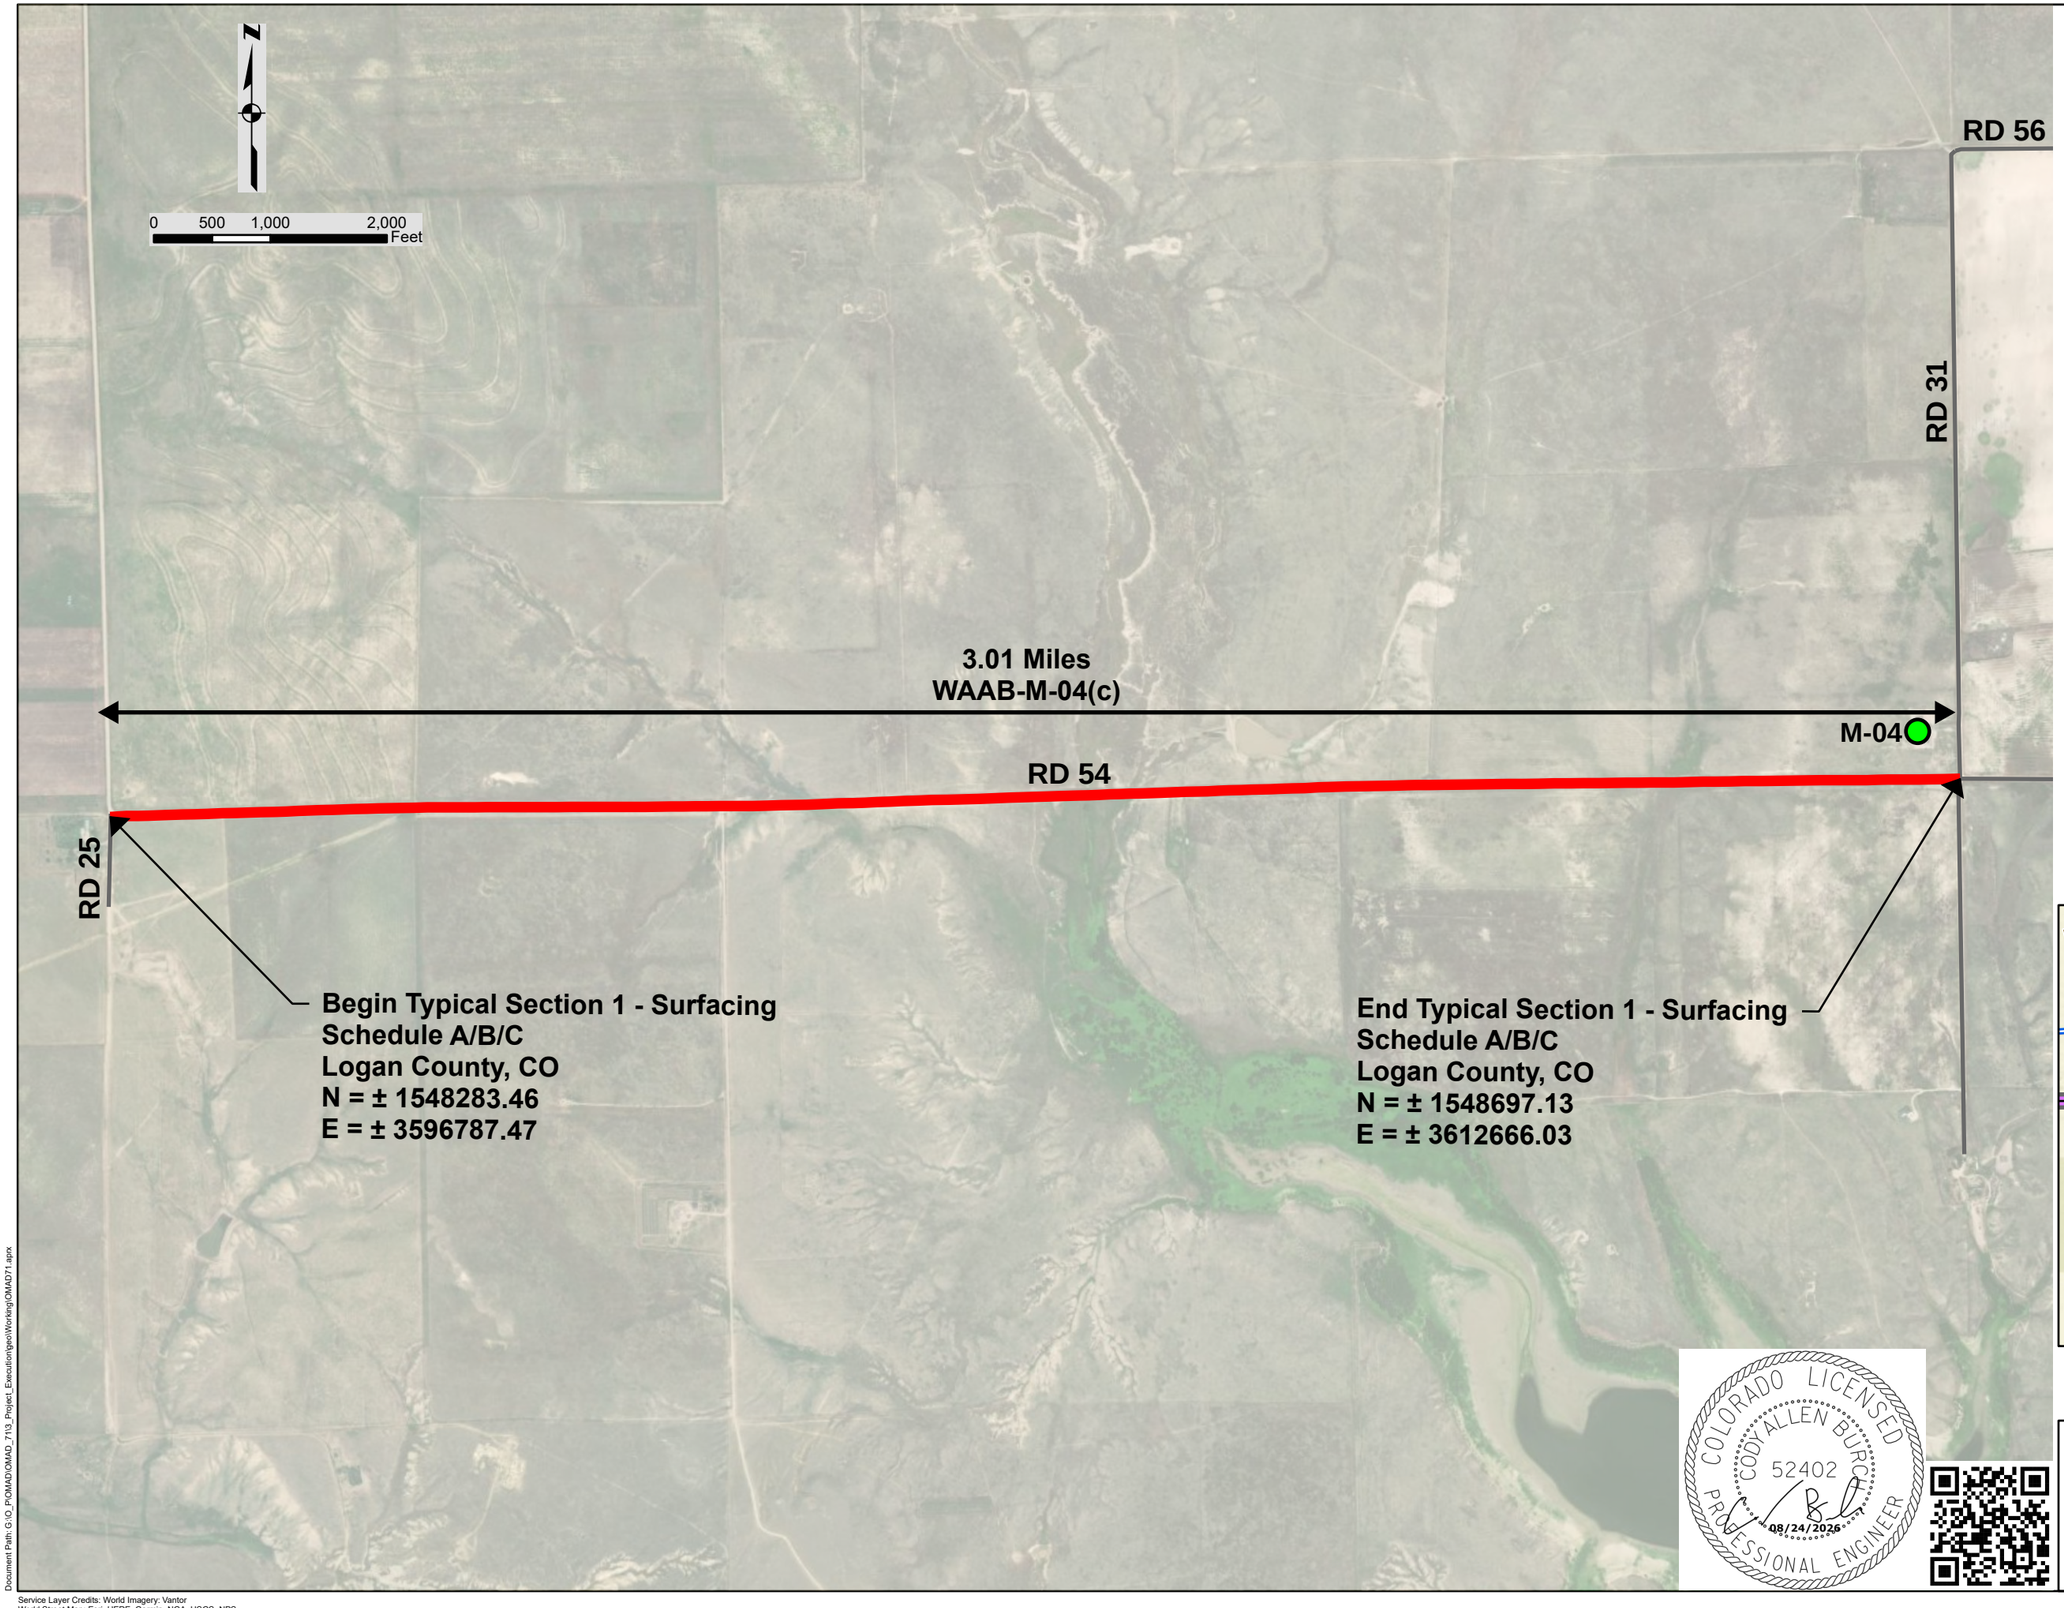

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

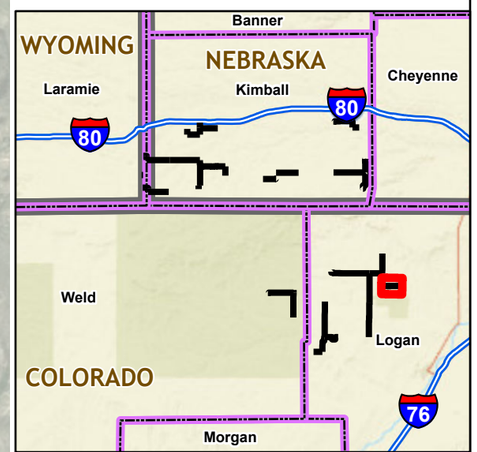

ROUTE ID
WAAB-M-04(c)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7103_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C10

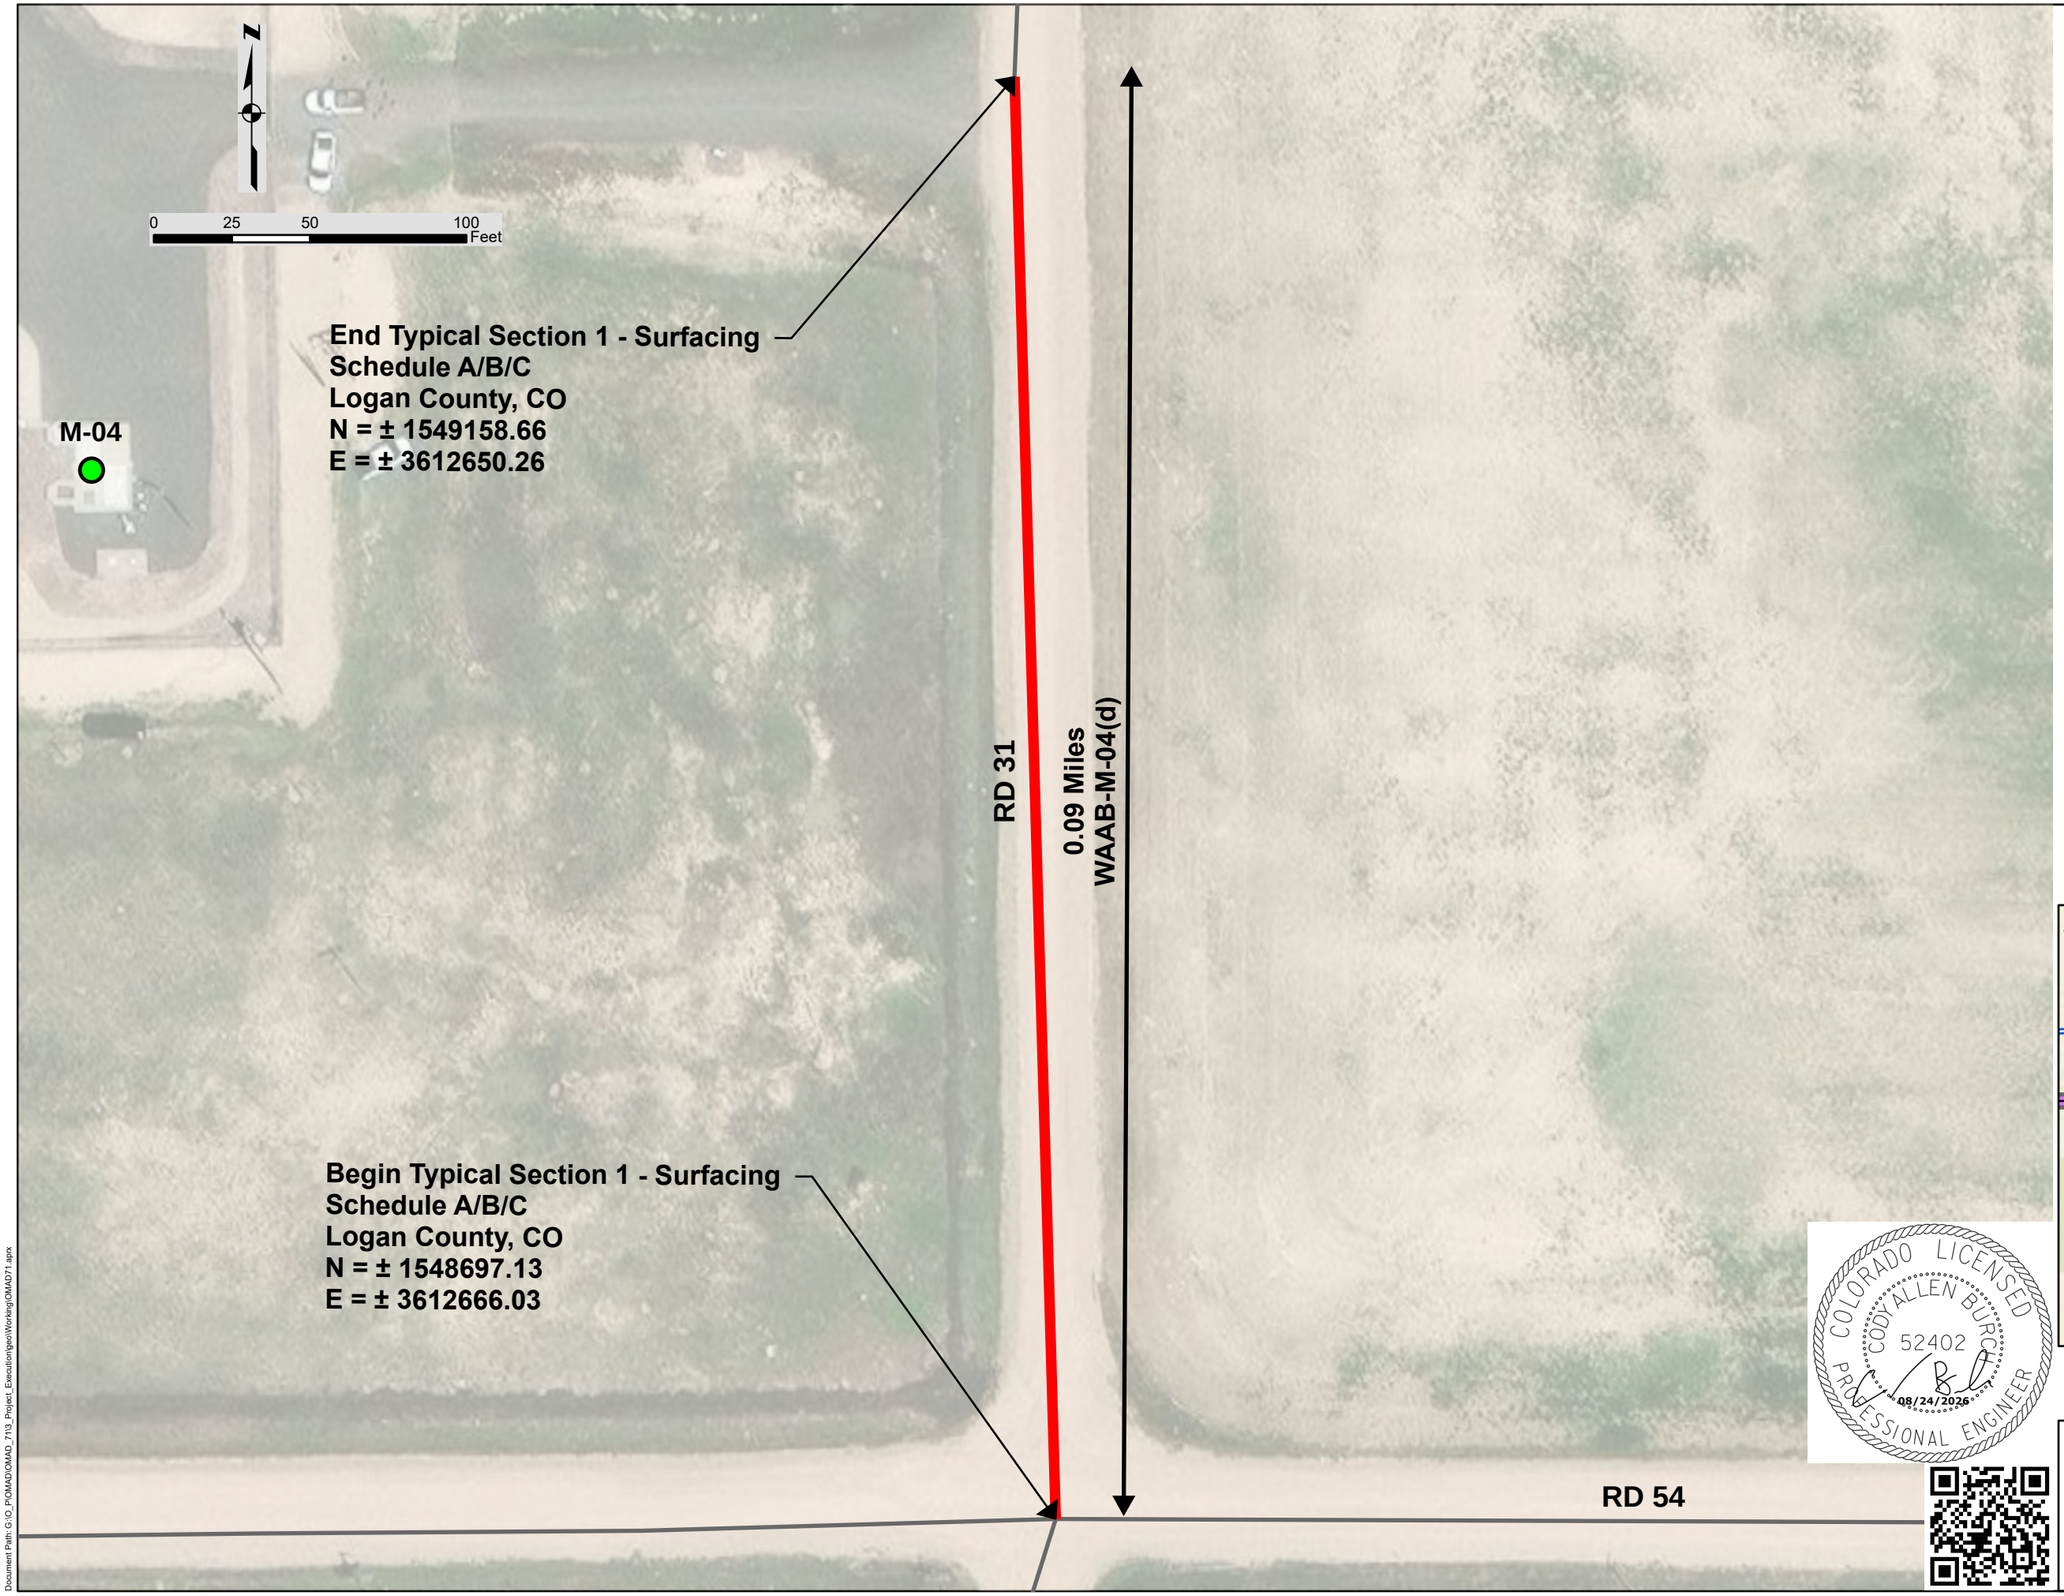

LEGEND

Proposed Route

- *Typical Section 1 Surfacing*

Transportation

- *Interstate*
- *Highway*
- *Local Road*
- *County Boundary*
- *State Boundary*
- *Missile Silo*
- *Project Culvert*

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

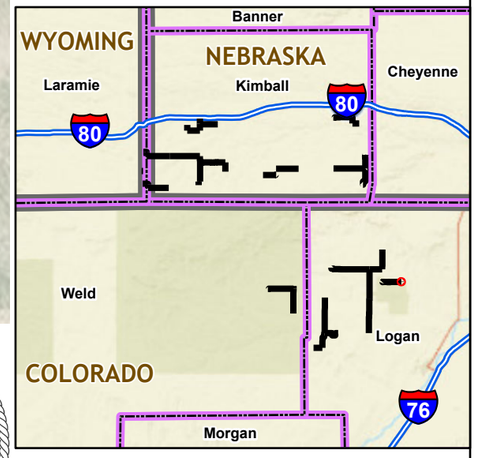

ROUTE ID
WAAB-M-04(d)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7\10_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS
World Imagery: Microsoft, Vantor

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C11

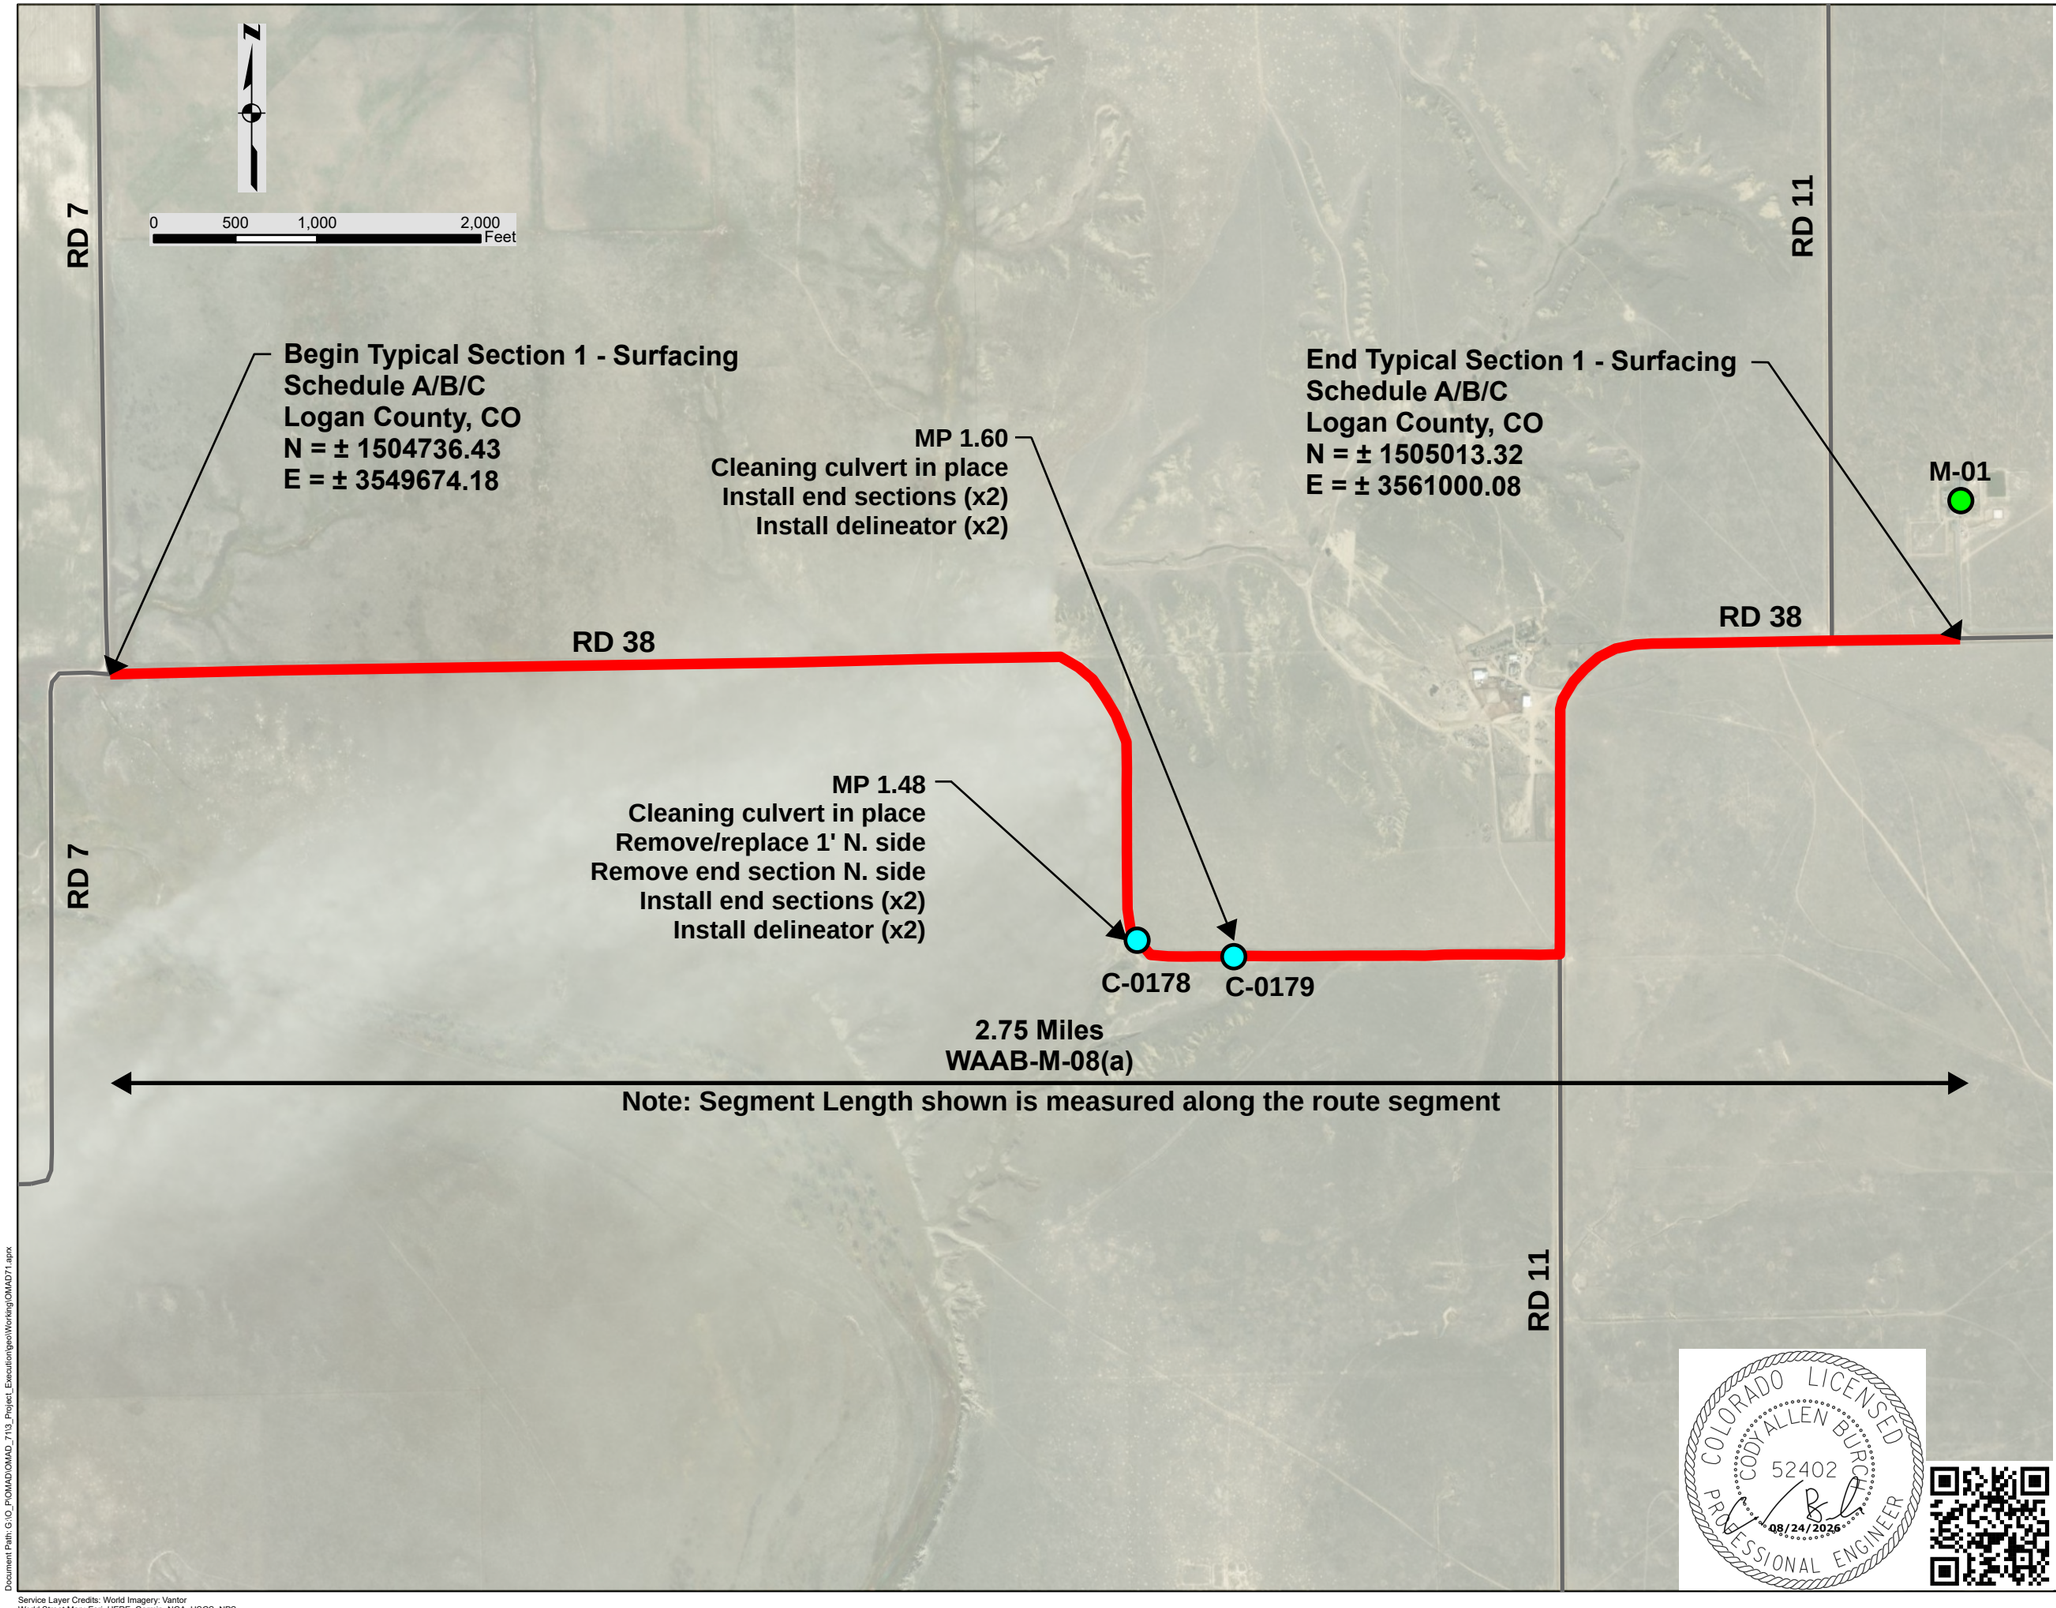

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

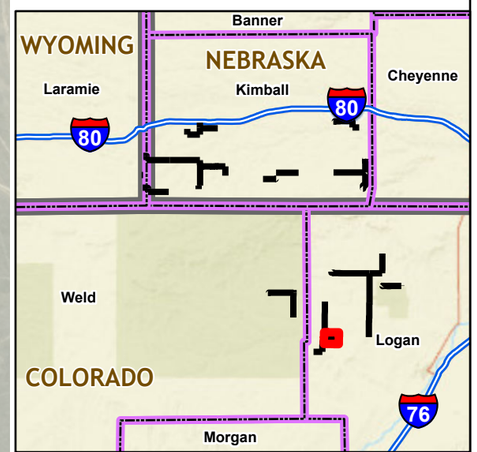

ROUTE ID
WAAB-M-08(a)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7103_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C12

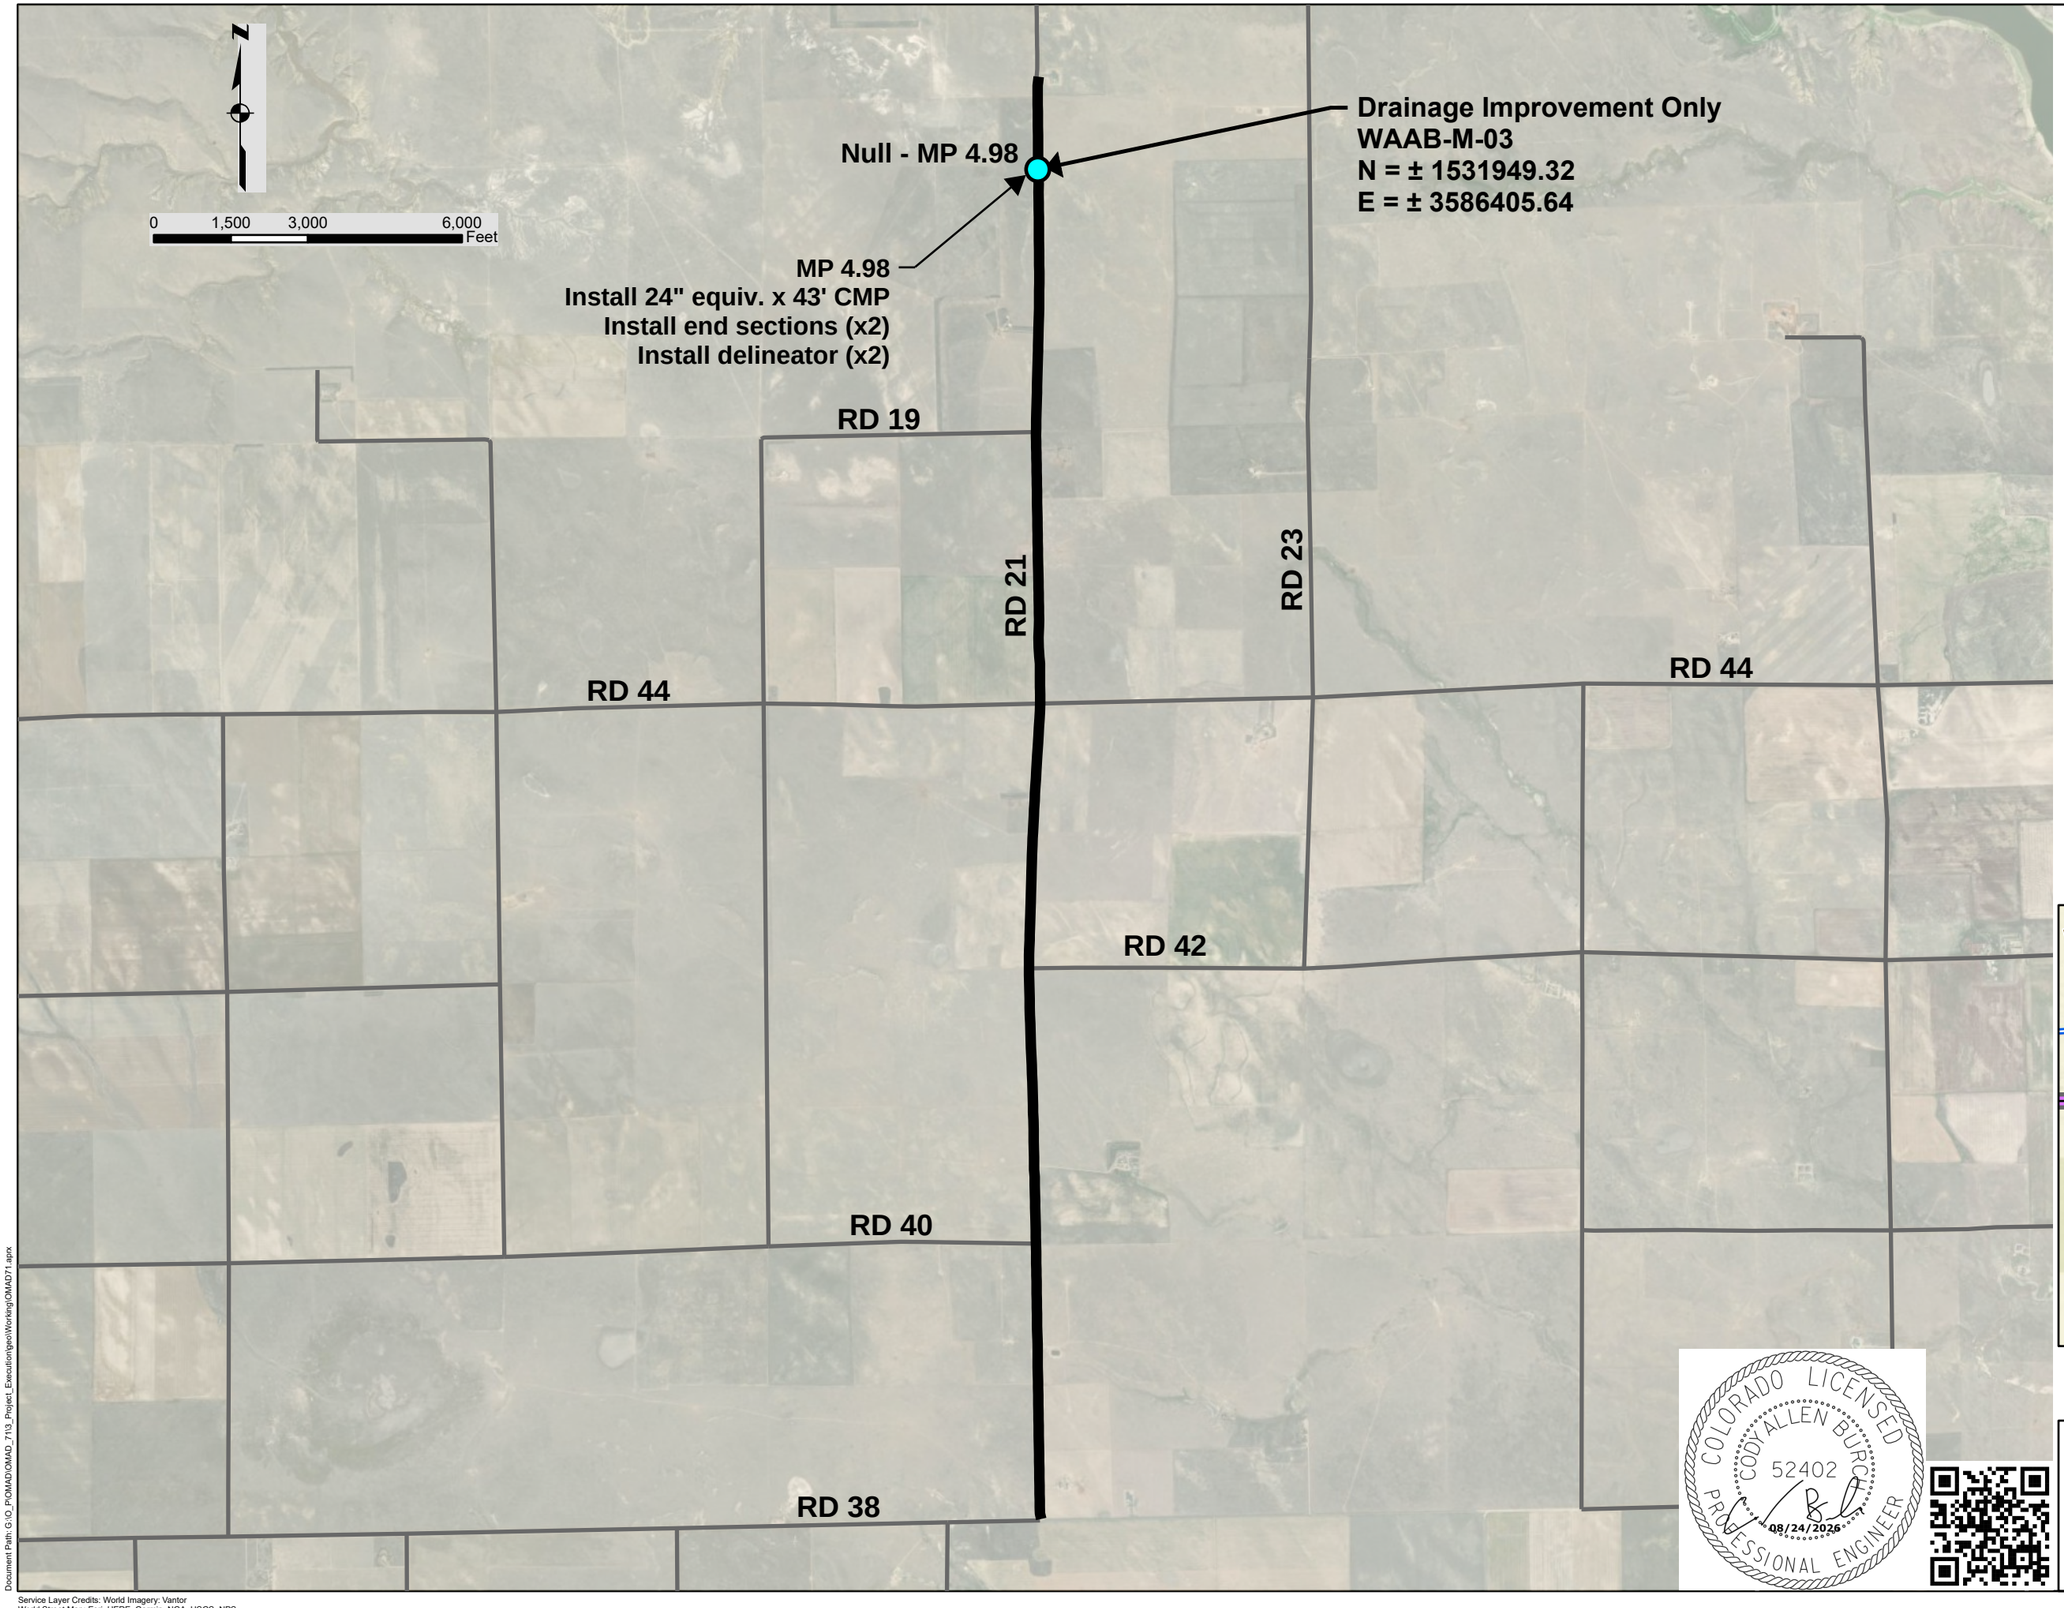

LEGEND

Proposed Route

- Typical Section 1 Surfacing
- Drainage Improvement Route

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

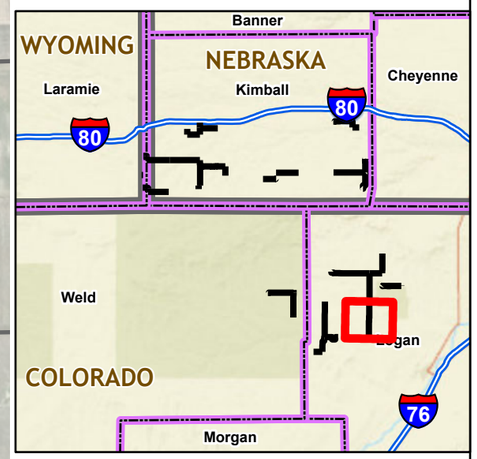

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-03
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7113_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C13

N

0 500 1,000 2,000 Feet

RD 38

RD 7

RD 7

Do not disturb existing bridge

C-0163

End Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1504736.43
E = ± 3549674.18

MP 2.08
Cleaning culvert in place
Install end sections (x2)
Install delineator (x2)

2.58 Miles
WAAB-M-08(b)

Note: Segment Length shown is measured along the route segment

RD 7

MP 0.39
Cleaning culvert in place
Remove/replace 3' W. side
Install end sections (x2)
Install delineator (x2)

RD 5

C-0162

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1492428.25
E = ± 3548100.35

RD 34

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

Perform no work on existing concrete bridge deck near MP 2.2.

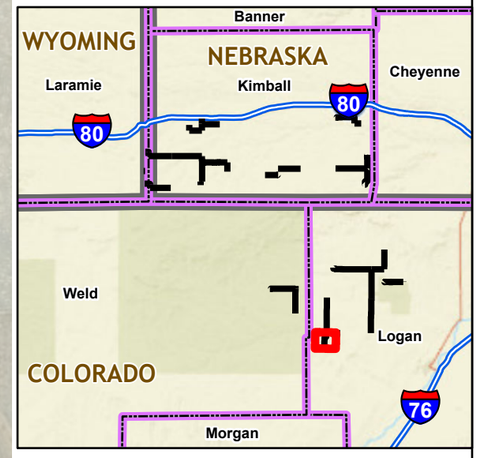

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-08(b)
(SCHEDULE A/B/C)

Document Path: G:\O_PIOMAD\OMAD_713_Project_Executionges\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C14

0 335 670 1,340 Feet

1.40 Miles
WAAB-M-08(c)

RD 34

M-08

RD 5

RD 7

RD 32.5

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1492339.34
E = ± 3540721.23

End Typical Section 1 - Surfacing
Schedule A/B/C
Logan County, CO
N = ± 1492428.25
E = ± 3548100.35

LEGEND

Proposed Route

Typical Section 1 Surfacing

Transportation

Interstate
Highway
Local Road

County Boundary

State Boundary

Missile Silo

Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

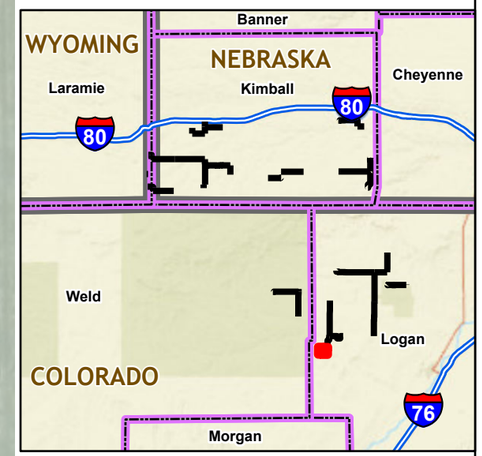

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-08(c)
(SCHEDULE A/B/C)

Document Path: G:\IO_P\OMAD\OMAD_7\13_Project_Execution\gis\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C15

0 500 1,000 2,000 Feet

MP 0.01
Cleaning culvert in place
Install end sections (x2)
Install object markers (x2)

4.05 Miles
WAAB-M-09(a)

MP 2.78
Cleaning culvert in place
Remove 2' S. side
Extend 7' S. side
Install end sections (x2)
Install object markers (x2)

MP 2.90
Cleaning culvert in place
Remove/replace 2' S. side
Extend 5' S. side
Install end sections (x2)
Install object markers (x2)

RD 112

C-0096

71

Null -
MP 0.01

C-0106

Null -
MP 2.90

MP 4.04
Remove existing 24" equiv. CMP

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Weld County, CO
N = ± 1540538.15
E = ± 3501539.87

End Typical Section 1 - Surfacing
Schedule A/B/C
Weld County, CO
N = ± 1541153.71
E = ± 3522923.45

RD 149

RD 110

RD 153

LEGEND

Proposed Route

Typical Section 1 Surfacing

Transportation

Interstate
Highway
Local Road
County Boundary
State Boundary
Missile Silo
Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983 StatePlane Colorado North FIPS 0501 Feet

Begin work at asphalt/gravel transition.

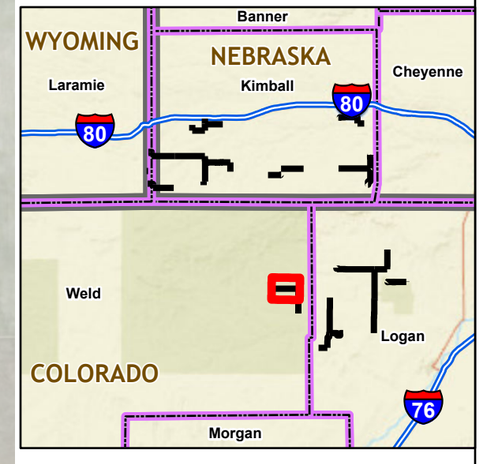

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-09(a)
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_713_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C16

N

0 130 260 520 Feet

M-10

End Typical Section 1 - Surfacing
Schedule A/B/C
Weld County, CO
N = ± 1543363.62
E = ± 3522841.07

RD 153

0.43 Miles
WAAB-M-10

Begin Typical Section 1 - Surfacing
Schedule A/B/C
Weld County, CO
N = ± 1541153.71
E = ± 3522923.45

RD 112

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

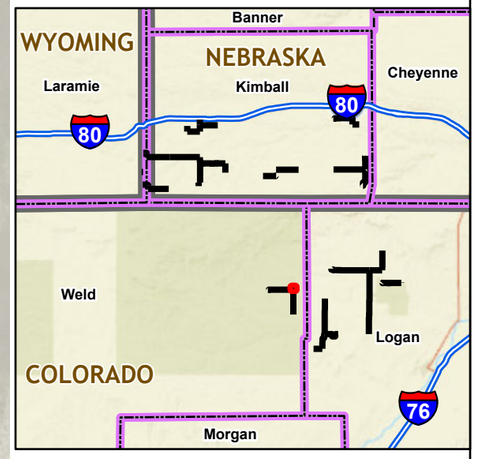

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-10
(SCHEDULE A/B/C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Executionges\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C17

N

0 125 250 500 Feet

RD 164

0.55 Miles
WAAB-E-01(a)

Note: Segment Length shown is measured along the route segment

RD 208

Begin Typical Section 1 - Surfacing
Schedule B/C
Laramie County, WY
N = ± 225789.9
E = ± 960082.85

End Typical Section 1 - Surfacing
Schedule B/C
Laramie County, WY
N = ± 225714.31
E = ± 962907.61

RD 1

LEGEND

Proposed Route

Typical Section 1 Surfacing

Transportation

Interstate
Highway
Local Road

County Boundary

State Boundary

Missile Silo

Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Wyoming East FIPS 4901 Feet

Begin work at asphalt/gravel transition.

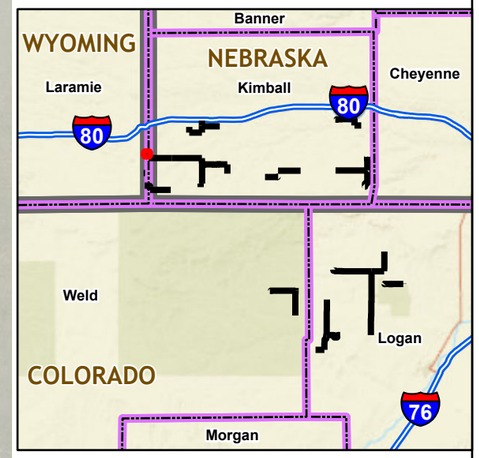

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

ROUTE ID
WAAB-E-01(a)
(SCHEDULE B/C)

Document Path: G:\O_PIONMAD\OMAD_713_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C18

RD 208

0 195 390 780 Feet

End Typical Section 1 - Surfacing
Schedule B/C
Kimball County, NE
N = ± 492728.27
E = ± 524229.35

0.63 Miles
WAAB-E-01(b)

RD 1

WYOMING

NEBRASKA

Begin Typical Section 1 - Surfacing
Schedule B/C
Kimball County, NE
N = ± 489412.26
E = ± 524089.11

RD 16

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Nebraska FIPS 2600 Feet

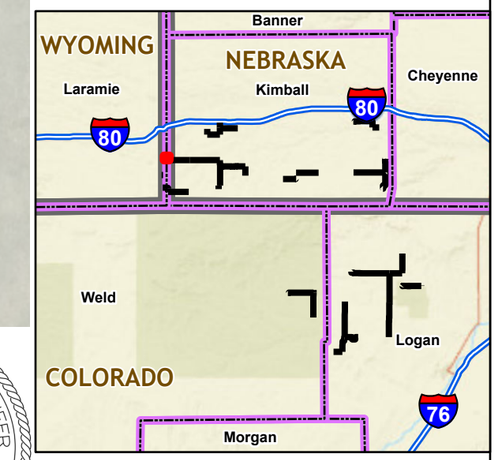

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

ROUTE ID
WAAB-E-01(b)
(SCHEDULE B/C)

Document Path: G:\O_P\OMAD\OMAD_713_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C19

N

0 1,000 2,000 4,000 Feet

RD 112

RD 110

RD 149

RD 153

3.92 Miles
WAAB-M-09(b)

End Typical Section 1 - Surfacing
Schedule B/C
Weld County, CO
N = ± 1541153.71
E = ± 3522923.45

MP 2.91
Remove existing CMP
Install 24" equiv. x 38' CMP
Install end sections (x2)
Install object markers (x2)

C-0100

MP 3.36
Remove existing CMP
Install 24" equiv. x 36' CMP
Install end sections (x2)
Install object markers (x2)

C-0101

MP 3.79
Remove existing CMP
Install 24" equiv x 31' CMP
Install end sections (x2)
Install object markers (x2)

MP 3.85
Cleaning culvert in place
Remove/replace 2' E. side
Extend 10' E. side
Install end sections (x2)
Install object markers (x2)

Begin Typical Section 1 - Surfacing
Schedule B/C
Weld County, CO
N = ± 1520463.75
E = ± 3523156.78

C-0102

C-0103

M-09

RD 104

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

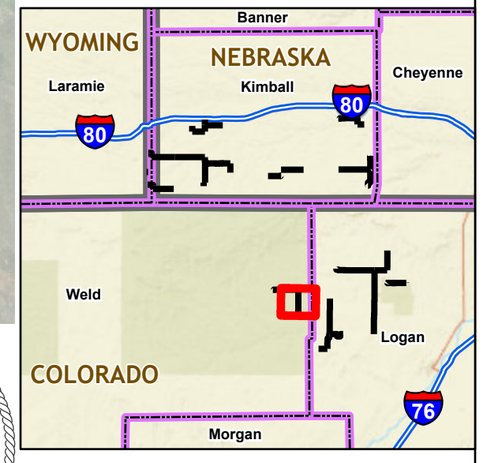

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-09(b)
(SCHEDULE B/C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Execution\gis\Working\OMAD71.aprx

Service Layer Credits: World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS
World Imagery: Earthstar Geographics

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C20

N

0 1,500 3,000 6,000 Feet

M-11

RD 48

End Typical Section 1 - Surfacing
Schedule B/C
Logan County, CO
N = ± 1534372.34
E = ± 3549171.31

RD 9

RD 46

RD 44

RD 7

5.61 Miles
WAAB-M-11

RD 9

RD 42

RD 11

Begin Typical Section 1 - Surfacing
Schedule B/C
Logan County, CO
N = ± 1504736.43
E = ± 3549674.18

RD 40

RD 38

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Colorado North FIPS 0501 Feet

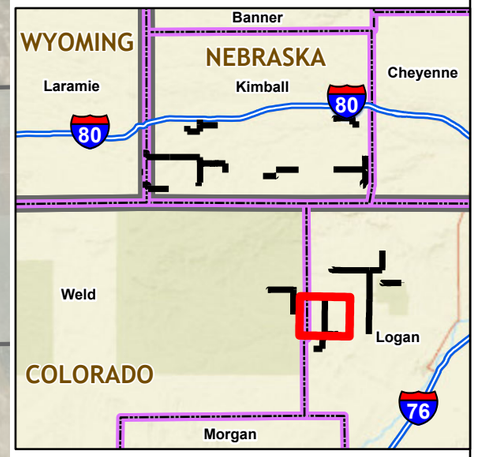

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

ROUTE ID
WAAB-M-11
(SCHEDULE B/C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Executionges\Working\OMAD71.aprx

Service Layer Credits: World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS
World Imagery: Earthstar Geographics

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C21

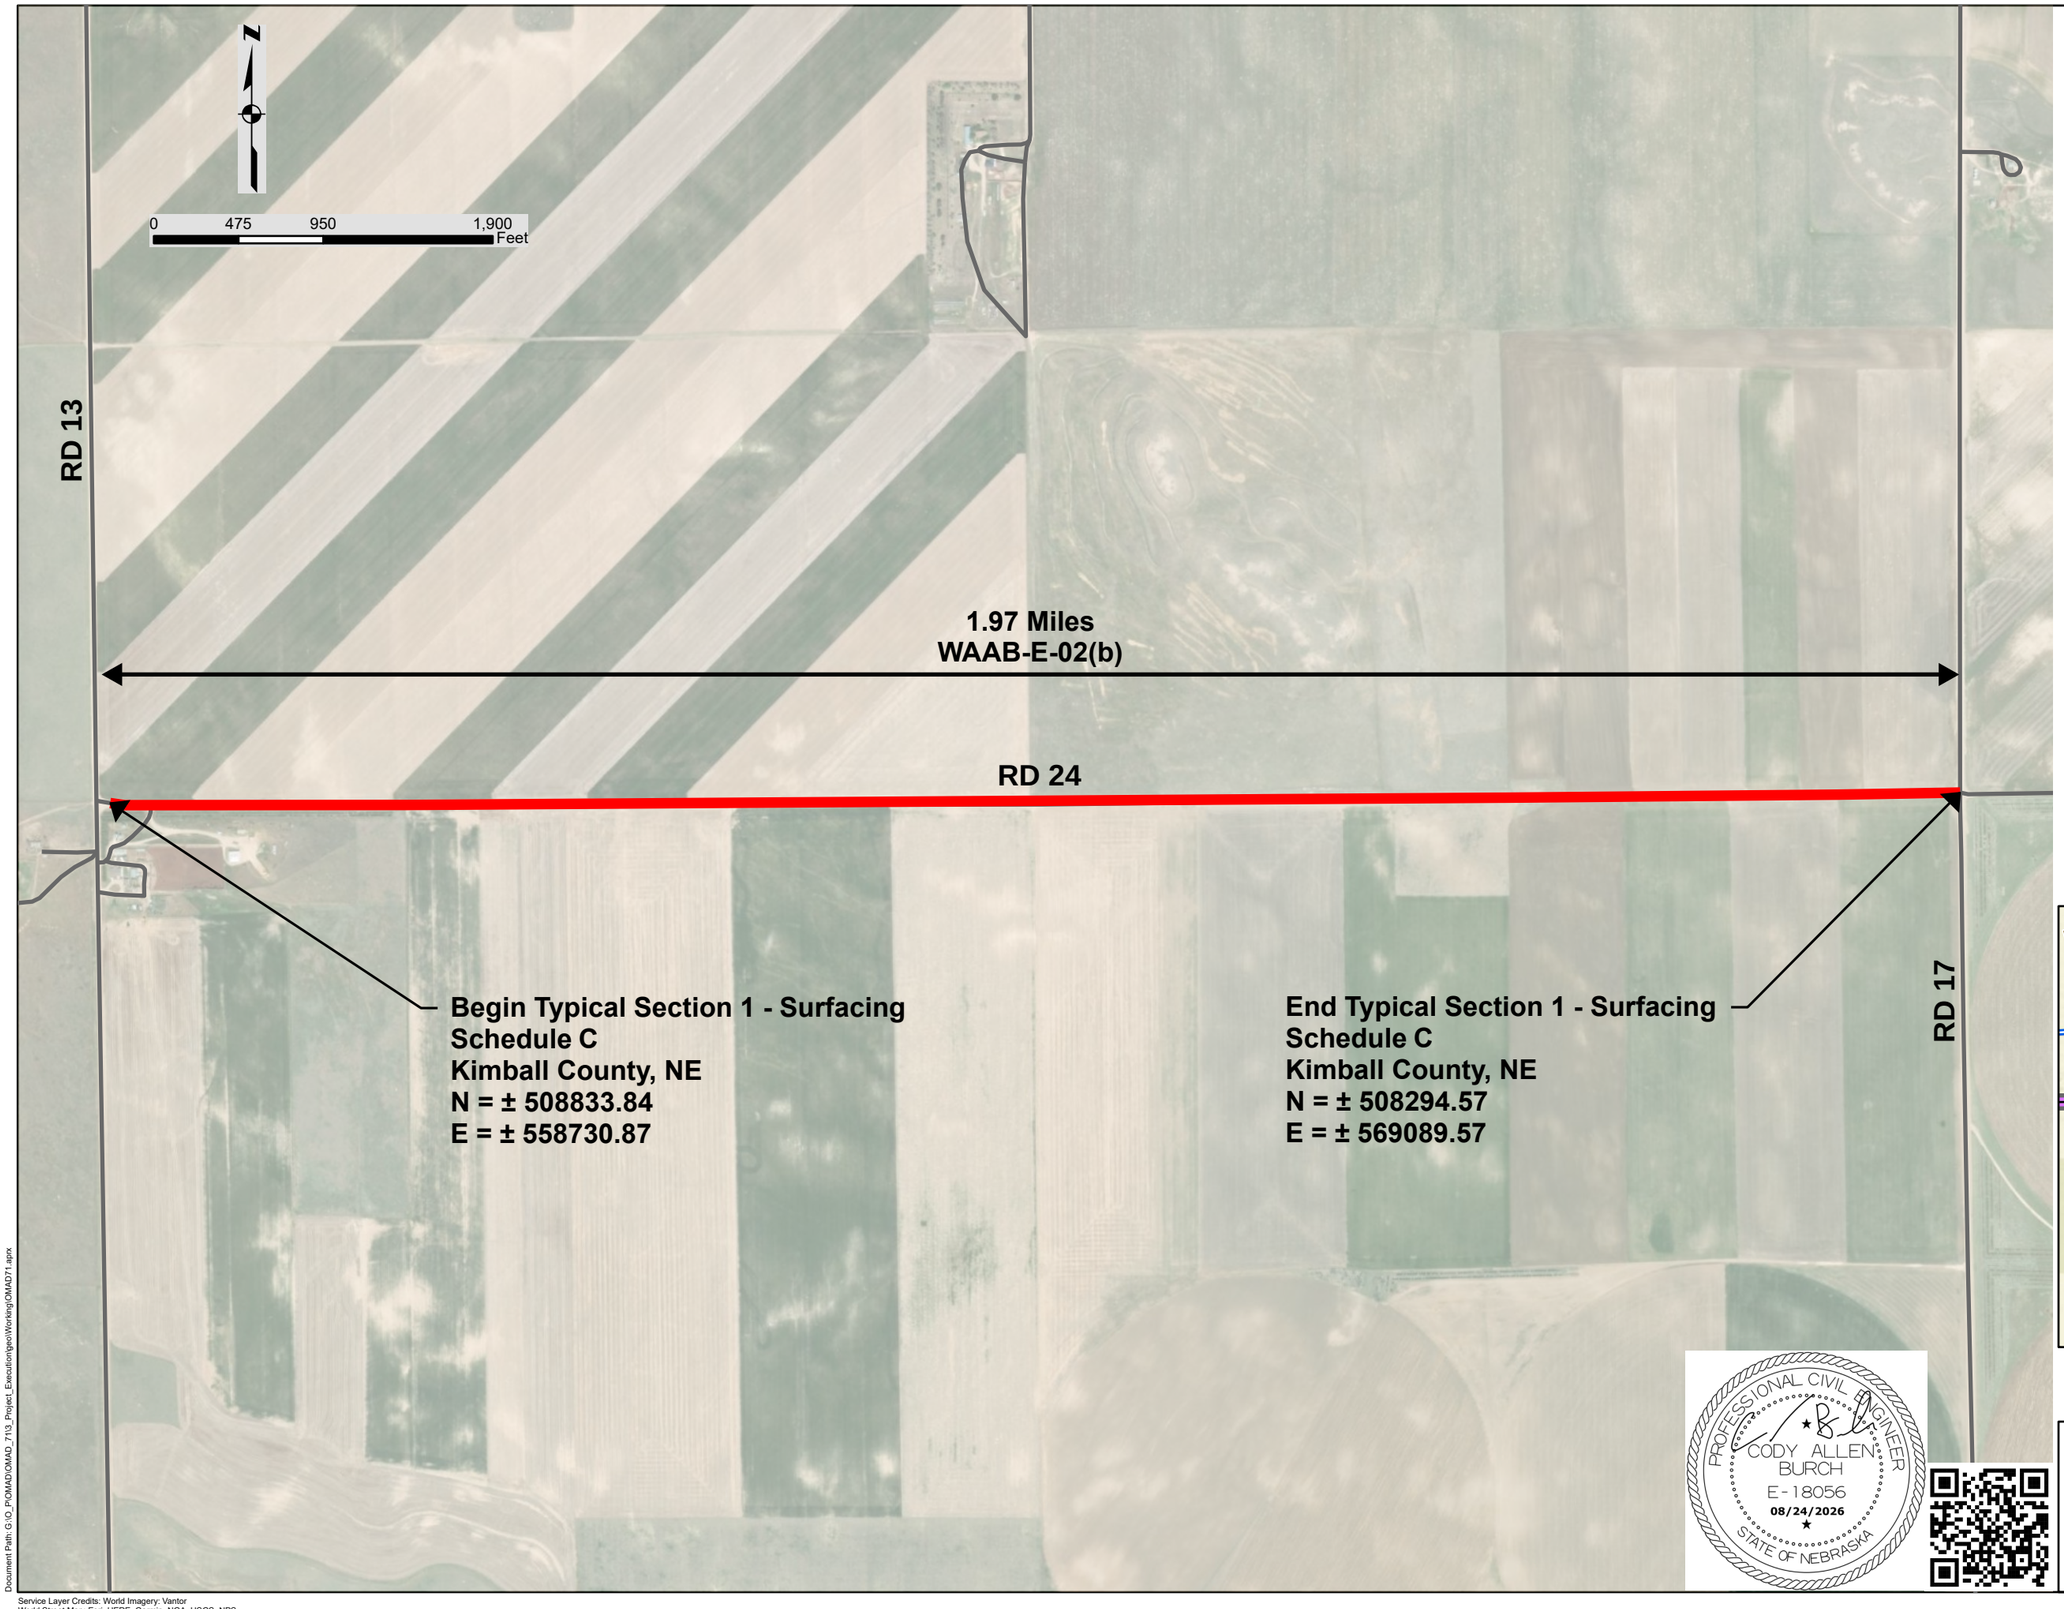

LEGEND

Proposed Route

- Typical Section 1 Surfacing

Transportation

- Interstate
- Highway
- Local Road
- County Boundary
- State Boundary
- Missile Silo
- Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Nebraska FIPS 2600 Feet

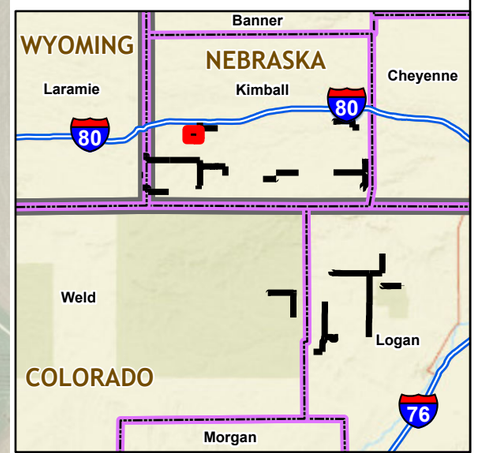

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

ROUTE ID
WAAB-E-02(b)
(SCHEDULE C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	C22

0 500 1,000 2,000 Feet

MP 0.16
Remove existing CMP
Install 24" equiv. x 40' CMP
Install end sections (x2)
Install object markers (x2)

MP 0.28
Remove existing CMP
Install 24" equiv. x 44' CMP
Install end sections (x2)
Install object markers (x2)

MP 2.37
Existing CBC
Cleaning drainage structure
See Special 607-A
Install object markers (x2)

MP 3.01
Remove/replace 6' S. side
Cleaning culvert in place
Install object markers (x2)

3.66 Miles
WAAB-E-01(c)

RD 1

C-0896 C-0892 C-0893 RD 16 C-0629 C-0630

Null -
MP 0.16

MP 0.64
Remove 2' N. side
Remove 2' S. side
Cleaning culvert in place
Install end sections (x2)
Install object markers (x2)

MP 1.72
Remove existing CMP
Install 30" equiv. x 50' CMP
Install end sections (x2)
Install object markers (x2)
Grade roadside slopes to drain to ditch

E-01

Begin Typical Section 1 - Surfacing
Schedule C
Kimball County, NE
N = ± 489412.26
E = ± 524089.11

End Typical Section 1 - Surfacing
Schedule C
Kimball County, NE
N = ± 488557.78
E = ± 543371.08

RD 7

WYOMING

NEBRASKA

LEGEND

Proposed Route

Typical Section 1 Surfacing

Transportation

Interstate
Highway
Local Road
County Boundary
State Boundary
Missile Silo
Project Culvert

Notes:
Begin/End Northing and Easting - NAD 1983
StatePlane Nebraska FIPS 2600 Feet

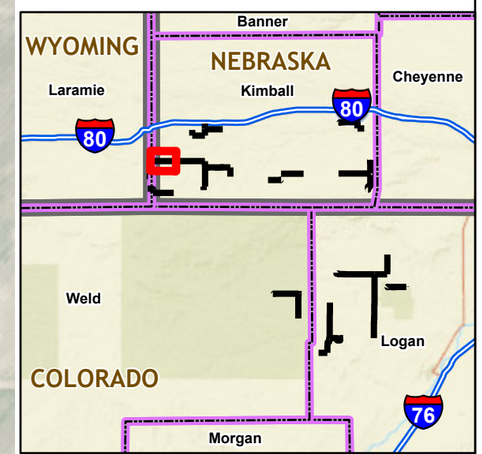

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

ROUTE ID
WAAB-E-01(c)
(SCHEDULE C)

Document Path: G:\O_P\OMAD\OMAD_7\13_Project_Execution\geo\Working\OMAD71.aprx

Service Layer Credits: World Imagery: Vantor
World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	F1

NOTE:

1. *Excavate around pipe as necessary to cut pipe. Tie slope into new outlet as direct by the CO.*
2. *All work is included as part of 20302-2100.*
3. *Treat the cut end of the culvert with brush-applied cold galvanized compound according to the manufacturer's recommendations.*

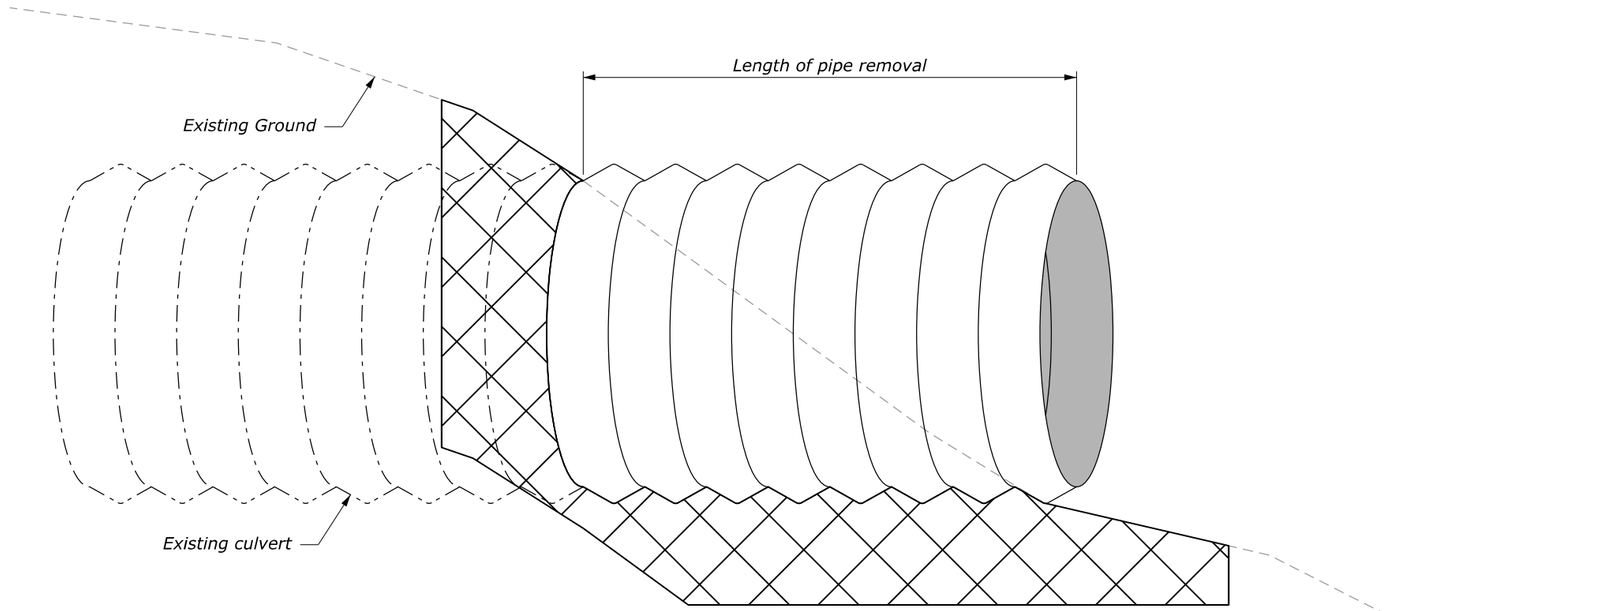

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	SPECIAL 203-A
CULVERT CUTTING DETAIL	

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27428\Std607-8.dgn [Std 635-6]
20 August 2026 4:09 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T1

METAL ROUND PIPE CULVERT

FILL HEIGHT AND METAL THICKNESS TABLE FOR HELICAL LOCKSEAM AND WELDED SEAM PIPE CULVERT

STEEL

PIPE SIZE DIAMETER INCHES	MINIMUM COVER INCHES	2⅔" x ½" CORRUGATIONS					3" x 1" CORRUGATIONS					5" x 1" CORRUGATIONS				
		METAL THICKNESS (INCH/GAGE)														
		0.064/16	0.079/14	0.109/12	0.138/10	0.168/8	0.064/16	0.079/14	0.109/12	0.138/10	0.168/8	0.064/16	0.079/14	0.109/12	0.138/10	0.168/8
		MAXIMUM FILL HEIGHT ABOVE TOP OF PIPE (FEET)														
12	12	100	100	100	100	100										
15	12	100	100	100	100	100										
18	12	100	100	100	100	100										
21	12	100	100	100	100	100										
24	12	100	100	100	100	100										
30	12	85	100	100	100	100										
36	12	71	89	100	100	100	81	100	100	100	100					
42	12	61	76	100	100	100	70	87	100	100	100					
48	12	53	66	93	100	100	61	76	100	100	100	54	68	95	100	100
54	12		59	83	100	100	54	68	95	100	100	48	60	85	100	100
60	12			74	97	100	49	61	86	100	100	43	54	76	98	100
66	12				87	100	44	55	78	100	100	39	49	69	89	100
72	12				80	97	40	51	71	92	100	36	45	63	82	100
78	12					87	37	47	66	85	100	33	42	58	75	92
84	12					75	35	43	61	78	96	31	39	54	70	86
90	12						32	40	57	73	90	29	36	51	65	80
96	12							38	53	69	84		34	48	61	75
102	18							36	50	65	79		32	45	57	71
108	18								47	61	75			42	54	67
114	18								45	58	71			40	52	63
120	18								43	55	67			38	49	60
126	18									52	64				47	57
132	18									50	61				44	54
138	18									48	58				42	52
144	18										56					50

ALUMINUM

PIPE SIZE DIAMETER INCHES	MINIMUM COVER INCHES	2⅔" x ½" CORRUGATIONS					3" x 1" CORRUGATIONS				
		METAL THICKNESS (INCH/GAGE)									
		0.060/16	0.075/14	0.105/12	0.135/10	0.164/8	0.060/16	0.075/14	0.105/12	0.135/10	0.164/8
		MAXIMUM FILL HEIGHT ABOVE TOP OF PIPE (FEET)									
12	12	100	100	100	100	100					
15	12	100	100	100	100	100					
18	12	100	100	100	100	100					
21	12	88	100	100	100	100					
24	12	77	97	100	100	100					
30	12	62	77	100	100	100	71	89	100	100	100
36	12	52	64	90	100	100	59	74	100	100	100
42	12	44	55	77	99	100	51	64	89	100	100
48	12			67	87	100	44	56	78	100	100
54	18			54	71	88	39	50	69	93	100
60	18				57	72	35	45	62	83	98
66	18					58	32	40	56	76	89
72	18					45	30	37	55	70	82
78	24							34	48	64	75
84	24								44	59	70
90	24								41	62	65
96	24								38	51	61
102	24									46	55
108	24									42	50
114	24										45
120	24										40

NOTE:

1. When directed, camber pipe culverts upward from a chord through the inlet and outlet inverts an ordinate amount equal to 1% of the pipe length. Develop camber on a parabolic curve. If the midpoint elevation on the parabolic curve as designed exceeds the elevation of the inlet invert, reduce the amount of camber or increase the pipe culvert gradient.
2. Fill heights exceeding 100 feet require special analysis by the CO.
3. The fill heights in the table are for helical lockseam and welded seam pipe only. Fill heights for culvert pipe with annular corrugations are more restrictive than those of helical lockseam and welded seam pipe. Obtain approval before furnishing annular corrugation pipe.
4. For flexible pavement and aggregate surface roadways, measure minimum cover from the top of the pipe culvert to the bottom of the roadway subgrade. For rigid pavements, measure minimum cover from the top of the pipe culvert to the top of the pavement. For all roadway surface types, measure maximum fill height from the top of the pipe culvert to the top of the pavement.

METAL PIPE ARCH CULVERT

FILL HEIGHT AND METAL THICKNESS TABLE FOR HELICAL LOCKSEAM AND WELDED SEAM PIPE CULVERT

STEEL

PIPE ARCH SIZE SPAN x RISE INCHES	EQUI-VALENT DIAMETER INCHES	MINIMUM CORNER RADIUS INCHES	MINIMUM COVER INCHES	2⅔" x ½" CORRUGATIONS					3" x 1" CORRUGATIONS					5" x 1" CORRUGATIONS				
				METAL THICKNESS (INCH/GAGE)														
				0.064/16	0.079/14	0.109/12	0.138/10	0.168/8	0.079/14	0.109/12	0.138/10	0.168/8		0.079/14	0.109/12	0.138/10	0.168/8	
				MAXIMUM FILL HEIGHT ABOVE TOP OF PIPE (FEET)														
17 x 13	15	3	12	13														
21 x 15	18	3	12	12														
24 x 18	21	3	12	13														
28 x 20	24	3	12	13														
35 x 24	30	3	12	12														
42 x 29	36	3.5	12	12														
49 x 33	42	4	12		12													
57 x 38	48	5	12			12												
60 x 46	54	8	15							21					21			
64 x 43	54	6	12			12												
66 x 51	60	9	15							21					21			
71 x 47	60	7	12				12											
73 x 55	66	12	18							20					20			
77 x 52	66	8	12					12										
81 x 59	72	14	18						17					17				
83 x 57	72	9	12					12										
87 x 63	78	14	18						17					17				
95 x 67	84	16	18						17					17				
103 x 71	90	16	18							17				17				
112 x 75	96	18	21							16					16			
117 x 79	102	18	21							16					16			
128 x 83	108	18	24								16					16		
137 x 87	114	18	24								16					16		
142 x 91	120	18	24									16						16

ALUMINUM

PIPE ARCH SIZE SPAN x RISE INCHES	EQUI-VALENT DIAMETER INCHES	MINIMUM CORNER RADIUS INCHES	MINIMUM COVER INCHES	2⅔" x ½" CORRUGATIONS				3" x 1" CORRUGATIONS			
				METAL THICKNESS (INCH/GAGE)							
				0.060/16	0.075/14	0.105/12	0.135/10	0.060/16	0.075/14	0.105/12	0.135/10
				MAXIMUM FILL HEIGHT ABOVE TOP OF PIPE (FEET)							
17 x 13	15	3	12	13							
21 x 15	18	3	12	12							
24 x 18	21	3	12	13							
28 x 20	24	3	12		13						
35 x 24	30	3	12		12						
42 x 29	36	3.5	15			12					
49 x 33	42	4	15			12					
57 x 38	48	5	15				12				
60 x 46	54	8	15					21			
64 x 43	54	6	18				12				
66 x 51	60	9	18					21			
73 x 55	66	12	18						20		
81 x 59	72	14	21							17	
87 x 63	78	14	21							17	
95 x 67	84	16	24							17	
103 x 71	90	16	24								17







NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 602-1
METAL PIPE CULVERT	SPECIFICATION FP-24, FP-14
	APPROVED FOR USE 8/2024

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms274228\Std602-1.dgn [Std 602-1]
6 August 2026 11:36 AM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T2

COUPLING BANDS FOR METAL PIPE CULVERT [1]

CORRUGATION SIZE [2] INCHES	ROUND PIPE DIAMETER INCHES	PIPE ARCH SPAN × RISE INCHES	MINIMUM BAND WIDTH (INCHES)		
			ANNULAR CORRUGATED BANDS [3]	HELICALLY CORRUGATED BANDS [4]	SEMI-CORRUGATED BANDS [5]
1½ × ¼	underline [6]	-	10.5	7	10.5
2⅔ × ½	12 to 36	17 × 13 to 42 × 29	7	12	
	42 to 72	49 × 33 to 83 × 57	10.5	12	
	78 to 84	-	10.5	12	10.5
3 × 1	36 to 72	60 × 46 to 81 × 59	12	14	10.5
	78 to 144	87 × 64 to 142 × 91	12	14	10.5
5 × 1	36 to 72	60 × 46 to 81 × 59	20	22	
	78 to 144	87 × 64 to 142 × 91	20	22	

[1] Fabricate annular, helical and semi-corrugated type coupling bands from the same metal as the connecting pipe. Provide coupling bands not more than 3 nominal sheet thicknesses thinner than the thickness of the pipe to be connected, and no thinner than 0.052 inch for steel or 0.048 inch for aluminum. Fasten coupling bands with the following diameter of bolt:
⅜" for 18" round culvert (21" × 15" pipe arch) or less
½" for 21" round culvert (24" × 18" pipe arch) or more

[2] For helically corrugated pipe with rerolled ends, the nominal corrugations size refers to the dimension of the end corrugation in the pipe.

[3] Use annular corrugated bands with pipes having annular corrugations or with helical pipe having rerolled end to form annular corrugations. A 10.5 inch band is acceptable on pipe ends rerolled with 2⅔" × ½" corrugations. A 12 inch band is acceptable on pipe ends rerolled with 3" × 1" pipe corrugations.

[4] Use helical corrugated bands with pipes having helically corrugated ends.

[5] The minimum band widths shown for 3" × 1" and 5" × 1" corrugated sizes apply to 2⅔" × ½" corrugations on rerolled pipe ends.

[6] Smooth sleeve-type couplers and flat bands may be used for pipe diameters of 12" or less. Use a matching metal having a nominal thickness of not less than 0.040 inch for steel, or 0.036 inch for aluminum, or a plastic with an equivalent strength to metal.

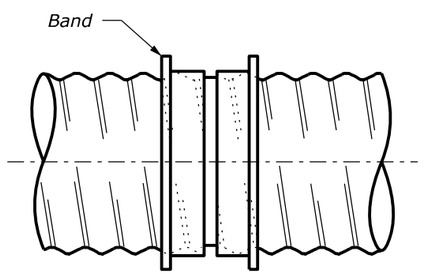

SLEEVE JOINT

Smoother sleeve with center stop.
Stab type joint

SMOOTH SLEEVE BAND

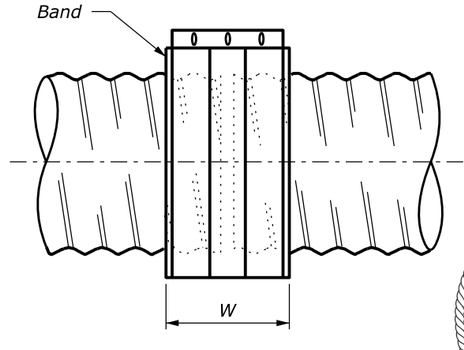

FLAT BAND

NOTE:

1. Other types of coupling bands or fastening devices that comply with the joint performance criteria of AASHTO Standard specifications for Highway Bridges, Division II Section 26 may be used.

COLORADO LICENSED CODY ALLEN BURCH 52402 PROFESSIONAL ENGINEER 08/24/2026

PROFESSIONAL CIVIL ENGINEER CODY ALLEN BURCH E-18056 08/24/2026 STATE OF NEBRASKA

My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

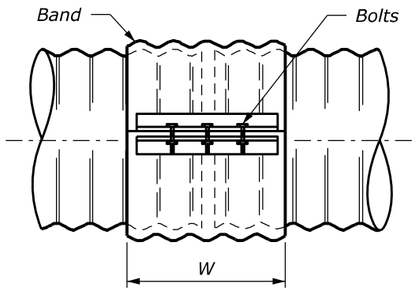

SIDE VIEW

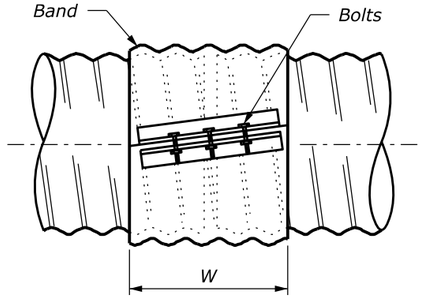

SIDE VIEW

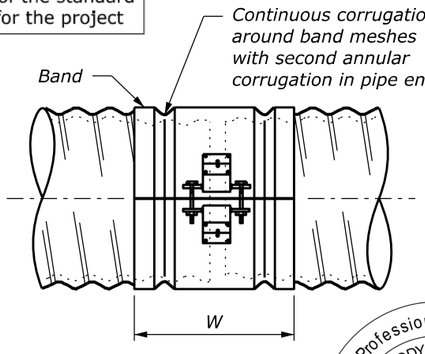

SIDE VIEW

Professional Engineer CODY BURCH 20272 Date 08/24/2026 WYOMING

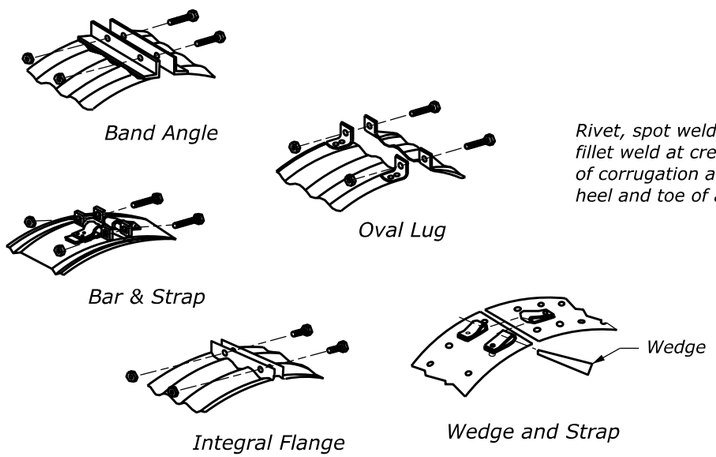

STANDARD BAND CONNECTIONS

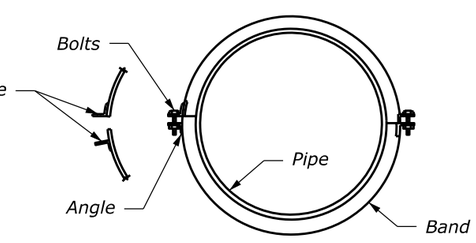

END VIEW

Second angle connection optional to 42" diameter, required above 42" diameter

ANNULAR BAND

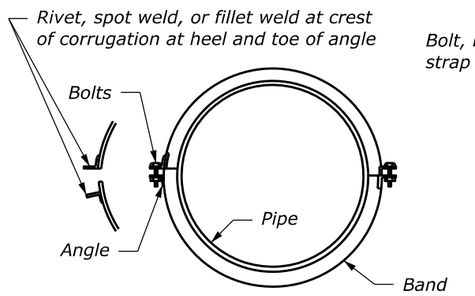

END VIEW

Second angle connection optional to 42" diameter, required above 42" diameter

HELICAL BAND

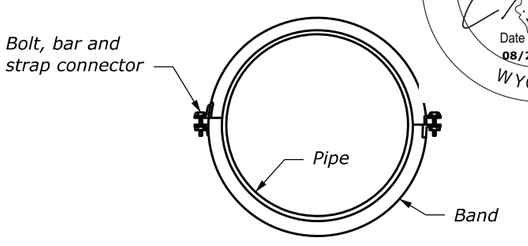

END VIEW

SEMI-CORRUGATED BAND

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 602-2
METAL PIPE CULVERT COUPLING BAND	SPECIFICATION FP-24, FP-14
	APPROVED FOR USE 1/2024

c:\pw_work\src-us-pw.bentley.com_src-us-pw-02\dms27428\Std602-2.dgn [Std 602-2]
6 August 2026 12:11 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T3

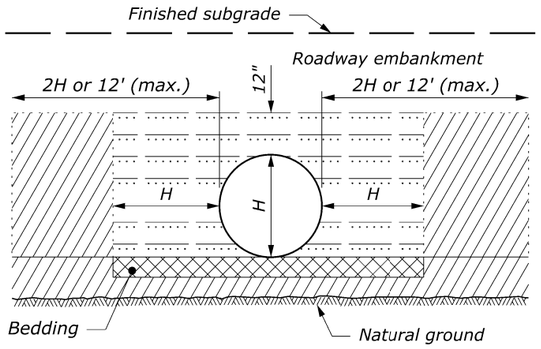

ABOVE NATURAL GROUND

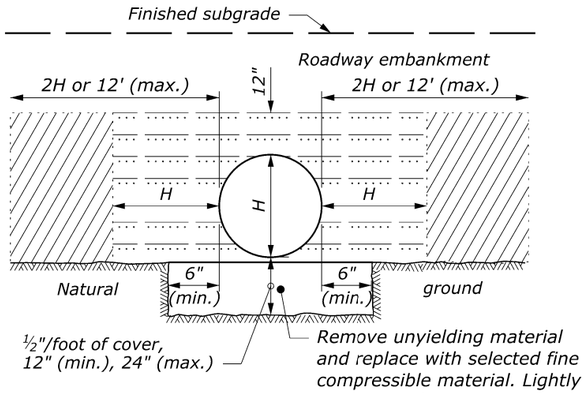

ON UNYIELDING MATERIAL

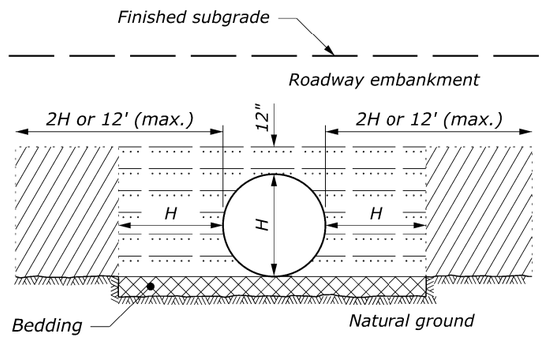

ON NATURAL GROUND

ABOVE AND BELOW NATURAL GROUND

LEGEND:

- Bedding material (uncompacted)
- Embankment material placed in layers not exceeding 6" compacted depth.
- Compacted backfill material placed in layers not exceeding 6" compacted depth; or flowable backfill according to Section 614.
- Impermeable backfill material.

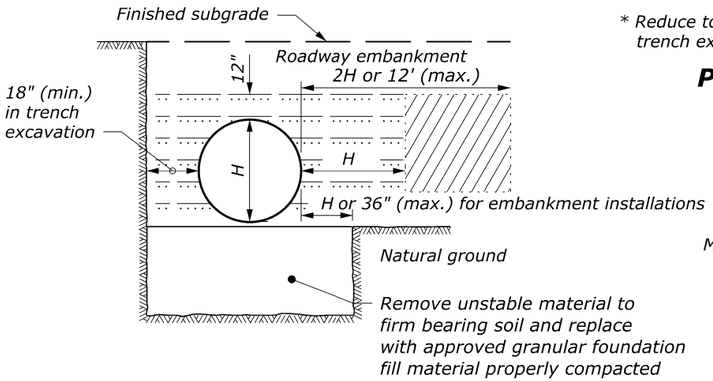

ON UNSTABLE MATERIAL

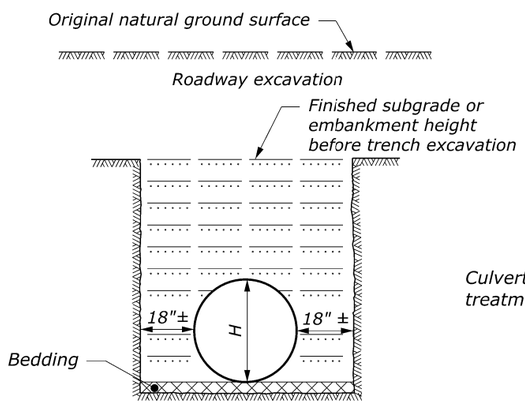

BELOW NATURAL GROUND OR TRENCH EXCAVATION IN EMBANKMENT

BEDDING DEPTH	
PIPE SIZE (H)	DEPTH
12" to 54"	4"
> 54"	6"

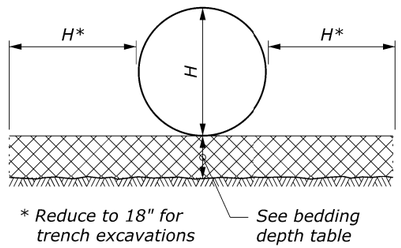

PIPE BEDDING

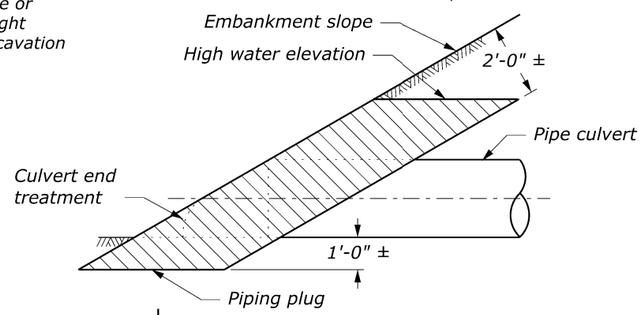

Construct piping plug of impermeable backfill material at the pipe culvert inlet where granular material is used for backfill. Width may be adjusted to tie into impervious material.

PIPING PLUG

NO SCALE

NOTE:

1. When directed, camber pipe culverts upward from a chord through the inlet and outlet inverts an ordinate amount equal to 1% of the pipe length. Develop camber on a parabolic curve. If the midpoint elevation on the parabolic curve as designed exceeds the elevation of the inlet invert, reduce the amount of camber or increase the pipe culvert gradient.
2. H equals the diameter of all round pipe culverts or the rise dimension of all pipe arch culverts.
3. See Section 704 for bedding and backfill requirements.

My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

MINIMUM SPACING	
DIAMETER or SPAN	SPACING
UP to 48"	24"
48" and UP	Half diameter or span or 36", whichever is less



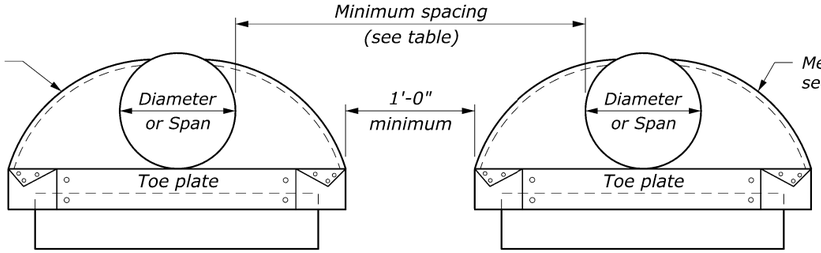

ELEVATION

MULTIPLE PIPE INSTALLATION



SECTION A-A



U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 602-3
METAL AND PLASTIC PIPE CULVERT BEDDING	SPECIFICATION FP-24
	APPROVED FOR USE 1/2024

c:\pw_work\srcl-us-pw.bentley.com_srcl-us-pw-02\dms27428\Std602-3.dgn [Std 602-3]
6 August 2026 12:11 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T4

END SECTIONS FOR ROUND PIPE CULVERT

PIPE SIZE DIAMETER INCHES	METAL THICKNESS				DIMENSIONS INCHES					SLOPE Approx.
	STEEL		ALUMINUM							
	INCHES	GAGE	INCHES	GAGE	A (min)	B (max)	H (min)	L (±2")	W (max)	
12	0.064	16	0.060	16	5	7	6	21	44	2¼
15	0.064	16	0.060	16	6	8	6	26	52	2¼
18	0.064	16	0.060	16	7	10	6	31	58	2⅛
21	0.064	16	0.060	16	8	12	6	36	66	2⅛
24	0.064	16	0.060	16	9	13	6	41	72	2⅛
30	0.079	14	0.075	14	11	16	8	51	88	2⅛
36	0.079	14	0.075	14	13	19	9	60	105	2
42	0.109	12	0.105	12	15	25	10	69	122	2⅛
48	0.109	12	0.105	12	17	29	12	78	131	2
54	0.109	12	0.105	12	17	33	12	84	143	2
60	0.109	12	0.105	12	17	36	12	87	157	1⅞
66	0.109	12	0.105	12	17	39	12	87	162	1⅝
72	0.109	12	0.105	12	17	44	12	87	169	1½
78	0.109	12	0.105	12	17	48	12	87	178	1⅜
84	0.109	12	0.105	12	17	52	12	87	184	1⅓
90	0.109	12	0.105	12	17	58	12	87	188	1¼
96	0.109	12	0.105	12	17	58	12	87	197	1⅛

END SECTIONS FOR PIPE ARCH CULVERT

PIPE SIZE SPAN × RISE INCHES	EQUI-VALENT DIAM. (INCHES)	METAL THICKNESS				DIMENSIONS INCHES					SLOPE Approx.
		STEEL		ALUMINUM							
		INCHES	GAGE	INCHES	GAGE	A (min)	B (max)	H (min)	L (±2")	W (max)	
17 × 13	15	0.064	16	0.060	16	7	9	6	19	30	2½
21 × 15	18	0.064	16	0.060	16	7	10	6	23	36	2½
24 × 18	21	0.064	16	0.060	16	8	12	6	28	42	2½
28 × 20	24	0.064	16	0.060	16	9	14	6	32	48	2½
35 × 24	30	0.079	14	0.075	14	10	16	8	39	60	2½
42 × 29	36	0.079	14	0.075	14	12	18	9	46	75	2½
49 × 33	42	0.109	12	0.105	12	13	21	12	53	85	2½
57 × 38	48	0.109	12	0.105	12	18	26	12	63	90	2½
60 × 46	54	0.109	12	0.105	12	18	34	12	70	102	2
64 × 43	54	0.109	12	0.105	12	18	30	12	70	102	2
66 × 51	60	0.109	12	0.105	12	18	33	12	77	116	1½
71 × 47	60	0.109	12	0.105	12	18	33	12	77	114	1½
73 × 55	66	0.109	12	0.105	12	18	36	12	77	126	1½
77 × 52	66	0.109	12	0.105	12	18	36	12	77	126	1½
81 × 59	72	0.109	12	0.105	12	18	39	12	77	138	1½
83 × 57	72	0.109	12	0.105	12	18	39	12	77	138	1½
87 × 63	78	0.109	12	0.105	12	20	38	12	77	148	1½
95 × 67	84	0.109	12	0.105	12	20	34	12	87	162	1½
103 × 71	90	0.109	12	0.105	12	20	38	12	87	174	1½
112 × 75	96	0.109	12	0.105	12	20	40	12	87	174	1½

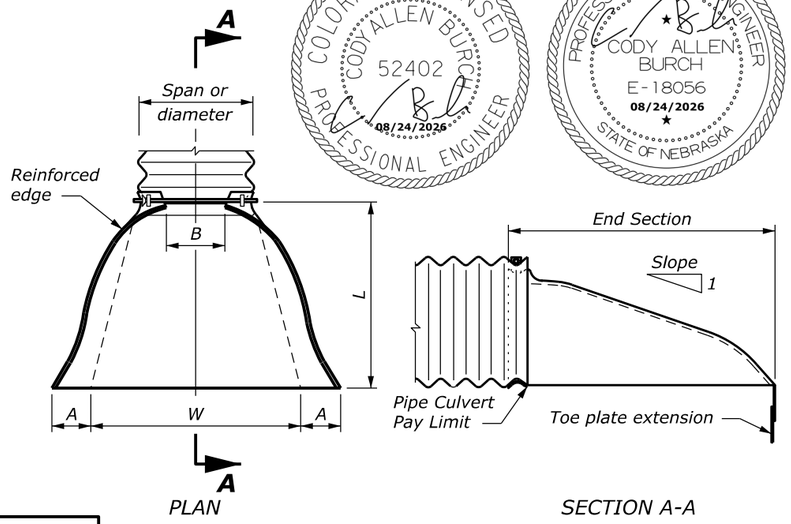

ROUND OR PIPE ARCH CULVERT

NOTE:

1. *Variations in design and dimensions are permitted to allow for manufacturer's standards.*
2. *Fabricate the diameter of the end section of Design B to match the inside diameter of the concrete pipe culvert.*
3. *Design C may be used in lieu of design A for all metal pipe culvert sizes. Coupling bands may be any acceptable type for the pipe culvert specified.*
4. *Fabricate multiple piece bodies with lap seams tightly joined by ⅜" rivets or bolts. Fabricate end section center panels for 60" and larger diameter pipe and equivalent pipe arch from 0.138 inch steel or 0.135 inch aluminum.*
5. *On end section center panels for 66" and larger equivalent pipe arch provide 2½" × 2½" × ¼" angle reinforcement bolted or riveted under the center panel seam.*
6. *Supplement the reinforced edges of end sections for 60" and larger diameter pipe and 66" and larger equivalent pipe arch with 2½" × 2½" × ¼" stiffener angles attached with bolts or rivets.*
7. *Fabricate connector section, corner plate and toe plate extensions from the same metal thickness as the panel body. Use toe plate extension where shown on the plans.*
8. *Warp embankment slopes to match the slope of the flared end sections.*

My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

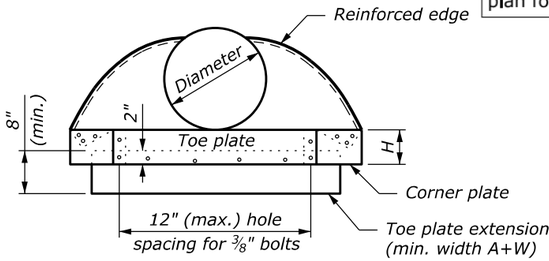

ELEVATION

ROUND PIPE CULVERT

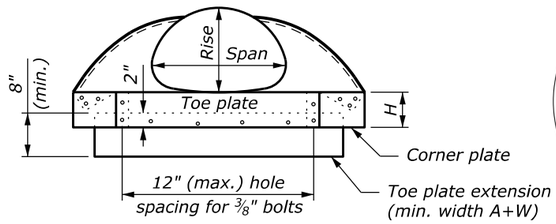

ELEVATION

PIPE ARCH CULVERT

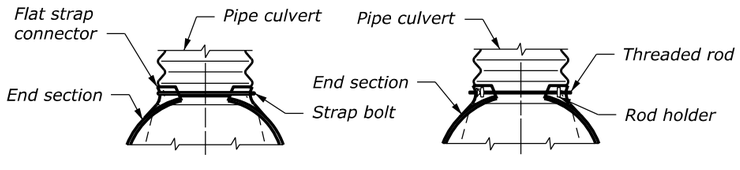

For 12" thru 24" round pipe and 17" × 13" thru 28" × 20" pipe arch

For 30" thru 60" round pipe and 35" × 24" thru 66" × 51" pipe arch

DESIGN A
CONNECTION TO ANNULAR CORRUGATED METAL PIPE

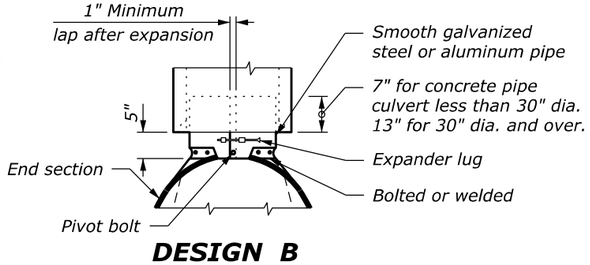

DESIGN B
CONNECTION TO CONCRETE PIPE INLET END

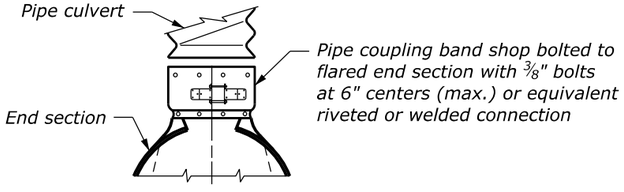

For all sizes of round pipe and pipe arch

DESIGN C
CONNECTION TO METAL PIPE OR OUTLET END OF CONCRETE PIPE

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 602-4
METAL END SECTIONS	SPECIFICATION FP-24, FP-14
	APPROVED FOR USE 1/2024

c:\pw_work\sndua-pw.bentley.com_sndua-pw-02\dms27428\Std602-4.dgn [Std 602-4]
6 August 2026 12:11 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T5

NOTE:

1. *Remove material as required to construct stable, flatter roadway side slopes adjacent to box headwall while maintaining existing roadway width.*
2. *Remove material as required for positive drainage while maintaining existing culvert embedment.*
3. *All work is included as part of 60706-0000 Cleaning Drainage Structure.*
4. *Proposed surface width to match typical roadway width measured at each end of box culvert.*

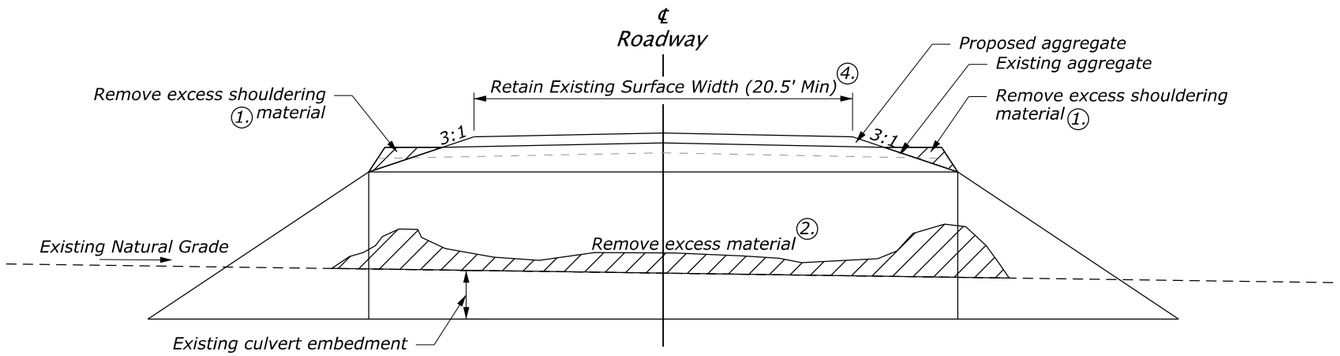

BOX CULVERT ELEVATION
Route WAAB-E-01(c)
Culvert ID (C-0629)



U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	SPECIAL 607-A
CLEANING DRAINAGE STRUCTURE	

21 August 2026 11:09 AM c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms274428\Std607-A.dgn [Std 635+6]

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T6

COUNTY SIGNAGE TYPES

COUNTY	SIGNAGE
Kimball	Type 2 Object Marker (OM2-2V)
Logan	Type 2 Delineator(Flexible)
Weld	Type 2 Object Marker (OM2-2V)
Laramie	Type 2 Object Marker (OM2-2V)

NOTES:

1. Locate and set sign height according to the "Manual on Uniform Traffic Control Devices" (MUTCD), latest edition.
2. Refer to Section 2A.18 of the MUTCD, latest edition, for additional information.
3. Install Type 2 object markers (OM2-2V) using U-channel steel posts according to Section 633. Install two, back to back panels per post.
4. Install appropriate marker type in accordance with County Signage Types Table shown on this sheet.
5. Install reflective elements according to the manufacturer's recommendations.

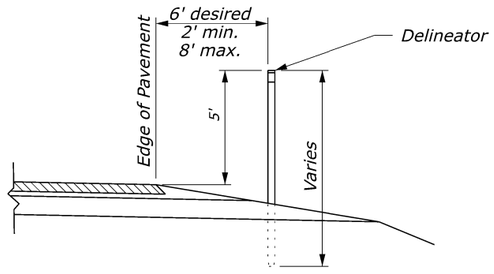

SIGN LOCATION (ELEVATION VIEW) TYPE 2 DELINEATOR

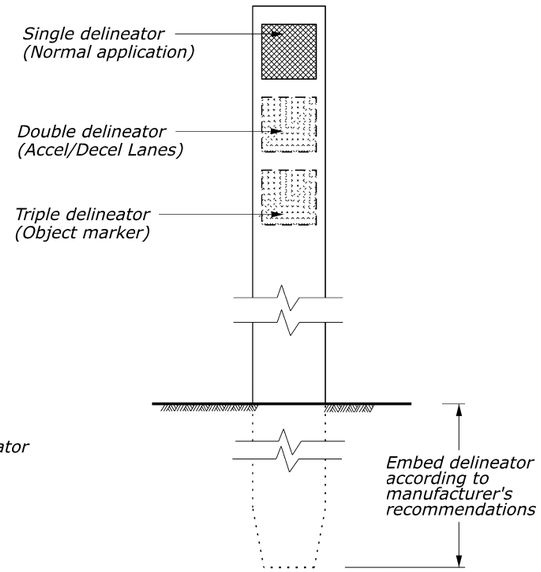

DELINEATOR (FLEXIBLE)
(TYPE 2 - retroreflective sheeting)

POST DETAILS TYPE 2 DELINEATOR

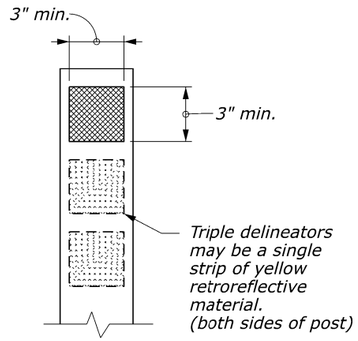

RETROREFLECTIVE SHEETING DETAIL TYPE 2 DELINEATOR

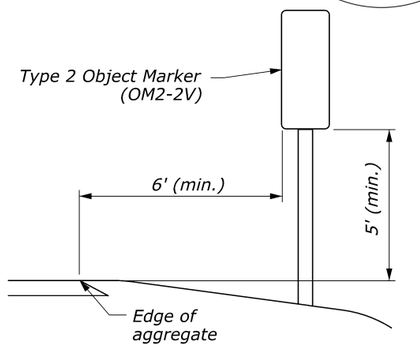

SIGN LOCATION (ELEVATION VIEW) TYPE 2 OBJECT MARKER

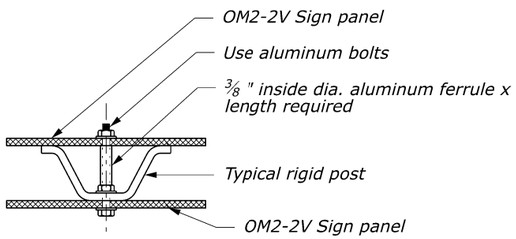

ATTACHMENT DETAIL TYPE 2 OBJECT MARKER

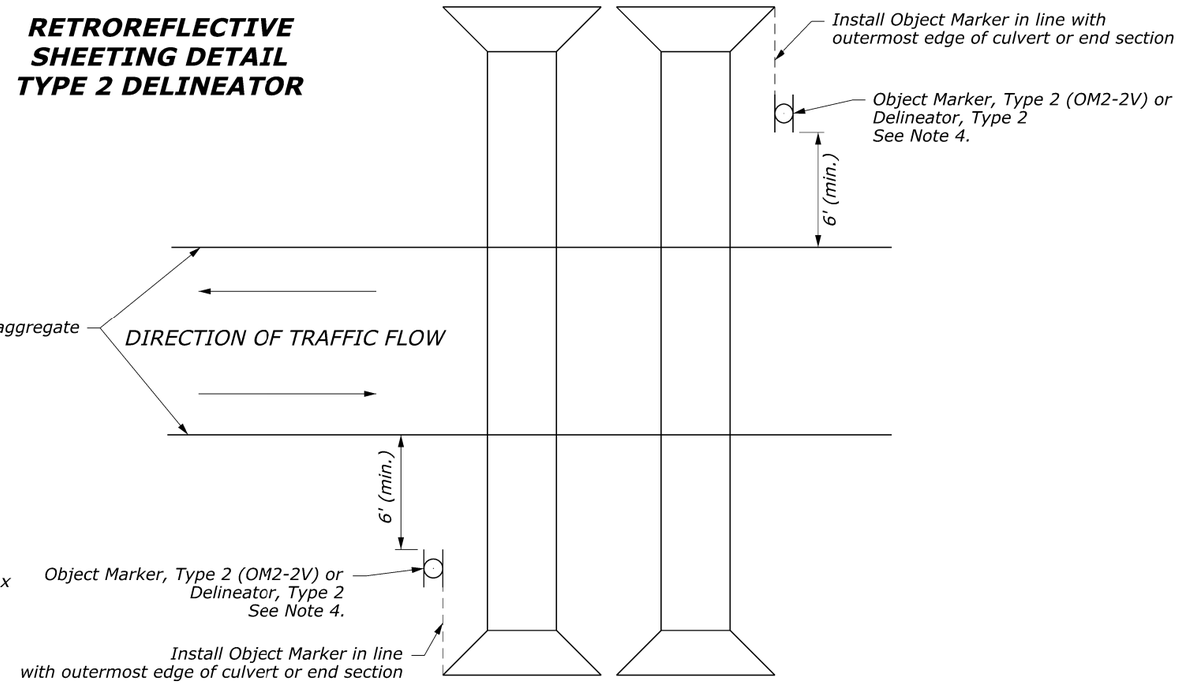

SIGN LOCATION (PLAN VIEW)

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	SPECIAL 633-A
OBJECT MARKER AND DELINEATOR DETAIL	

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

c:\pw_work\sncl-us-pw.bentley.com_sncl-us-pw-02\dms27428\E633-01 (1).dgn [Sheet]
2 September 2026 12:44 PM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T7

SIGN SPACING TABLE			
ROAD TYPE	DISTANCE BETWEEN SIGNS IN FEET		
	A	B	C
Urban and Rural 30 mph and less	100	100	100
Urban and Rural 35 mph to 50 mph	350	350	350
Rural greater than 50 mph	500	500	500
Expressway / Freeway	1000	1500	2640

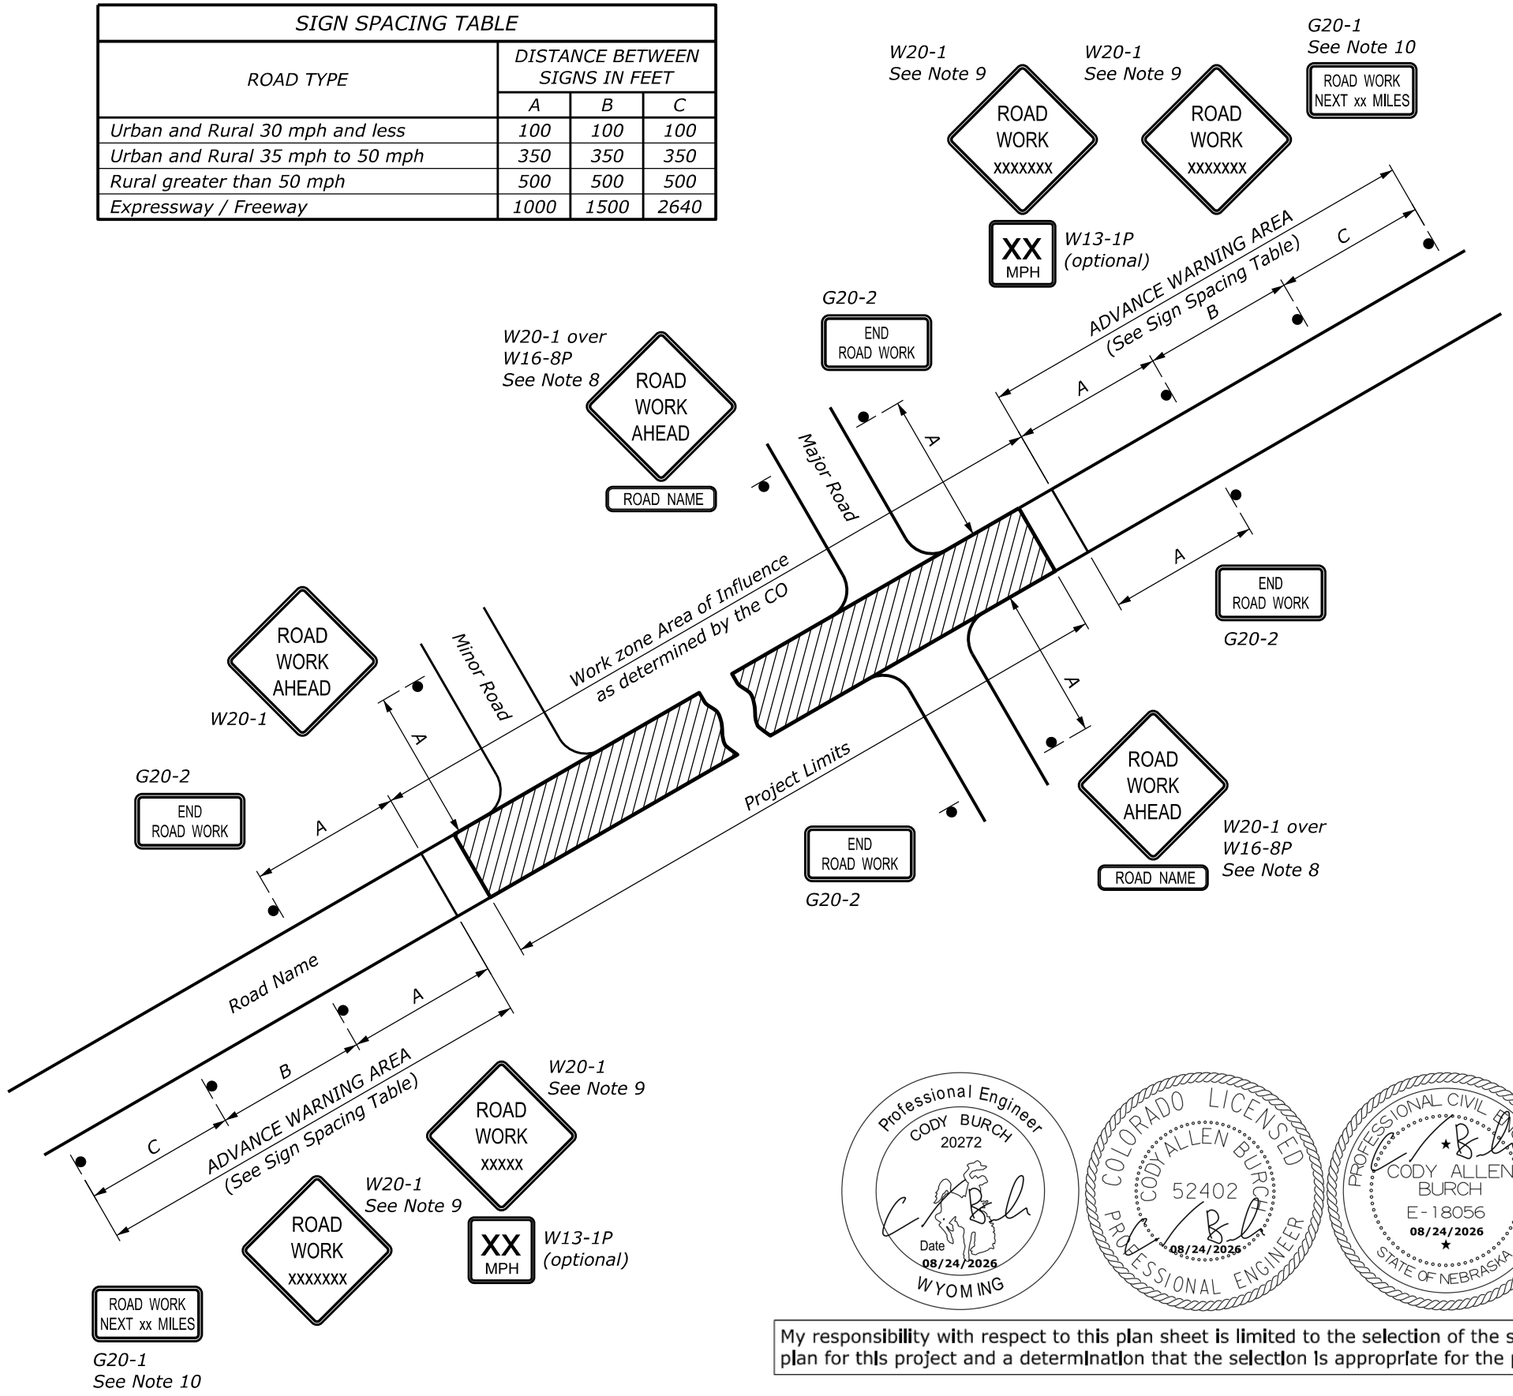

NOTE:

1. *Erect all project advance warning signs before starting construction work.*
2. *Not all details shown on the temporary traffic control sheets may be applicable to this project. The Contractor may add or delete information and details in this traffic control plan as necessary to accommodate actual operations.*
3. *Where advance warning signs, placed as shown, interfere with permanent signs, locate the warning signs to fit field conditions as approved. Vary messages as required.*
4. *Install advisory speed plaques under the W20 series warning signs as needed to indicate a maximum recommended speed through the construction area.*
5. *Ensure all sign supports exposed to traffic are crashworthy.*
6. *Maintain two-way traffic during all non-work hours except as approved.*
7. *Do not store traffic control devices along the roadway when not in use. Cover post-mounted signs when not applicable.*
8. *If W20-1 is placed on a roadway other than that on which the actual construction work occurs, include a supplementary plaque indicating the name of the road on which the construction does occur (applies to major roads only).*
9. *The message on the W20-1 signs may be ROAD WORK AHEAD or may specify the distance to the work area in feet or in miles. Install an additional W20-1 sign when approach speeds exceed 50 mph. When used, place the two W20-1 signs "B" feet apart according to the Sign Spacing Table.*
10. *For work zones that are 2 miles or more in length, install G20-1 signs at each end of the project. Show the distance on the G20-1 sign to the nearest whole mile.*
11. *If signing on a roadway under a jurisdiction other than the client agency, verify that an encroachment permit has been obtained.*
12. *State standards may be used as an alternative if approved.*



My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 635-1
TEMPORARY TRAFFIC CONTROL ADVANCE SIGNING	SPECIFICATION FP-24
	APPROVED FOR USE 2/2024

21 August 2026 11:37 AM c:\pw_work\sndua-pw.bentley.com_sndua-pw-02\dms27428\Std635-1.dgn [Std 635-1]

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T8

LENGTH AND SPACING TABLE	
APPROACH SPEED* MPH	BUFFER SPACE LENGTH FEET
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730

* Approach speed based on the regulatory posted speed, not the advisory speed.

SIGN SPACING TABLE			
ROAD TYPE	DISTANCE BETWEEN SIGNS IN FEET		
	A	B	C
Urban and Rural 30 mph and less	100	100	100
Urban and Rural 35 mph to 50 mph	350	350	350
Rural greater than 50 mph	500	500	500
Expressway / Freeway	1000	1500	2640

NOTE:

1. Signs are shown for one direction of travel only. Place signs similar to those depicted for the opposite direction of travel.
2. Final location and spacing of devices may be changed to fit field conditions as approved.
3. For pilot car operation, mount the PILOT CAR FOLLOW ME (G20-4) sign at a conspicuous location on the rear of vehicle. Prominently display the name of the Contractor on the pilot car.
4. If closure is completely within the project limits, eliminate the ROAD WORK AHEAD (W20-1) and END ROAD WORK (G20-2) signs.
5. Do not allow equipment, materials, or vehicles to be parked or stored in the buffer space.

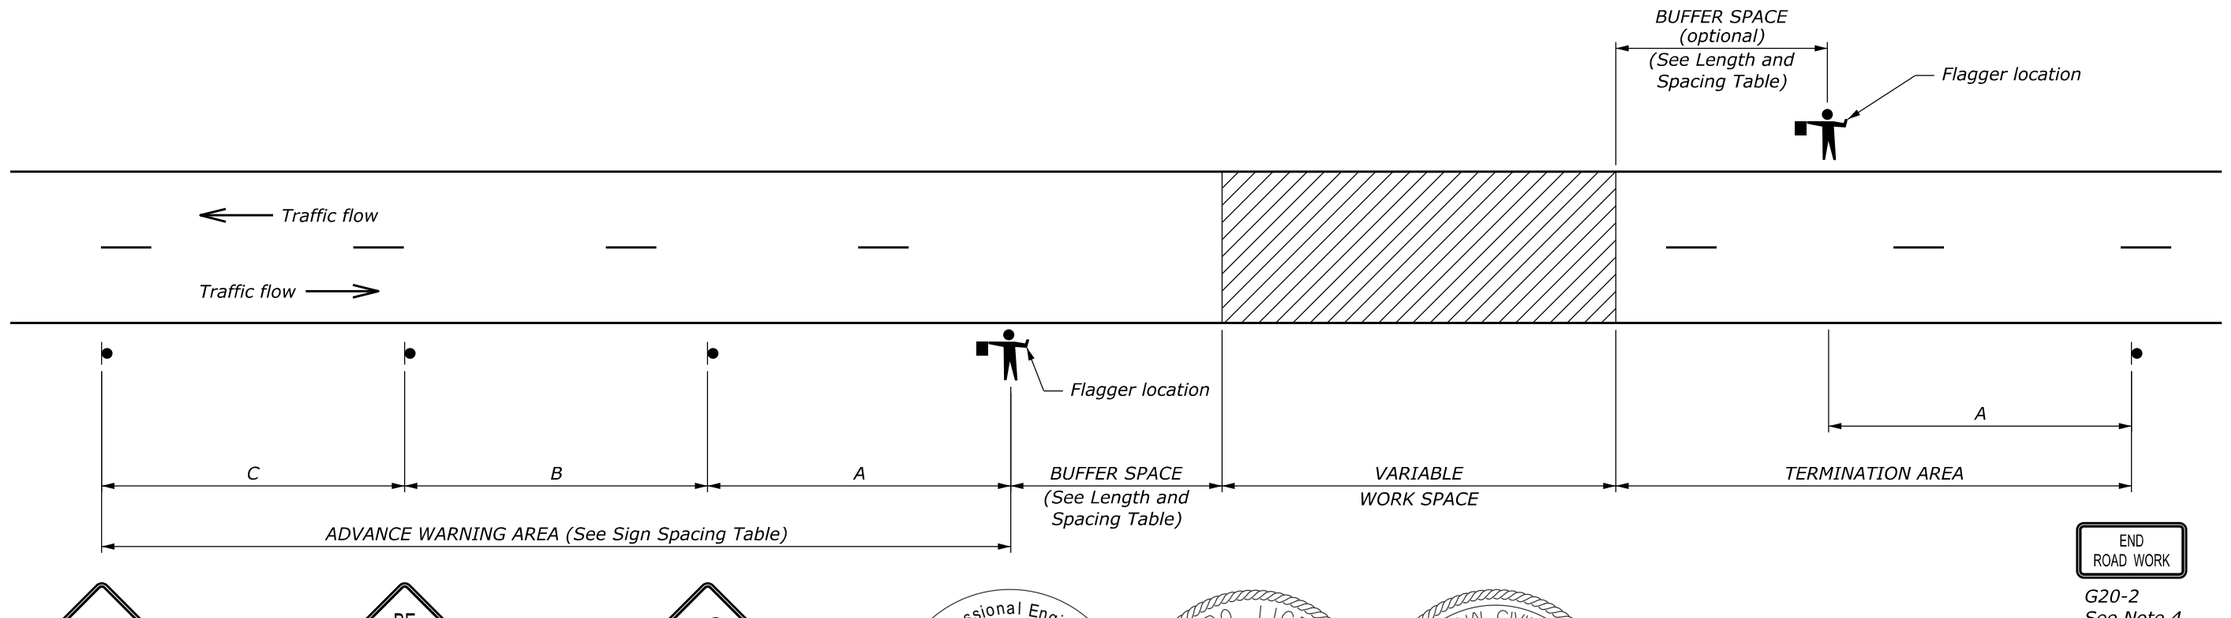

Professional Engineer
CODY BURCH
20272
Date
08/24/2026
WYOMING

COLORADO LICENSED
CODY ALLEN BURCH
52402
08/24/2026
PROFESSIONAL ENGINEER

PROFESSIONAL CIVIL ENGINEER
CODY ALLEN BURCH
E-18056
08/24/2026
STATE OF NEBRASKA

My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA
OFFICE OF FEDERAL LANDS HIGHWAY

TEMPORARY TRAFFIC CONTROL ROAD CLOSURE LAYOUT (WITH FLAGGERS)

FLH STANDARD
635-5
SPECIFICATION
FP-24, FP-14
APPROVED FOR USE
2/2024

c:\pw_work\snrfl-us-nsw.bentley.com_snrfl-us-nsw-02\dms27428\Std635-5.dgn [Std 635-5]
21 August 2026 11:39 AM

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	T9

LENGTH AND SPACING TABLE				
APPROACH SPEED* MPH	BUFFER SPACE LENGTH FEET	CHANNELIZING DEVICE SPACING IN FEET		
		TAPER AREA	BUFFER SPACE	WORK SPACE
20	115	20	40	40
25	155	20	50	50
30	200	20	60	60
35	250	20	70	70
40	305	20	80	80
45	360	20	90	90
50	425	20	100	100
55	495	20	110	110
60	570	20	120	120
65	645	20	130	130
70	730	20	140	140

* Approach speed based on the regulatory posted speed, not the advisory speed.

SIGN SPACING TABLE			
ROAD TYPE	DISTANCE BETWEEN SIGNS IN FEET		
	A	B	C
Urban and Rural 30 mph and less	100	100	100
Urban and Rural 35 mph to 50 mph	350	350	350
Rural greater than 50 mph	500	500	500
Expressway / Freeway	1000	1500	2640

NOTE:

1. Signs are shown for one direction of travel only. Place signs similar to those depicted for the opposite direction of travel.
2. Final location and spacing of devices may be changed to fit field conditions as approved.
3. For pilot car operation, mount the PILOT CAR FOLLOW ME (G20-4) sign at a conspicuous location on the rear of vehicle. Prominently display the name of the Contractor on the pilot car.
4. If closure is completely within the project limits, eliminate the ROAD WORK AHEAD (W20-1) and END ROAD WORK (G20-2) signs.
5. For project specific minimum width, refer to the Special Contract Requirements, Section 156.
6. Do not allow equipment, materials, or vehicles to be parked or stored in the buffer space.

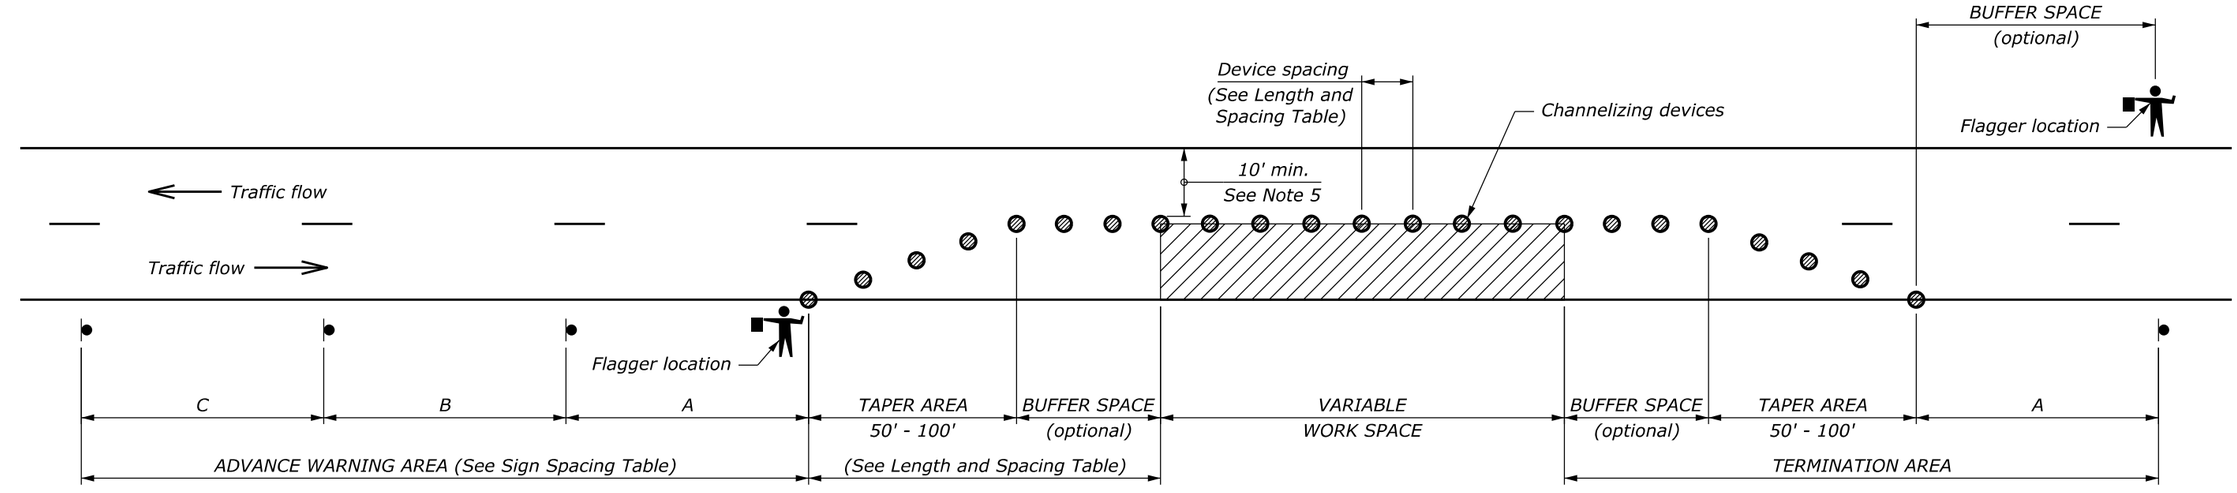

W20-1
See Note 4

W20-4

W13-1P
(optional)

W20-7

W16-2P

G20-2
See Note 4



My responsibility with respect to this plan sheet is limited to the selection of the standard plan for this project and a determination that the selection is appropriate for the project

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 635-6
TEMPORARY TRAFFIC CONTROL SINGLE LANE CLOSURE LAYOUT (WITH FLAGGERS)	SPECIFICATION FP-24
	APPROVED FOR USE 2/2024

c:\pw_work\sndusa-pw.bentley.com_sndusa-pw402\dms274428\Std635-6.dgn [Std 635-6]
21 August 2026 11:39 AM