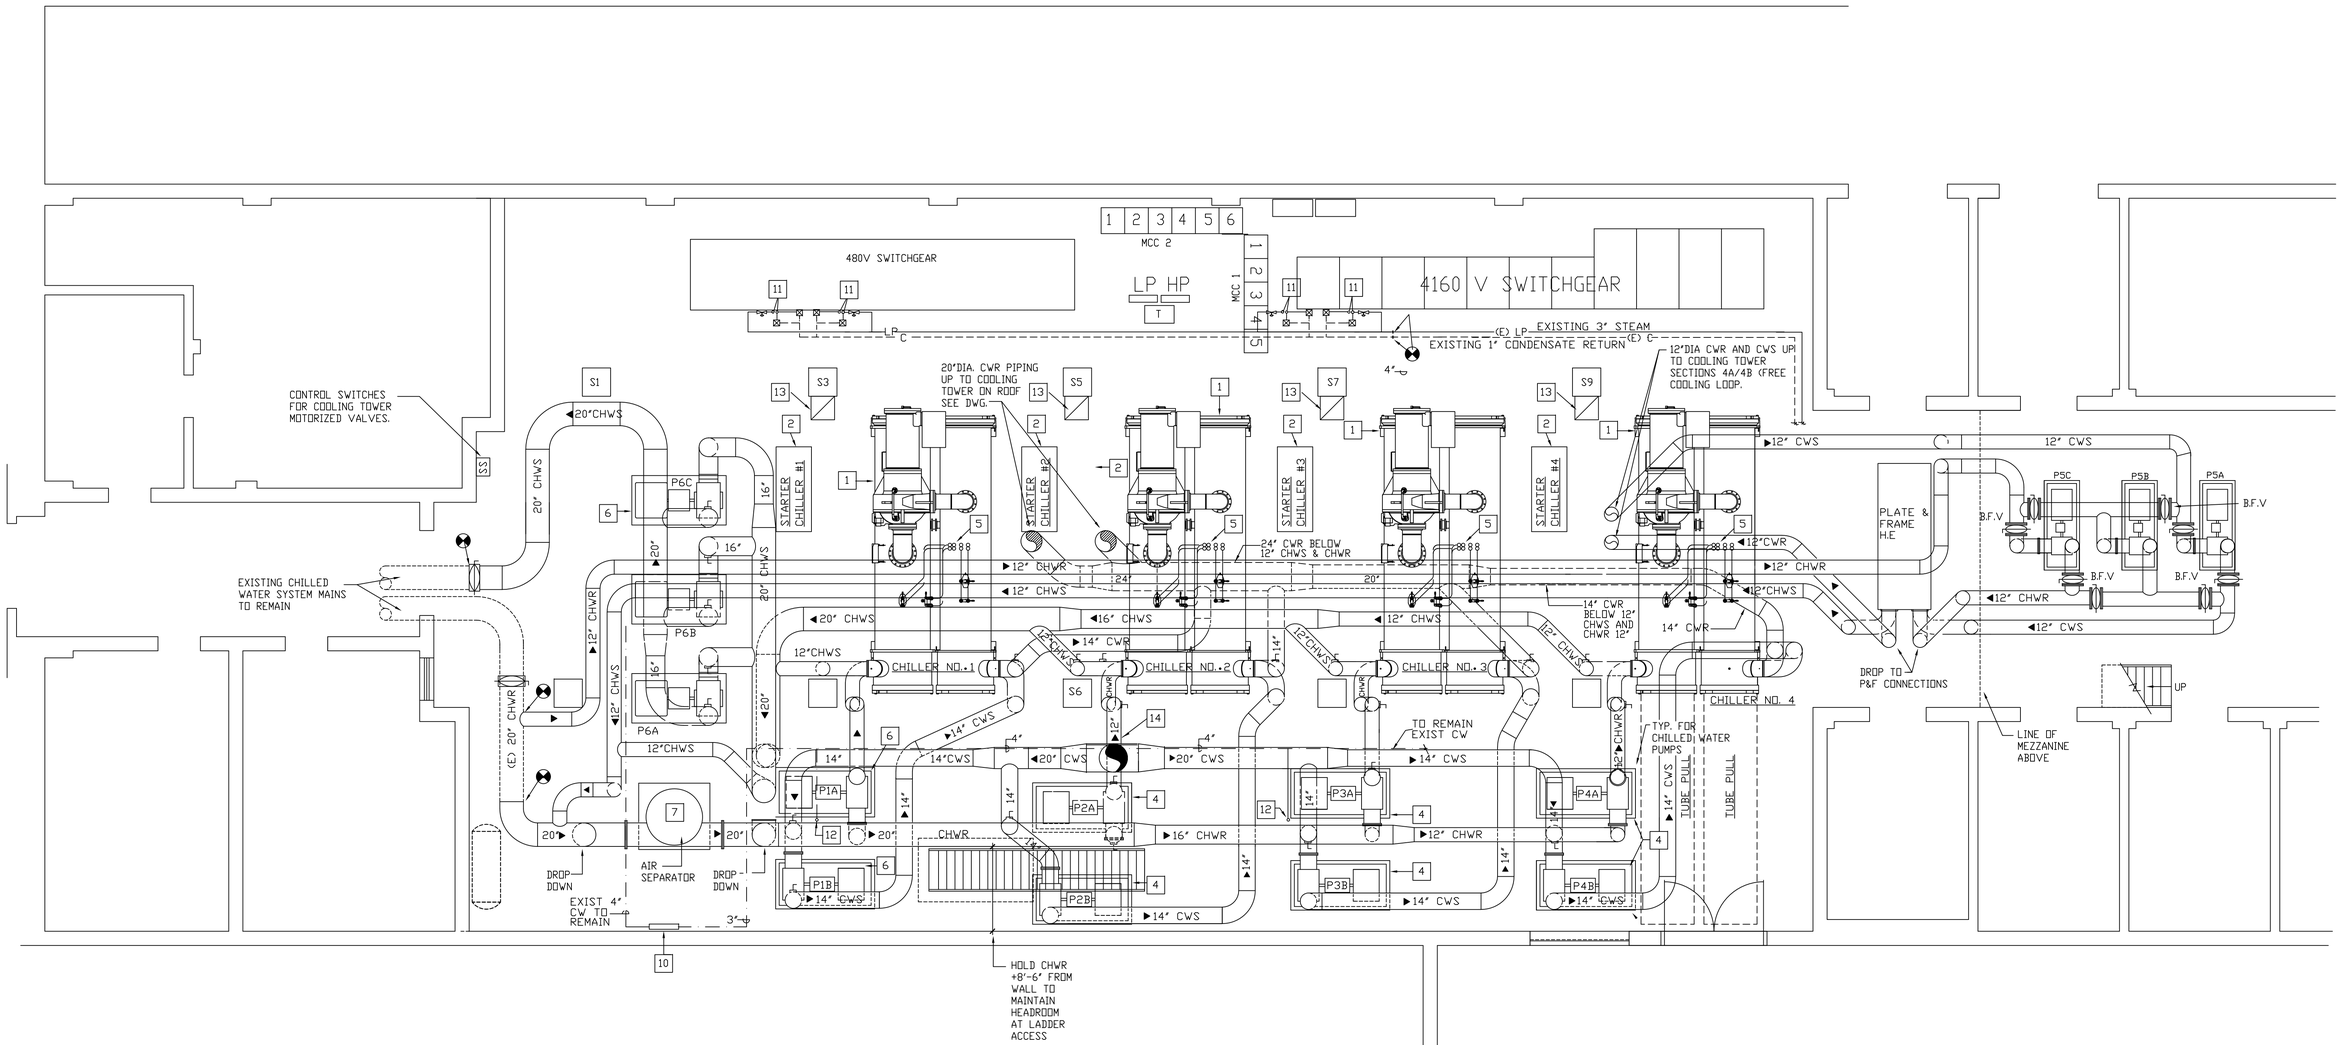


CHILLER PLAN FLOOR PLAN-(BSMT)-MECHANICAL PIPING

SCALE: 1/4"=1'-0"

KEYED PLAN NOTES (APPLICABLE TO THIS DRAWING ONLY)

1. NEW CENTRIFUGAL CHILLER. MOUNT ON 4" HIGH REINFORCED CONCRETE HOUSEKEEPING PAD.
2. REMOTE CHILLER STARTER MOUNTED ON 4" HIGH REINFORCED CONCRETE HOUSEKEEPING PAD, MEDIUM VOLTAGE (4160V). SEE CHILLER SUBMITTAL AND ELECTRICAL WORK.
3. CHILLED WATER PIPING DOWN TO CHILLER COOLER. SEE TYPICAL CHILLER.
4. CONDENSER WATER PIPING DOWN TO CHILLER CONDENSER WATER, SEE TYPICAL CHILLER PIPING DETAIL.
5. REFRIGERANT RELIEF VALVES FOR COOLER AND CONDENSER, EXTEND 1-1/4" DISCHARGES FULL SIZE TO TERMINATION OUTDOORS.
6. NEW BASE MOUNTED PUMP (HORIZONTAL SUCTION, VERTICAL DISCHARGE). MOUNT ON CONCRETE HOUSEKEEPING PAD, SEE TYPICAL DETAIL.
7. AIR SEPARATOR FLOOR MOUNTED ON 4" HIGH REINFORCED CONCRETE HOUSEKEEPING PAD.
8. PLATE AND FRAME HEAT EXCHANGER MOUNT ON EXISTING CONCRETE PAD.
9. (NOT USED).
10. COOLING TOWER MAKE-UP WATER BACKFLOW PREVENTER ASSEMBLY (BY BEP) WALL MOUNT AT +6'-0" AFF TO CENTERLINE OF PIPE.
11. STEAM, CONDENSATE RETURN PIPING UP THRU ROOF TO COOLING TOWER. SEE DETAIL AT TOWER CONNECTIONS.
12. DOMESTIC C.W. MAKE-UP WATER UP THRU ROOF TO COOLING TOWER. SEE DETAIL AT TOWER CONNECTIONS.
13. 24" DIAMETER CONDENSER WATER SUPPLY UP THRU ROOF TO COOLING TOWER, SEE DWG M-2 (ROOF PLAN)
14. EMERGENCY VENTILATION DUCTS DOWN TO 4"AFF. SEE VENTILATION PLAN DWG M-3.