ABBREVIATIONS

ABV.	ABOVE	LAM.	LAMINATED
AT	ACOUSTICAL TILE	L	LENGTH
A.F.F.	ABOVE FINISH FLOOR	LVT	LUXURY VINYL TILE
ALUM.	ALUMINUM	MAX	MAXIMUM
ATH.	ALUMINUM THRESHOLD	MECH	MECHANICAL
BD	BOARD	MTG	MOUNTING
BLKG	BLOCKING	MTL	METAL
CC	CUBICLE CURTAIN	NIC	NOT IN CONTRACT
CG	CORNER GUARD	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED
CLG	CEILING	OFOI	OWNER FURNISHED OWNER INSTALLED
COL	COLUMN	CFCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED
CONC.	CONCRETE	CFOI	CONTRACTOR FURNISHED OWNER INSTALLED
CONT.	CONTINUOUS	PL	PLASTIC LAMINATE
CR	CARD READER	P	PAINT
CT	CERAMIC TILE	PTD	PAINTED
DR	DOOR	R.	RISER
ELEC	ELECTRIC(AL)	RA	RETURN AIR
EL	ELEVATION	RB	RESILIENT BASE
ELEV	ELEVATOR	RES	RESINOUS FLOORING
ESRROI	EXISTING SALVAGED, RECONDITIONED, RELOCATED, OWNER INSTALLED	SC	SEALED CONCRETE
		SG	SAFETY GLASS
ESRRCI	EXISTING SALVAGED, RECONDITIONED, RELOCATED, CONTRACTOR INSTALLED	SCW	SOLID CORE WOOD
		S	SOLID SURFACE
ESROI	EXISTING SALVAGED, RELOCATED, OWNER INSTALLED	S.S.	STAINLESS STEEL
		WSF	WELDED SHEET VINYL
ESRCI	EXISTING SALVAGED, RELOCATED, CONTRACTOR INSTALLED	SIM	SIMILAR
		STOR	STORAGE
ETR	EXISTING TO REMAIN	SUSP.	SUSPENDED
EWC	ELECTRIC WATER COOLER	TERR	TERRAZZO
EXIST.	EXISTING	TG	TEMPERED GLASS
EXST	EXISTING	TME	TO MATCH EXISTING
FOF	FACE OF FINISH	T.O.G.	TOP OF GRADE
F.O.S.	FACE OF STUD	TP	TEMPERED
FIN	FINISH(ED)	TR	TREAD
F.F.	FINISHED FACE	TRTD	TREATED
FIN FL	FINISHED FLOOR	TYP	TYPICAL
FLR	FLOOR	U.O.N.	UNLESS OTHERWISE NOTED
GALV.	GALVANIZED	VERT	VERTICAL
GL	GLAZING	VIF	VERIFY IN FIELD
GWB	GYPSUM WALLBOARD	VT	VINYL TILE
GYP	GYPSUM	RWC	VINYL WALL COVERING
HDW	HARDWARE	WIN	WINDOW
HW	HARDWARE	WAP	WAVE PLATE
HCW	HOLLOW CORE WOOD	@	AT
HM	HOLLOW METAL	∠	ANGLE
HR	HOUR	℄	CENTER LINE
HT	HEIGHT	Ø	DIAMETER

ARCHITECTURAL SYMBOL LEGEND

- EXISTING DOOR
- DEMO DOOR
- NEW WALL
- EXISTING WALL
- DEMO WALL OR ITEMS ABOVE OR BELOW
- NEW DOOR
- MATCHLINE
- 1 — FINISH NOTES
- 101 — DEMO ROOM NUMBER
- 1 — NEW WORK NOTE
- 101 — ROOM NUMBER
- 1 — DEMOLITION NOTE
- M350 SP — WALL TAG
- XXX — TOILET ACCESSORY TAG
- 101 — DOOR TAG
- WWW — EQUIPMENT TAG
- 1 — REVISION TAG
- 1i — CURTAIN WALL AND WINDOW MARKER
- 1 / A101 — INTERIOR ELEVATION MARKER
- 0 — EXISTING COLUMN GRID NUMBER
- SIM 1 / A101 — SECTION OR WALL SECTION NUMBER
- 1 — COLUMN GRID NUMBER
- 1 / A120 — BUILDING ELEVATION MARKER
- 1 / A810 — DETAIL MARKER

WALL TYPE LEGEND

MATERIAL / STUD/CORE SIZE / STC RATING / FIRE/SMOKE RATING

M 3 50 _ SP

SP	SMOKE PARTITION
1	1 HR FIRE BARRIER
SB	SMOKE BARRIER
1SB	1 HR FIRE BARRIER AND SMOKE BARRIER
2	2 HR FIRE BARRIER
2SB	2 HR FIRE BARRIER AND SMOKE BARRIER
L	LEAD LINED

SHEET INDEX LEGEND

PHASE (IF APPLICABLE) / DISCIPLINE / SERIES / FLOOR LEVEL

P1 - A 1 3 0

1- FLOOR PLANS
2- REFLECTED CEILING PLANS
3- ROOF PLANS
4- BUILDING ELEVATIONS
5- BUILDING & WALL SECTIONS / DETAILS
6- SCHEDULES
7- ENLARGED PLANS
8- INTERIOR ELEVATIONS
9- VERTICAL CIRCULATION

TYPICAL TOILET ACCESSORY LOCATIONS

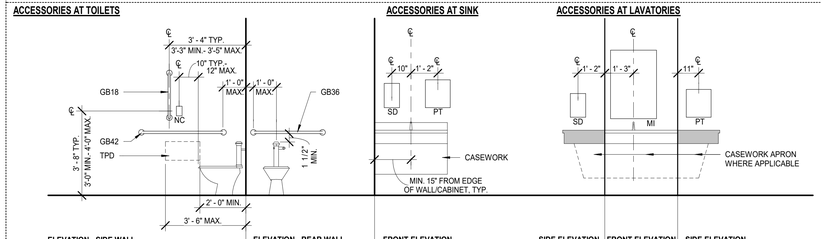

ELEVATION - SIDE WALL
SIDE WALL GRAB BARS
GB42 - 42" HORIZONTAL
GB18 - 18" VERTICAL
TOILET PAPER DISPENSERS
TPD - SINGLE, OR DOUBLE ROLL
NURSE CALL
NC - WHERE APPLICABLE

ELEVATION - REAL WALL
SIDE WALL GRAB BARS
GB36 - 36" HORIZONTAL*

** 24" HORIZONTAL GRAB BARS PERMITTED WHERE WALL SPACE DOES NOT PERMIT 36" GRAB BARS DUE TO THE LOCATION OF A RECESSED FIXTURE, AS PER EXCEPTION 2 OF SECTION 604.5.3 ICC A117.1-2009.*

FRONT ELEVATION
SOAP — SD
PAPER TOWEL — PT

SIDE ELEVATION
SOAP — SD

FRONT ELEVATION
MIRROR — MI

SIDE ELEVATION
PAPER TOWEL — PT

PLAN

NOTES:

1. REFER TO TOILET ACCESSORY SCHEDULE FOR MOUNTING HEIGHTS AND BLOCKING REQUIREMENTS.
2. DIMENSIONS TO BE FOLLOWED U.O.N. REQUIREMENTS BASED ON ICC A117.1-2009, SECTIONS 604.1-604.7 FOR GRAB BARS AND TOILET ACCESSORIES. NURSE CALL LOCATION BASED ON FGI GUIDELINES FOR DESIGN AND CONSTRUCTION OF HOSPITALS 2018, SECTION 2.1-8.5.1.3.
3. CONTRACTOR TO COORDINATE FLUSH VALVES AND ACCESS PANELS TO AVOID CONFLICT WITH HORIZONTAL GRAB BAR.
4. MITERED GRAB BARS IDENTIFIED AS ONE ACCESSORY IN ARCHITECTURAL DRAWINGS. CONTRACTOR TO FURNISH AND INSTALL, AS WELL AS COORDINATE INSTALLATION.
5. SOAP AND PAPER DISPENSER DIMENSIONED LOCATIONS ARE FOR REFERENCE. THEY CAN VARY, DEPENDING ON SPACE REQUIREMENTS, OUTLET LOCATIONS, ETC. COORDINATE ANY CHANGES OF DISPENSER LOCATIONS WITH ARCHITECT.
6. REFER TO ELEVATIONS FOR CASEWORK INFORMATION.

INTERIOR ELEVATIONS SYMBOL LEGEND

NURSE CALL
- NC NURSE CALL
- IFV INTERCOM WITH VIDEO
- PB PANIC BUTTON
- DR DOOR RELEASE
- IF INTERCOM

ELECTRICAL
- N DUPLEX POWER
- N QUAD POWER
- LS LIGHT SWITCH
- LS LIGHT SWITCH 3-GANG
- JB JUNCTION BOX

DOOR HARDWARE
- CR CARD READER
- HO MAGNETIC HOLD OPEN
- FHO MAGNETIC HOLD OPEN (LOW TO FLOOR)
- PP PUSH PLATE

TELEPHONE/DATA
- D DATA

FIRE ALARM
- PS PULL STATION
- S STROBE
- SS SPEAKER AND STROBE
- TB TERMINAL BOX

MECHANICAL
- RPM ROOM PRESSURE MONITOR
- RPS ROOM PRESSURE SENSOR
- T THERMOSTAT

NOTE: REFER TO MEPT DRAWINGS FOR SPECIFIC TYPES

DEVICES MOUNTING HEIGHT

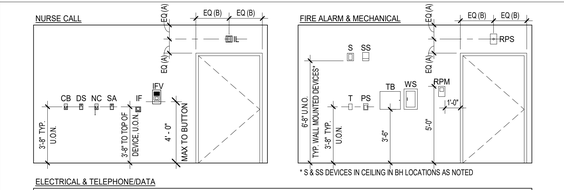

* S & SS DEVICES IN CEILING IN BH LOCATIONS AS NOTED

ELECTRICAL & TELEPHONE/DATA

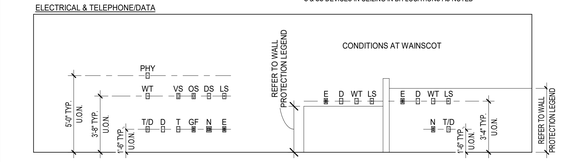

DOOR HARDWARE



ELECTRICAL AND DATA AT CASEWORK

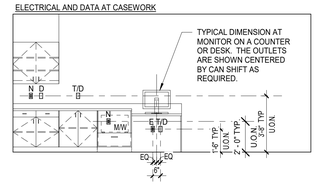

DOOR HARDWARE FOR CARD READERS

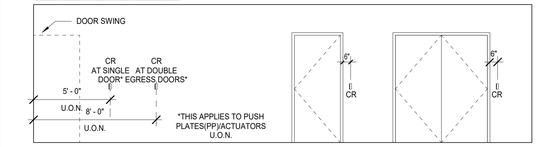

ELECTRICAL AND DATA SPECIAL CONDITIONS

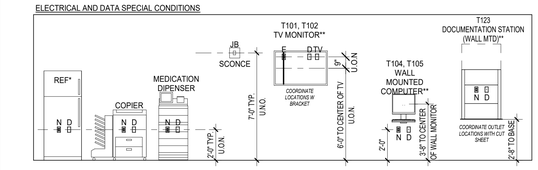

NOTE:
ANY ELECTRICAL AND DATA DEVICE NEXT TO A DOOR NEEDS TO BE LOCATED AT A MINIMUM OF 8" FROM DOOR FRAME.

MISCELLANEOUS MOUNTING HEIGHTS

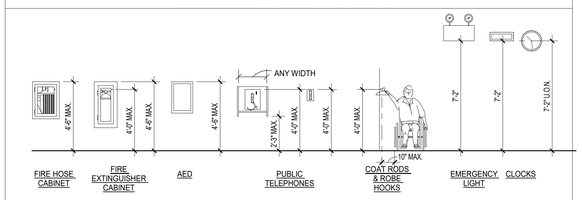

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | **Date:**

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA — JOSEPH H. TROST — NO. 7843 — 2025-12-30 — ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL ABBREVIATIONS, SYMBOLS, LEGENDS, NOTES & WALL TYPE SCHEDULE

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | **Checked:** DJP | **Drawn:** MAT / SKC

VA Drawing Number: 2617
Building Number: 143
Drawing Number: A-001

12/29/2025 1:41:57 AM

VA FORM 08 - 6231

PHASING NARRATIVE

PHASE 1:

DEMOLISH AREAS IN EXISTING PATIENT WING AS INDICATED TO BUILD 3 NEW OPERATING ROOMS CORRIDORS AND PART OF CLEAN CORE. EXISTING OPERATING ROOMS AND CLEAN CORE TO REMAIN IN OPERATION THE ENTIRE TIME. THE EXISTING LOUNGE AND BATHROOMS ARE TO BE DEMOLISHED SO THAT THE NEW CORRIDOR CAN BE CONSTRUCTED TO ALLOW CLEAN SUPPLIES TO REACH THE NEWLY CONSTRUCTED OPERATING ROOMS IN PHASE 2.

PHASE 2:

AT THE BEGINGING OF THE PHASE A NEW TEMPORARY CORRIDOR FROM THE CLEAN ELEVATOR THRU THE CLEAN CORE, TO THE NEW CORRIDOR CREATED IN PHASE 1, SHALL BE CONSTRUCTED PRIOR TO ANY DEMOLITION. ONCE THE CORRIDOR IS COMPLETE DEMOLISION OF EXISTING OPERATING ROOMS 2, 3, 4, 5, 6 AND REMAINING PORTIONS OF THE CLEAN CORE CAN PROCEED. THE HYBRID OR AND THE TWO NEW OR'S BECOME OPERATIONAL. NEW OR'S 4, 5, 6, THE REMANING CLEAN CORE, AND SUPPORT ROOMS ARE BUILT OUT.

PHASE 3:

WORK IN EXISTING OR PREP TAKES PLACE. EXISTING PACU IS USED FOR PRE OP PREP AND RECOVERY DURING THIS PHASE. NEW OFFICES AND STORAGE ROOM ARE BUILT OUT. EXISTING OFFICES ARE RENOVATED.

PHASE 4:

WORK IN EXISTING PACU TAKES PLACE. NEW OR PREP AREA IS USED FOR PRE OP PREP AND PACU DURING THIS PHASE. OFFICES ARE BUILT OUT AT THIS TIME.

GENERAL NOTES

1. SEE INDIVIDUAL ICRA PLANS,A-011 THRU A-015, FOR DETAILED PHASING DIAGRAMS AND NOTES PER EACH PHASE.
2. ALL TEMPORARY PARTIONS SHALL BE REMOVED AT THE END OF EACH PHASE UNLESS INDICATED THAT THEY MAY REMAIN IN PLACE AS PART OF THE PERMANENT WORK.
3. EXITING SURGICAL SOILED UTILITY ROOM PLUMBING WORK CAN BE DONE IN ANY PHASE. COORDINATE WORK IN THE AREA WITH THE COR.
4. NEW DOOR TO MED GAS ROOM CAN BE DONE IN ANY PHASE. COORDINATE WORK WITH COR
5. FINISHES WORK IN CORRIDOR SHALL BE COMPLETED AT THE END OF THE PHASES AND DONE AFTER HOURS. COORDINATE WORK WITH COR.
6. CONTRACTOR TO REFER TO EACH DISCIPLINE DRAWINGS FOR COMPLETE SCOPE AND AREA OF WORK PER PHASE.

OVERALL PHASING NOTES

1	HATCHED AREA INDICATES LOCATIONS WHERE PHASES HAVE AN OVERLAP OF WORK.

PHASE 1

PHASE 2

PHASE 3

PHASE 4

PATIENT RM D-D110; PATIENT RM D-D109; PATIENT RM D-D108; PCU ROOM D-D1001; PCU RM D-D1002; ON CALL D-D1004; TOILET D-C1005; WAITING D-C1006; TOILET D-C172; OFFICE D-C173; ELECTRICAL D-C175; ELECTRICAL D-C198; CORRIDOR XC; PATIENT ROOM D-D111; CORRIDOR D-C161; TOILET D-C159; ANTE D-D1002A; STORAGE D-D1003; CORRIDOR D-C177; PCU OFFICE D-C1007; STAIR XB; HOUSEKEEPING D-C103; NURSING STATION D-C160; GROUP OFFICE D-C1015; ELEV D-C190; OFFICE D-C1019; WAITING D-C107; LOCKERS D-C107A; TLT D-C107B; OFFICE D-C16; PATIENT ROOM D-D112; NOURISHMENT D-D1031; STORAGE D-C168; PCU OFFICE D-C1008; OFFICE D-C1018; LOGISTICS D-C1020; CORRIDOR D-C12; PCU EQUIPMENT D-C1009; NURSE STATION D-C18; PATIENT ROOM D-D115; MEDS D-D1030; RECOVERY CCLO D-D101; WORK ROOM D-C1010; OR 5 D-C138; OR 6 D-C145; OR 7 D-C146; OR 8 D-C106; OFFICE D-C108; OFFICE D-C109; CLEAN D-D1029; IRM D-C165; PCU LOUNGE / LOCKERS D-C1012; PATIENT ROOM D-D116; SOILED HOLDING D-D1028; ELECTRICAL D-D1027; TLT D-C106B; STORAGE D-C106A; OFFICE D-C108A; OFFICE D-C109A; CLEAN LAUNDRY D-C115; ELECTRICAL D-C110; PATIENT ROOM D-D143; CORRIDOR D-148; DIRTY UTILITY RM D-142; TOILET D-144; TOILET D-145; TOILET D-142E; TOILET D-142D; CLEAN CORE D-C126D; OFFICE D-C120; ISOLATION ROOM D-C117; ANTE D-C119; ANESTHESIA WORKROOM D-C122; PACU D-C11; OFFICE D-124; WORK RM D-123; CORRIDOR D-120; CORRIDOR D-147; DEMO D-C126F; DEMO D-C126C; DEMO D-C126A; OFFICE D-C144; OFFICE D-C118; ANEST OFFICE D-C116; NURSE STATION D-C12; TLT D-C114; RECOVERY D-C13; OR 4 D-C133; SEMI-RESTRICED CORRIDOR D-C123; EQUIPMENT D-C131; IRM D-C1038; OR 3 D-C130; OR 2 D-C126; OFFICE D-C115; BREAK RM D-C113; CLEAN SUPPLY D-C133A; ELECTRICAL D-C1037; GENERAL STORAGE D-C125A; OFFICE D-C124; DIRTY UTILITY D-C125; EQUIP STORAGE D-C112; BIO HZRD D-C111; WAITING D-C110; TOILET / SHOWER D-C191; LOUNGE D-C192; TOILET D-C193; TOILET D-C194; MECH RM IC-132

1 FIRST FLOOR PLAN - OVERALL PHASING
SCALE: 1/8" = 1'-0"

BUILDING 143



KEY PLAN

PLAN NORTH

ACTUAL NORTH

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO: 0459-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL PHASING PLANS FIRST FLOOR - OVERALL	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: A-010
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: MAT / SKC	

12/29/2025 1:42:08 AM

VA FORM 08 - 6231

PHASING COORDINATION

OWNER, ARCHITECT AND CONTRACTOR SHALL REVIEW AND COORDINATE PHASING REQUIREMENTS WHEN CONTRACT IS AWARDED.

GENERAL PHASING NOTES

1. THE CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND COMMUNICATIONS AS REQUIRED TO SUPPORT TEMPORARY RELOCATED EQUIPMENT AND MAINTAIN OPERATIONS IN AREAS NOT UNDER CONSTRUCTION.
2. THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING WEEKENDS, AND/OR DURING EVENINGS.
3. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER THE SCHEDULING OF ALL INTERRUPTIONS IN SERVICES REQUIRED BY THIS PROJECT.
4. THE CONTRACTOR SHALL MAINTAIN THE EXISTING WEATHERTIGHT CONDITION THROUGHOUT THE CONSTRUCTION PERIOD AND REPAIR ALL DAMAGE CAUSED BY CONSTRUCTION OPERATIONS.
5. THE CONTRACTOR SHALL PROVIDE TEMPORARY DIRECTIONAL SIGNS FOR EACH PHASE OF THE CONSTRUCTION PROJECT TO BE LOCATED AS DIRECTED BY THE OWNER.
6. TEMPORARY PARTITIONS INDICATED ARE THE MINIMUM REQUIREMENTS AND ARE FOR DESIGN INTENT ONLY. IF ADDITIONAL PARTITIONS ARE REQUIRED TO ENSURE SAFETY AND TO FACILITATE THE OWNER'S OPERATIONS IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE. DOORS SHALL BE PROVIDED IN PARTITIONS AS REQUIRED BY THE OWNER.
7. WORK NOT INDICATED WITHIN A SPECIFIED PHASING PLAN SHALL BE COORDINATED WITH THE OWNER PRIOR TO COMMENCEMENT OF THE WORK.
8. THE CONTRACTOR SHALL MAINTAIN INTERIM LIFE SAFETY STANDARDS AT ALL TIMES DURING CONSTRUCTION.
9. THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
10. ALL DEBRIS CARTS UTILIZED SHALL HAVE TIGHT FITTING COVERS TO MINIMIZE THE SPREAD OF DUST.
11. EACH PHASE MUST BE COMPLETE AND OCCUPIED BY THE OWNER PRIOR TO BEGINNING THE NEXT PHASE. CONTRACTOR SHALL ALLOW SEVEN (7) DAYS BETWEEN PHASES TO ALLOW THE OWNER TO MOVE.
12. ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
13. ARCHITECTURAL WORK SUCH AS CEILING REMOVAL/REPLACEMENT, PATCHING, ETC. SHALL BE PROVIDED AS REQUIRED BY MECHANICAL, PLUMBING AND ELECTRICAL WORK OUTSIDE OF THE MAJOR WORK ARES. CONTRACTOR SHALL REVIEW ALL DRAWINGS AND FIELD VERIFY EXISTING CONDITIONS TO DETERMINE SCOPE OF THIS WORK.

⑪ PHASING NOTES

1. 1 HR RATED TEMPORARY PARTITION. FINISH SIDE EXPOSED TO PUBLIC.
2. 3/4 HR RATED DOOR AND HARDWARE.
3. VESTIBULE WITH WALK OFF MATS.
4. MAINTAIN CORRIDOR ACCESS AT ALL TIMES.
5. INSTALL DOOR AND CONTROLS DURING EVENINGS AND/OR WEEKENDS.
6. INSTALL WALL DURING EVENINGS AND/OR WEEKENDS.
7. REMOVE AND REPLACE THIS DOOR AT THE END OF PHASE 1 AND SEAL TIGHT AT ALL TIME DURING PHASE 1

LEGEND

- CLEAN SUPPLIES
- SOILED SUPPLIES
- PATIENT TO SURGERY
- PATIENT TO PACU
- CONTRACTOR ACCESS
- 1 HOUR RATED TEMPORARY CONSTRUCTION WALL
- STARTING POINT
- DIRECTION OF TRAVEL
- RESTRICTED ACCESS CORRIDOR

BUILDING 143

PHASE 1 | PHASE 2 | PHASE 3 | PHASE 4 | PHASE 3

KEY PLAN

PLAN NORTH

ACTUAL NORTH

1 ICRA - FIRST FLOOR PLAN - PHASE 1

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO. 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL ICRA PLAN FIRST FLOOR - PHASE 1
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT / SKC
VA Drawing Number	2617
Building Number	143
Drawing Number	A-011

12/29/2025 1:42:19 AM

VA FORM 08 - 6231

PHASING COORDINATION

OWNER, ARCHITECT AND CONTRACTOR SHALL REVIEW AND COORDINATE PHASING REQUIREMENTS WHEN CONTRACT IS AWARDED.

GENERAL PHASING NOTES

1. THE CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND COMMUNICATIONS AS REQUIRED TO SUPPORT TEMPORARY RELOCATED EQUIPMENT AND MAINTAIN OPERATIONS IN AREAS NOT UNDER CONSTRUCTION.
2. THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING WEEKENDS, AND/OR DURING EVENINGS.
3. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER THE SCHEDULING OF ALL INTERRUPTIONS IN SERVICES REQUIRED BY THIS PROJECT.
4. THE CONTRACTOR SHALL MAINTAIN THE EXISTING WEATHERTIGHT CONDITION THROUGHOUT THE CONSTRUCTION PERIOD AND REPAIR ALL DAMAGE CAUSED BY CONSTRUCTION OPERATIONS.
5. THE CONTRACTOR SHALL PROVIDE TEMPORARY DIRECTIONAL SIGNS FOR EACH PHASE OF THE CONSTRUCTION PROJECT TO BE LOCATED AS DIRECTED BY THE OWNER.
6. TEMPORARY PARTITIONS INDICATED ARE THE MINIMUM REQUIREMENTS AND ARE FOR DESIGN INTENT ONLY. IF ADDITIONAL PARTITIONS ARE REQUIRED TO ENSURE SAFETY AND TO FACILITATE THE OWNER'S OPERATIONS IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE. DOORS SHALL BE PROVIDED IN PARTITIONS AS REQUIRED BY THE OWNER.
7. WORK NOT INDICATED WITHIN A SPECIFIED PHASING PLAN SHALL BE COORDINATED WITH THE OWNER PRIOR TO COMMENCEMENT OF THE WORK.
8. THE CONTRACTOR SHALL MAINTAIN INTERIM LIFE SAFETY STANDARDS AT ALL TIMES DURING CONSTRUCTION.
9. THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
10. ALL DEBRIS CARTS UTILIZED SHALL HAVE TIGHT FITTING COVERS TO MINIMIZE THE SPREAD OF DUST.
11. EACH PHASE MUST BE COMPLETE AND OCCUPIED BY THE OWNER PRIOR TO BEGINNING THE NEXT PHASE. CONTRACTOR SHALL ALLOW SEVEN (7) DAYS BETWEEN PHASES TO ALLOW THE OWNER TO MOVE.
12. ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
13. ARCHITECTURAL WORK SUCH AS CEILING REMOVAL/REPLACEMENT, PATCHING, ETC. SHALL BE PROVIDED AS REQUIRED BY MECHANICAL, PLUMBING AND ELECTRICAL WORK OUTSIDE OF THE MAJOR WORK ARES. CONTRACTOR SHALL REVIEW ALL DRAWINGS AND FIELD VERIFY EXISTING CONDITIONS TO DETERMINE SCOPE OF THIS WORK.

PHASING NOTES

1. 1 HR RATED TEMPORARY PARTITION. FINISH SIDE EXPOSED TO PUBLIC.
2. 3/4 HR RATED DOOR AND HARDWARE.
3. VESTIBULE WITH WALK OFF MATS.
4. INSTALL THIS DOOR PRIOR TO PHASE 2.

LEGEND

- CLEAN SUPPLIES
- SOILED SUPPLIES
- PATIENT TO SURGERY
- PATIENT TO PACU
- CONTRACTOR ACCESS
- 1 HOUR RATED TEMPORARY CONSTRUCTION WALL
- STARTING POINT
- DIRECTION OF TRAVEL
- RESTRICTED ACCESS CORRIDOR

BUILDING 143

PHASE 1 | PHASE 2 | PHASE 3 | PHASE 4 | PHASE 3

KEY PLAN

PLAN NORTH

ACTUAL NORTH

1 ICRA - FIRST FLOOR PLAN - PHASE 2

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK

A Service-Disabled Veteran-Owned Small Business

(856) 429-4000 • Miller-Remick.com

MR PROJECT NO. 0459-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA — JOSEPH D. JONES — NO. 7843 — 2025-12-30 — REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL ICRA PLAN FIRST FLOOR - PHASE 2

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: DJP | Drawn: MAT / SKC

VA Drawing Number: 2617

Building Number: 143

Drawing Number: A-012

12/29/2025 1:42:31 AM

VA FORM 08 - 6231

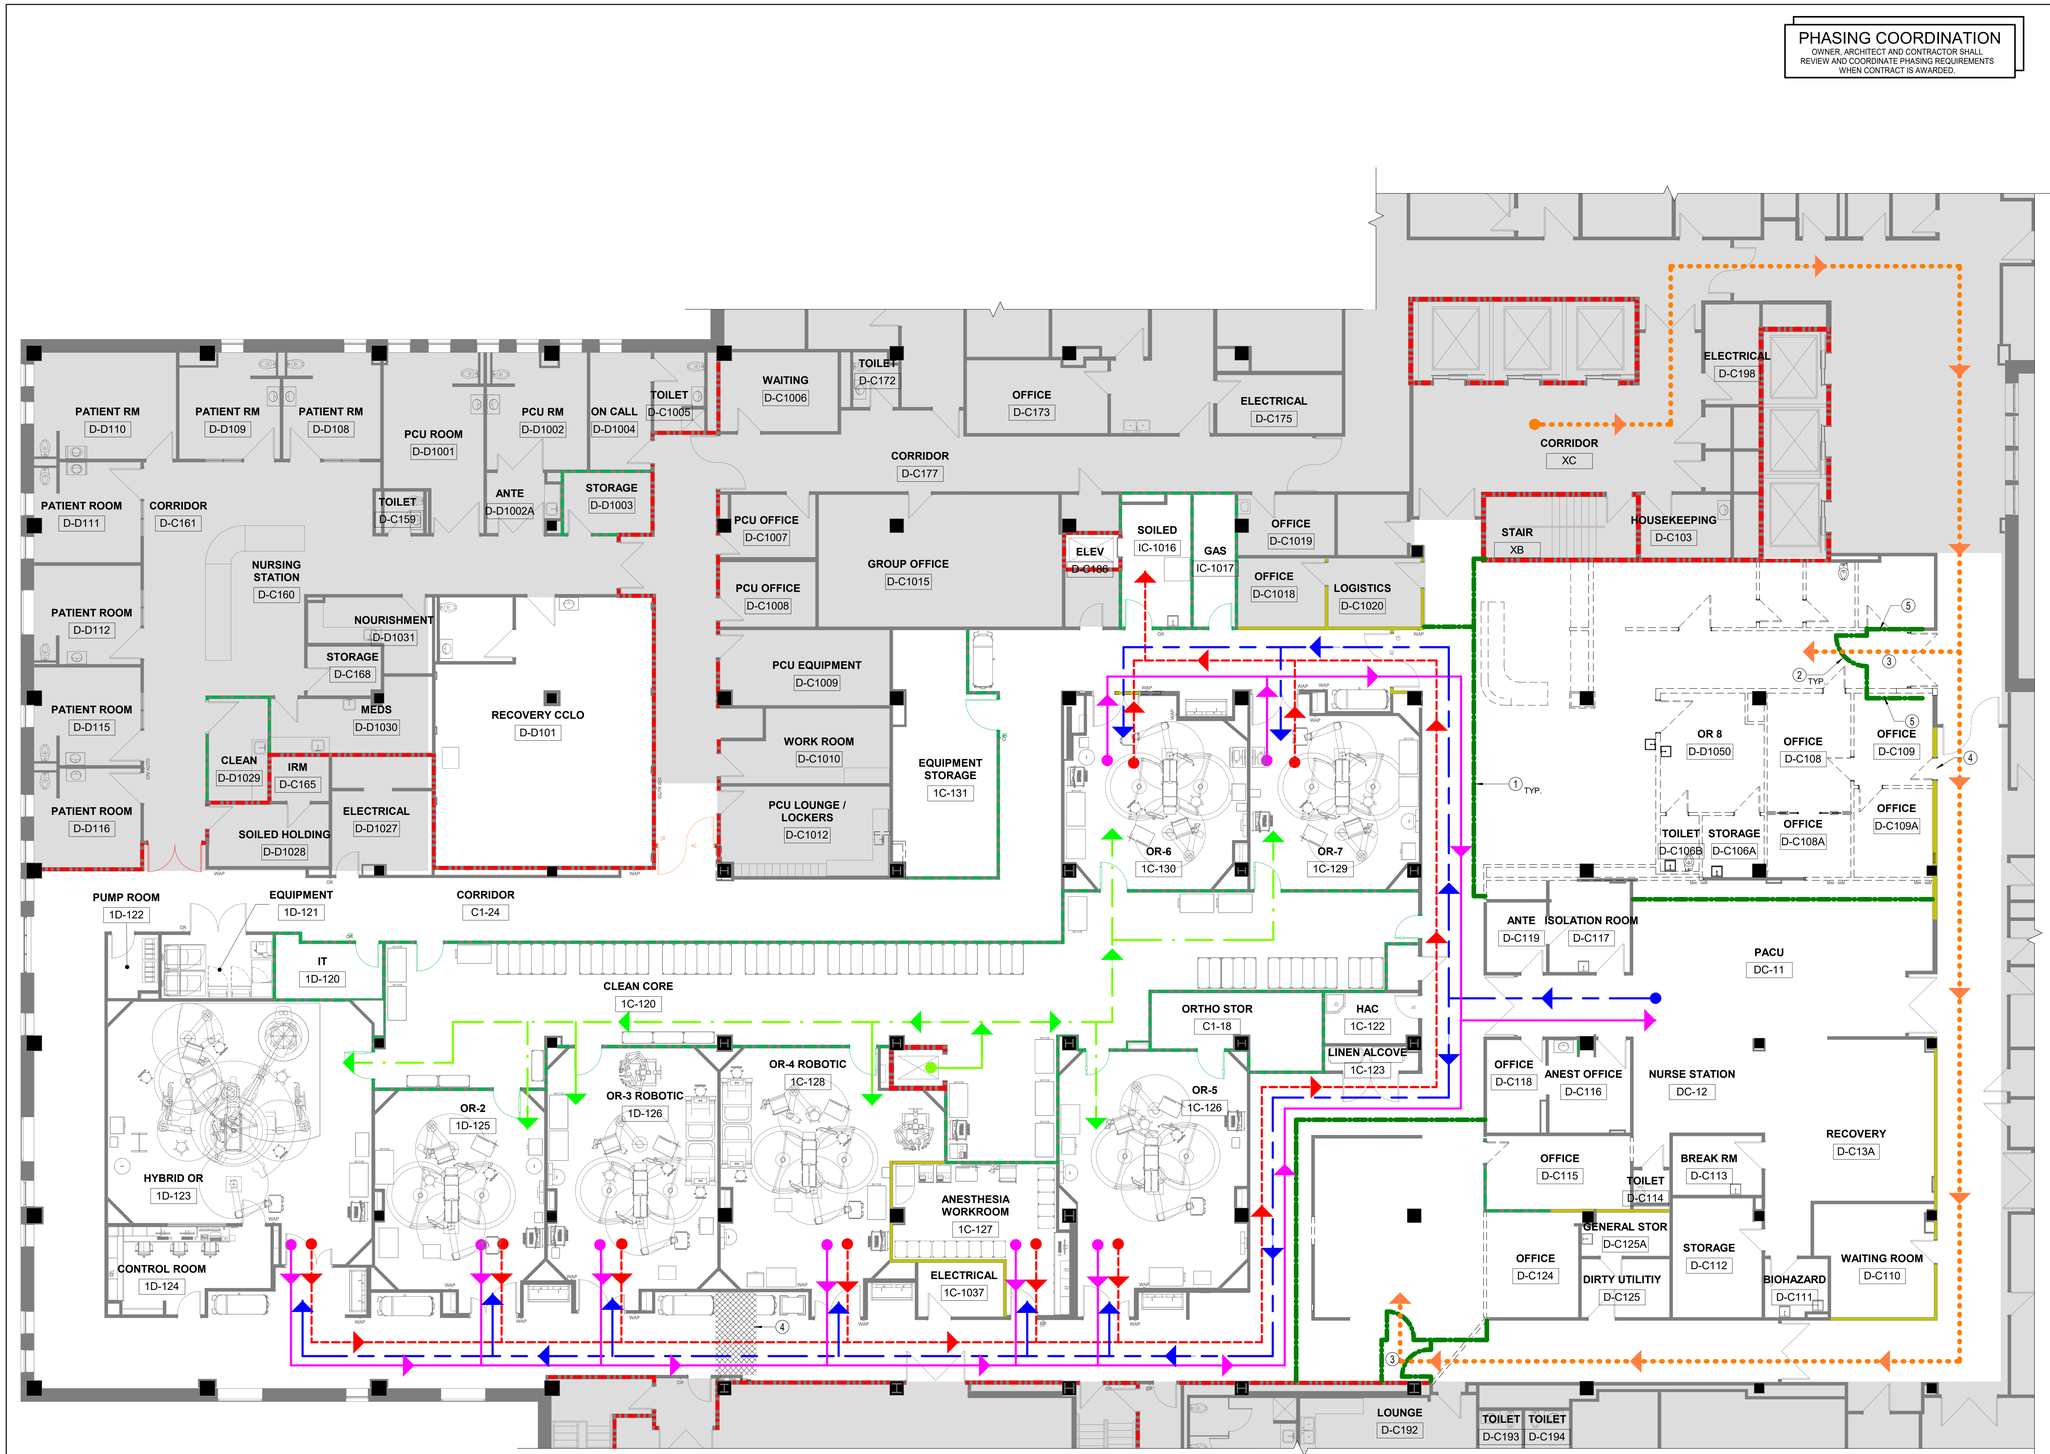

GENERAL PHASING NOTES

1. THE CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND COMMUNICATIONS AS REQUIRED TO SUPPORT TEMPORARY RELOCATED EQUIPMENT AND MAINTAIN OPERATIONS IN AREAS NOT UNDER CONSTRUCTION.
2. THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING WEEKENDS, AND/OR DURING EVENINGS.
3. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER THE SCHEDULING OF ALL INTERRUPTIONS IN SERVICES REQUIRED BY THIS PROJECT.
4. THE CONTRACTOR SHALL MAINTAIN THE EXISTING WEATHERTIGHT CONDITION THROUGHOUT THE CONSTRUCTION PERIOD AND REPAIR ALL DAMAGE CAUSED BY CONSTRUCTION OPERATIONS.
5. THE CONTRACTOR SHALL PROVIDE TEMPORARY DIRECTIONAL SIGNS FOR EACH PHASE OF THE CONSTRUCTION PROJECT TO BE LOCATED AS DIRECTED BY THE OWNER.
6. TEMPORARY PARTITIONS INDICATED ARE THE MINIMUM REQUIREMENTS AND ARE FOR DESIGN INTENT ONLY. IF ADDITIONAL PARTITIONS ARE REQUIRED TO ENSURE SAFETY AND TO FACILITATE THE OWNER'S OPERATIONS IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE. DOORS SHALL BE PROVIDED IN PARTITIONS AS REQUIRED BY THE OWNER.
7. WORK NOT INDICATED WITHIN A SPECIFIED PHASING PLAN SHALL BE COORDINATED WITH THE OWNER PRIOR TO COMMENCEMENT OF THE WORK.
8. THE CONTRACTOR SHALL MAINTAIN INTERIM LIFE SAFETY STANDARDS AT ALL TIMES DURING CONSTRUCTION.
9. THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
10. ALL DEBRIS CARTS UTILIZED SHALL HAVE TIGHT FITTING COVERS TO MINIMIZE THE SPREAD OF DUST.
11. EACH PHASE MUST BE COMPLETE AND OCCUPIED BY THE OWNER PRIOR TO BEGINNING THE NEXT PHASE. CONTRACTOR SHALL ALLOW SEVEN (7) DAYS BETWEEN PHASES TO ALLOW THE OWNER TO MOVE.
12. ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
13. ARCHITECTURAL WORK SUCH AS CEILING REMOVAL/REPLACEMENT, PATCHING, ETC. SHALL BE PROVIDED AS REQUIRED BY MECHANICAL, PLUMBING AND ELECTRICAL WORK OUTSIDE OF THE MAJOR WORK ARES. CONTRACTOR SHALL REVIEW ALL DRAWINGS AND FIELD VERIFY EXISTING CONDITIONS TO DETERMINE SCOPE OF THIS WORK.

(#) PHASING NOTES

1. 1 HR RATED TEMPORARY PARTITION. FINISH SIDE EXPOSED TO PUBLIC.
2. 3/4 HR RATED DOOR AND HARDWARE.
3. VESTIBULE WITH WALK OFF MATS.
4. REMOVE DOOR AND INFILL THE OPENING AFTER HOURS OR ON WEEKEND.
5. TEMPORARY PARTITIONS MAY BECOME PERMANENT WALLS AT THE END OF PHASE.

LEGEND

- CLEAN SUPPLIES
- SOILED SUPPLIES
- PATIENT TO SURGERY
- PATIENT TO PACU
- CONTRACTOR ACCESS
- 1 HOUR RATED TEMPORARY CONSTRUCTION WALL
- STARTING POINT
- DIRECTION OF TRAVEL
- RESTRICTED ACCESS CORRIDOR

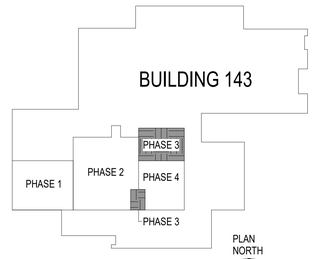

KEY PLAN

1 ICRA -FIRST FLOOR PLAN - PHASE 3

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL ICRA PLAN FIRST FLOOR - PHASE 3
Phase	BID DOCUMENTS
Approved by:	Jon Manninen, COR
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT / SKC
VA Drawing Number	2617
Building Number	143
Drawing Number	A-013

12/29/2025 1:42:46 AM

VA FORM 08 - 6231

PHASING COORDINATION

OWNER, ARCHITECT AND CONTRACTOR SHALL REVIEW AND COORDINATE PHASING REQUIREMENTS WHEN CONTRACT IS AWARDED.

GENERAL PHASING NOTES

1. THE CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND COMMUNICATIONS AS REQUIRED TO SUPPORT TEMPORARY RELOCATED EQUIPMENT AND MAINTAIN OPERATIONS IN AREAS NOT UNDER CONSTRUCTION.
2. THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING WEEKENDS, AND/OR DURING EVENINGS.
3. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER THE SCHEDULING OF ALL INTERRUPTIONS IN SERVICES REQUIRED BY THIS PROJECT.
4. THE CONTRACTOR SHALL MAINTAIN THE EXISTING WEATHERTIGHT CONDITION THROUGHOUT THE CONSTRUCTION PERIOD AND REPAIR ALL DAMAGE CAUSED BY CONSTRUCTION OPERATIONS.
5. THE CONTRACTOR SHALL PROVIDE TEMPORARY DIRECTIONAL SIGNS FOR EACH PHASE OF THE CONSTRUCTION PROJECT TO BE LOCATED AS DIRECTED BY THE OWNER.
6. TEMPORARY PARTITIONS INDICATED ARE THE MINIMUM REQUIREMENTS AND ARE FOR DESIGN INTENT ONLY. IF ADDITIONAL PARTITIONS ARE REQUIRED TO ENSURE SAFETY AND TO FACILITATE THE OWNER'S OPERATIONS IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE. DOORS SHALL BE PROVIDED IN PARTITIONS AS REQUIRED BY THE OWNER.
7. WORK NOT INDICATED WITHIN A SPECIFIED PHASING PLAN SHALL BE COORDINATED WITH THE OWNER PRIOR TO COMMENCEMENT OF THE WORK.
8. THE CONTRACTOR SHALL MAINTAIN INTERIM LIFE SAFETY STANDARDS AT ALL TIMES DURING CONSTRUCTION.
9. THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
10. ALL DEBRIS CARTS UTILIZED SHALL HAVE TIGHT FITTING COVERS TO MINIMIZE THE SPREAD OF DUST.
11. EACH PHASE MUST BE COMPLETE AND OCCUPIED BY THE OWNER PRIOR TO BEGINNING THE NEXT PHASE. CONTRACTOR SHALL ALLOW SEVEN (7) DAYS BETWEEN PHASES TO ALLOW THE OWNER TO MOVE.
12. ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
13. ARCHITECTURAL WORK SUCH AS CEILING REMOVAL/REPLACEMENT, PATCHING, ETC. SHALL BE PROVIDED AS REQUIRED BY MECHANICAL, PLUMBING AND ELECTRICAL WORK OUTSIDE OF THE MAJOR WORK ARES. CONTRACTOR SHALL REVIEW ALL DRAWINGS AND FIELD VERIFY EXISTING CONDITIONS TO DETERMINE SCOPE OF THIS WORK.

(#) PHASING NOTES

1. 1 HR RATED TEMPORARY PARTITION. FINISH SIDE EXPOSED TO PUBLIC.
2. 3/4 HR RATED DOOR AND HARDWARE.
3. VESTIBULE WITH WALK OFF MATS.
4. PRIOR TO INSTALL ICRA WALL, REMOVE WALL AND DOOR COMPLETE. WORK IN THIS AREA SHALL BE PERFORMED AFTER HOURS OR ON WEEKENDS.
5. TEMPORARY PARTITIONS MAY BECOME PERMANENT WALLS AT THE END OF PHASE.

LEGEND

- CLEAN SUPPLIES
- SOILED SUPPLIES
- PATIENT TO SURGERY
- PATIENT TO PACU
- CONTRACTOR ACCESS
- 1 HOUR RATED TEMPORARY CONSTRUCTION WALL
- STARTING POINT
- DIRECTION OF TRAVEL
- RESTRICTED ACCESS CORRIDOR

KEY PLAN

BUILDING 143

PHASE 1 | PHASE 2 | PHASE 3 | PHASE 4 | PHASE 3

PLAN NORTH / ACTUAL NORTH

1 ICRA - FIRST FLOOR DEMOLITION PLAN - PHASE 4

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL ICRA PLAN FIRST FLOOR - PHASE 4
Phase	BID DOCUMENTS
Approved by:	Jon Manninen, COR
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT / SKC
VA Drawing Number	2617
Building Number	143
Drawing Number	A-014

12/29/2025 1:45:04 AM

VA FORM 08 - 6231

DEMOLITION NOTES - BASEMENT CEILING

1	HATCHED AREA INDICATES APPROXIMATE AREA OF PLUMBING WORK ABOVE, REFER TO NEW WORK PLAN AND PLUMBING DRAWINGS. REWORK CEILING AS REQUIRED TO ACCOMMODATE NEW WORK. COORDINATE WITH COR FOR AREA ACCESS AND PERMITED WORK TIMES. CONTRACTOR IS RESPONSIBLE FOR TEMPORARY ICRA BARRIERS FOR ISOLATED WORK AREAS.
2	HATCHED AREA INDICATES APPROXIMATE AREA OF STRUCTURAL WORK ABOVE, REFER TO NEW WORK PLAN AND STRUCTURAL DRAWINGS. REWORK CEILING AS REQUIRED TO ACCOMMODATE NEW WORK. COORDINATE WITH COR FOR AREA ACCESS AND PERMITED WORK TIMES. CONTRACTOR IS RESPONSIBLE FOR TEMPORARY ICRA BARRIERS FOR ISOLATED WORK AREAS.
3	PROVIDE ICRA BARRIER.

GENERAL DEMOLITION NOTES

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK. TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

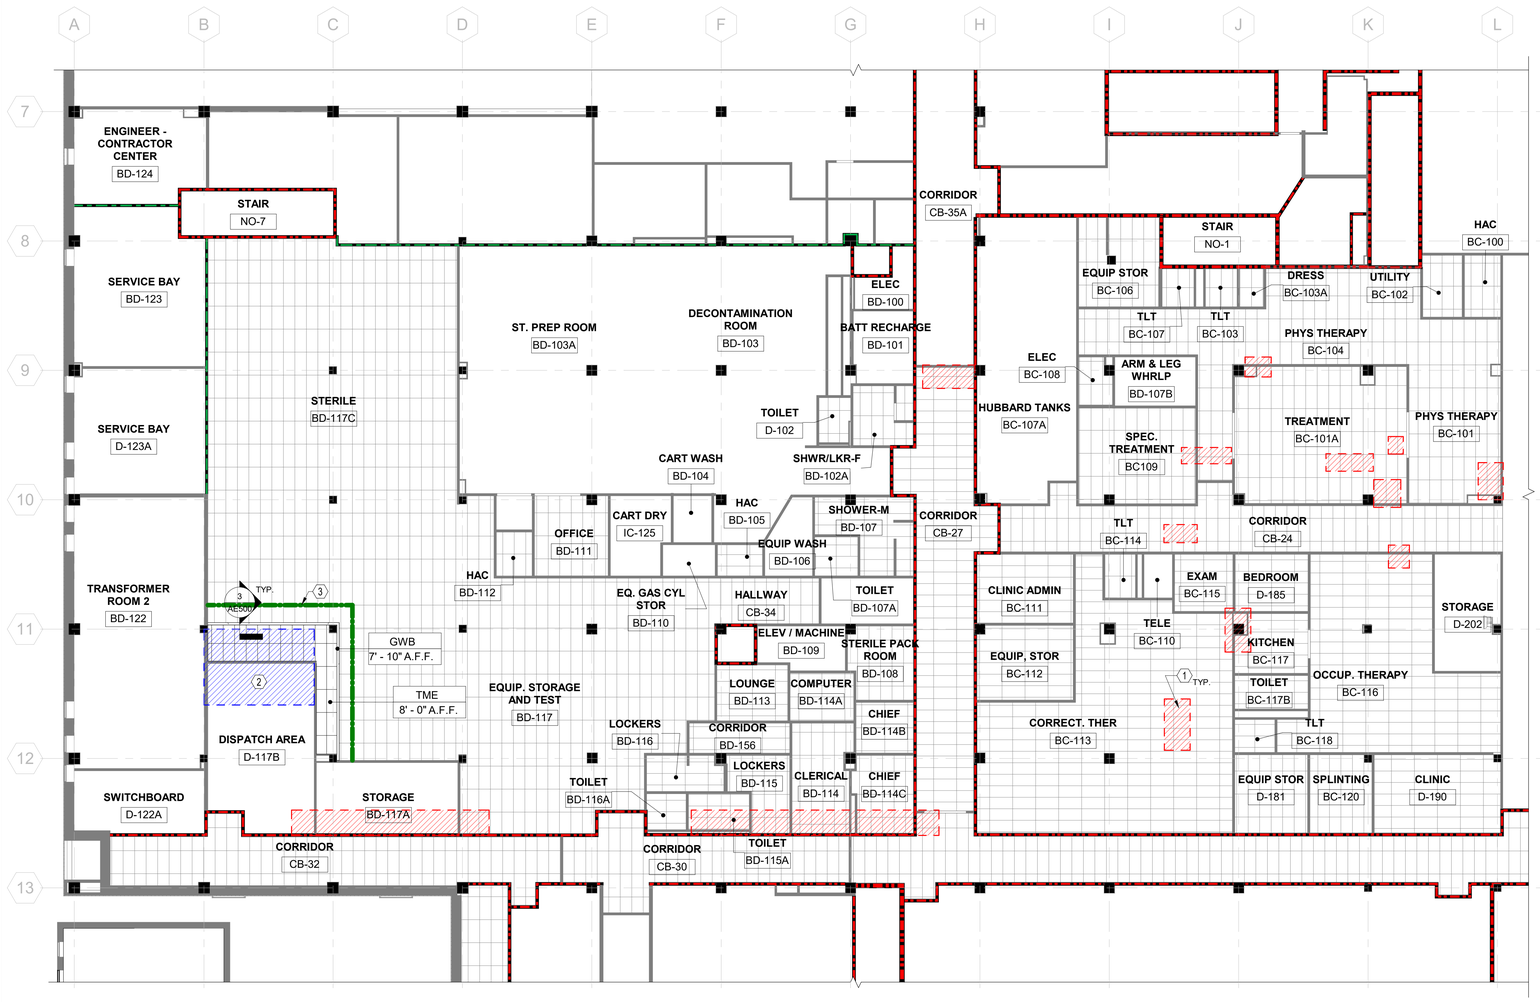

1 BASEMENT CEILING DEMOLITION AND NEW WORK PLAN

SCALE: 3/32" = 1'-0"

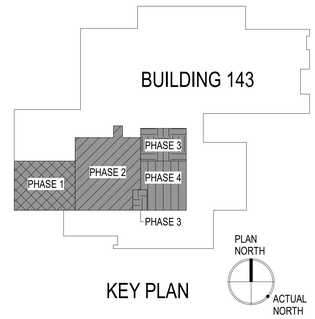

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 04959-01136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL DEMOLITION PLAN BASEMENT	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: AD100
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: MAT / SKC	

12/29/2025 1:43:08 AM

VA FORM 08 - 6231

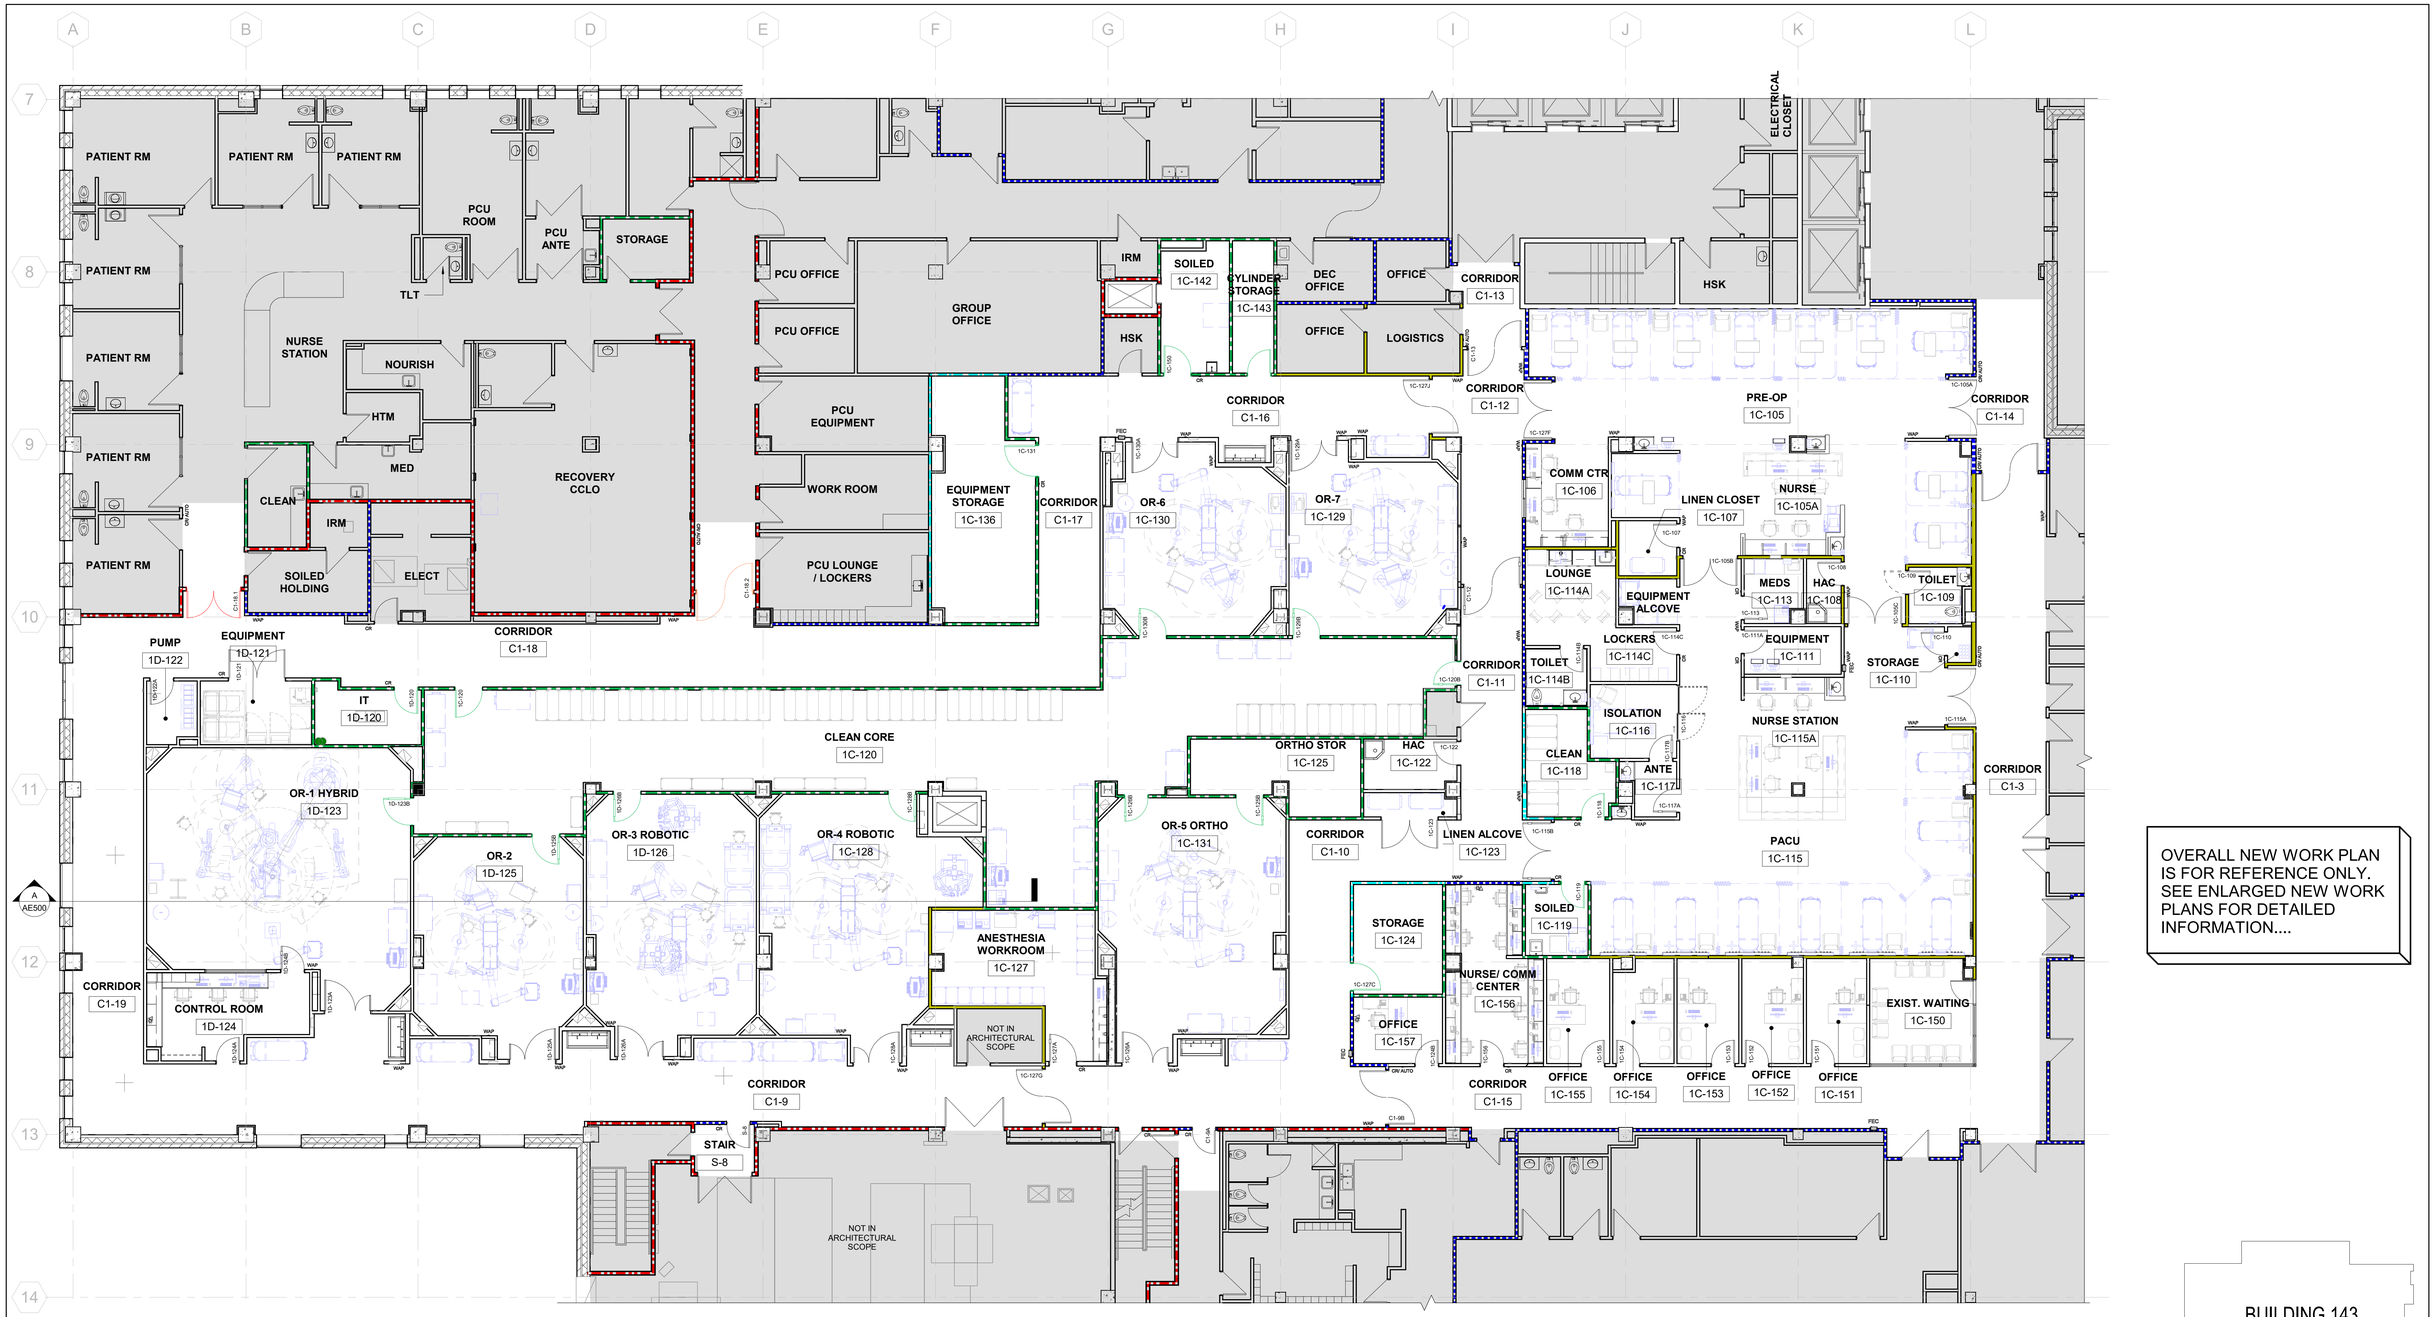

OVERALL NEW WORK PLAN IS FOR REFERENCE ONLY. SEE ENLARGED NEW WORK PLANS FOR DETAILED INFORMATION....

1 OVERALL NEW WORK PLAN - FIRST FLOOR

SCALE: 1/8" = 1'-0"

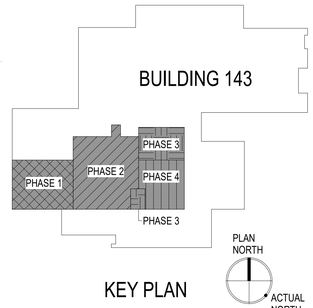

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
784.3
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - OVERALL	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: AE100
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: MAT / SKC	

12/29/2025 1:43:29 AM

VA FORM 08 - 6231

NOT IN SCOPE

NOT IN ARCHITECTURAL SCOPE

NOT IN ARCHITECTURAL SCOPE

NOT IN SCOPE

1C-142 1C-143 C1-16 C1-12 1C-105 1C-106 1C-105A 1C-107 1C-108 1C-109 1C-112 1C-114A 1C-113 1C-110 1C-136 C1-17 1C-130 1C-129 C1-18 1D-121 1D-122 1D-120 1C-120 1C-120 1C-120 1C-122 1C-125 1C-128 C1-11 1C-114C 1C-114B 1C-111 1C-116 1C-118 1C-115A 1C-117 1D-123 1D-126 1C-131 1C-128 C1-10 1C-115 1C-119 1D-125 C1-19 1C-127 1C-124 1C-157 1C-156 1C-155 1C-154 1C-153 1C-152 1C-151 1C-150 1D-124 C1-9 C1-15

PHASING LEGEND

- PHASE 1
- PHASE 2
- PHASE 3
- PHASE 4

OVERALL REFLECTED CEILING PLAN IS FOR REFERENCE ONLY. SEE ENLARGED REFLECTED CEILING PLANS FOR DETAILED INFORMATION....

BUILDING 143

PHASE 1 PHASE 2 PHASE 3 PHASE 4 PHASE 3

KEY PLAN

PLAN NORTH

ACTUAL NORTH

1 OVERALL REFLECTED CEILING PLAN - FIRST FLOOR

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK

A Service-Disabled Veteran-Owned Small Business

(856) 429-4000 • Miller-Remick.com

M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA JOSEPH H. TROST NO. 7843 2025-12-30 ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - OVERALL

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: DJP | Drawn: MAT / SKC

VA Drawing Number: 2617

Building Number: 143

Drawing Number: AC100

12/29/2025 1:43:33 AM

VA FORM 08 - 6231

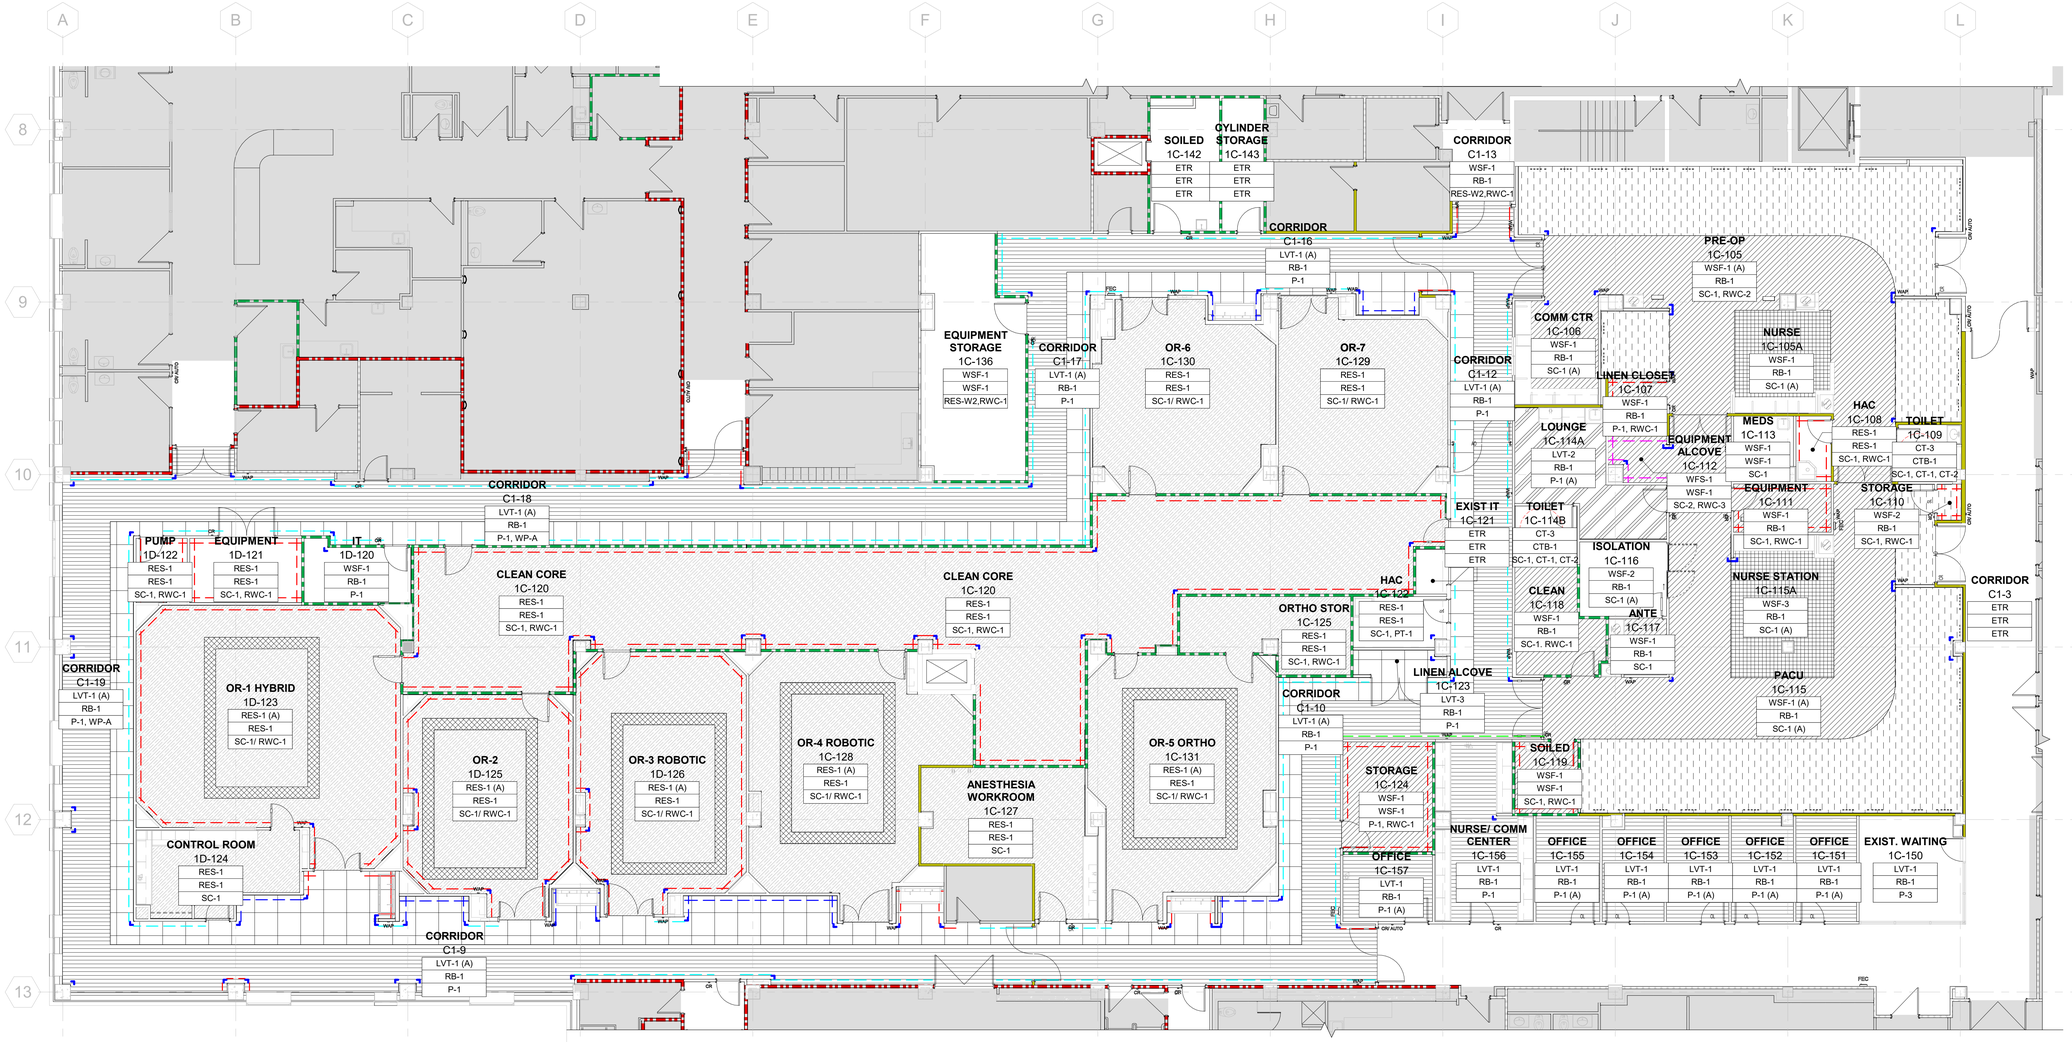

1 OVERALL FINISH PLAN - FIRST FLOOR

SCALE: 1/8" = 1'-0"

OVERALL FINISH PLAN IS FOR REFERENCE ONLY. SEE ENLARGED FINISH PLANS FOR DETAILED INFORMATION....

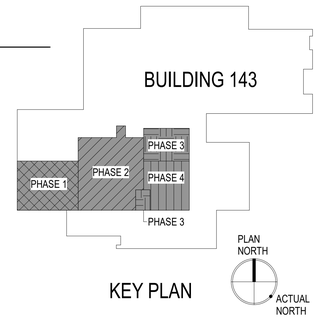

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R. PROJECT NO. 24109-0138

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA — JOSEPH M. TINSLEY — NO. 7843 — REGISTERED ARCHITECT — 2025-12-30

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL FINISH PLAN FIRST FLOOR - OVERALL
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	HLJ
VA Drawing Number	2617
Building Number	143
Drawing Number	AI100

02/26/2025 1:43:43 AM

VA FORM 08 - 6231

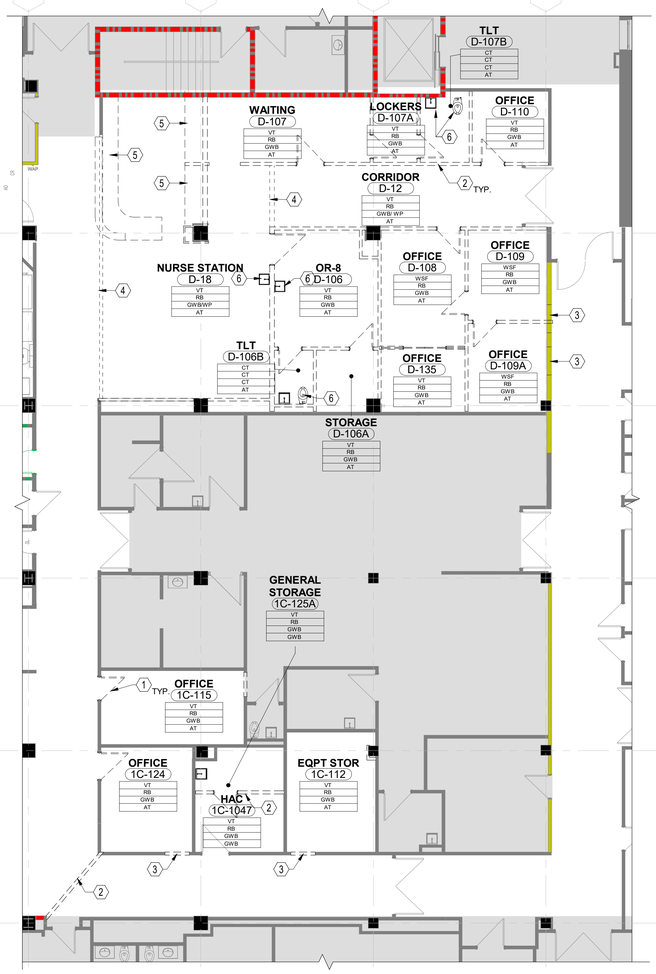

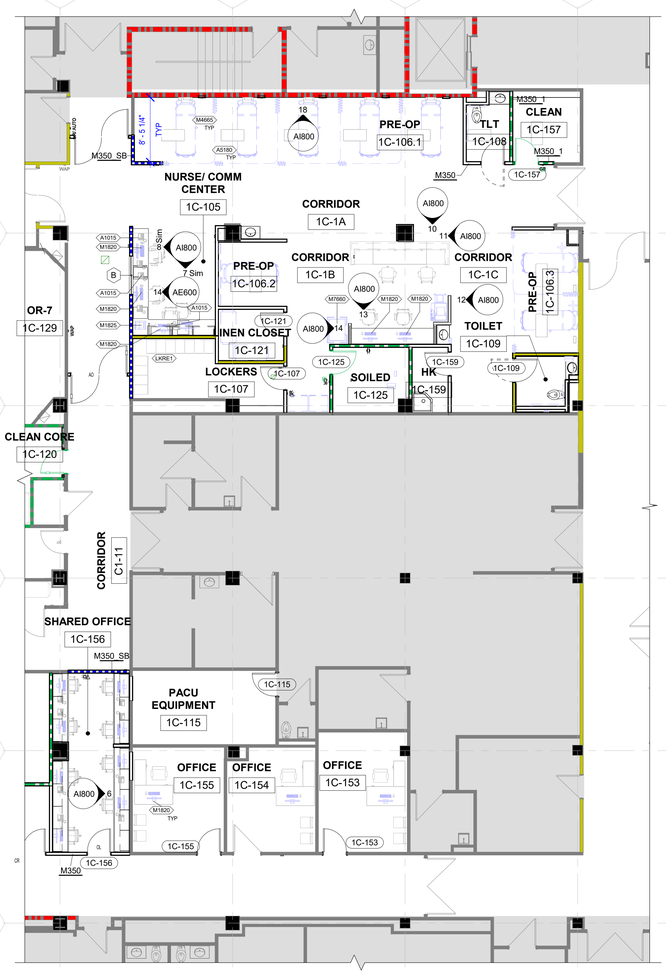

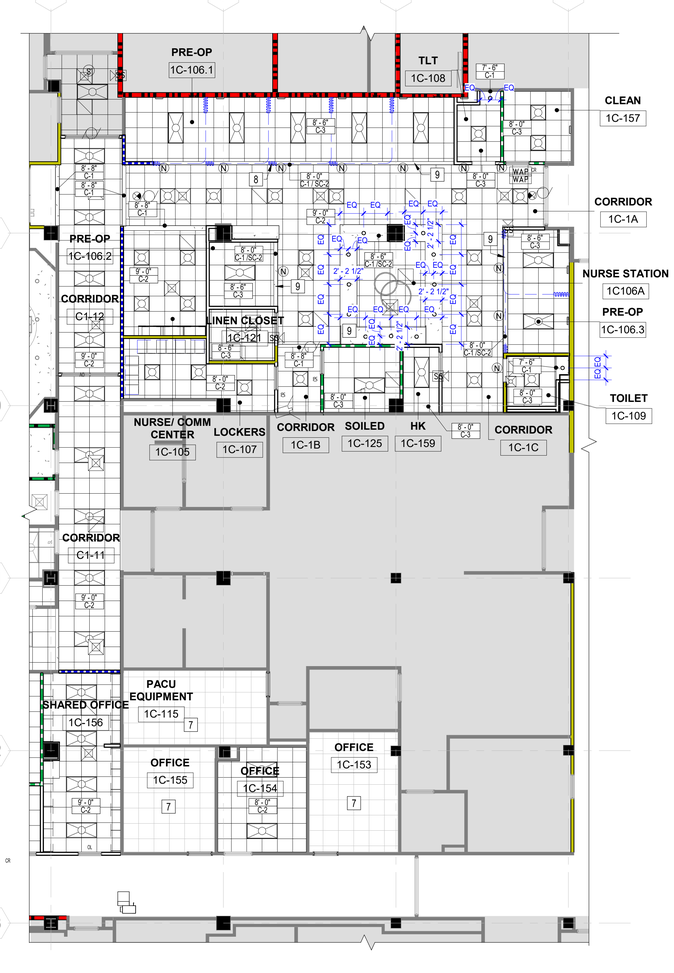

1 FIRST FLOOR DEMOLITION PLAN - BID DEDUCT

SCALE: 1/8" = 1'-0"

2 FIRST FLOOR NEW WORK PLAN - BID DEDUCT

SCALE: 1/8" = 1'-0"

3 REFLECTED CEILING PLAN- BID DEDUCT

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES.

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.

GENERAL DEMOLITION NOTES.

21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

ⓐ DEMOLITION NOTES - BID DEDUCT

1	REMOVE DOOR, FRAME, AND HARDWARE COMPLETE.
2	REMOVE EXISTING GWB AND METAL STUDS COMPLETE, AS DENOTED BY DASHED LINE, INCLUDING, BUT NOT LIMITED TO, ALL FINISHES AND BRACING.
3	REMOVE PORTION OF WALL TO INSTALL NEW DOOR. COORDINATE WITH NEW WORK.
4	REMOVE PTD GWB SOFFIT COMPLETE, AS DENOTED BY DASHED LINE.
5	REMOVE CASEWORK COMPLETE, INCLUDING, BUT NOT LIMITED TO, BASE CABINETS, WALL CABINETS, SINKS, BRACING, AND HARDWARE.
6	REMOVE TOILET ACCESSORIES AND PLUMBING FIXTURES, COMPLETE. SEE PLUMBING DRAWINGS.
7	REMOVE BUMPER RAILS, WAINSCOTTING, AND CORNER GUARDS COMPLETE.

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.

GENERAL NEW WORK NOTES

5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD, REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - BID DEDUCT

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	PROVIDE SEMI-RECESSED FIRE EXTINGUISHER AS SPECIFIED.
3	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
4	OFOI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
5	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
6	PROVIDE PTD GWB SOFFIT SEE FINISH SCHEDULE FOR COLOR.
7	EXISTING CEILING TO REMAIN.
8	CFCI CUBICLE CURTAIN TRACKS, TYP
9	PAINT ACCENT PAINT COLOR ON VERTICAL AND HORIZONTAL SURFACES OF GYP. SOFFIT.

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.

GENERAL CEILING NOTES

7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION. IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

EQUIPMENT SCHEDULE- BID DEDUCT

MARK	DESCRIPTION	NEW EQUIPMENT OFOI	OFCI	CFCI	COMMENTS
A1015	TELEPHONE, DESK, MULTIPLE LINE	***			PROVIDE POWER AND DATA
A5075	TORK ELEVATION SENSOR FOAM SOAP DISPENSER		***		-
A5077	HAND SANITIZER, HANDS FREE	***			-
A5082	DISPENSER PAPER TOWEL SURFACE MOUNT		***		-
A5107	GLOVE DISPENSER, WALL MOUNTED	***			-
A5108	WASTE DISPOSAL UNIT, SHARPS	***			-
A5180	SURFACE MOUNTED CUBICLE TRACK WITH CURTAIN			***	-
F0515	CLOSED LINEN SUPPLY CART	***			-
F3200	CLOCK, BATTERY, 12" DIAMETER				-
GB18	VERTICAL GRAB BAR		***		PROVIDE BLOCKING
GB36	HORIZONTAL GRAB BAR 36"		***		PROVIDE BLOCKING
GB42	HORIZONTAL GRAB BAR 42"		***		PROVIDE BLOCKING
HDWS	HEADWALL SYSTEM		***		PROVIDE POWER, DATA AND BLOCKING
M1805	COPY MACHINE	***			PROVIDE POWER AND DATA
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M3105	BLANKET WARMER	***			PROVIDE POWER
M3150	PYXIS MED STATION	***			PROVIDE POWER AND DATA
M4255	IV STAND	***			-
M4665	STRETCHER	***			-
M7040	OVERBED TABLE	***			-
M7660	CRASH CART	***			PROVIDE EMERGENCY POWER
M7845	4 CHANNEL BEDSIDE PHYSIOLOGICAL MONITOR	***			PROVIDE EMERGENCY POWER
MIR	STAINLESS STEEL MIRROR		***		-
SD2	HORIZONTAL SOAP DISPENSER		***		MANUFACTURER: BOBRICK: MODEL #B-2112
TPD	TOILET PAPER DISPENSER		***		-
WOW	MOBILE COMPUTER TRAY				PROVIDE POWER AND DATA

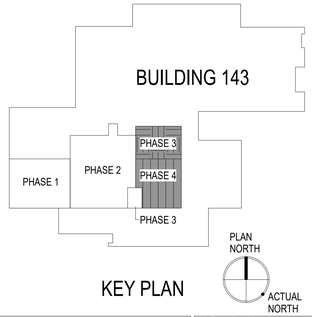

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: Date:

CONSULTANT

Architecture: PF&A DESIGN, P.C.
Civil Engineering: LABELLA ASSOCIATES
Fire Protection: STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO. 04/09-01/36

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH D. JONES
NO. 7843
2025-12-30

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL DEMOLITION, NEW WORK, & REFLECTED CEILING PLANS - FIRST FLOOR - BID DEDUCT

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30
Checked: DJP
Drawn: MAT / SKC

VA Drawing Number: 2617
Building Number: 143
Drawing Number: AE110

12/29/2025 14:31 AM

VA FORM 08 - 6231

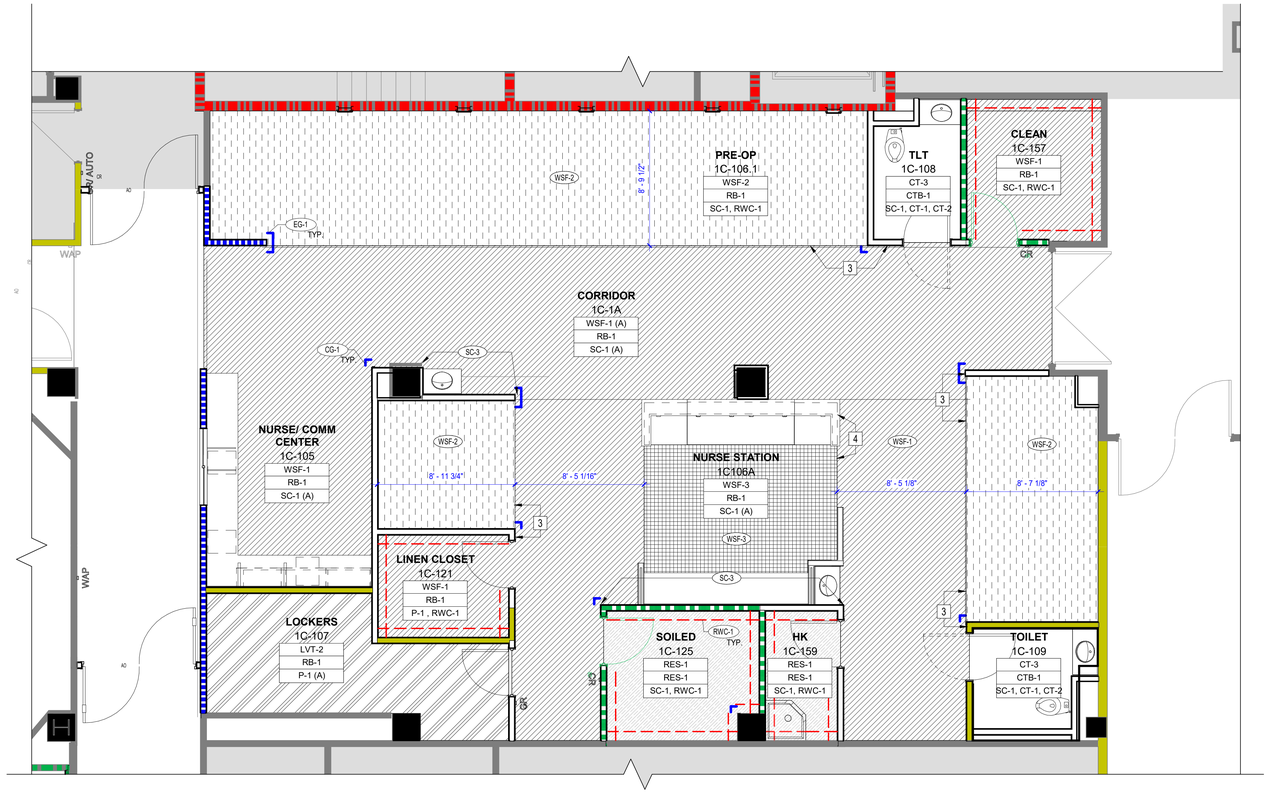

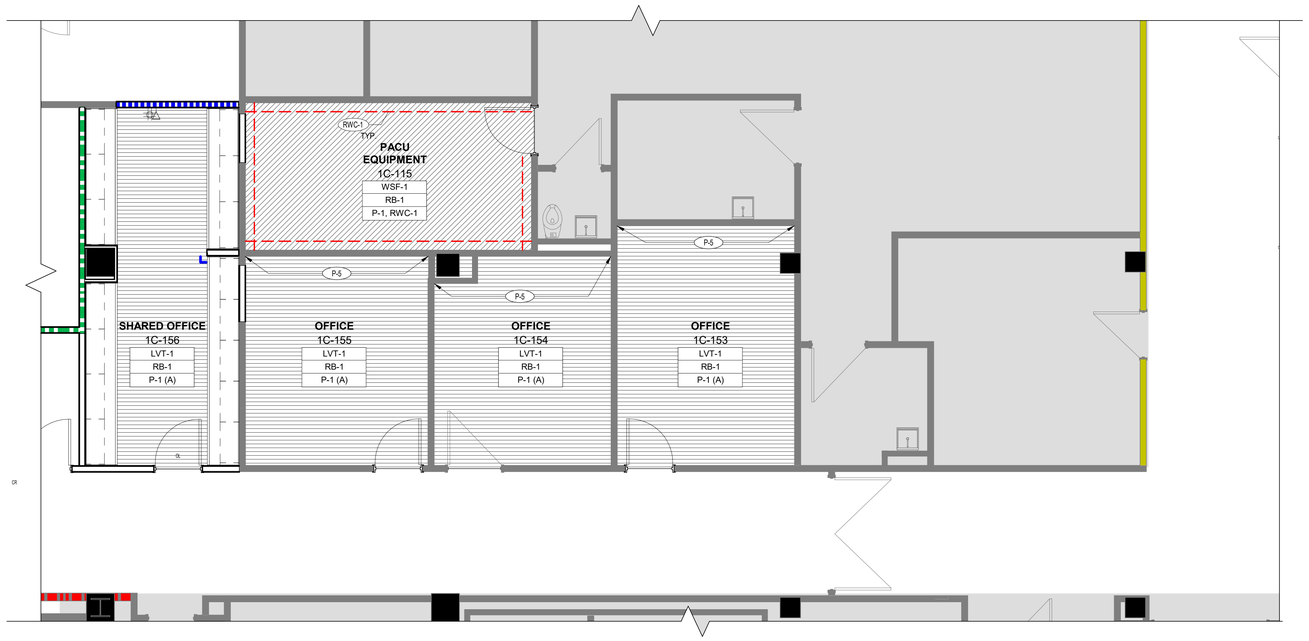

FIRST FLOOR FINISH PLAN - BID DEDUCT

1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES. WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

BID DEDUCT FLOOR PATTERN LEGEND

RES-1

WSF-1

WSF-2

WSF-3

LVT-1

LVT-2

ROOM NAME

ROOM #
P-1 — WALL FINISH
RB-1 — BASE FINISH
BBT-1 — FLOOR FINISH

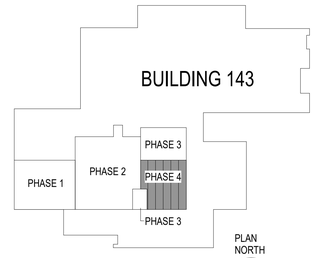

KEY PLAN

PLAN NORTH

ACTUAL NORTH

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
MR PROJECT NO. 24109-0138

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH M. TINSLEY
No. 7843
2025-12-30
Registered Architect

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL FINISH PLAN & SCHEDULE FIRST FLOOR - BID DEDUCT	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
		Project Number 658-19-103	**Building Number** 143
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Location** SALEM VA MEDICAL CENTER	**Drawing Number** AE111
		Issue Date 2025-12-30 / **Checked** DJP / **Drawn** HLJ	

02/26/2025 1:43:53 AM

VA FORM 08 - 6231

GENERAL DEMOLITION NOTES

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

(#) DEMOLITION NOTES - PHASE 1

1	REMOVE DOOR, FRAME, AND HARDWARE COMPLETE.
2	REMOVE EXISTING GWB AND METAL STUDS COMPLETE, AS DENOTED BY DASHED LINE, INCLUDING, BUT NOT LIMITED TO, ALL FINISHES AND BRACING.
3	REMOVE PORTION OF WALL TO INSTALL NEW DOOR. COORDINATE WITH NEW WORK.
4	REMOVE SHOWER PAN AND DRAIN COMPLETE. INFILL HOLE TO MATCH EXISTING SLAB.
5	REMOVE TOILET ACCESSORIES AND PLUMBING FIXTURES, COMPLETE. SEE PLUMBING DRAWINGS.
6	REMOVE CASEWORK COMPLETE, INCLUDING, BUT NOT LIMITED TO, BASE CABINETS, WALL CABINETS, SINKS, BRACING, AND HARDWARE.
7	REMOVE BUMPER RAILS, WAINSCOTTING, AND CORNER GUARDS COMPLETE.
8	REMOVE WINDOW AND PORTION OF EXTERIOR WALL AS REQUIRED TO TRANSPORT SIEMENS EQUIPMENT. COORDINATE WITH EQUIPMENT MANUFACTURER
9	REMOVE MOP SINK AND DRAIN COMPLETE. INFILL HOLE TO MATCH EXISTING SLAB.
10	DEMOLISH AND INSTALL DOOR AND CONTROLS DURING EVENINGS AND WEEKENDS.

DEMOLITION REMARKS

1. CONTRACTOR TO FIELD VERIFY FINISHES TO BE DEMOLISHED AT THIS LOCATION.
2. NO FINISHES AT THIS LOCATION.
3. COORDINATE FINISHES DEMOLITION WITH PHASING.

1 DEMOLITION - FIRST FLOOR PLAN - PHASE 1

SCALE: 1/8" = 1'-0"

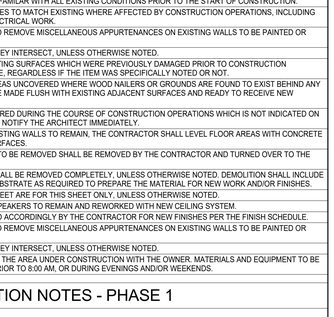

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R. PROJECT NO. 24109-0138

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH M. TRUETT
No. 23643
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL DEMOLITION PLANS FIRST FLOOR - PHASE 1	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR		Project Number: 658-19-103	Building Number: 143
	FULLY SPRINKLERED	Location: SALEM VA MEDICAL CENTER	Drawing Number: P1-AD100
		Issue Date: 2025-12-30 / Checked: SKC / Drawn: MAT	

VA FORM 08 - 6231

2/28/2025 1:44:03 AM

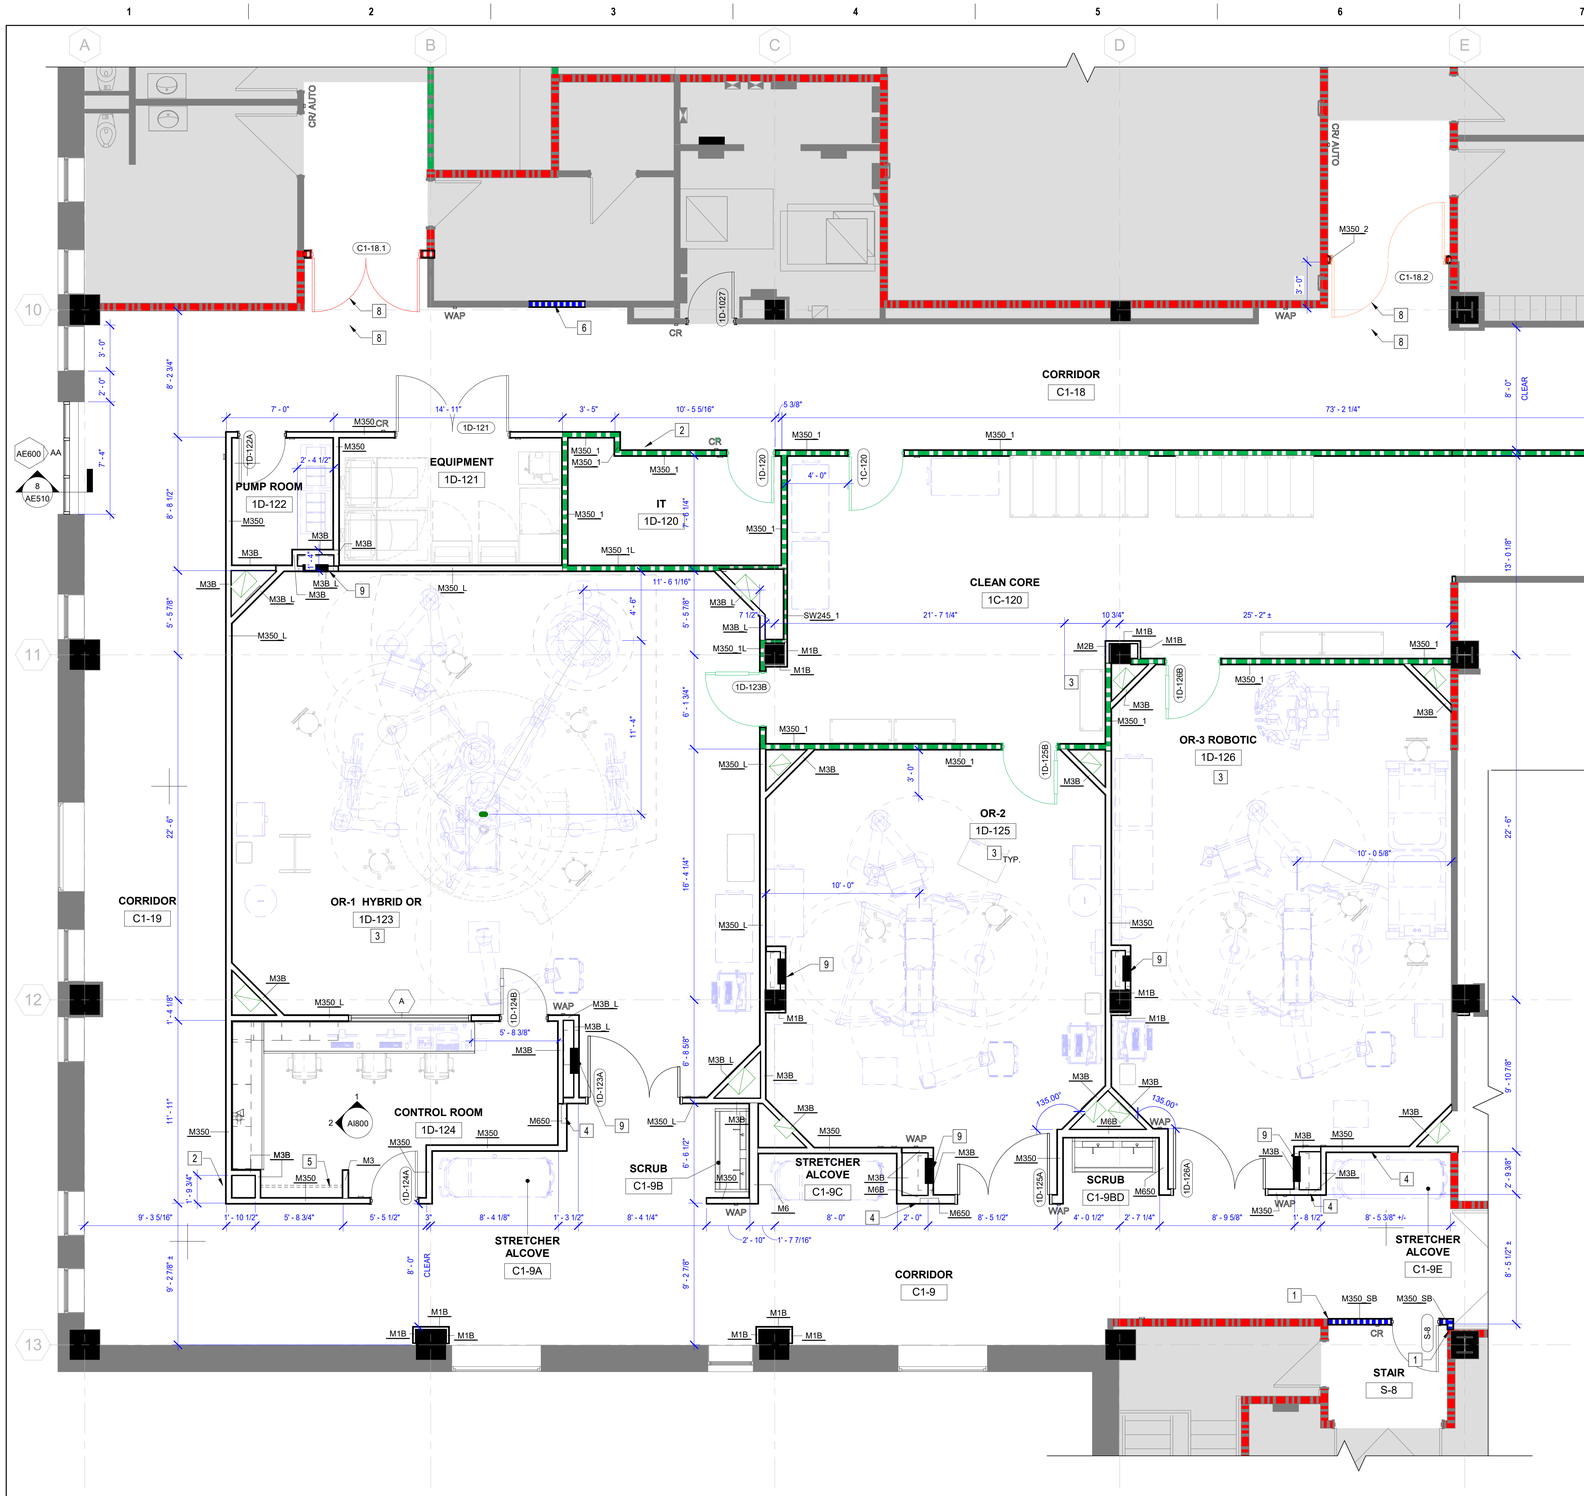

1 FIRST FLOOR NEW WORK PLAN - PHASE 1

SCALE: 1/4" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD, REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - PHASE 1

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	PROVIDE SEMI-RECESSED FIRE EXTINGUISHER AS SPECIFIED.
3	OFOI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
4	PROVIDE MED GAS ZONE VALVE BOX IN THIS LOCATION. COORDINATE WITH MECHANICAL DRAWINGS.
5	PROVIDE LEAD STORAGE RACK: 1-1/2" DIA. GALVANIZED 40 STEEL PIPE ROD WITH WELDED CONNECTIONS.
6	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
7	PROVIDE ICRA BARRIER
8	INSTALL DOOR AND CONTROLS DURING EVENINGS AND/OR WEEKENDS.
9	ISOLATION PANEL, SEE ELECTRICAL DRAWINGS.

WALL TYPE SCHEDULE- PHASE 1

TYPE	STC	DESCRIPTION	FIRE RATING	UL	REMARKS	Type Mark
M1B	-	1 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M1B
M2B	-	2 1/2" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M2B
M3	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3
M3B	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3B
M3B_L	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER LEAD LINED 5/8" GWB ON ROOM SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	PROVIDE LEAD LINING PER OWNER'S PHYSICIST REPORT. PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M3B_L
M6	-	6" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M6
M6B	-	6" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M6B
M350	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB EACH SIDE, 3.5" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	-	M350
M350_1	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	M350_1
M350_1L	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER LEAD LINED 5/8" GWB, (1) LAYER 5/8" GWB OTHER SIDE. 3.5" SAFB CREASED MINERAL WOOL INSULATION. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE LEAD LINING PER OWNER'S PHYSICIST REPORT. PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M350_1L
M350_2	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (2) LAYERS 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	2 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "2 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	M350_2
M350_L	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER LEAD LINED 5/8" GWB, (1) LAYER 5/8" GWB OTHER SIDE. 3.5" SAFB CREASED MINERAL WOOL INSULATION. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	PROVIDE LEAD LINING PER OWNER'S PHYSICIST REPORT.	M350_L
M350_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.	M350_SB
M650	50	6" METAL STUDS AT 16" O.C. MAX. (1) LAYER OF 5/8" GWB ONE SIDE. (1) LAYER 5/8" GWB OTHER SIDE. PROVIDE 3" SAFB CREASED MINERAL WOOL, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	-	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M650
SW245_1	45	2 1/2" METAL C-H STUDS AT 24" O.C. MAX. (1) LAYER OF 5/8" FIRE RATED GWB ON ONE SIDE, (1) LAYER OF 1" FIRE RATED GWB ON ONE SIDE, 1" SOUND BATTS IN CAVITY. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT BOTTOM TRACK, TOP TRACK, AND ALL WALL PENETRATIONS. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U415	PROVIDE 6" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	SW245_1

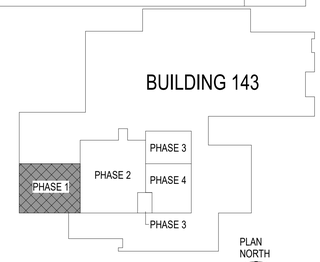

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO. 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA — JOSEPH T. TRIST — NO. 7843 — 2025-12-30 — ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - PHASE 1	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
		Project Number 658-19-103	**Building Number** 143
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Location** SALEM VA MEDICAL CENTER	**Drawing Number** P1-AE100
		Issue Date 2025-12-30 / **Checked** SKC / **Drawn** MAT/ABK	

12/29/2025 1:44:13 AM

VA FORM 08 - 6231

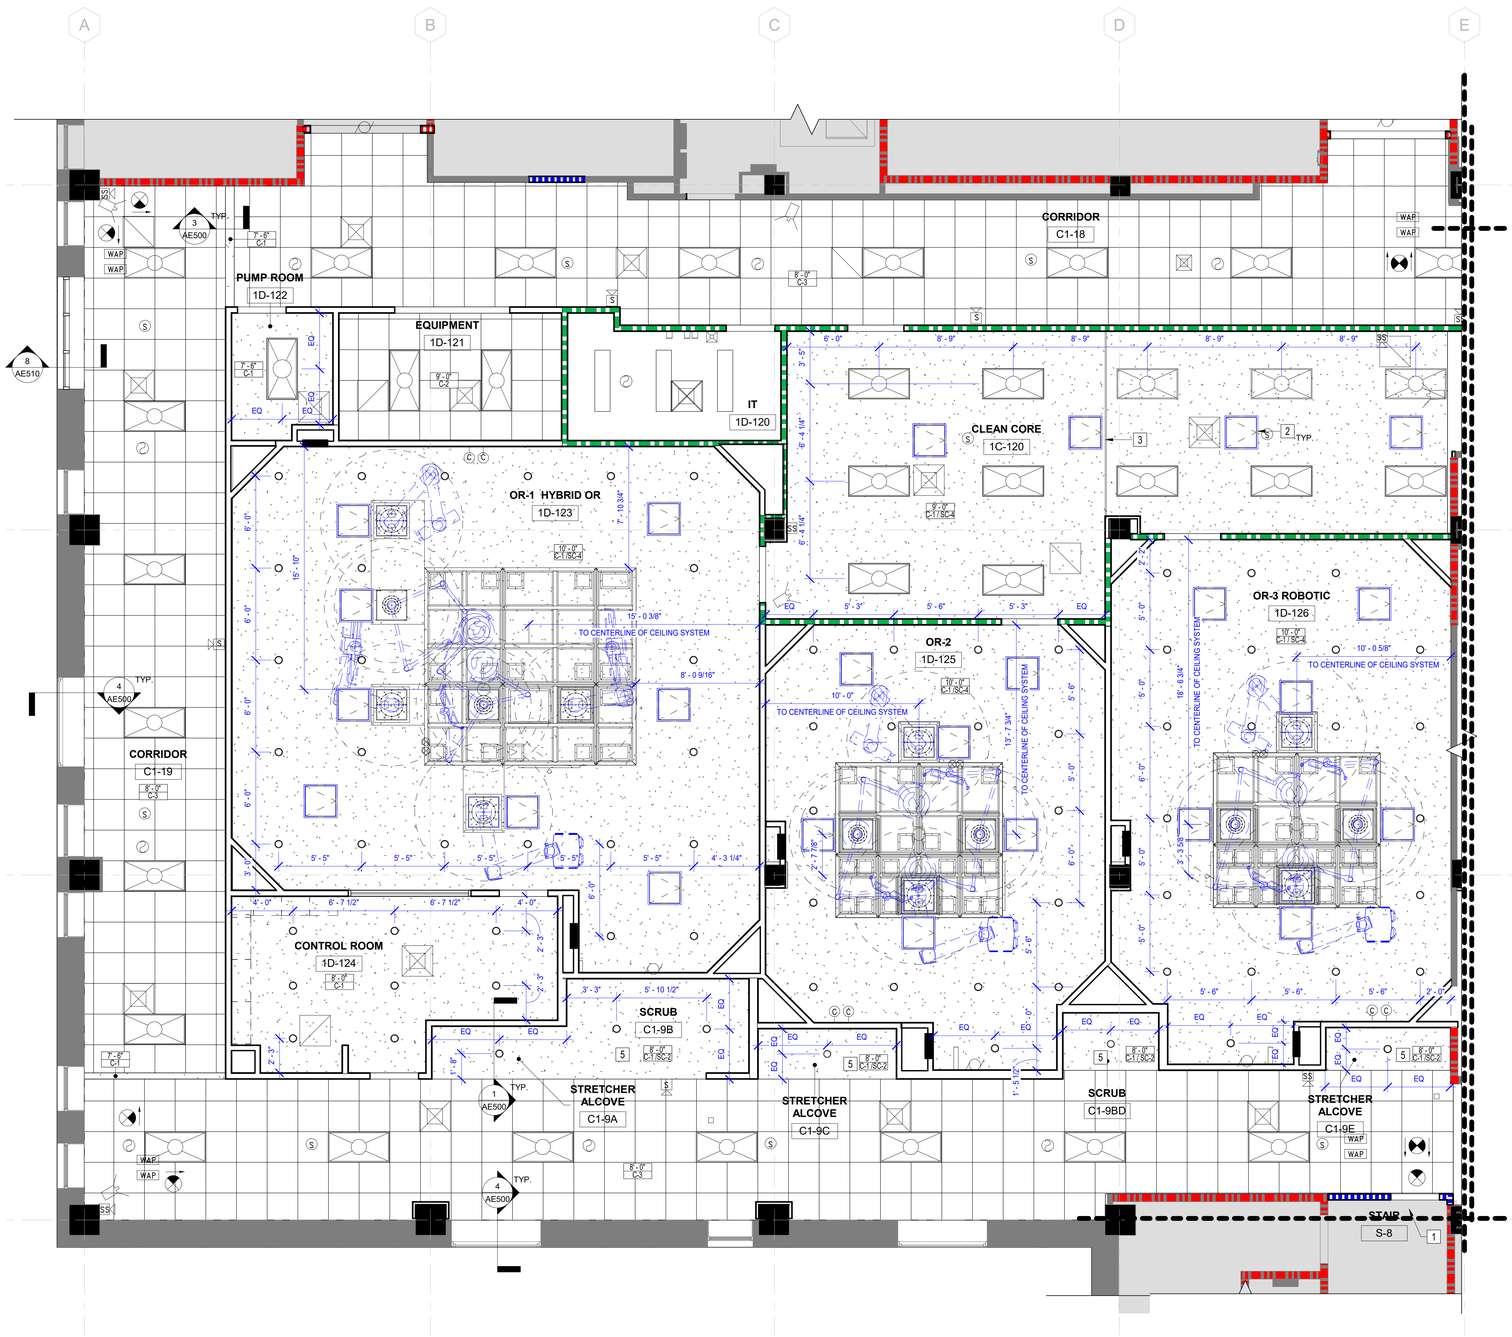

1 FIRST FLOOR REFLECTED CEILING PLAN - PHASE 1

SCALE: 1/4" = 1'-0"

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.
7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION, IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

CEILING NEW WORK NOTES - PHASE 1

1	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
2	ACCESS PANELS, COORDINATE LOCATION WITH MEP SYSTEMS.
3	<varies>
4	<varies>
5	<varies>
6	PAINT HORIZONTAL SURFACE OF GYP. SOFFIT.

CEILING LEGEND

** ITEMS ON THIS SHEET ARE SHOWN FOR LOCATION ONLY. COORDINATE WITH MECHANICAL AND ELECTRICAL SHEETS. CONTRACTOR TO VERIFY HOUSING TO WORK WITH CEILING TYPE.**

- EXHAUST AIR DIFFUSER
- RETURN AIR DIFFUSER
- SUPPLY AIR DIFFUSER
- 2 X 2 INDIRECT LIGHT FIXTURE
- 2 X 4 INDIRECT LIGHT FIXTURE
- CEILING ACCESS PANELS
- RECESSED CEILING LIGHT
- EXIT SIGN
- 2'-0" x 2'-0" ACT SYSTEM
- GWB CEILING
- (N) NURSE CALL DEVICES
- (S) SPEAKER
- WAP WIRELESS ACCESS POINT

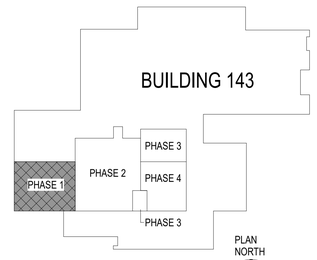

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO. 0459-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - PHASE 1	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
		Project Number 658-19-103	**Building Number** 143
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Location** SALEM VA MEDICAL CENTER	**Drawing Number** P1-AC100
		Issue Date 2025-12-30 / **Checked** SKC / **Drawn** MAT	

12/29/2025 1:44:15 AM

VA FORM 08 - 6231

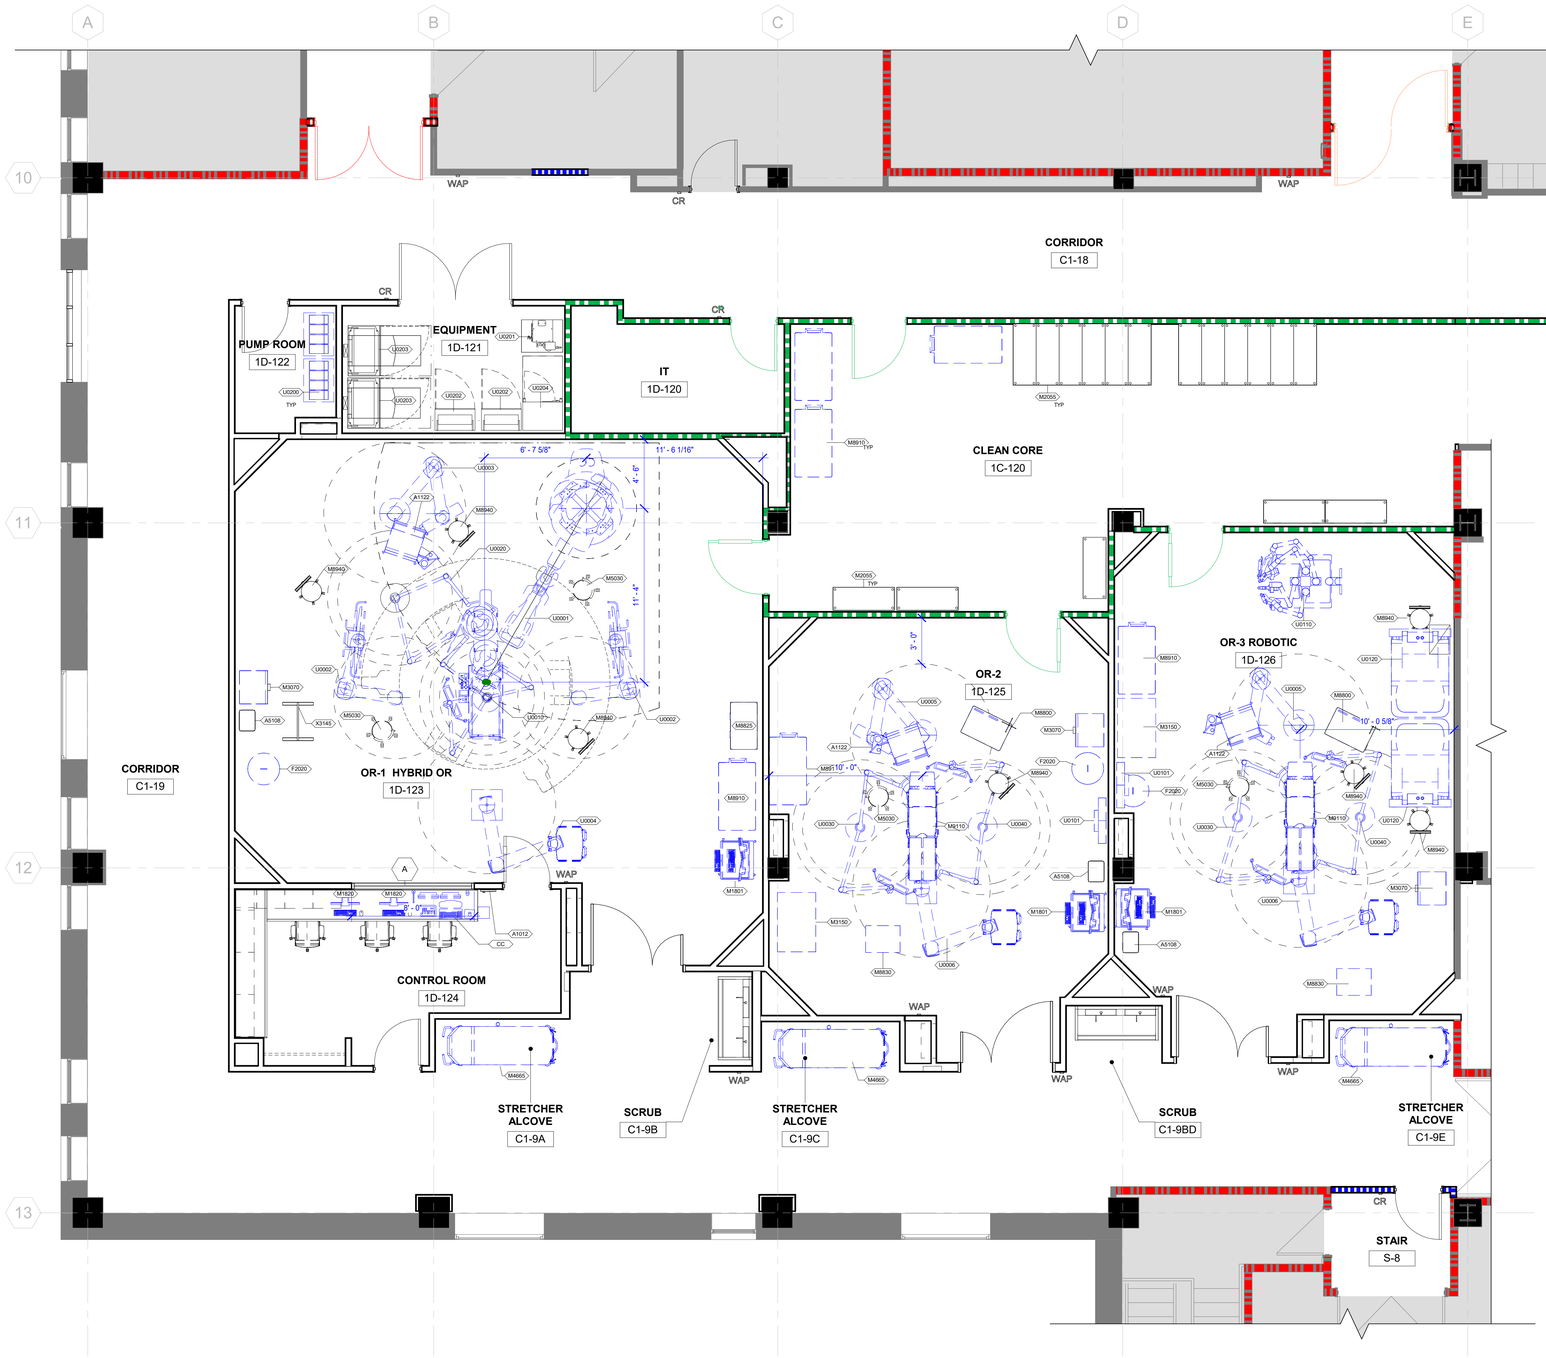

1 FIRST FLOOR EQUIPMENT PLAN - PHASE 1
SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE- PHASE 1

MARK	DESCRIPTION	NEW EQUIPMENT VAFVAI	VAFCI	CFCI	CONTRACTOR COMMENTS
A1012	TELEPHONE, WALL MOUNTED, 1 LINE	***			PROVIDE POWER AND DATA
A1122	ANESTHESIA MACHINE	***			PROVIDE POWER AND DATA
A5108	WASTE DISPOSAL UNIT; SHARPS	***			-
CC	CONTROL EQUIPMENT	***			COORDINATE WITH SIEMENS DRAWINGS
F2020	TRASH CAN	***			-
M1801	MOBILE NURSE STATION	***			PROVIDE POWER
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M2055	STATIONARY SHELVING UNIT	***			-
M3070	HAMPER, LINEN MOBILE	***			-
M3150	PYXIS MED STATION	***			PROVIDE POWER
M4665	STRETCHER	***			-
M5030	EXAM STOOL	***			-
M8800	CART, ANESTHESIA	***			-
M8825	INSTRUMENT AND DRESSING TABLE	***			-
M8830	INSTRUMENT TABLE	***			-
M8910	SURGICAL CASE CART	***			-
M8940	ANESTHESIA STOOL W/ BACK	***			-
M9110	SURGICAL TABLE	***			-
U0001	PHENO AND SURGICAL TABLE		***		COORDINATE WITH SIEMENS DRAWINGS
U0002	STERIS MONITOR DISPLAY BOOM - C2		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0003	STERIS ANESTHESIA BOOM - C3		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0004	STERIS EQUIPMENT BOOM - C4		***		PROVIDE POWER, DATA, MEDICAL GAS, AND SUPPORT
U0005	STERIS ANESTHESIA BOOM - C5		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0006	STERIS EQUIPMENT BOOM - C6		***		PROVIDE POWER, DATA, MEDICAL GAS, AND SUPPORT
U0010	STERIS SURGICAL LIGHT BOOM - B1		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0020	STERIS SURGICAL LIGHT BOOM - B2		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0030	STERIS SURGICAL LIGHT BOOM - B3		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0040	STERIS SURGICAL LIGHT BOOM - B4		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0101	X-RAY VIEW BOX		***		PROVIDE POWER AND BLOCKING
U0110	SURGICAL DI VINCI ROBOT	***			PROVIDE POWER AND DATA
U0120	SURGEON STATION		***		PROVIDE POWER AND DATA
U0200	HEART LUNG MACHINE		***		PROVIDE POWER
U0201	SIEMENS EQUIPMENT		***		COORDINATE WITH SIEMENS DRAWINGS
U0202	SIEMENS EQUIPMENT		***		COORDINATE WITH SIEMENS DRAWINGS
U0203	SIEMENS EQUIPMENT		***		COORDINATE WITH SIEMENS DRAWINGS
U0204	SIEMENS EQUIPMENT		***		COORDINATE WITH SIEMENS DRAWINGS
X3145	MOBILE X-RAY PROTECTIVE SCREEN/BARRIER	***			PROVIDE POWER AND DATA

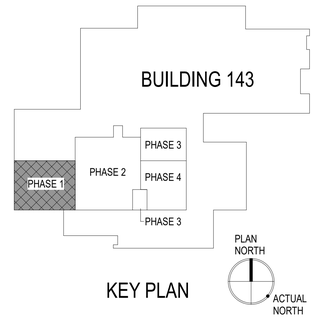

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL EQUIPMENT PLAN FIRST FLOOR - PHASE 1

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: JHT | Drawn: MAT

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P1-AQ100

12/29/2025 1:44:22 AM

VA FORM 08 - 6231

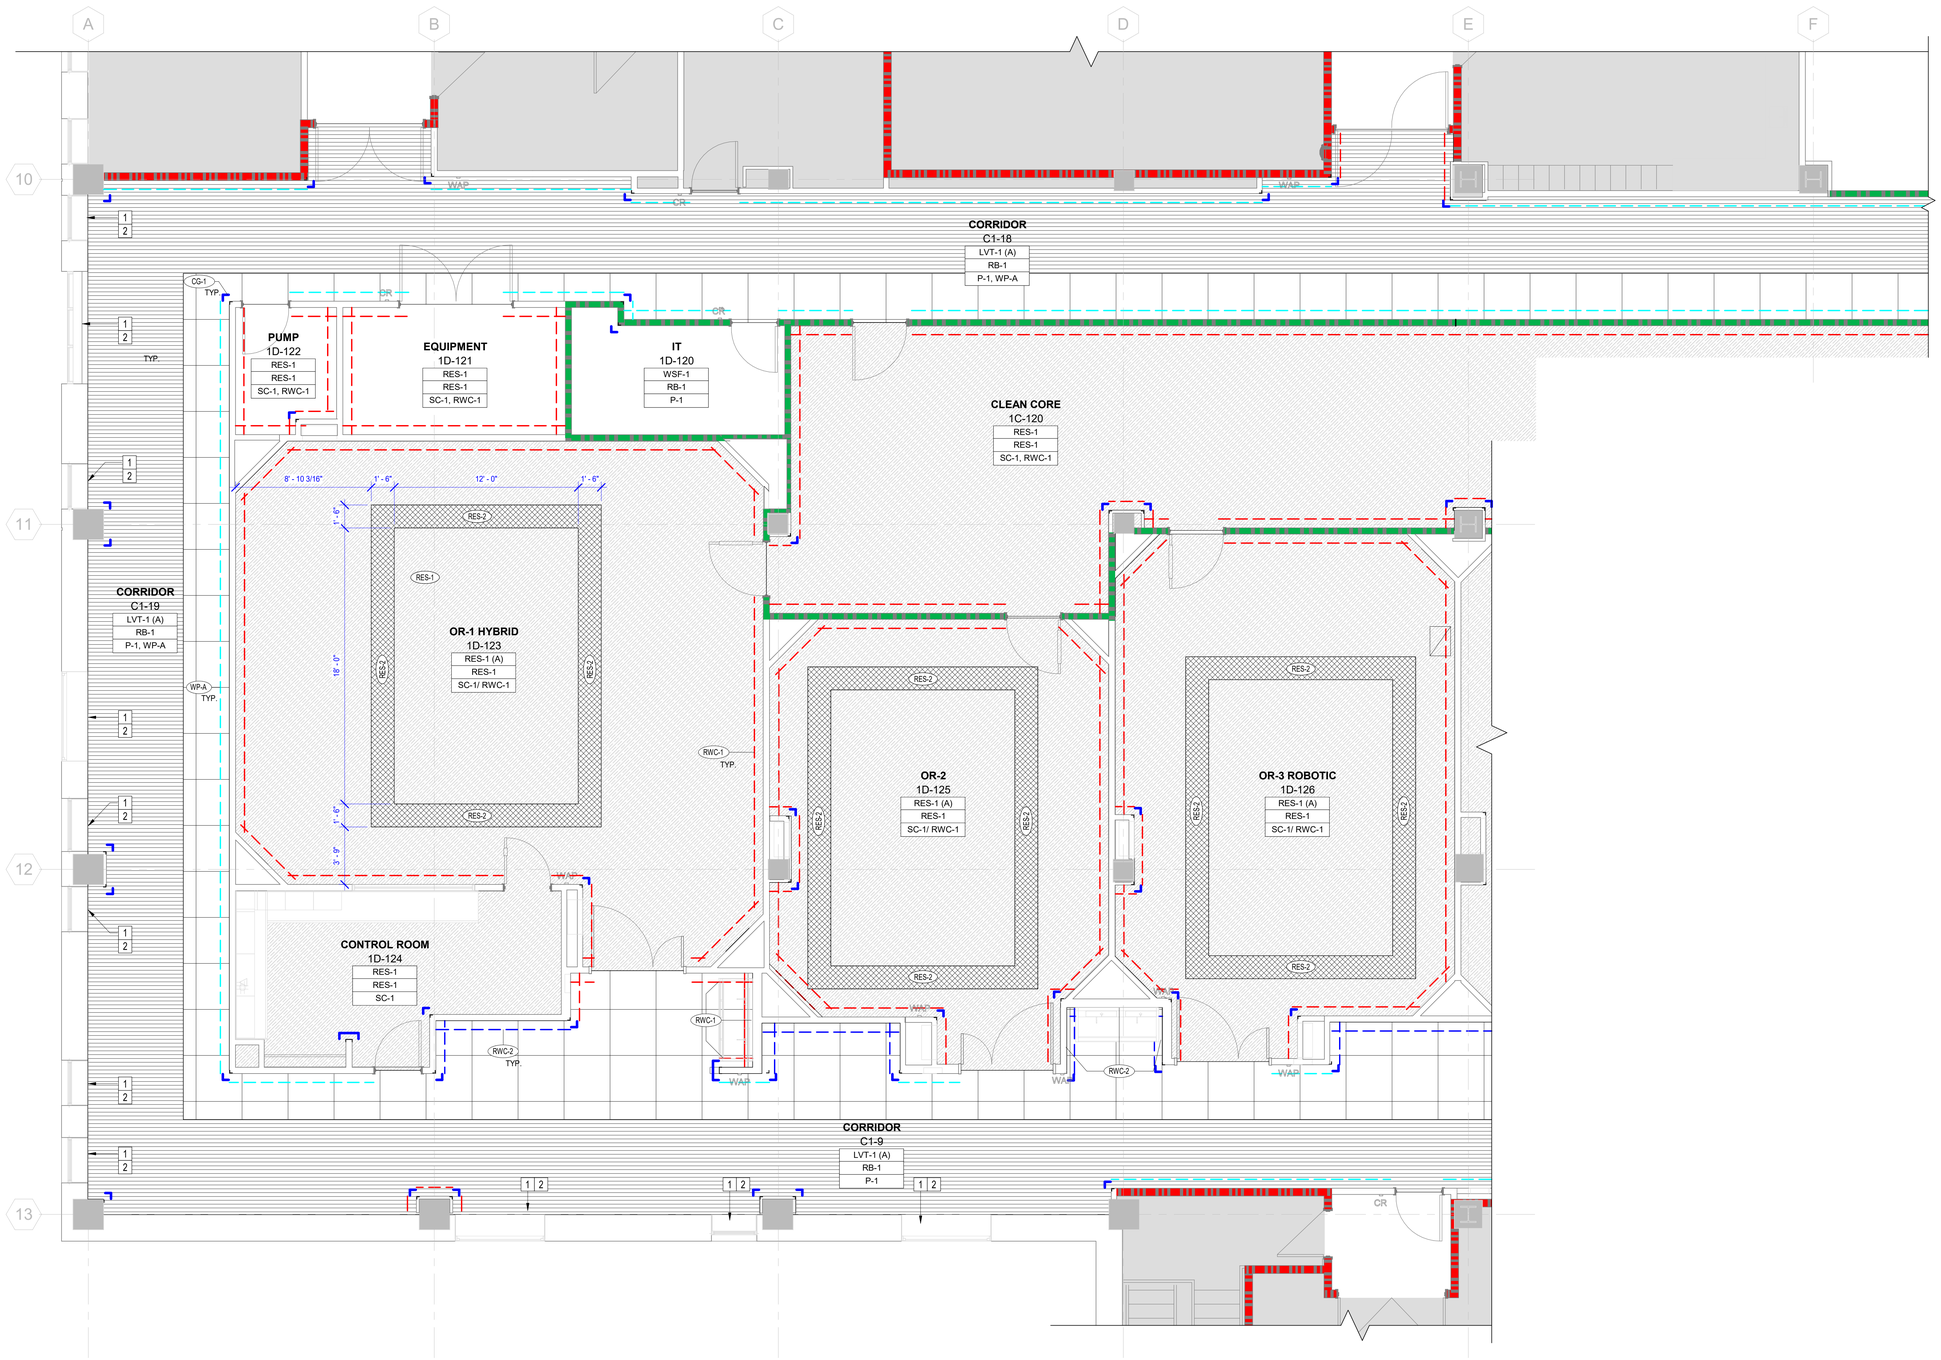

1 FIRST FLOOR FINISH PLAN - PHASE 1

SCALE: 1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES, WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

FLOOR PATTERN LEGEND

RES-1
RES-2
WSF-1
WSF-2
WSF-3
LVT-1
LVT-2
LVT-3

ROOM NAME
ROOM #
LVT-1 — FLOOR FINISH
RB-1 — BASE FINISH
P-1 — WALL FINISH

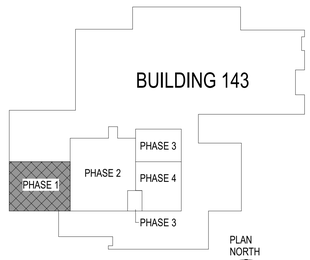

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA — JOSEPH H. TROST — NO. 7843 — 2025-12-30 — ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL FINISH PLAN FIRST FLOOR - PHASE 1

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | **Checked:** DJP | **Drawn:** HLJ

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P1-AI100

12/29/2025 1:44:27 AM

VA FORM 08 - 6231

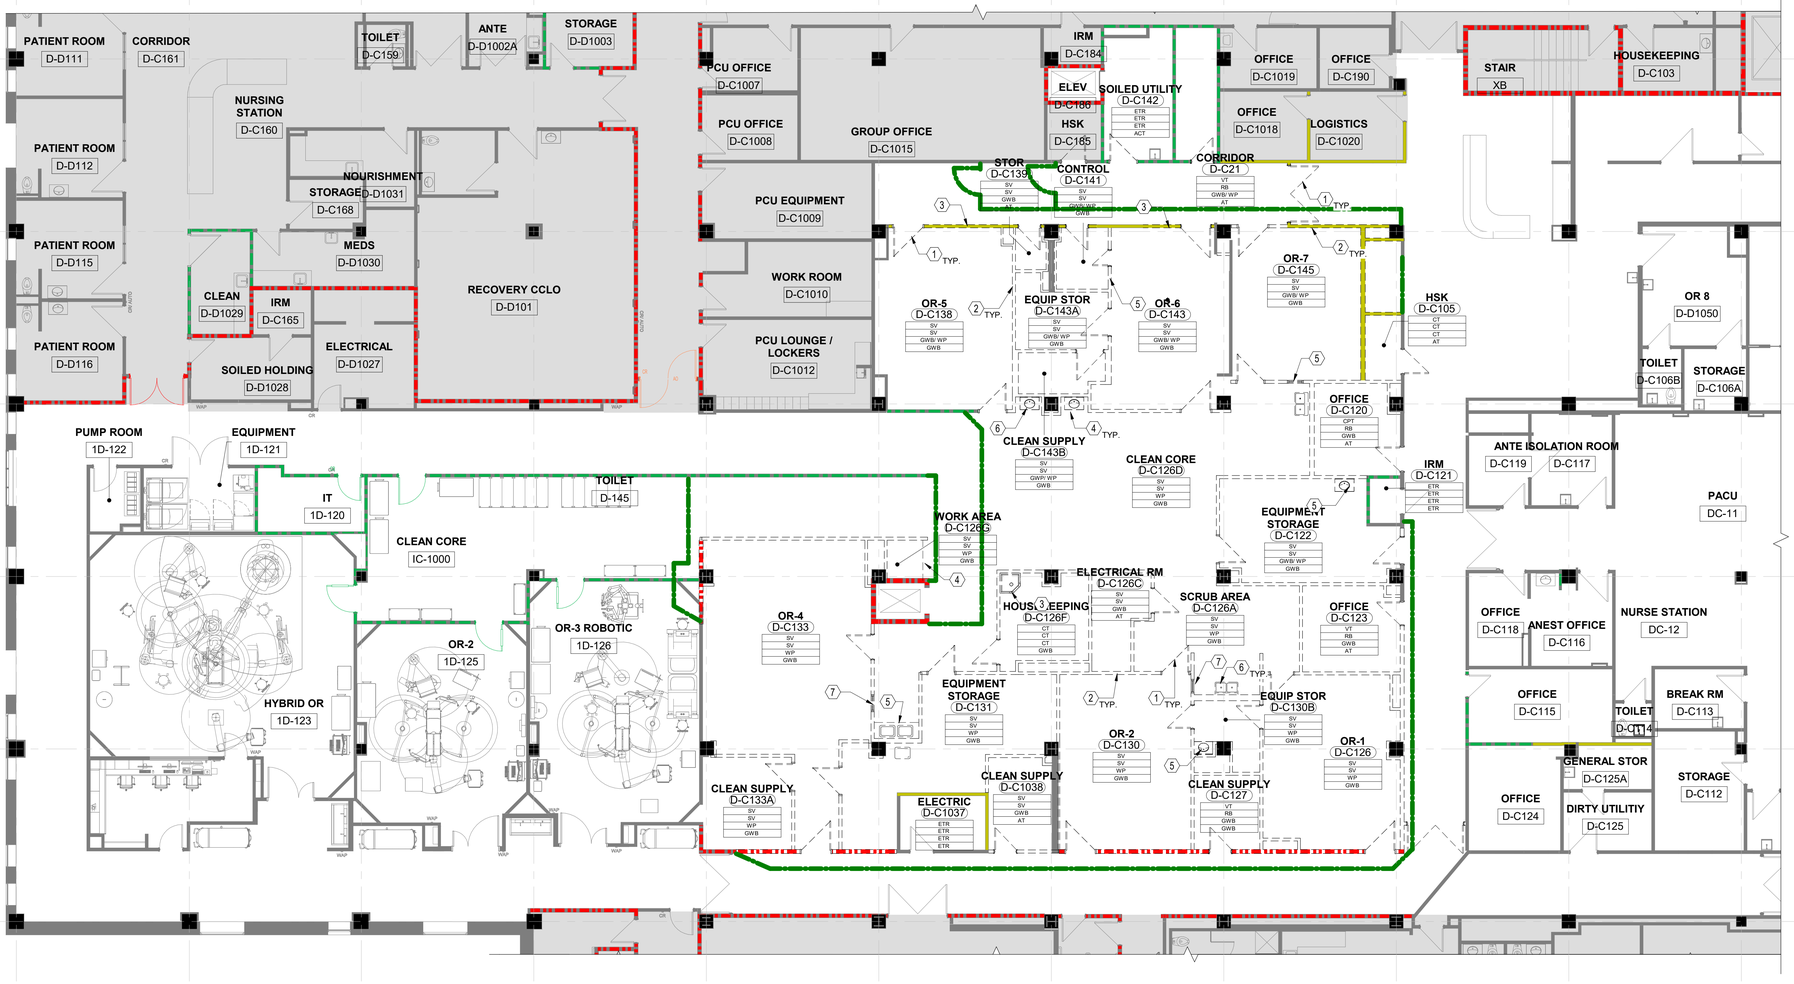

1 FIRST FLOOR DEMOLITION PLAN - PHASE 2

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

DEMOLITION NOTES - PHASE 2

1	REMOVE DOOR, FRAME, AND HARDWARE COMPLETE.
2	REMOVE EXISTING GWB AND METAL STUDS COMPLETE, AS DENOTED BY DASHED LINE, INCLUDING, BUT NOT LIMITED TO, ALL FINISHES AND BRACING.
3	REMOVE MOP SINK AND DRAIN COMPLETE. INFILL HOLE TO MATCH EXISTING SLAB.
4	REMOVE PTD GWB SOFFIT COMPLETE, AS DENOTED BY DASHED LINE.
5	REMOVE CASEWORK COMPLETE, INCLUDING, BUT NOT LIMITED TO, BASE CABINETS, WALL CABINETS, SINKS, BRACING, AND HARDWARE.
6	REMOVE TOILET ACCESSORIES AND PLUMBING FIXTURES, COMPLETE. SEE PLUMBING DRAWINGS.
7	REMOVE WINDOW, FRAME, AND HARDWARE COMPLETE.

DEMOLITION REMARKS

1. CONTRACTOR TO FIELD VERIFY FINISHES TO BE DEMOLISH AT THIS ROOM.
2. CONTRACTOR TO REMOVE ANY WALL OR CEILING MOUNTED EQUIPMENT AND RETURN TO THE OWNER.
3. NO FINISHES TO BE DEMOLISHED.

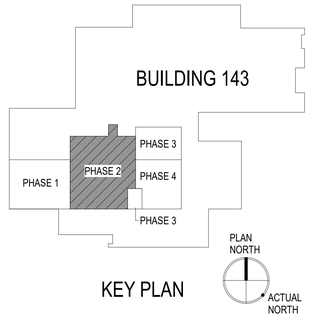

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO. 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. FIRST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL DEMOLITION PLAN FIRST FLOOR - PHASE 2	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: P2-AD100
		Issue Date: 2025-12-30 / Checked: SKC / Drawn: GEB	

12/29/2025 1:44:31 AM

VA FORM 08 - 6231

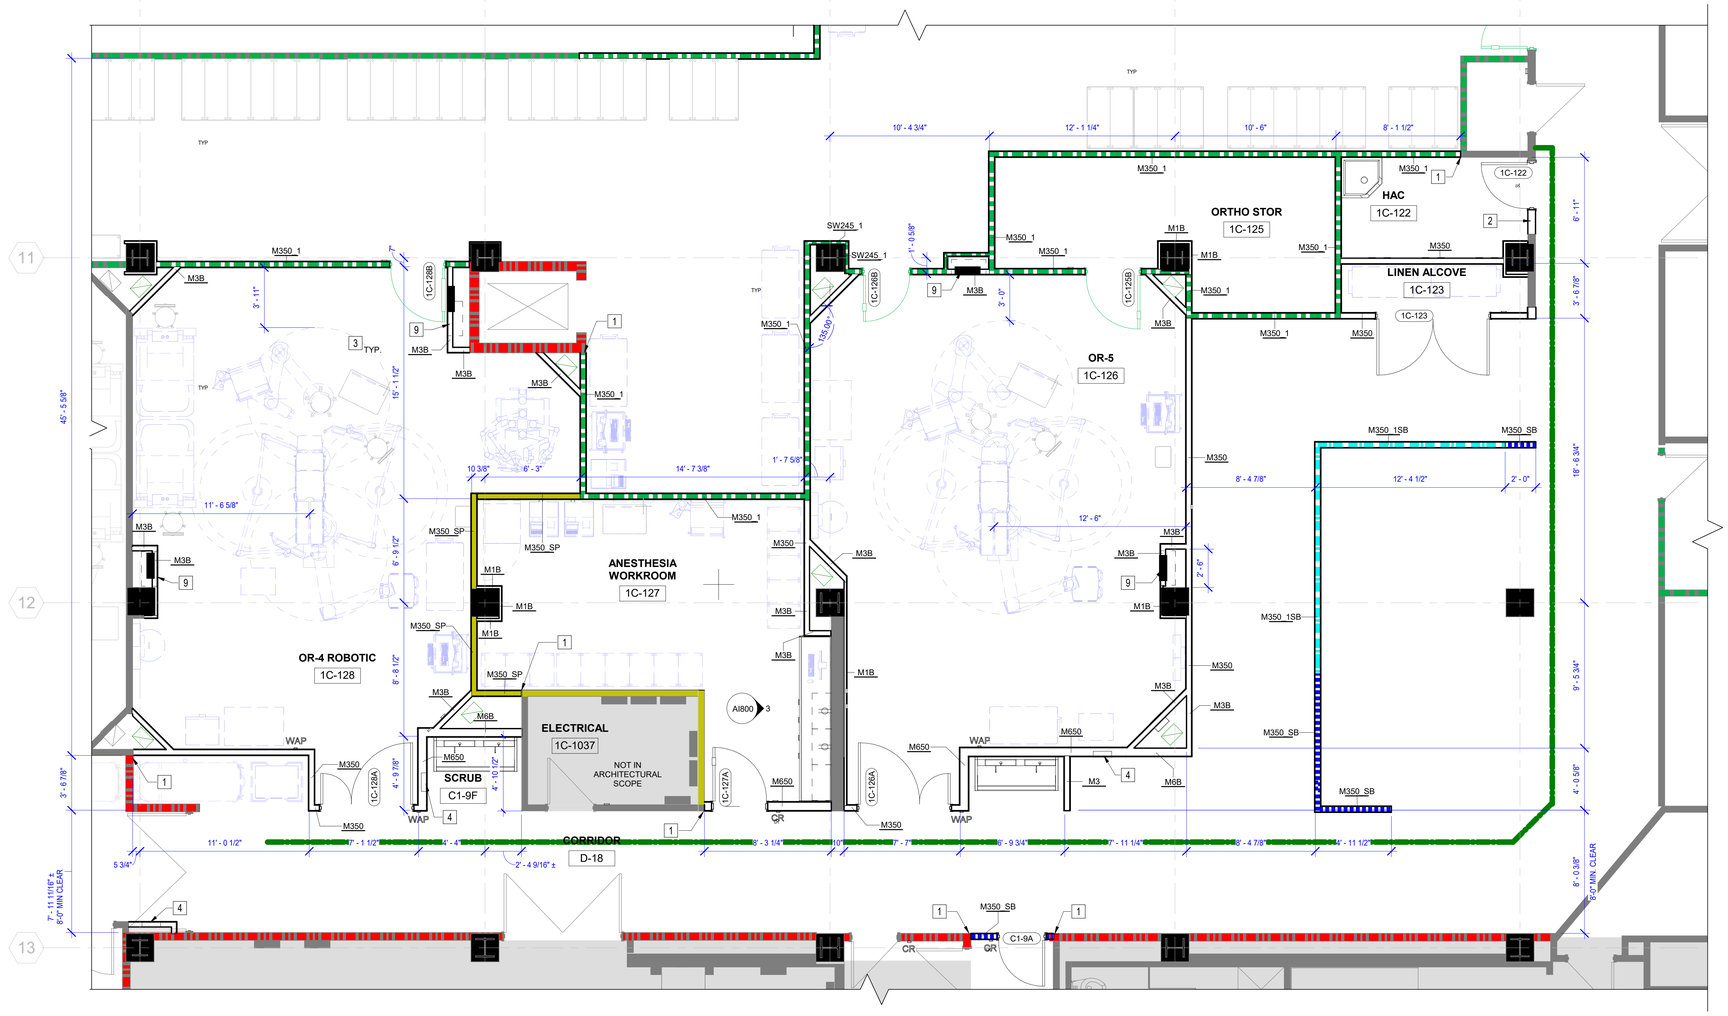

1 FIRST FLOOR NEW WORK PLAN - PHASE 2

SCALE: 1/4" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - PHASE 2

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
3	OFCI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
4	PROVIDE MED GAS ZONE VALVE BOX IN THIS LOCATION. COORDINATE WITH PLUMBING DRAWINGS.

WALL TYPE SCHEDULE- PHASE 2

TYPE	STC	DESCRIPTION	FIRE RATING	UL	REMARKS	Type Mark
GWB	N/A	(1) LAYER 5/8" GWB ONE SIDE. EXTEND WALL ASSEMBLY TO 4" ABOVE FINISHED CEILING.	-	-	-	
M1B	-	1 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M1B
M2B	-	2 1/2" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M2B
M3	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3
M3_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB BOTH SIDES, RC-1 CHANNEL ONE SIDE AT 24" O.C., 3" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE .PROVIDE INSULATION WHERE COMPONENTS MEET DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT RUNNER AND HEAD PRIOR TO INSTALLATION OF GWB.	M3_SP
M3B	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3B
M6B	-	6" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M6B
M350	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB EACH SIDE, 3 5" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	-	M350
M350_1	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	M350_1
M350_1SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR AND SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED AND SMOKE BARRIER" AS REQUIRED BY CODE.	M350_1SB
M350_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.	M350_SB
M350_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M350_SP
M650	50	6" METAL STUDS AT 16" O.C. MAX. (1) LAYER OF 5/8" GWB ONE SIDE. (1) LAYER 5/8" GWB OTHER SIDE. PROVIDE 3" SAFB CREASED MINERAL WOOL. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	-	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M650
MF	N/A	7/8" METAL FURRING AT 16" O.C. MAX. (1) LAYER 5/8" GWB BOTH SIDES. EXTEND WALL ASSEMBLY TO 4" ABOVE FINISHED CEILING.	-	-	-	
SW245_1	45	2 1/2" METAL C-H STUDS AT 24" O.C. MAX. (1) LAYER OF 5/8" FIRE RATED GWB ON ONE SIDE. (1) LAYER OF 1" FIRE RATED GWB ON ONE SIDE. 1" SOUND BATTS IN CAVITY. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT BOTTOM TRACK, TOP TRACK, AND ALL WALL PENETRATIONS. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U415	PROVIDE 6" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	SW245_1

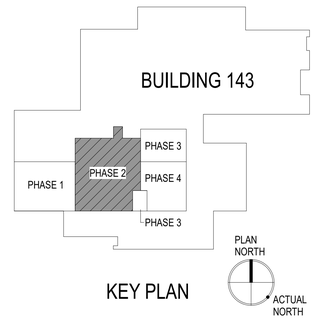

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - PHASE 2

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: SKC | Drawn: MAT/ABK

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P2-AE100

12/29/2025 1:44:37 AM

VA FORM 08 - 6231

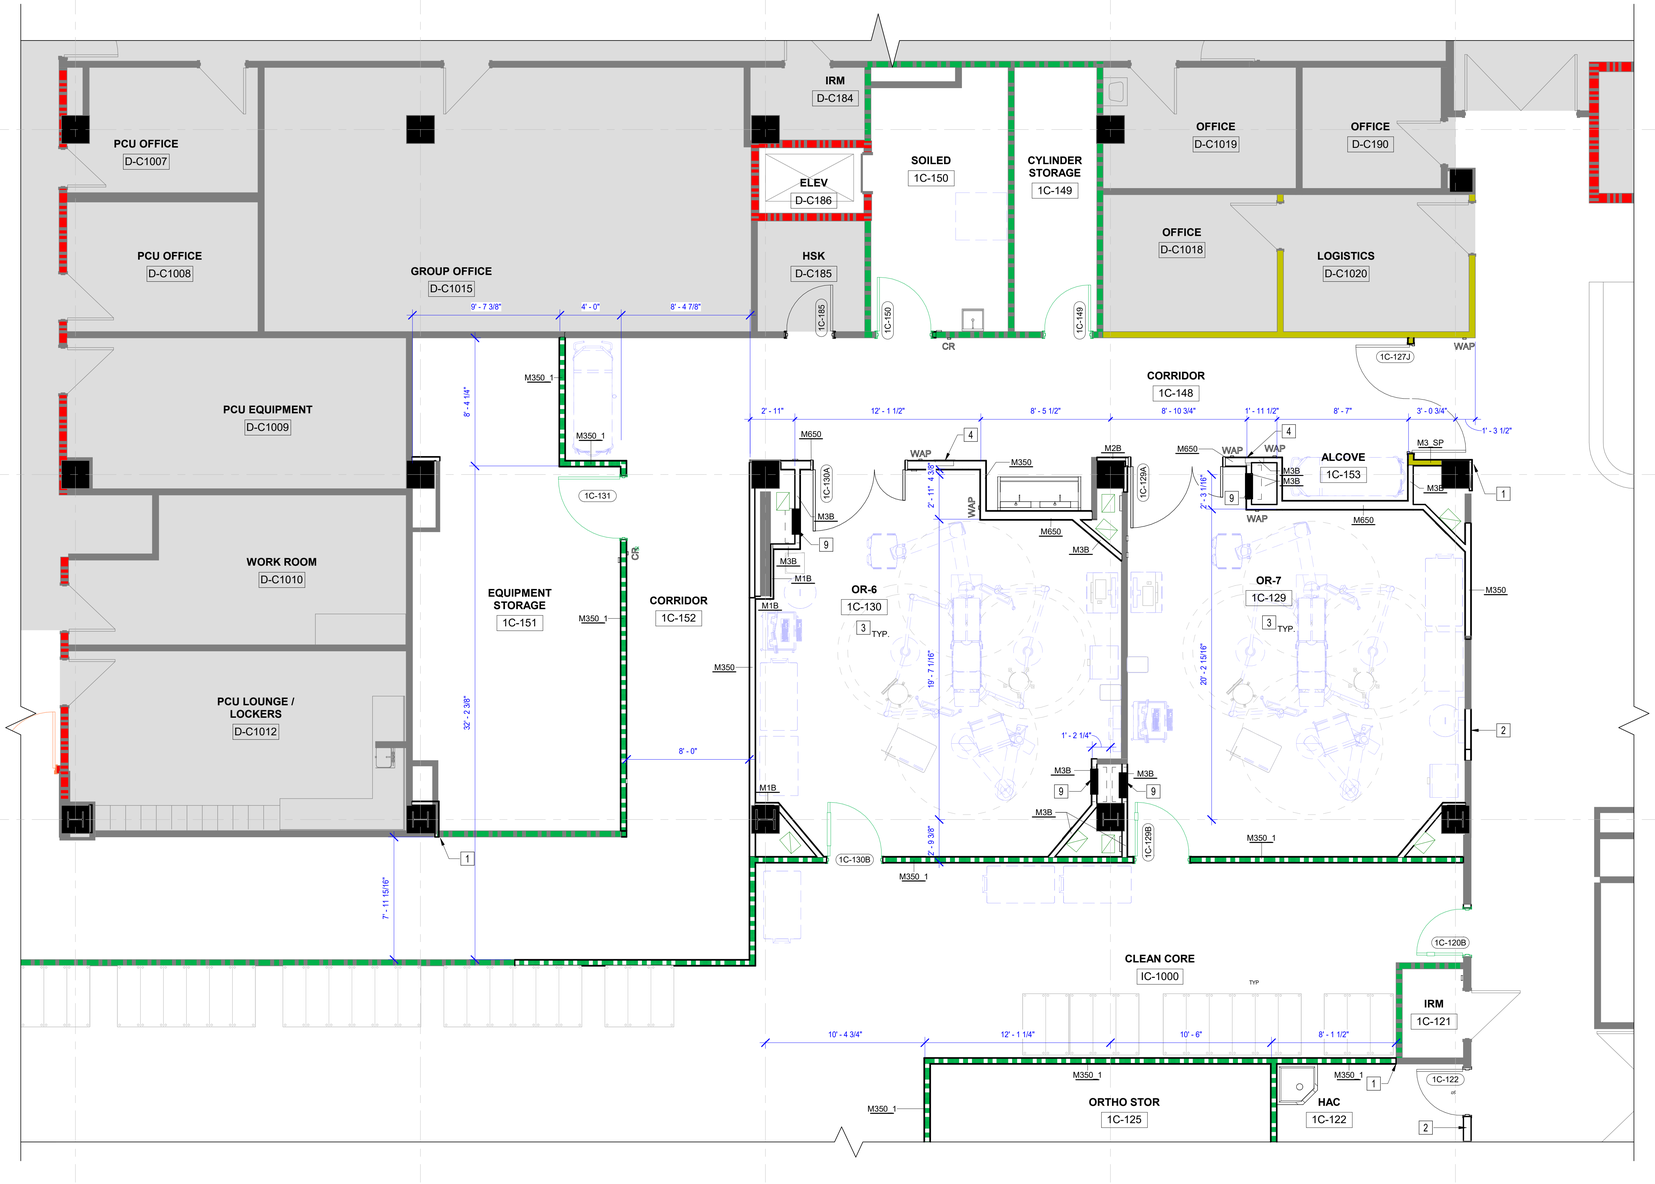

1 FIRST FLOOR NEW WORK PLAN - PHASE 2

SCALE: 1/4" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - PHASE 2

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
3	OFOI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
4	PROVIDE MED GAS ZONE VALVE BOX IN THIS LOCATION. COORDINATE WITH PLUMBING DRAWINGS.

WALL TYPE SCHEDULE- PHASE 2

TYPE	STC	DESCRIPTION	FIRE RATING	UL	REMARKS	Type Mark
GWB	N/A	(1) LAYER 5/8" GWB ONE SIDE. EXTEND WALL ASSEMBLY TO 4" ABOVE FINISHED CEILING.	-	-	-	
M1B	-	1 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M1B
M2B	-	2 1/2" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M2B
M3	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3
M3_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB BOTH SIDES, RC-1 CHANNEL ONE SIDE AT 24" O.C., 3" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE . PROVIDE INSULATION WHERE COMPONENTS MEET DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT RUNNER AND HEAD PRIOR TO INSTALLATION OF GWB.	M3_SP
M3B	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3B
M6B	-	6" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M6B
M350	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB EACH SIDE, 3.5" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	-	M350
M350_1	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	M350_1
M350_1SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR AND SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED AND SMOKE BARRIER" AS REQUIRED BY CODE.	M350_1SB
M350_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.	M350_SB
M350_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M350_SP
M650	50	6" METAL STUDS AT 16" O.C. MAX. (1) LAYER OF 5/8" GWB ONE SIDE. (1) LAYER 5/8" GWB OTHER SIDE. PROVIDE 3" SAFB CREASED MINERAL WOOL. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	-	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M650
MF	N/A	7/8" METAL FURRING AT 16" O.C. MAX. (1) LAYER 5/8" GWB BOTH SIDES. EXTEND WALL ASSEMBLY TO 4" ABOVE FINISHED CEILING.	-	-	-	
SW245_1	45	2 1/2" METAL C-H STUDS AT 24" O.C. MAX. (1) LAYER OF 5/8" FIRE RATED GWB ON ONE SIDE. (1) LAYER OF 1" FIRE RATED GWB ON ONE SIDE. 1" SOUND BATTS IN CAVITY. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT BOTTOM TRACK, TOP TRACK, AND ALL WALL PENETRATIONS. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U415	PROVIDE 6" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	SW245_1

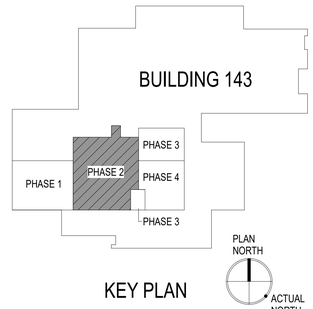

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - PHASE 2 (NORTH)
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	JHT
Drawn	MAT
VA Drawing Number	2617
Building Number	143
Drawing Number	P2-AE101

12/29/2025 1:44:42 AM

VA FORM 08 - 6231

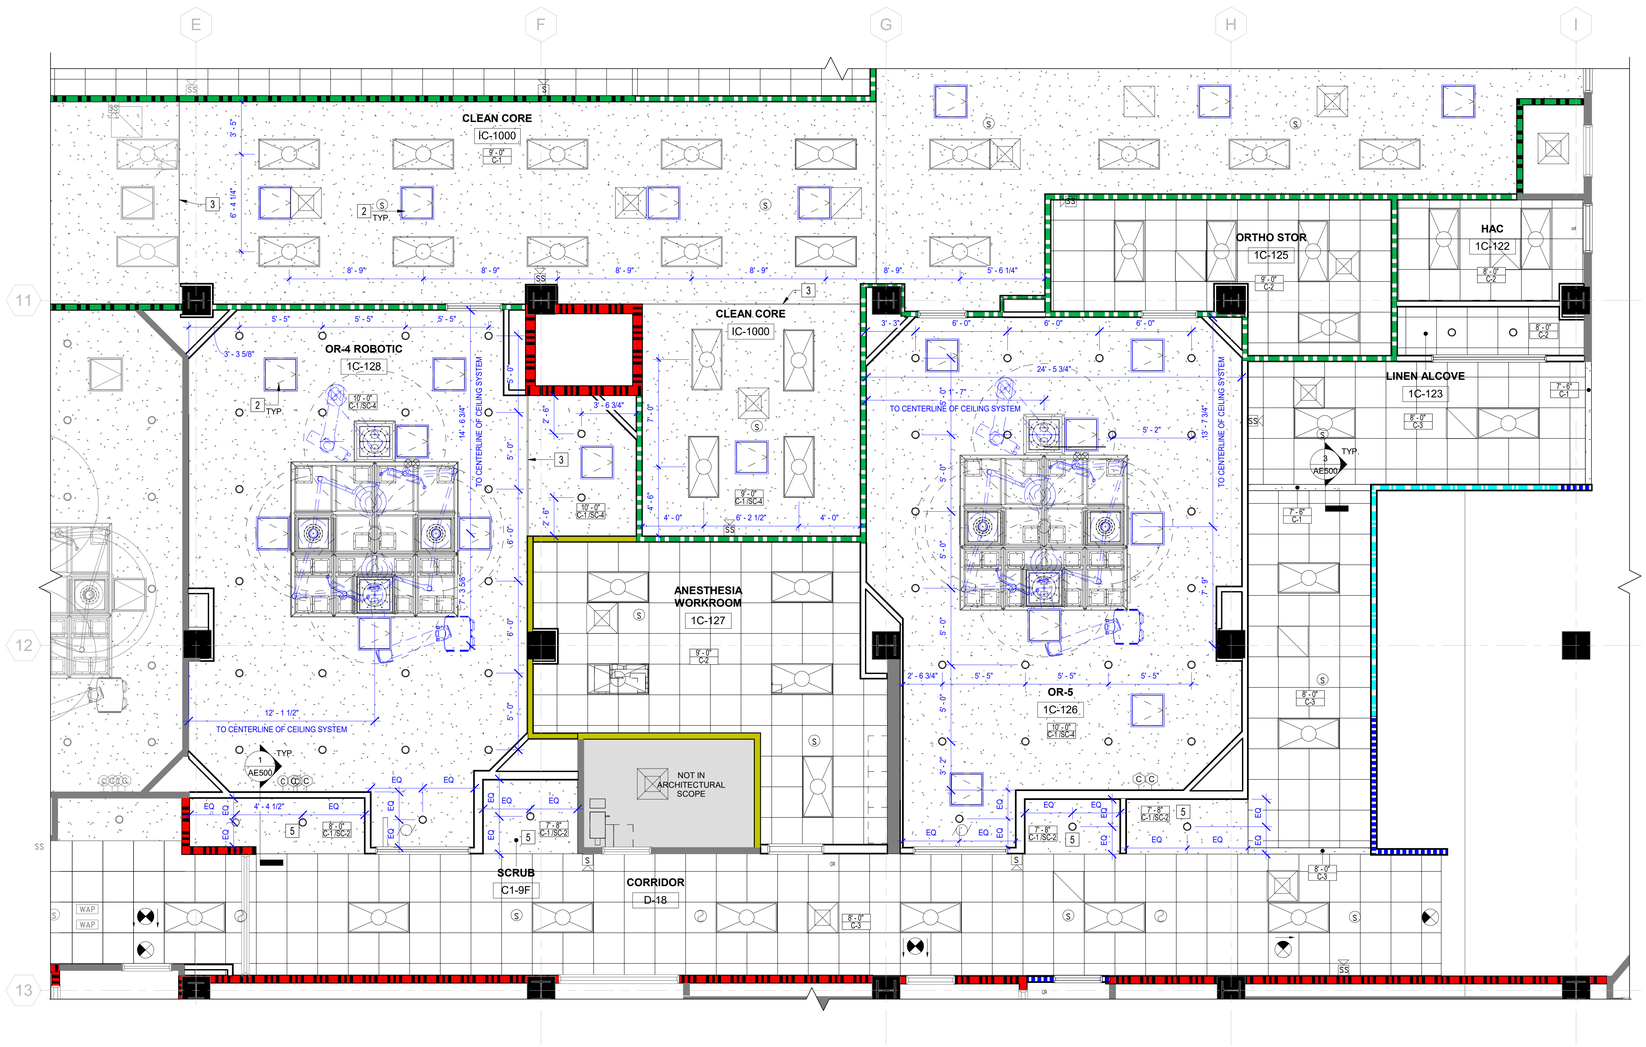

1 REFLECTED CEILING PLAN- FIRST FLOOR- PHASE 2

SCALE: 1/4" = 1'-0"

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.
7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION, IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

CEILING NEW WORK NOTES - PHASE 2

1	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
2	ACCESS PANELS, COORDINATE LOCATION WITH MEP SYSTEMS.
3	<varies>
4	<varies>
5	<varies>
6	PAINT HORIZONTAL SURFACE OF GYP. SOFFIT.

CEILING LEGEND

** ITEMS ON THIS SHEET ARE SHOWN FOR LOCATION ONLY. COORDINATE WITH MECHANICAL AND ELECTRICAL SHEETS. CONTRACTOR TO VERIFY HOUSING TO WORK WITH CEILING TYPE.**

- EXHAUST AIR DIFFUSER
- RETURN AIR DIFFUSER
- SUPPLY AIR DIFFUSER
- 2 X 2 INDIRECT LIGHT FIXTURE
- 2 X 4 INDIRECT LIGHT FIXTURE
- CEILING ACCESS PANELS
- RECESSED CEILING LIGHT
- EXIT SIGN
- 2'-0" x 2'-0" ACT SYSTEM
- GWB CEILING
- (N) NURSE CALL DEVICES
- (S) SPEAKER
- WAP WIRELESS ACCESS POINT

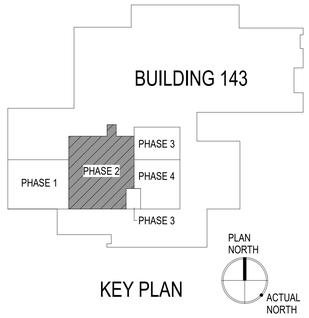

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO. 0459-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - PHASE 2	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
		Project Number 658-19-103	**Building Number** 143
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Location** SALEM VA MEDICAL CENTER	**Drawing Number** P2-AC100
		Issue Date 2025-12-30 / **Checked** SKC / **Drawn** MAT	

12/29/2025 1:44:44 AM

VA FORM 08 - 6231

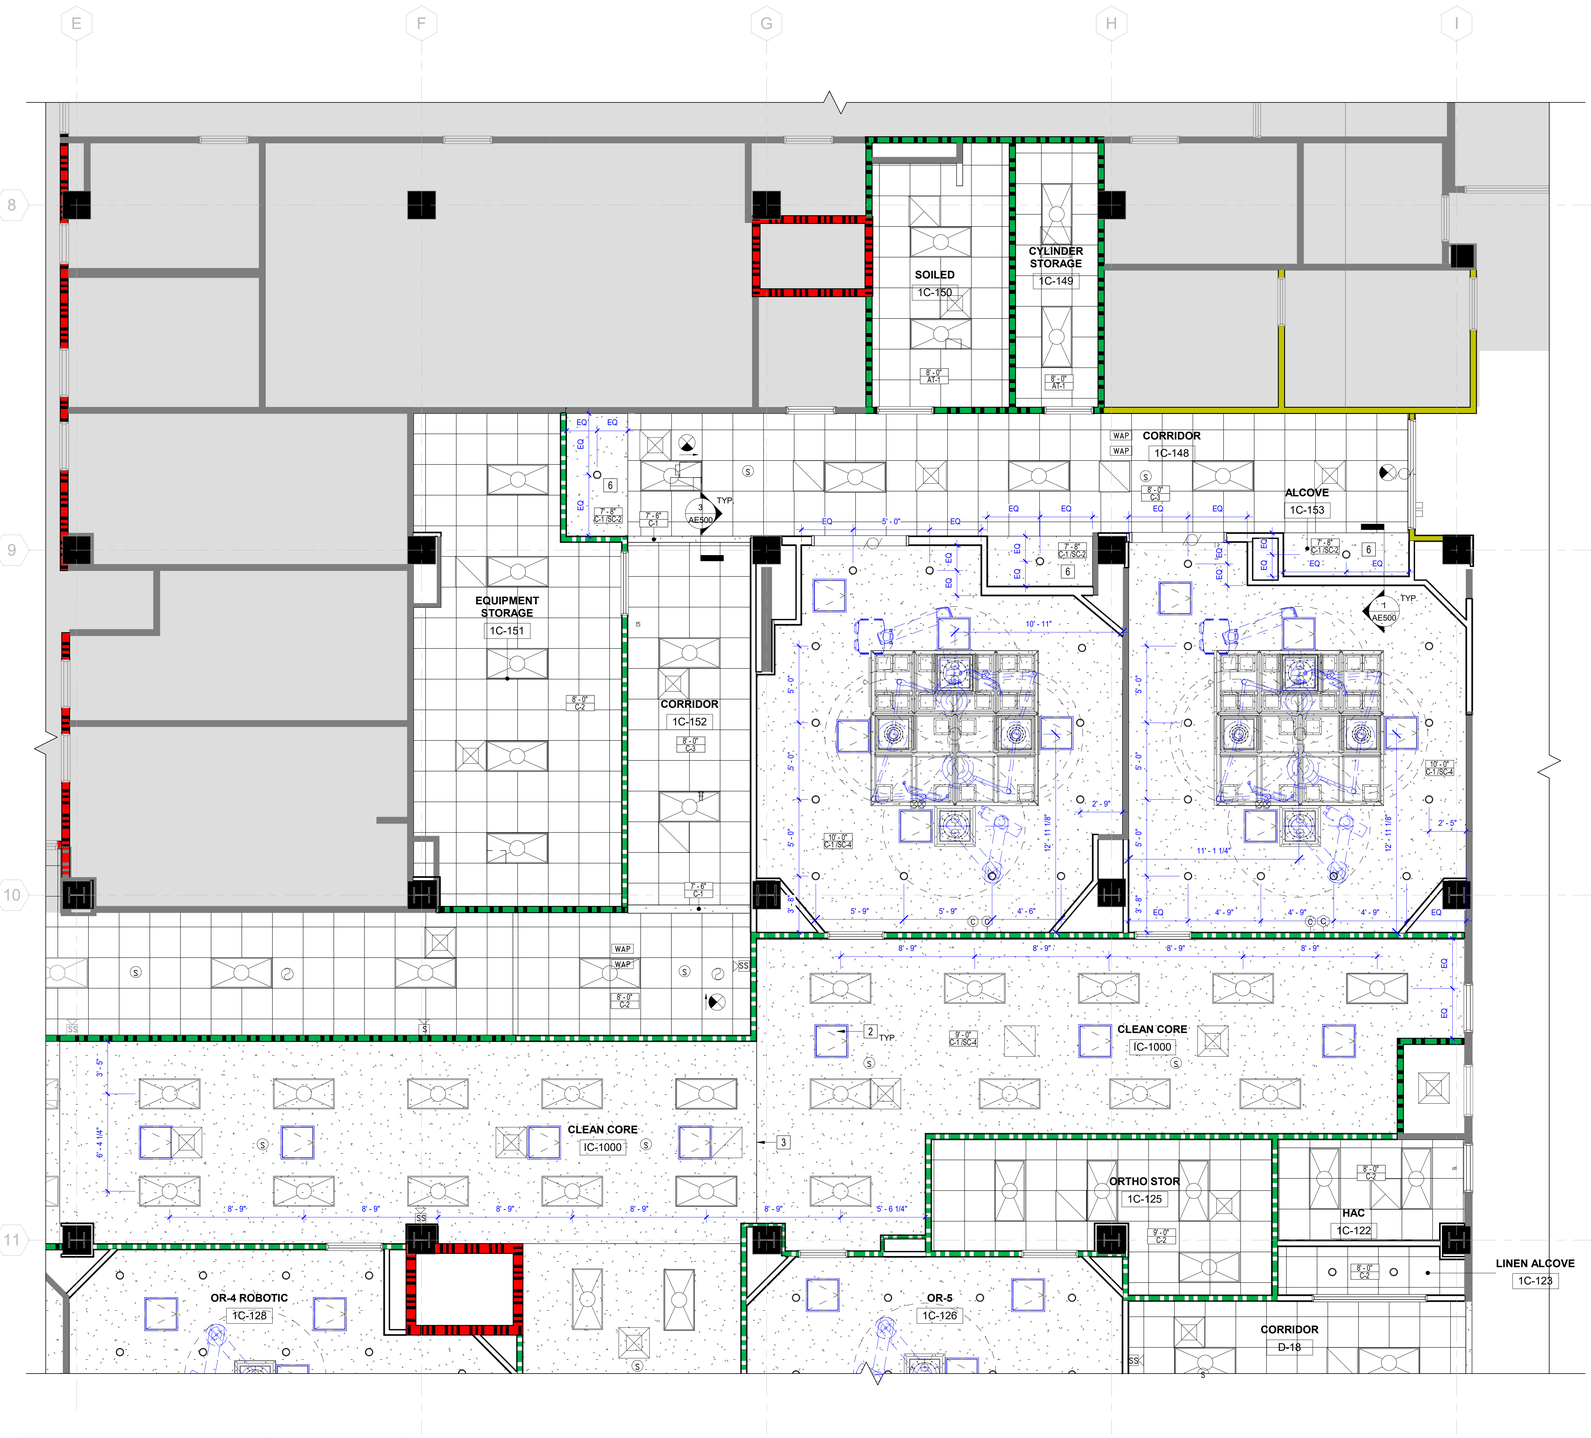

1 REFLECTED CEILING PLAN- PHASE 2
SCALE: 1/4" = 1'-0"

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.
7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION, IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

CEILING NEW WORK NOTES - PHASE 3

1	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
2	ACCESS PANELS, COORDINATE LOCATION WITH MEP SYSTEMS.
3	1" CONTROL JOINT.
4	ALIGN FACE OF SOFFIT WITH WALL.
5	PAINT HORIZONTAL AND VERTICAL SURFACES OF GYP. SOFFIT.
6	PAINT HORIZONTAL SURFACE OF GYP. SOFFIT.

CEILING LEGEND

** ITEMS ON THIS SHEET ARE SHOWN FOR LOCATION ONLY. COORDINATE WITH MECHANICAL AND ELECTRICAL SHEETS. CONTRACTOR TO VERIFY HOUSING TO WORK WITH CEILING TYPE.**

- EXHAUST AIR DIFFUSER
- RETURN AIR DIFFUSER
- SUPPLY AIR DIFFUSER
- 2 X 2 INDIRECT LIGHT FIXTURE
- 2 X 4 INDIRECT LIGHT FIXTURE
- CEILING ACCESS PANELS
- RECESSED CEILING LIGHT
- EXIT SIGN
- 2'-0" x 2'-0" ACT SYSTEM
- GWB CEILING
- (N) NURSE CALL DEVICES
- (S) SPEAKER
- (WAP) WIRELESS ACCESS POINT

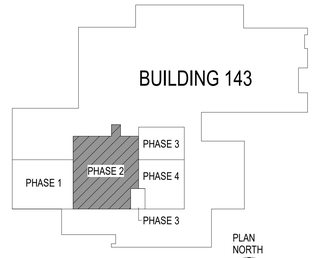

KEY PLAN

PLAN NORTH

ACTUAL NORTH

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - PHASE 2 (NORTH)

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: SKC | Drawn: MAT

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P2-AC101

12/29/2025 1:44:46 AM

VA FORM 08 - 6231

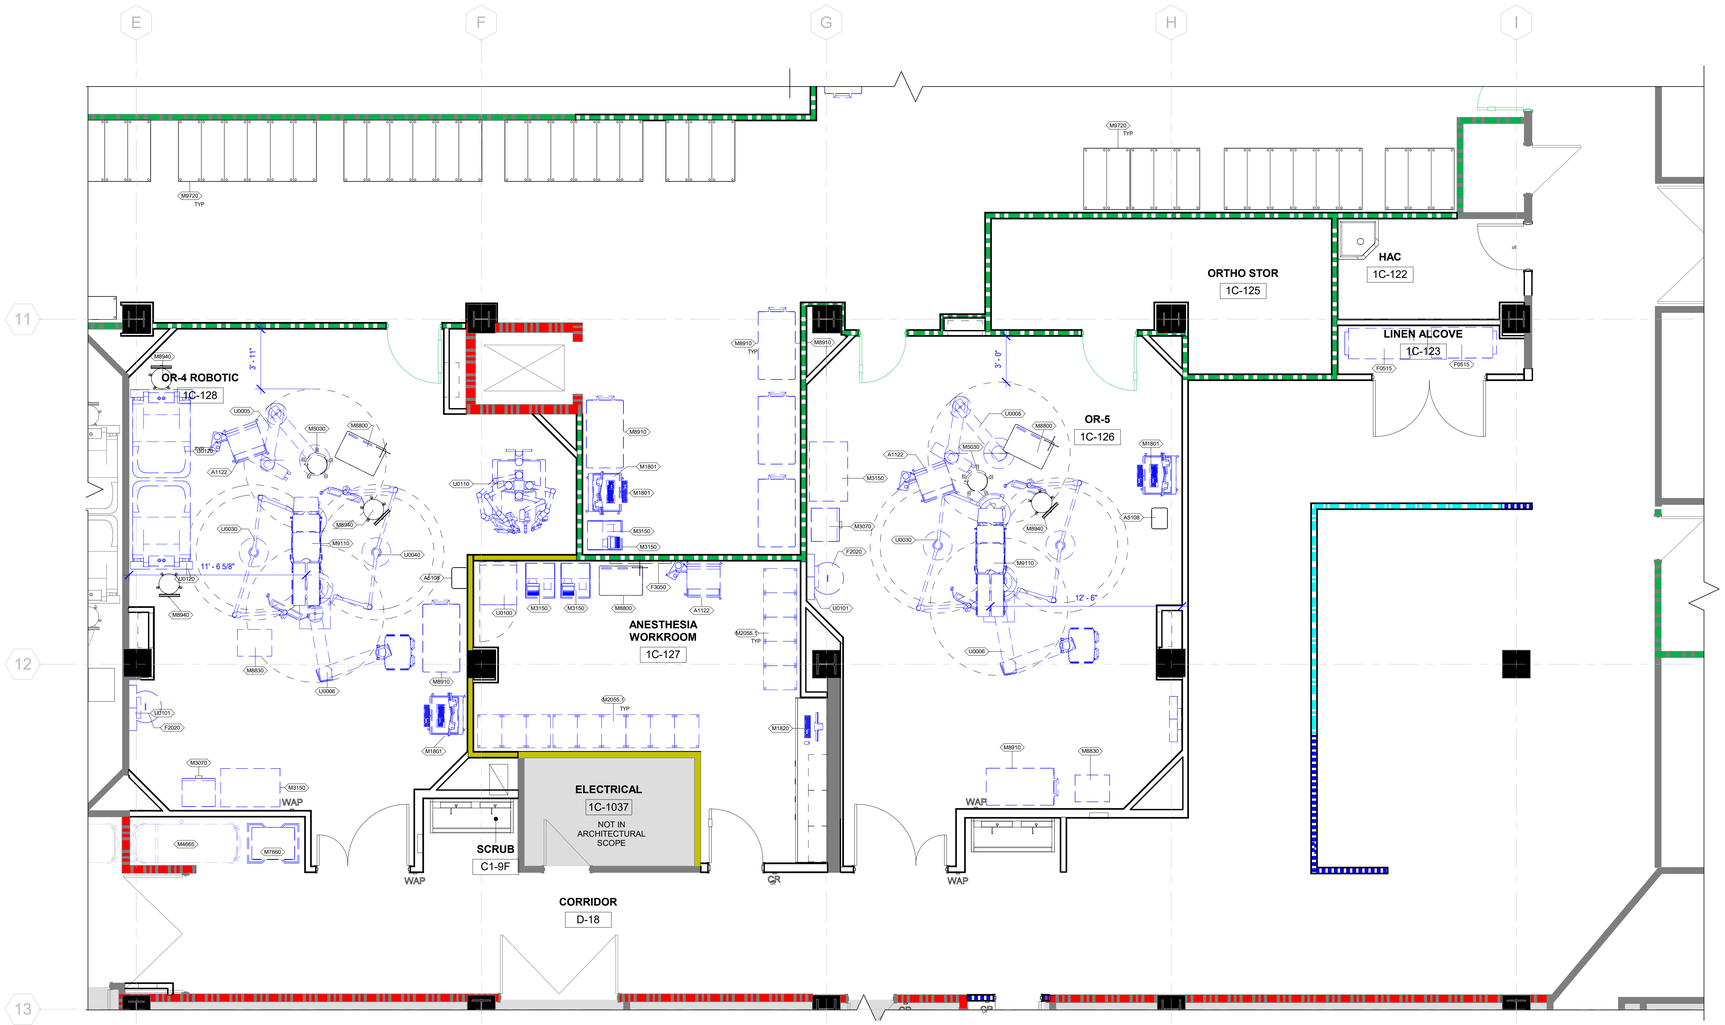

1 FIRST FLOOR EQUIPMENT PLAN - PHASE 2
SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE- PHASE 2

MARK	DESCRIPTION	NEW EQUIPMENT VAFVAI	VAFCI	CFCI	CONTRACTOR COMMENTS
A1122	ANESTHESIA MACHINE	***			PROVIDE POWER AND DATA
A5108	WASTE DISPOSAL UNIT; SHARPS	***			-
F0515	CLOSED LINEN SUPPLY CART	***			-
F2020	TRASH CAN	***			-
F3050	WHITEBOARD	***			PROVIDE BLOCKING
M1801	MOBILE NURSE STATION	***			PROVIDE POWER
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M2055	STATIONARY SHELVING UNIT	***			-
M2055.1	METAL STORAGE SHELVING	***			-
M3070	HAMPER, LINEN MOBILE	***			-
M3073	BIOHAZARD BIN	***			-
M3150	PYXIS MED STATION	***			PROVIDE POWER AND DATA
M4665	STRETCHER	***			-
M5030	EXAM STOOL	***			-
M7660	CRASH CART	***			PROVIDE EMERGENCY POWER
M8606	FIBEROPTIC ENDOSCOPY CART	***			-
M8800	CART, ANESTHESIA	***			-
M8830	INSTRUMENT TABLE	***			-
M8910	SURGICAL CASE CART	***			-
M8940	ANESTHESIA STOOL W/ BACK	***			-
M9110	SURGICAL TABLE	***			-
M9720	HIGH DENSITY SHELVING UNIT	***			-
U0005	STERIS ANESTHESIA BOOM - C5		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0006	STERIS EQUIPMENT BOOM - C6		***		PROVIDE POWER, DATA, MEDICAL GAS, AND SUPPORT
U0030	STERIS SURGICAL LIGHT BOOM - B3		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0040	STERIS SURGICAL LIGHT BOOM - B4		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0100	REFRIGERATOR	***			PROVIDE POWER AND DATA
U0101	X-RAY VIEW BOX	***			PROVIDE POWER AND DATA
U0110	SURGICAL DI VINCI ROBOT	***			PROVIDE POWER AND DATA
U0120	SURGEON STATION		***		PROVIDE POWER AND DATA
U0121	DORNOCH FLUID WASTE MANAGEMENT SYSTEM	***			PROVIDE POWER AND WATER CONNECTION

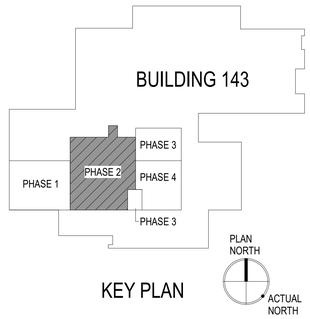

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
MR PROJECT NO. 24109-0138

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH M. TRENT
No. 7843
2025-12-30
Registered Architect

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL EQUIPMENT PLAN FIRST FLOOR - PHASE 2

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30
Checked: DJP
Drawn: MAT

VA Drawing Number: 2617
Building Number: 143
Drawing Number: P2-AQ100

2/28/2025 1:44:50 AM

VA FORM 08 - 6231

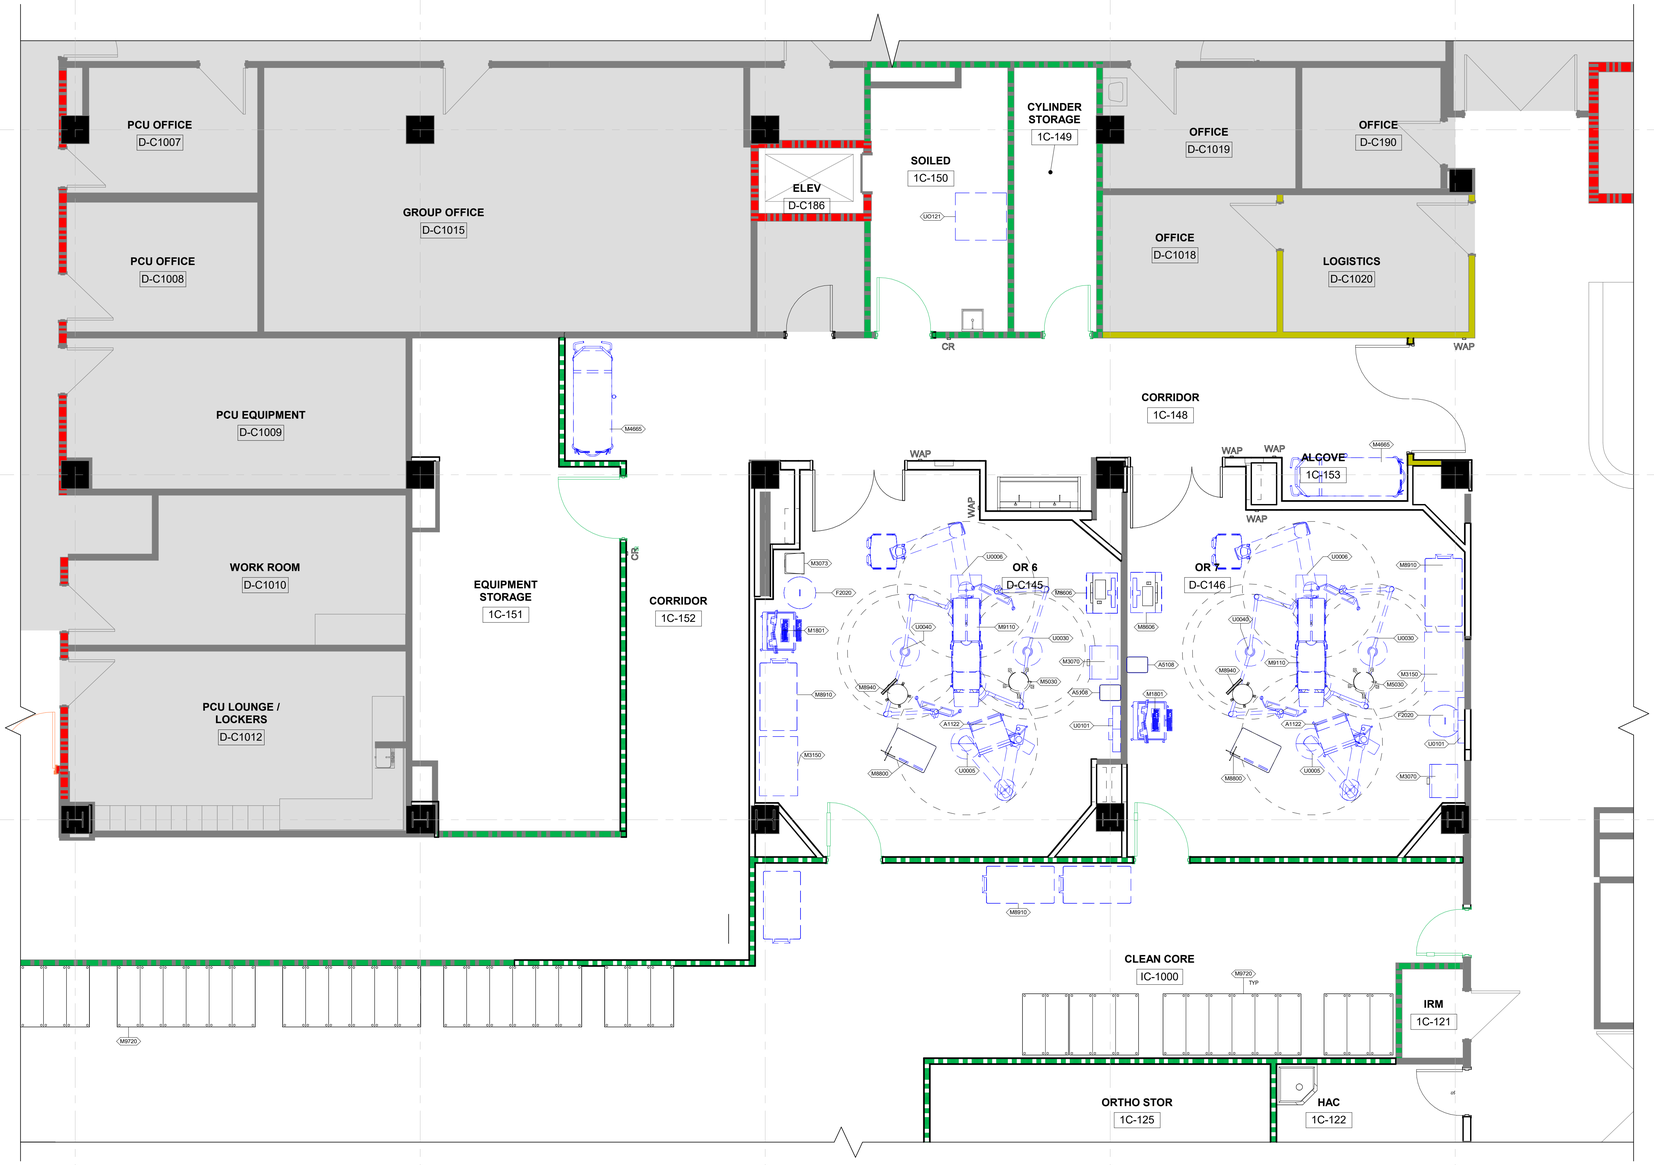

EQUIPMENT SCHEDULE- PHASE 2

MARK	DESCRIPTION	NEW EQUIPMENT VAFVAI	VAFCI	CFCI	CONTRACTOR COMMENTS
A1122	ANESTHESIA MACHINE	***			PROVIDE POWER AND DATA
A5108	WASTE DISPOSAL UNIT; SHARPS	***			-
F0515	CLOSED LINEN SUPPLY CART	***			-
F2020	TRASH CAN	***			-
F3050	WHITEBOARD	***			PROVIDE BLOCKING
M1801	MOBILE NURSE STATION	***			PROVIDE POWER
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M2055	STATIONARY SHELVING UNIT	***			-
M2055.1	METAL STORAGE SHELVING	***			-
M3070	HAMPER, LINEN MOBILE	***			-
M3073	BIOHAZARD BIN	***			-
M3150	PYXIS MED STATION	***			PROVIDE POWER AND DATA
M4665	STRETCHER	***			-
M5030	EXAM STOOL	***			-
M7660	CRASH CART	***			PROVIDE EMERGENCY POWER
M8606	FIBEROPTIC ENDOSCOPY CART	***			-
M8800	CART, ANESTHESIA	***			-
M8830	INSTRUMENT TABLE	***			-
M8910	SURGICAL CASE CART	***			-
M8940	ANESTHESIA STOOL W/ BACK	***			-
M9110	SURGICAL TABLE	***			-
M9720	HIGH DENSITY SHELVING UNIT	***			-
U0005	STERIS ANESTHESIA BOOM - C5		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0006	STERIS EQUIPMENT BOOM - C6		***		PROVIDE POWER, DATA, MEDICAL GAS, AND SUPPORT
U0030	STERIS SURGICAL LIGHT BOOM - B3		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0040	STERIS SURGICAL LIGHT BOOM - B4		***		COORDINATE WITH STERIS BOOM DRAWINGS
U0100	REFRIGERATOR	***			PROVIDE POWER AND DATA
U0101	X-RAY VIEW BOX	***			PROVIDE POWER AND DATA
U0110	SURGICAL DI VINCI ROBOT	***			PROVIDE POWER AND DATA
U0120	SURGEON STATION		***		PROVIDE POWER AND DATA
UO121	DORNOCH FLUID WASTE MANAGEMENT SYSTEM	***			PROVIDE POWER AND WATER CONNECTION

1 FIRST FLOOR NEW WORK PLAN - PHASE 2

SCALE: 1/4" = 1'-0"

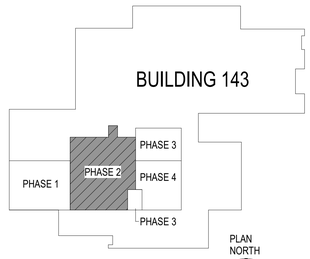

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

12/29/2025 1:44:54 AM

VA FORM 08 - 6231

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 04990-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title
ARCHITECTURAL
EQUIPMENT PLAN
FIRST FLOOR - PHASE 2 (NORTH)

Approved by:
Jon Manninen, COR

Phase
BID DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE SURGICAL SUITE
PHASE II
Project Number 658-19-103

Location SALEM VA MEDICAL CENTER

Issue Date 2025-12-30 | **Checked** DJP | **Drawn** MAT

VA Drawing Number 2617

Building Number 143

Drawing Number P2-AQ101

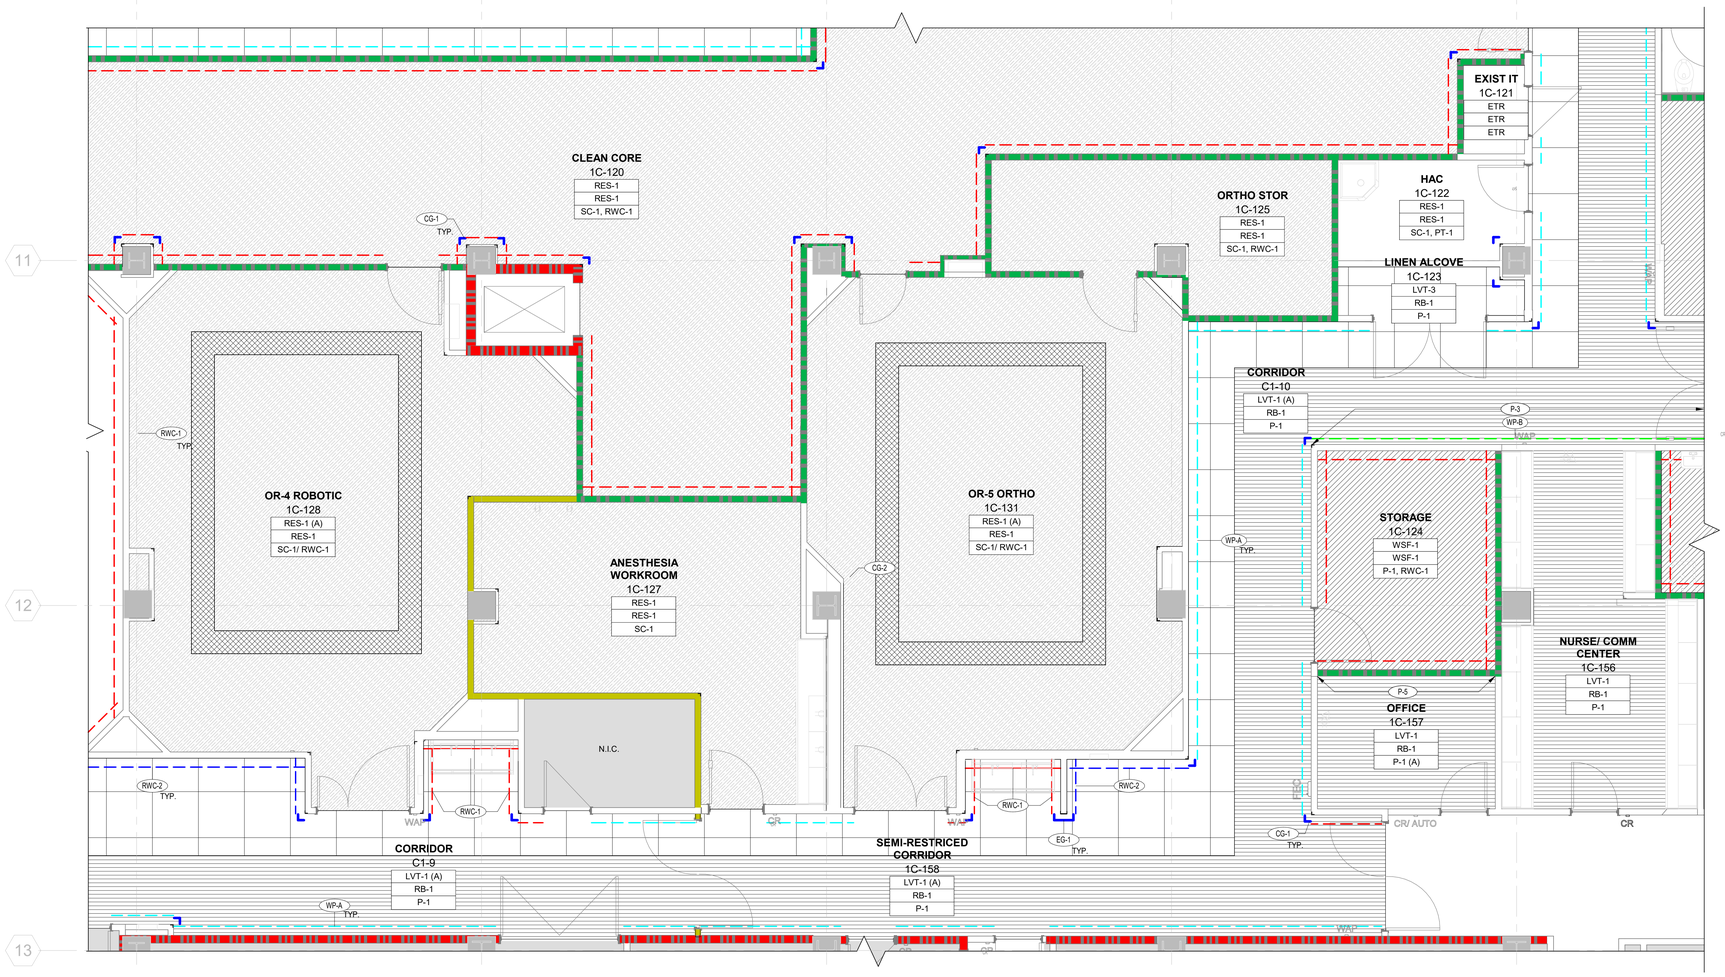

1 FIRST FLOOR FINISH PLAN - PHASE 2
SCALE: 1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES, WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

FLOOR PATTERN LEGEND

RES-1
RES-2
WSF-1
WSF-2
WSF-3
LVT-1
LVT-2
LVT-3

ROOM NAME
ROOM #
LVT-1 — FLOOR FINISH
RB-1 — BASE FINISH
P-1 — WALL FINISH

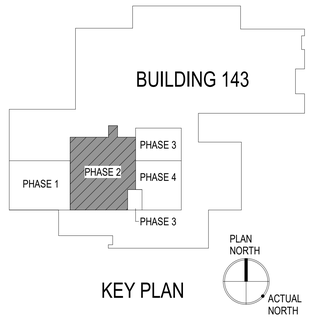

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 Miller-Remick.com
M-R PROJECT NO: 04990-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title
ARCHITECTURAL
FINISH PLAN
FIRST FLOOR - PHASE 2

Approved by:
Jon Manninen, COR

Phase
BID DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE SURGICAL SUITE
PHASE II
Project Number 658-19-103

Location SALEM VA MEDICAL CENTER

Issue Date 2025-12-30 | **Checked** DJP | **Drawn** HLJ

VA Drawing Number 2617
Building Number 143
Drawing Number P2-AI100

VA FORM 08 - 6231

12/29/2025 1:44:55 AM

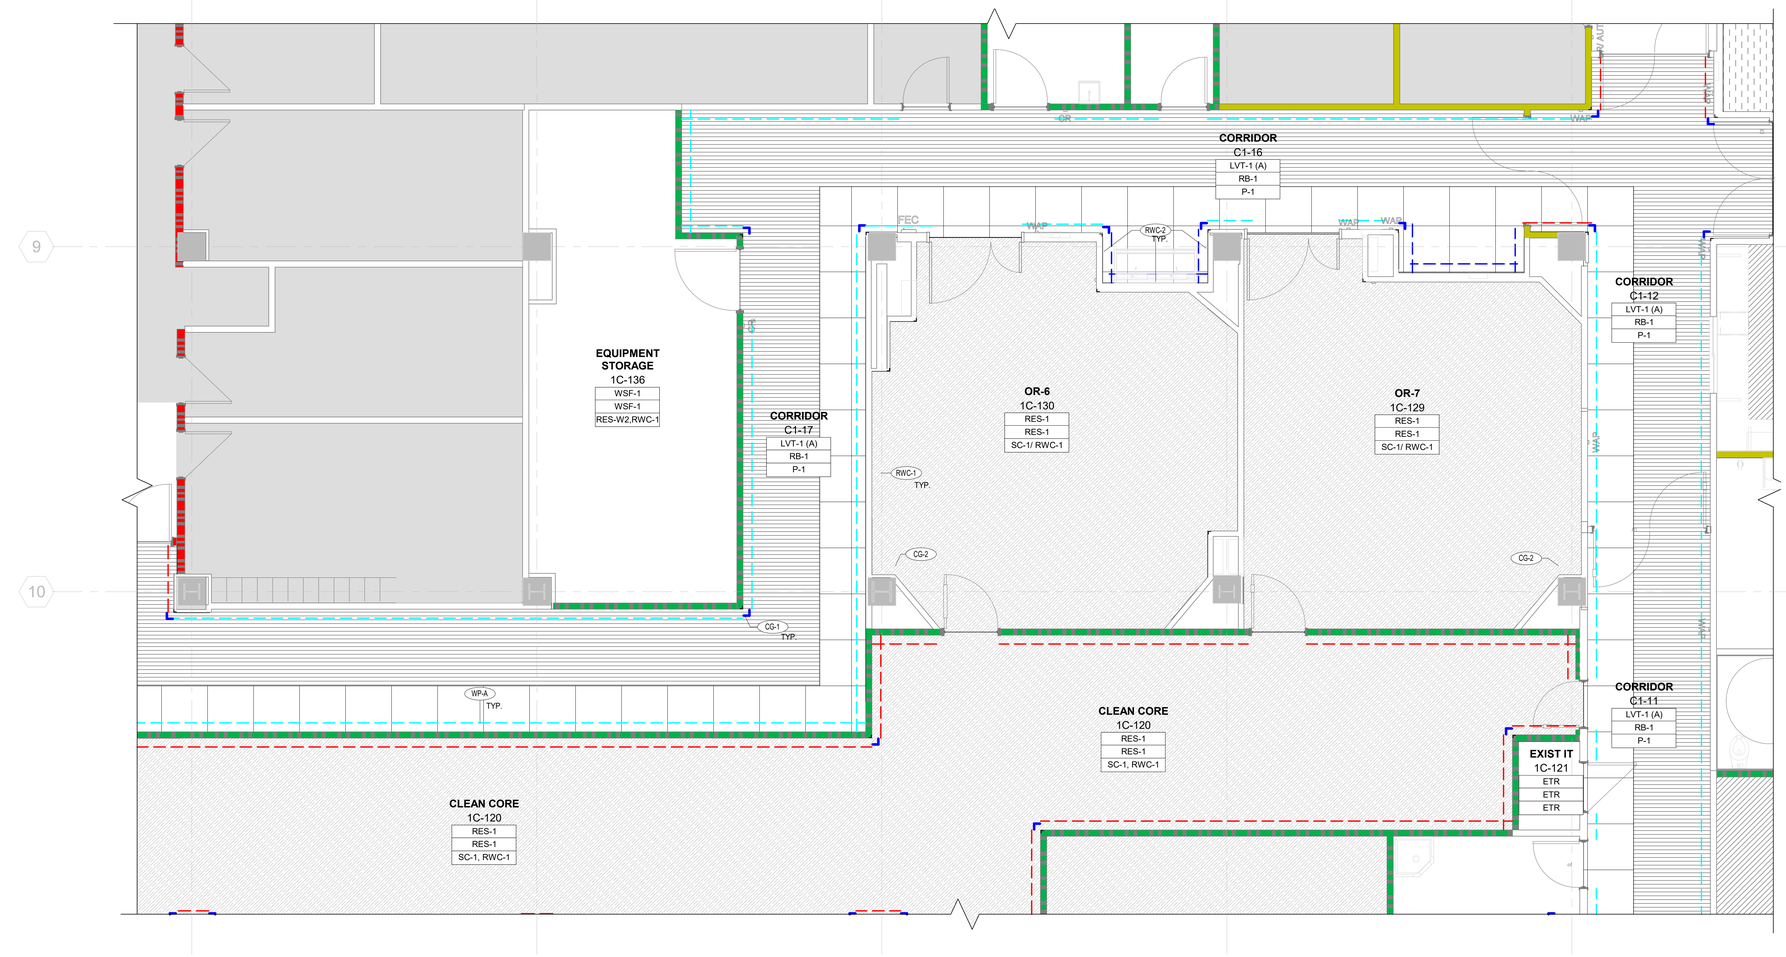

1 FIRST FLOOR FINISH PLAN - PHASE 2

SCALE: 1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES, WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

FLOOR PATTERN LEGEND

RES-1
RES-2
WSF-1
WSF-2
WSF-3
LVT-1
LVT-2
LVT-3

ROOM NAME
ROOM #
LVT-1 — FLOOR FINISH
RB-1 — BASE FINISH
P-1 — WALL FINISH

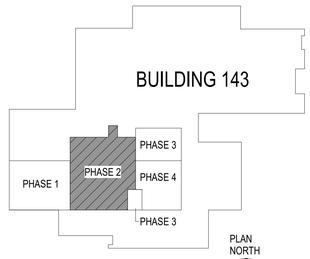

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO. 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL FINISH PLAN FIRST FLOOR - PHASE 2 (NORTH)

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | **Checked:** DJP | **Drawn:** HLJ

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P2-AI101

12/29/2025 1:44:56 AM

VA FORM 08 - 6231

GENERAL DEMOLITION NOTES.

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.

GENERAL DEMOLITION NOTES.

21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

(#) DEMOLITION NOTES - PHASE 3

1	REMOVE DOOR, FRAME, AND HARDWARE COMPLETE.
2	REMOVE EXISTING GWB AND METAL STUDS COMPLETE, AS DENOTED BY DASHED LINE, INCLUDING, BUT NOT LIMITED TO, ALL FINISHES AND BRACING.
3	REMOVE PORTION OF WALL TO INSTALL NEW DOOR. COORDINATE WITH NEW WORK.
4	REMOVE PTD GWB SOFFIT COMPLETE, AS DENOTED BY DASHED LINE.
5	REMOVE WINDOW, FRAME, AND HARDWARE COMPLETE.
6	REMOVE CASEWORK COMPLETE, INCLUDING, BUT NOT LIMITED TO, BASE CABINETS, WALL CABINETS, SINKS, BRACING, AND HARDWARE.
7	REMOVE TOILET ACCESSORIES AND PLUMBING FIXTURES, COMPLETE. SEE PLUMBING DRAWINGS.
8	REMOVE BUMPER RAILS, WAINSCOTTING, AND CORNER GUARDS COMPLETE.
9	REMOVE DOOR, FRAME, AND WALL AS INDICATED UPON COMPLETION OF PHASE 2. EXECUTE WORK ON EVENINGS AND / OR WEEKENDS.

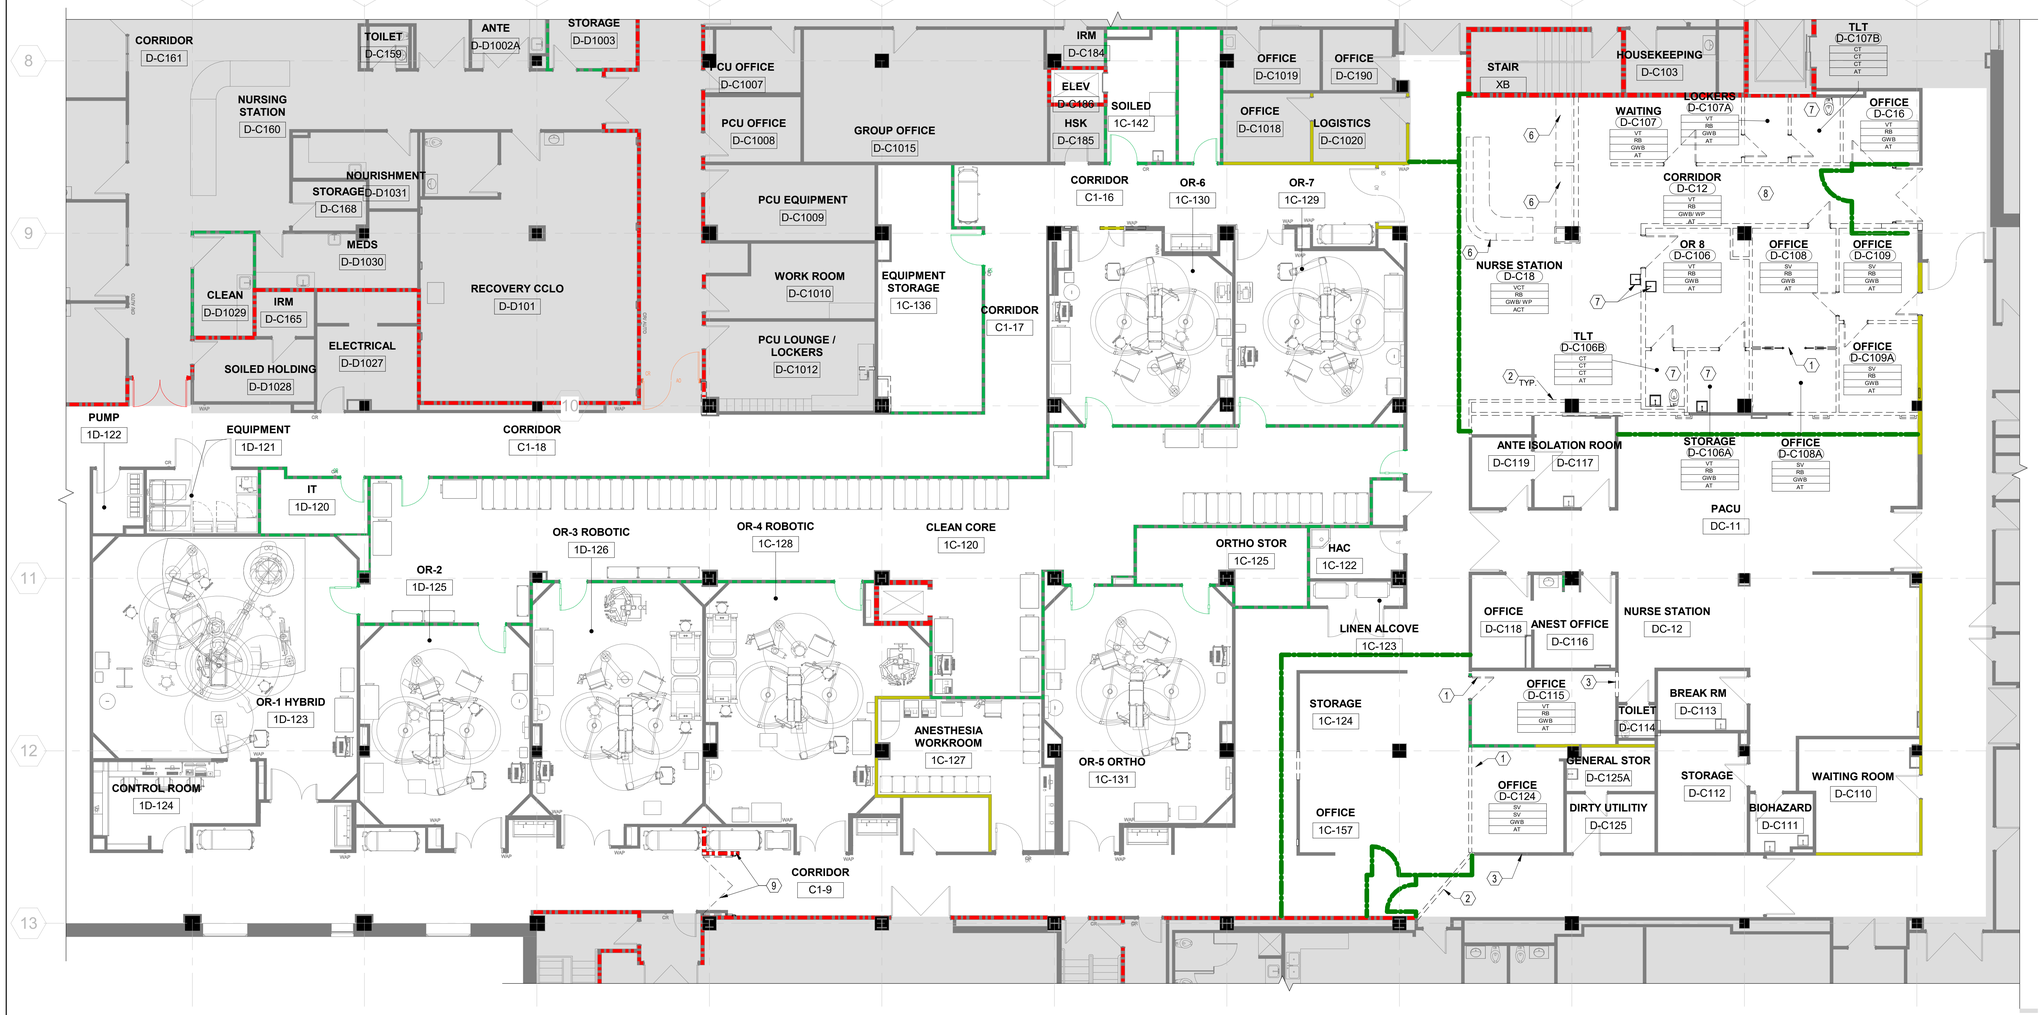

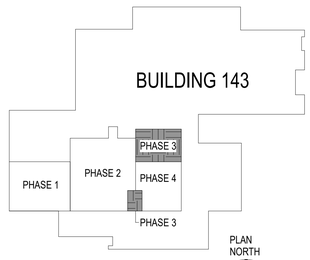

KEY PLAN

1 FIRST FLOOR DEMOLITION PLAN - PHASE 3

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL DEMOLITION PLAN FIRST FLOOR - PHASE 3

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30
Checked: SKC
Drawn: MAT

VA Drawing Number: 2617
Building Number: 143
Drawing Number: P3-AD100

12/29/2025 1:45:09 AM

VA FORM 08 - 6231

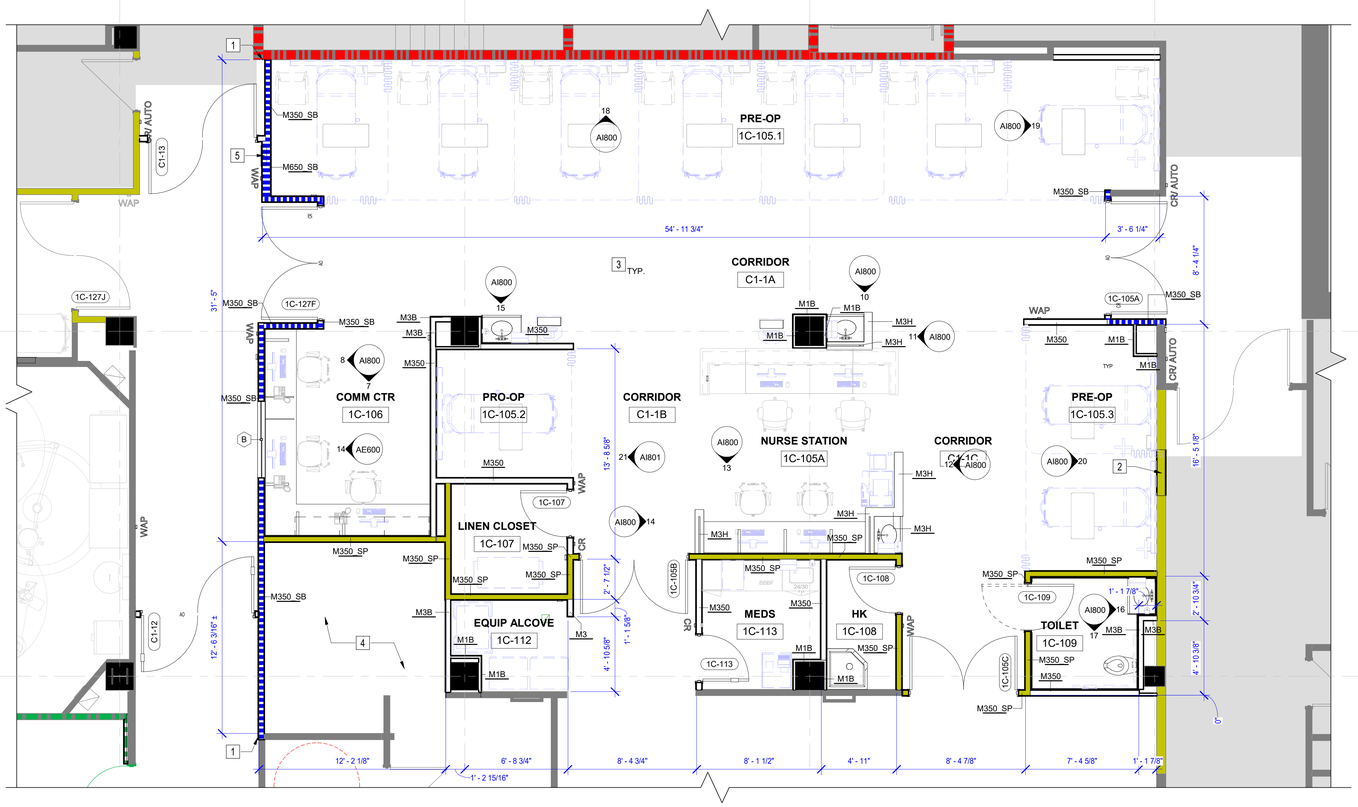

1 FIRST FLOOR NEW WORK PLAN - PHASE 3- PREP/RECOVERY

SCALE: 1/4" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD, REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - PHASE 3 PREP/RECOVERY

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
3	OFOI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
4	FUTURE SPACES, SEE PHASE 4 DRAWINGS.
5	PROVIDE MED GAS ZONE VALVE BOX IN THIS LOCATION. COORDINATE WITH PLUMBING DRAWINGS.

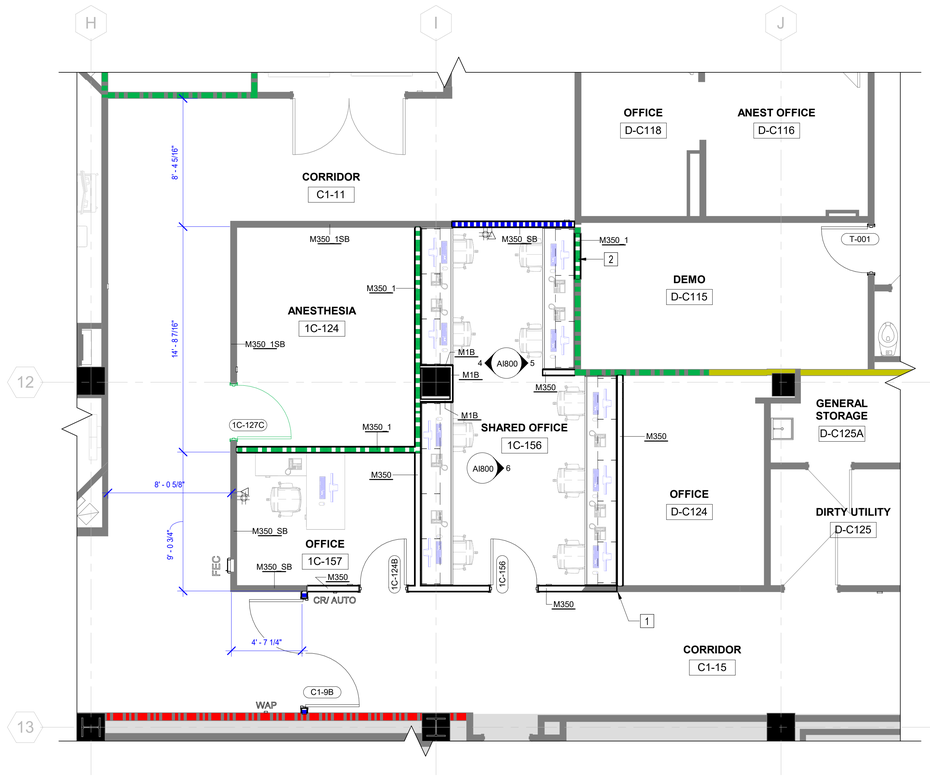

2 FIRST FLOOR NEW WORK PLAN - PHASE 3

SCALE: 1/4" = 1'-0"

WALL TYPE SCHEDULE- PHASE 3

TYPE	STC	DESCRIPTION	FIRE RATING	UL	REMARKS
CERAMIC TILE		DEMO			
M1B	-	1 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE. EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-
M3	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-
M3B	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE. EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-
M3H	-	HALF HEIGHT WALL, 3 5/8" METAL STUDS AT 16" O.C. MAX WITH (1) LAYER 5/8" GWB EACH SIDE. HEIGHT VARIES, SEE INTERIOR ELEVATIONS.	-	-	-
M350	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" GWB EACH SIDE, 3.5" CREASED MINERAL WOOL INSULATION. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	-
M350_1	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.
M350_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.
M350_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.
M650_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.
M650_SP	50	6" METAL STUDS AT 16" O.C. MAX. (1) LAYER OF 5/8" GWB ONE SIDE. (1) LAYER 5/8" GWB OTHER SIDE. PROVIDE 3" SAFB CREASED MINERAL WOOL. EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.
MF	N/A	7/8" METAL FURRING AT 16" O.C. MAX. (1) LAYER 5/8" GWB BOTH SIDES. EXTEND WALL ASSEMBLY TO 4" ABOVE FINISHED CEILING.	-	-	-
PORCELAIN TILE		DEMO			
SW245_1	45	2 1/2" METAL C-H STUDS AT 24" O.C. MAX. (1) LAYER OF 5/8" FIRE RATED GWB ON ONE SIDE, (1) LAYER OF 1" FIRE RATED GWB ON ONE SIDE, 1" SOUND BATTS IN CAVITY, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE ACOUSTICAL SEALANT AT BOTTOM TRACK, TOP TRACK, AND ALL WALL PENETRATIONS. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U415	PROVIDE 6" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.

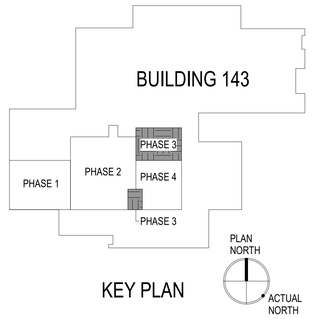

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
784
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - PHASE 3	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: P3-AE100
		Issue Date: 2025-12-30 / Checked: SKC / Drawn: MAT/ABK	

12/29/2025 1:45:17 AM

VA FORM 08 - 6231

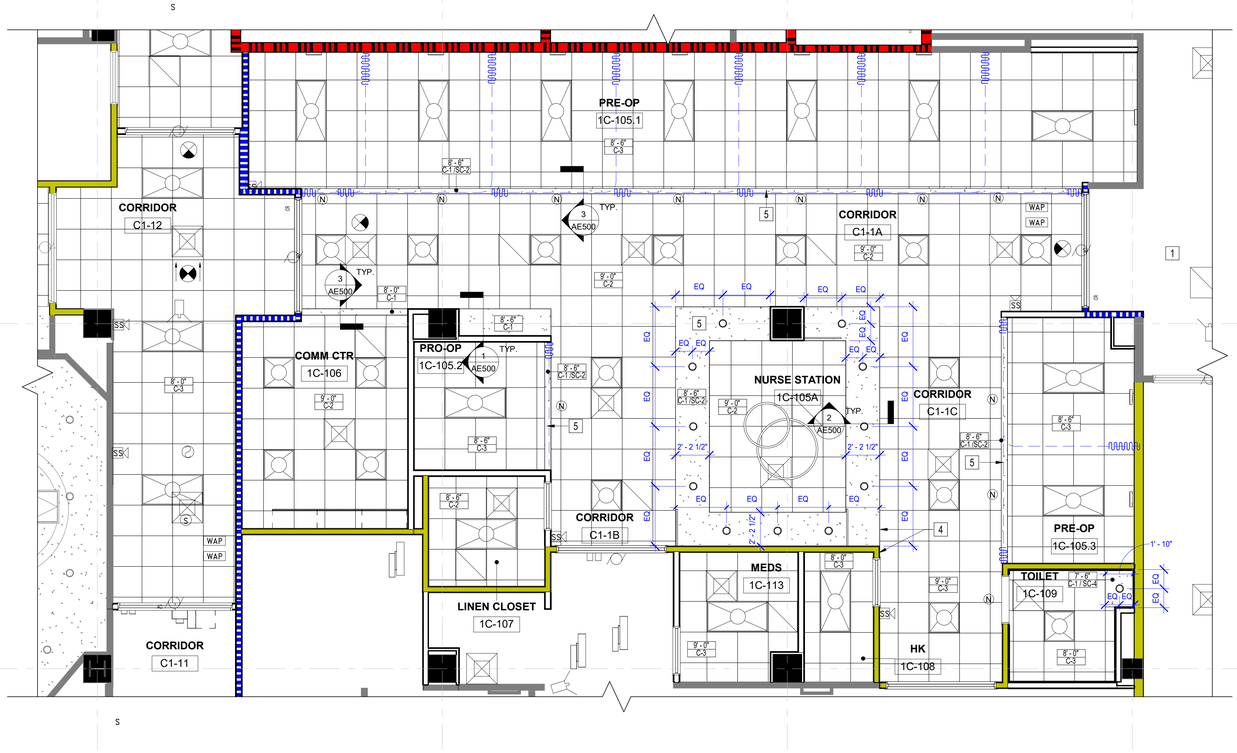

1 RCP FIRST FLOOR PLAN - PHASE 3 - PREP RECOVERY

SCALE: 1/4" = 1'-0"

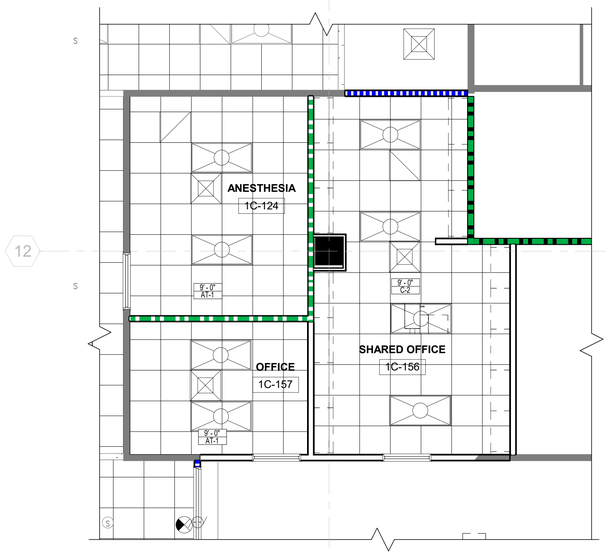

2 REFLECTED CEILING PLAN - PHASE 3

SCALE: 1/4" = 1'-0"

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.
7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION, IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

CEILING NEW WORK NOTES - PHASE 3 PREP/RECOVERY

1	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
2	ACCESS PANELS, COORDINATE LOCATION WITH MEP SYSTEMS.
3	1" CONTROL JOINT.
4	ALIGN FACE OF SOFFIT WITH WALL.
5	PAINT HORIZONTAL AND VERTICAL SURFACES OF GYP. SOFFIT.
6	PAINT HORIZONTAL SURFACE OF GYP. SOFFIT.

CEILING LEGEND

** ITEMS ON THIS SHEET ARE SHOWN FOR LOCATION ONLY. COORDINATE WITH MECHANICAL AND ELECTRICAL SHEETS. CONTRACTOR TO VERIFY HOUSING TO WORK WITH CEILING TYPE.**

- EXHAUST AIR DIFFUSER
- RETURN AIR DIFFUSER
- SUPPLY AIR DIFFUSER
- 2 X 2 INDIRECT LIGHT FIXTURE
- 2 X 4 INDIRECT LIGHT FIXTURE
- CEILING ACCESS PANELS
- RECESSED CEILING LIGHT
- EXIT SIGN
- 2'-0" x 2'-0" ACT SYSTEM
- GWB CEILING
- (N) NURSE CALL DEVICES
- (S) SPEAKER
- WAP WIRELESS ACCESS POINT

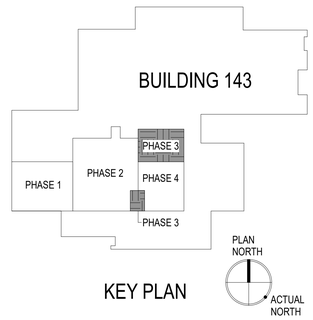

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - PHASE 3

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | Checked: SKC | Drawn: MAT

VA Drawing Number: 2617

Building Number: 143

Drawing Number: P3-AC100

12/29/2025 1:45:19 AM

VA FORM 08 - 6231

EQUIPMENT SCHEDULE- PHASE 3					
MARK	DESCRIPTION	NEW EQUIPMENT VAFVAI	VAFCI	CFCI	COMMENTS
A1015	TELEPHONE, DESK, MULTIPLE LINE	***			PROVIDE POWER AND DATA
A5075	TORK ELEVATION SENSOR FOAM SOAP DISPENSER		***		-
A5077	HAND SANITIZER, HANDS FREE	***			-
A5082	DISPENSER PAPER TOWEL SURFACE MOUNT		***		-
A5107	GLOVE DISPENSER, WALL MOUNTED	***			-
A5108	WASTE DISPOSAL UNIT; SHARPS	***			-
A5180	SURFACE MOUNTED CUBICLE TRACK WITH CURTAIN			***	-
F0515	CLOSED LINEN SUPPLY CART	***			-
F3200	CLOCK, BATTERY, 12" DIAMETER				-
GB18	VERTICAL GRAB BAR		***		PROVIDE BLOCKING
GB36	HORIZONTAL GRAB BAR 36"		***		PROVIDE BLOCKING
GB42	HORIZONTAL GRAB BAR 42"		***		PROVIDE BLOCKING
HDWS	HEADWALL SYSTEM		***		PROVIDE POWER, DATA AND BLOCKING
M1805	COPY MACHINE	***			PROVIDE POWER AND DATA
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M1840	SURFACE MOUNTED CUBICLE TRACK WITH CURTAIN			***	-
M3105	BLANKET WARMER	***			PROVIDE POWER
M3150	PYXIS MED STATION	***			PROVIDE POWER AND DATA
M4255	IV STAND	***			-
M4665	STRETCHER	***			-
M7040	OVERBED TABLE	***			-
M7660	CRASH CART	***			PROVIDE EMERGENCY POWER
M7845	4 CHANNEL BEDSIDE PHYSIOLOGICAL MONITOR	***			PROVIDE EMERGENCY POWER
MIR	STAINLESS STEEL MIRROR		***		-
R4650	ICE MAKER		***		PROVIDE POWER , WATER CONNECTION AND DRAIN
R6200	MINIFRIDGE, UNDERCOUNTER, MED ROOM		***		PROVIDE POWER AND DATA
SD2	HORIZONTAL SOAP DISPENSER		***		MANUFACTURER: BOBRICK MODEL #B-2112
TPD	TOILET PAPER DISPENSER		***		-
WOW	MOBILE COMPUTER TRAY				PROVIDE POWER AND DATA

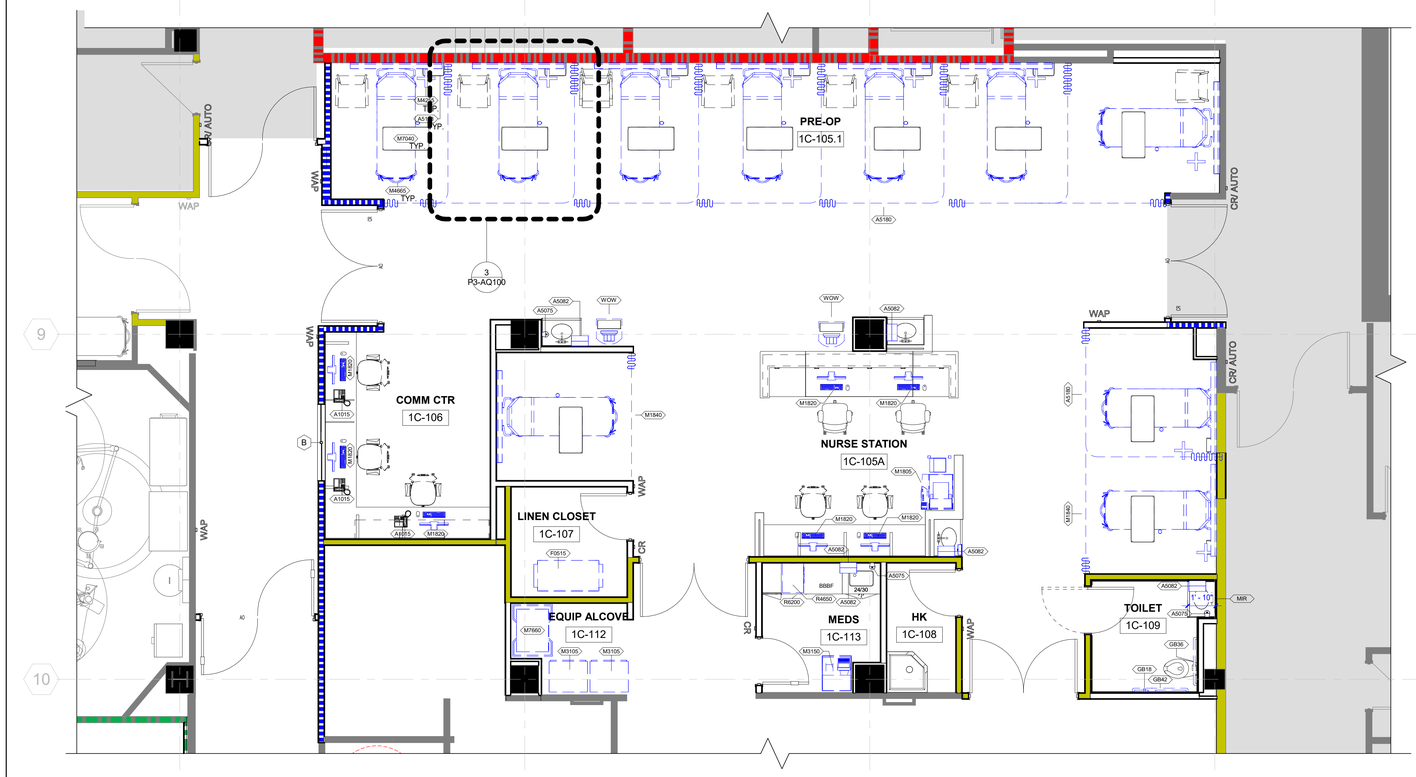

1 FIRST FLOOR EQUIPMENT PLAN - PHASE 3- PREP/RECOVERY

SCALE: 1/4" = 1'-0"

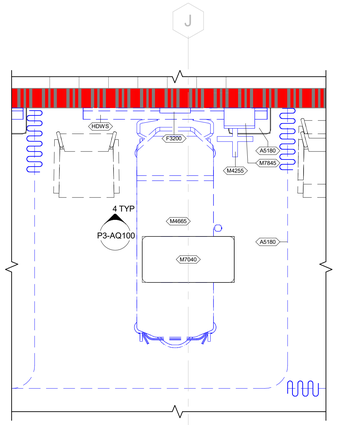

3 PREP/RECOVERY ENLARGED BAY PLAN - TYPICAL

P3-AQ100 — 1/2" = 1'-0"

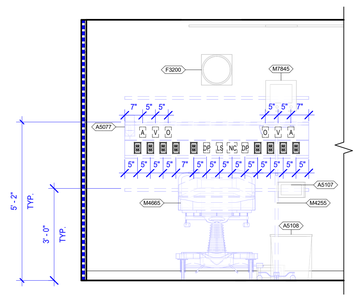

4 TYPICAL HEADWALL ELEVATION

P3-AQ100 — 1/2" = 1'-0"

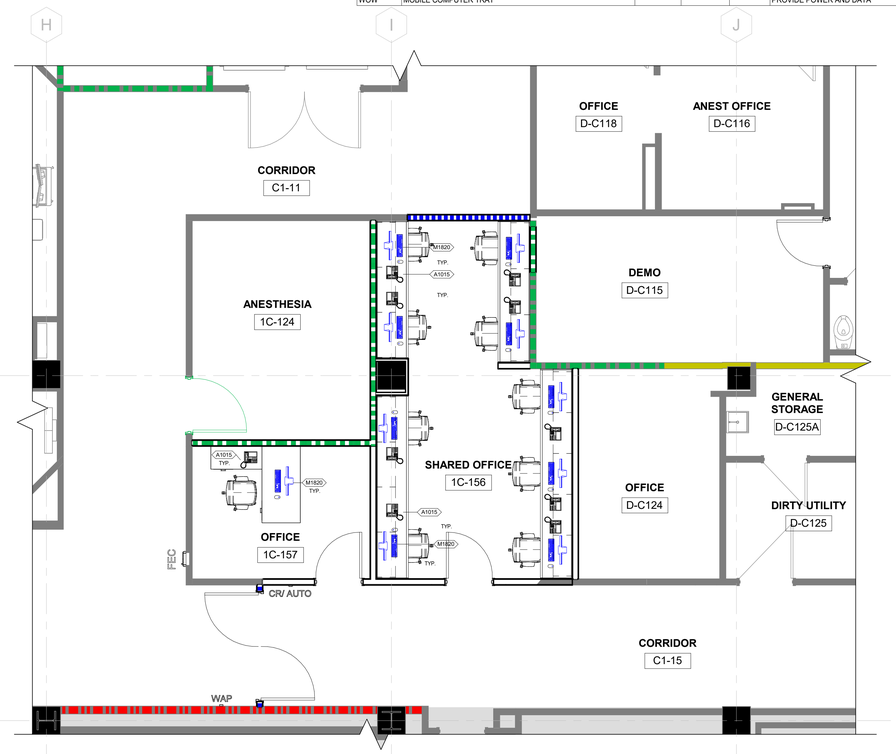

2 FIRST FLOOR NEW WORK PLAN - PHASE 3

SCALE: 1/4" = 1'-0"

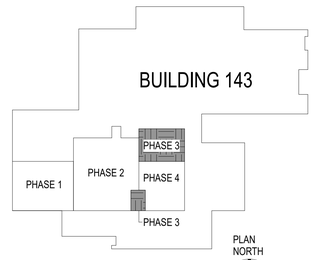

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO. 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. FIRST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL EQUIPMENT PLAN FIRST FLOOR - PHASE 3
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT
VA Drawing Number	2617
Building Number	143
Drawing Number	P3-AQ100

12/29/2025 1:45:32 AM

VA FORM 08 - 6231

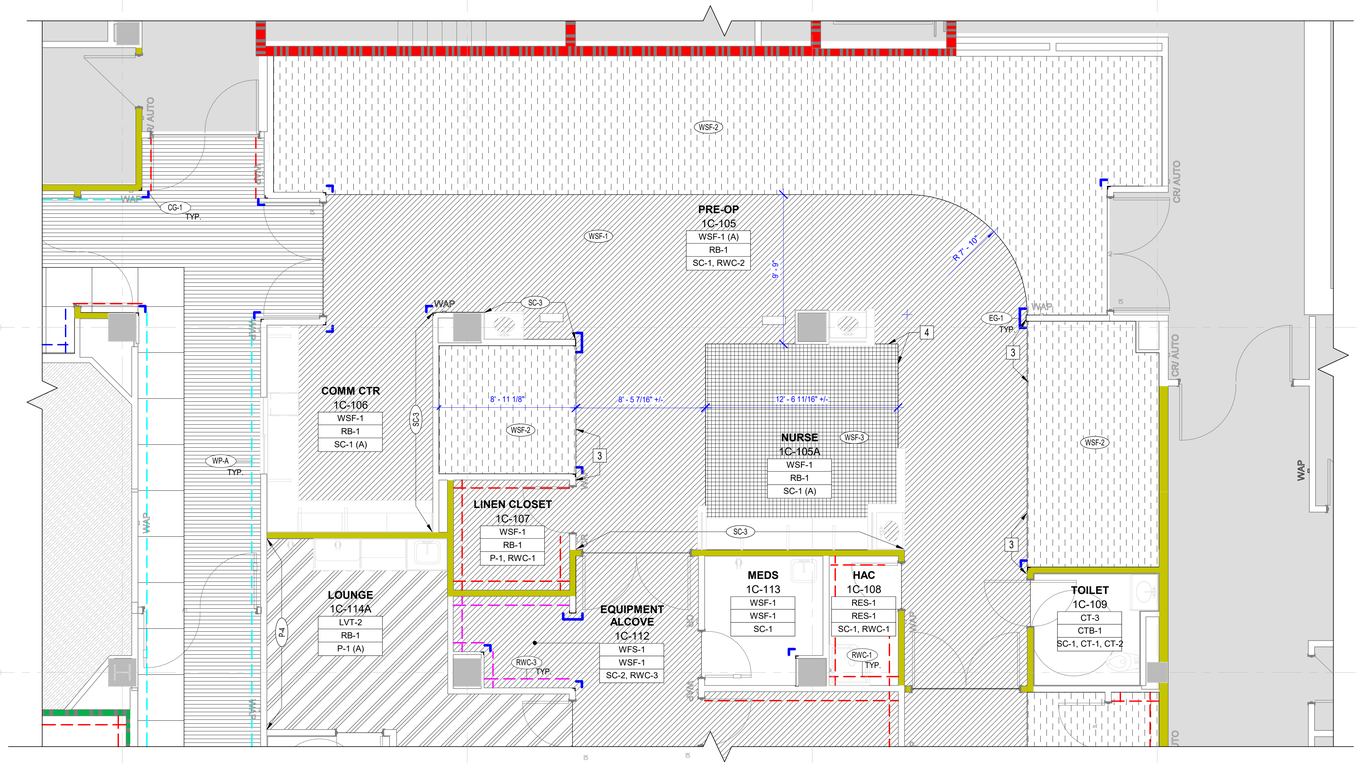

1 FIRST FLOOR FINISH PLAN - PHASE 3 - PREP/ RECOVERY

SCALE: 1/4" = 1'-0"

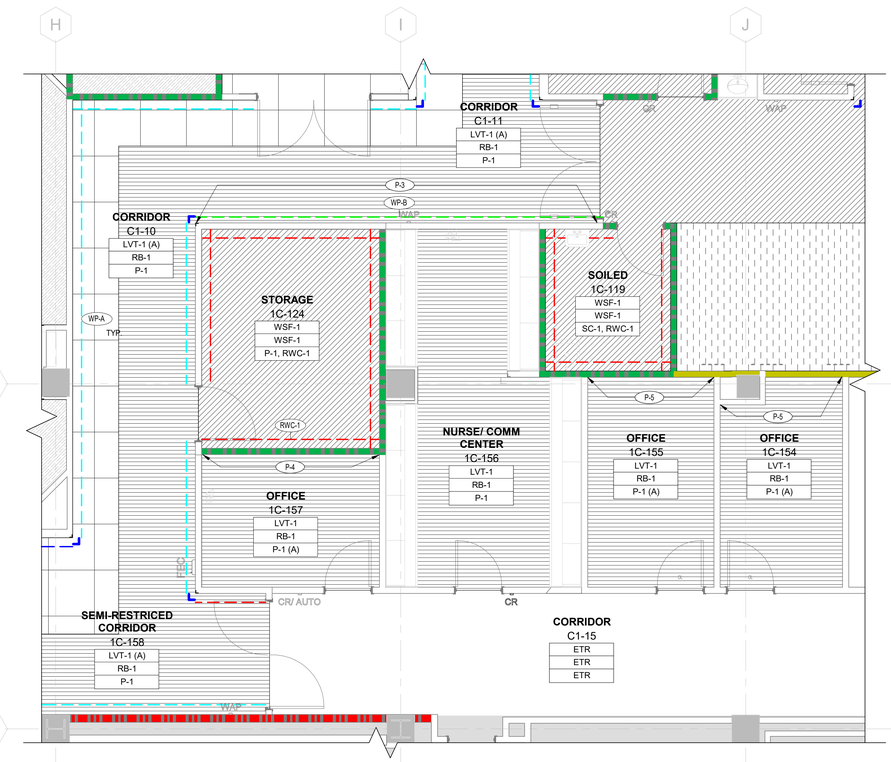

2 FIRST FLOOR FINISH PLAN - PHASE 3

SCALE: 1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES, WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

FLOOR PATTERN LEGEND

RES-1
RES-2
WSF-1
WSF-2
WSF-3
LVT-1
LVT-2
LVT-3

ROOM NAME
ROOM #
LVT-1 — FLOOR FINISH
RB-1 — BASE FINISH
P-1 — WALL FINISH

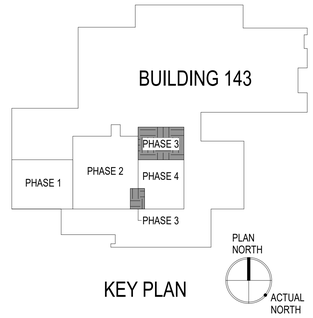

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL FINISH PLAN FIRST FLOOR - PHASE 3
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	HLJ
VA Drawing Number	2617
Building Number	143
Drawing Number	P3-AI100

VA FORM 08 - 6231

12/29/2025 1:45:33 AM

GENERAL DEMOLITION NOTES.

1	DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK, ALL ABANDONED ITEMS, AND ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
2	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
3	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
4	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
5	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
6	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
7	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
8	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
9	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
10	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
11	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
12	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
13	WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
14	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
15	THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
16	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
17	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
18	THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
19	THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
20	IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.

GENERAL DEMOLITION NOTES.

21	WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
22	ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
23	ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY, UNLESS OTHERWISE NOTED. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
24	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
25	ALL EXISTING NURSE CALL, SMOKE DETECTORS, AND SPEAKERS TO REMAIN AND REWORKED WITH NEW CEILING SYSTEM.
26	EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY BY THE CONTRACTOR FOR NEW FINISHES PER THE FINISH SCHEDULE.
27	THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC., AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
28	ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT, UNLESS OTHERWISE NOTED.
29	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

(#) DEMOLITION NOTES - PHASE 4

1	REMOVE DOOR, FRAME, AND HARDWARE COMPLETE.
2	REMOVE EXISTING GWB AND METAL STUDS COMPLETE, AS DENOTED BY DASHED LINE, INCLUDING, BUT NOT LIMITED TO, ALL FINISHES AND BRACING.
3	REMOVE PORTION OF WALL TO INSTALL NEW DOOR. COORDINATE WITH NEW WORK.
4	REMOVE PTD GWB SOFFIT COMPLETE, AS DENOTED BY DASHED LINE.
5	REMOVE CASEWORK COMPLETE, INCLUDING, BUT NOT LIMITED TO, BASE CABINETS, WALL CABINETS, SINKS, BRACING, AND HARDWARE.
6	REMOVE TOILET ACCESSORIES AND PLUMBING FIXTURES, COMPLETE. SEE PLUMBING DRAWINGS.
7	REMOVE BUMPER RAILS, WAINSCOTTING, AND CORNER GUARDS COMPLETE.

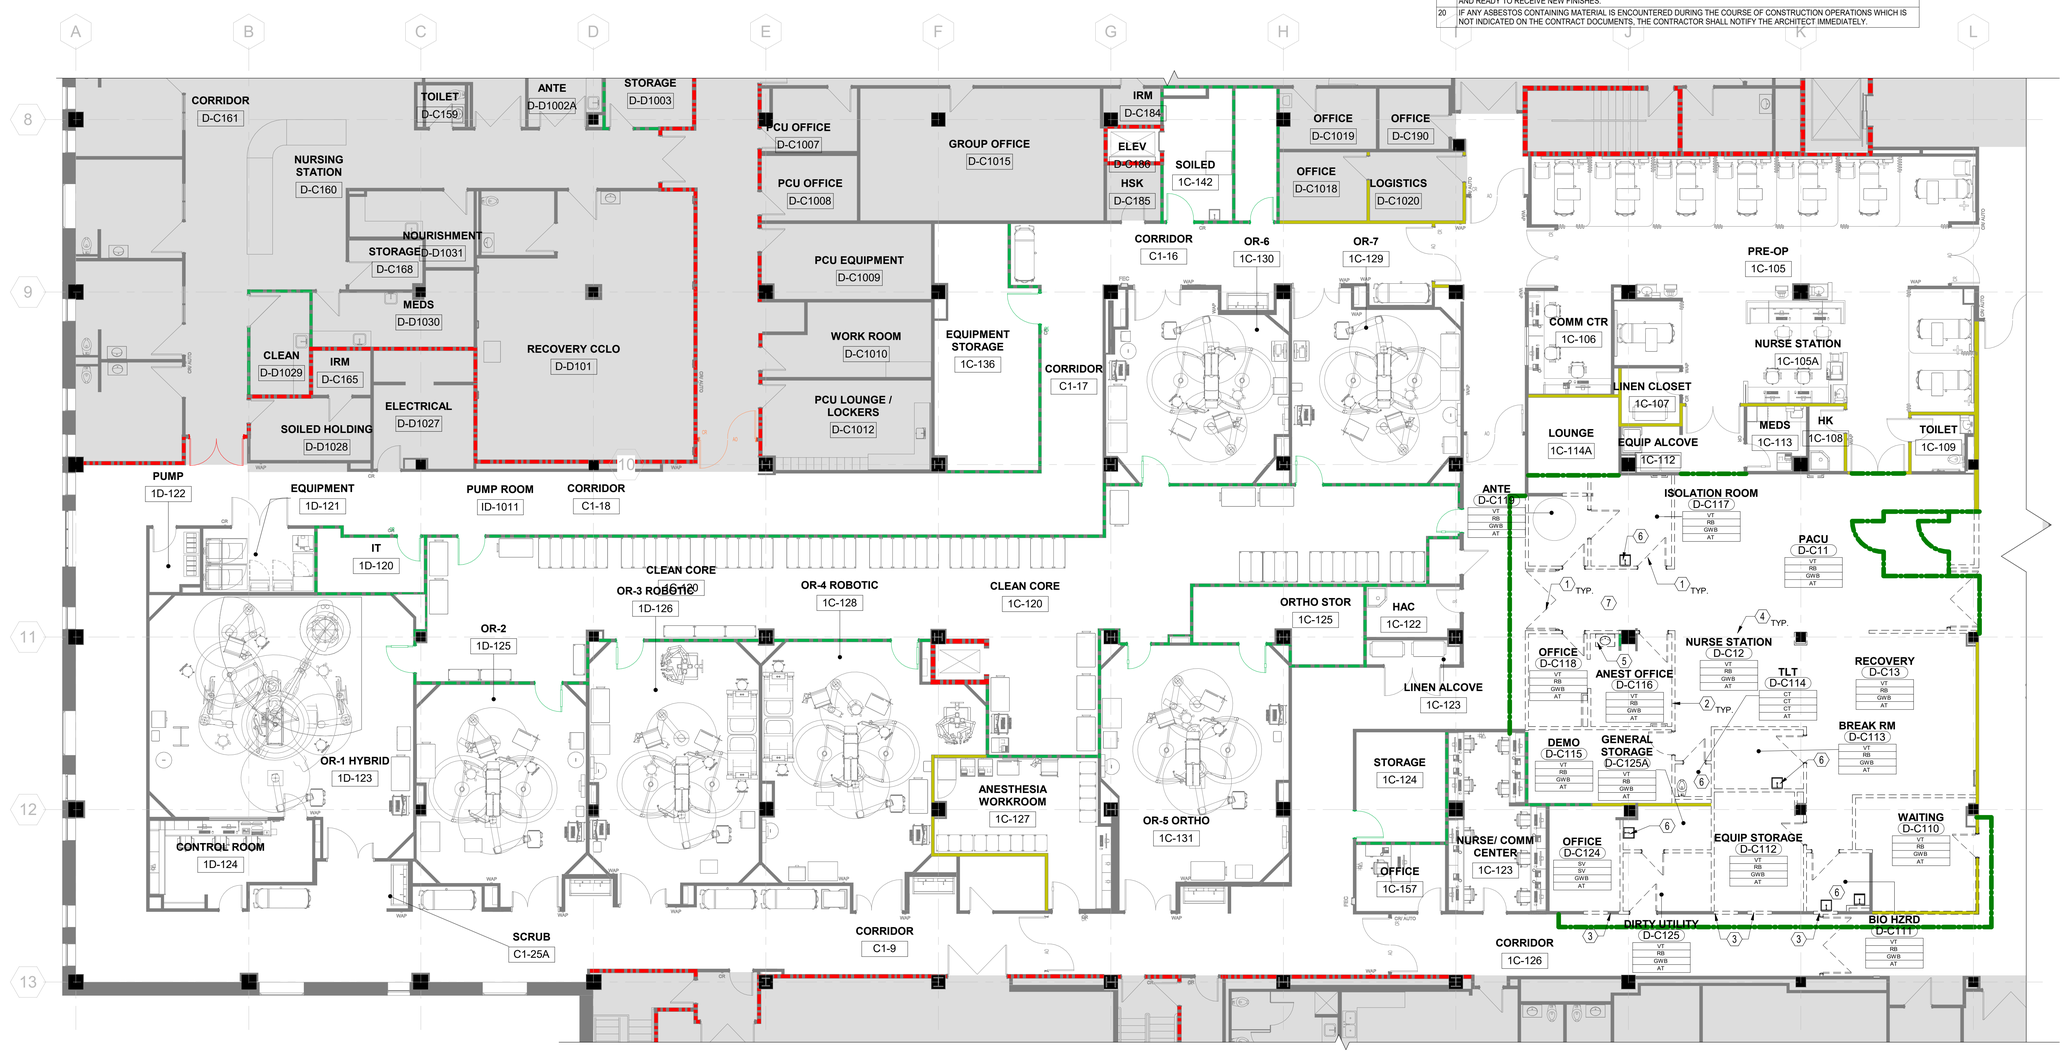

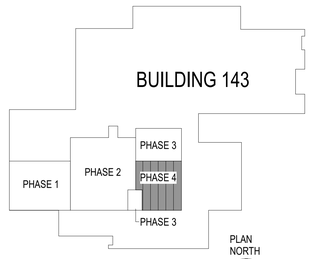

KEY PLAN

1 FIRST FLOOR DEMOLITION PLAN - PHASE 4

SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
784
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL DEMOLITION PLAN FIRST FLOOR - PHASE 4
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	SKC
Drawn	MAT/ABK
VA Drawing Number	2617
Building Number	143
Drawing Number	P4-AD100

VA FORM 08 - 6231

12/29/2025 1:45:53 AM

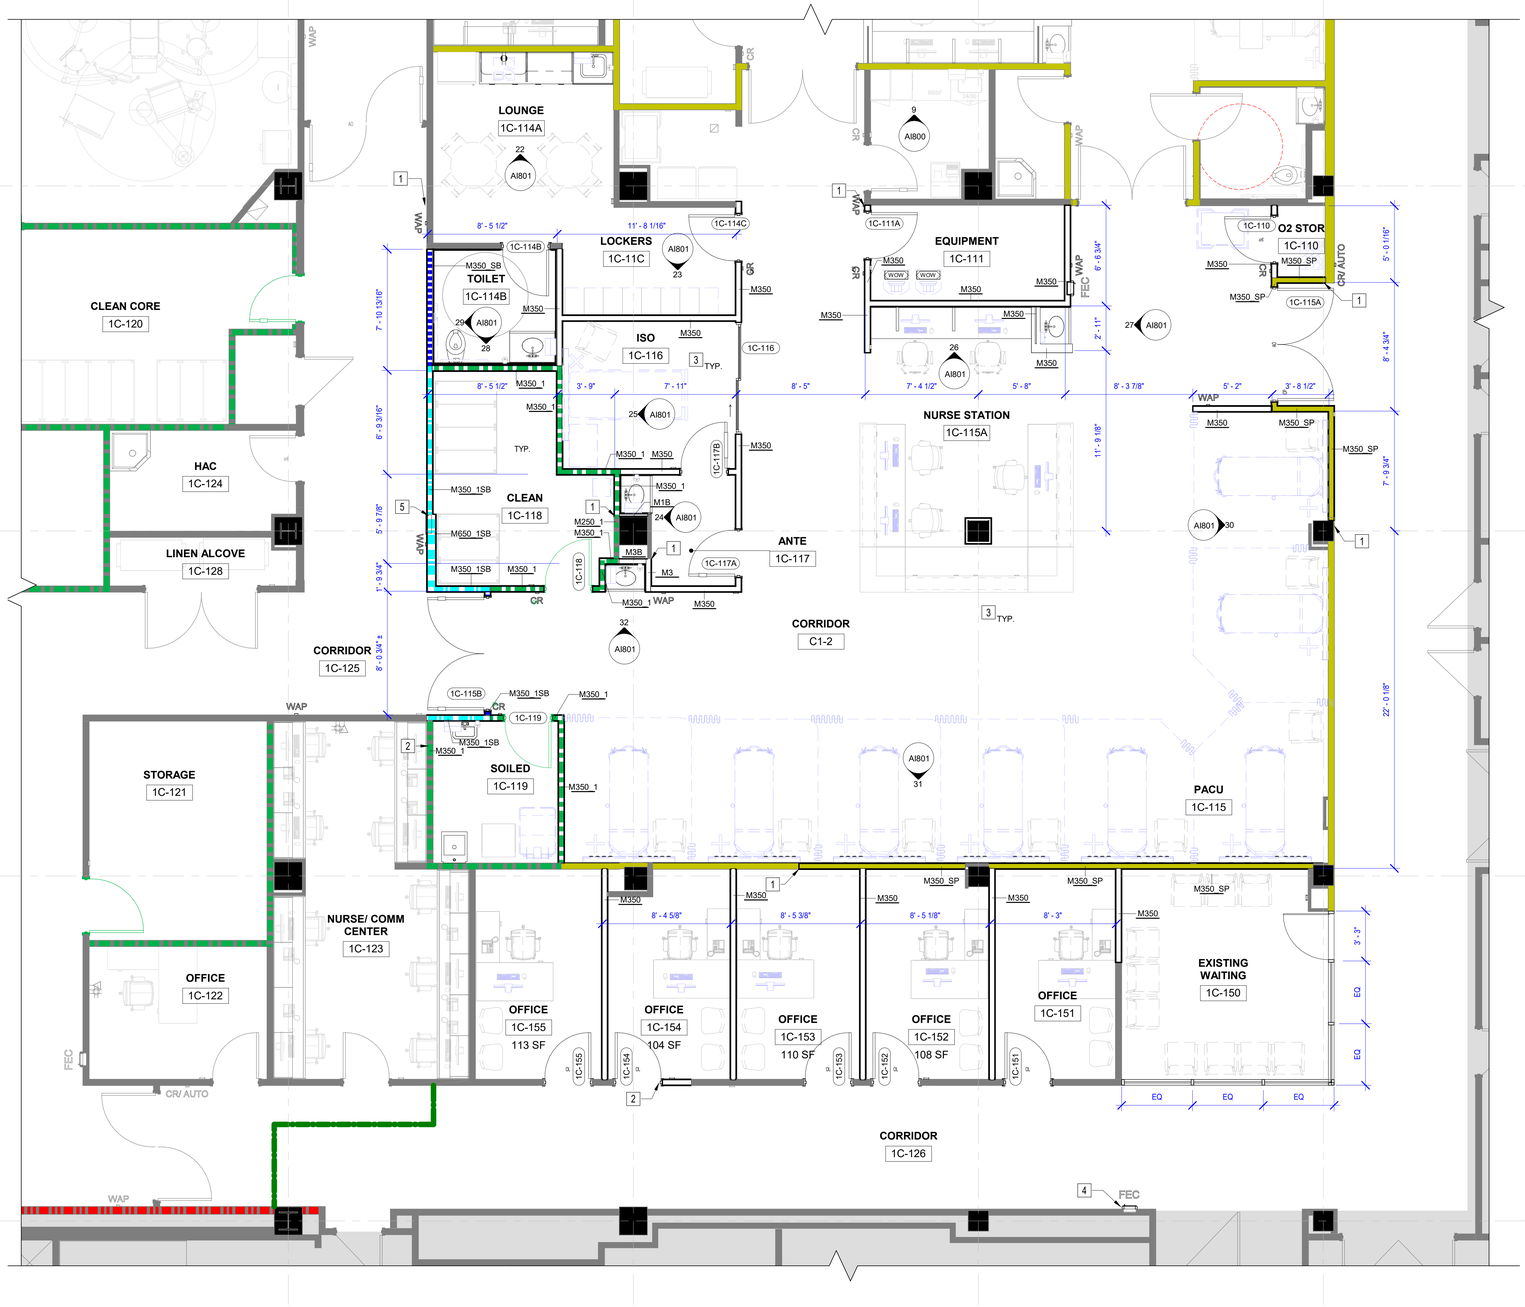

1 FIRST FLOOR NEW WORK PLAN - PHASE 4
SCALE: 1/4" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - PHASE 4

1	ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
2	INFILL WALL TO MATCH EXISTING ADJACENT WALLS AND ALIGN ALL SIDES.
3	OFOI FURNITURE SHOWN FOR COORDINATION PURPOSES ONLY.
4	PROVIDE SEMI-RECESSED FIRE EXTINGUISHER AS SPECIFIED.
5	PROVIDE MED GAS ZONE VALVE BOX IN THIS LOCATION. COORDINATE WITH PLUMBING DRAWINGS.

WALL TYPE SCHEDULE- PHASE 4

TYPE	STC	DESCRIPTION	FIRE RATING	UL	REMARKS	Type Mark
CERAMIC TILE		DEMO				
M1B	-	1 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M1B
M3	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB EACH SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3
M3B	-	3 5/8" METAL STUDS AT 16" O.C. MAX EXTENDED TO DECK ABOVE WITH (1) LAYER 5/8" GWB ONE SIDE, EXTENDED TO 4" ABOVE FINISHED CEILING.	-	-	-	M3B
M350	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE.	-	-	-	M350
M350_1	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED BARRIER" AS REQUIRED BY CODE.	M350_1
M350_1SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR AND SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED AND SMOKE BARRIER" AS REQUIRED BY CODE.	M350_1SB
M350_SB	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX READING "SMOKE BARRIER" AS REQUIRED BY CODE.	M350_SB
M350_SP	50	3 5/8" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	SMOKE PARTITION	-	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "SMOKE PARTITION" AS REQUIRED BY CODE.	M350_SP
M650_1SB	50	6" METAL STUDS AT 16" O.C. MAX. (1) LAYER 5/8" FIRE RATED GWB EACH SIDE, 3.5" SAFB CREASED MINERAL WOOL INSULATION, EXTEND WALL ASSEMBLY TO UNDERSIDE OF DECK ABOVE. PROVIDE FIRE SAFING AT ALL VOIDS AT TOP OF WALL CONNECTION.	1 HR AND SMOKE BARRIER	U419	PROVIDE 3" STENCILED TEXT WITH 3/8" STROKE EVERY 8' O.C. MAX. READING "1 HR FIRE RATED AND SMOKE BARRIER" AS REQUIRED BY CODE.	M650_1SB
PFA_Storefront						C
PORCELAIN TILE		DEMO				

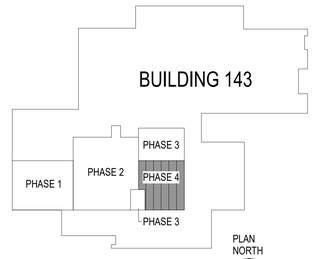

KEY PLAN

PLAN NORTH

ACTUAL NORTH

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL NEW WORK PLAN FIRST FLOOR - PHASE 4	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Project Number** 658-19-103	**Building Number** 143
		Location SALEM VA MEDICAL CENTER	**Drawing Number** P4-AE100
		Issue Date 2025-12-30 / **Checked** SKC / **Drawn** MAT	

VA FORM 08 - 6231

12/29/2025 1:46:03 AM

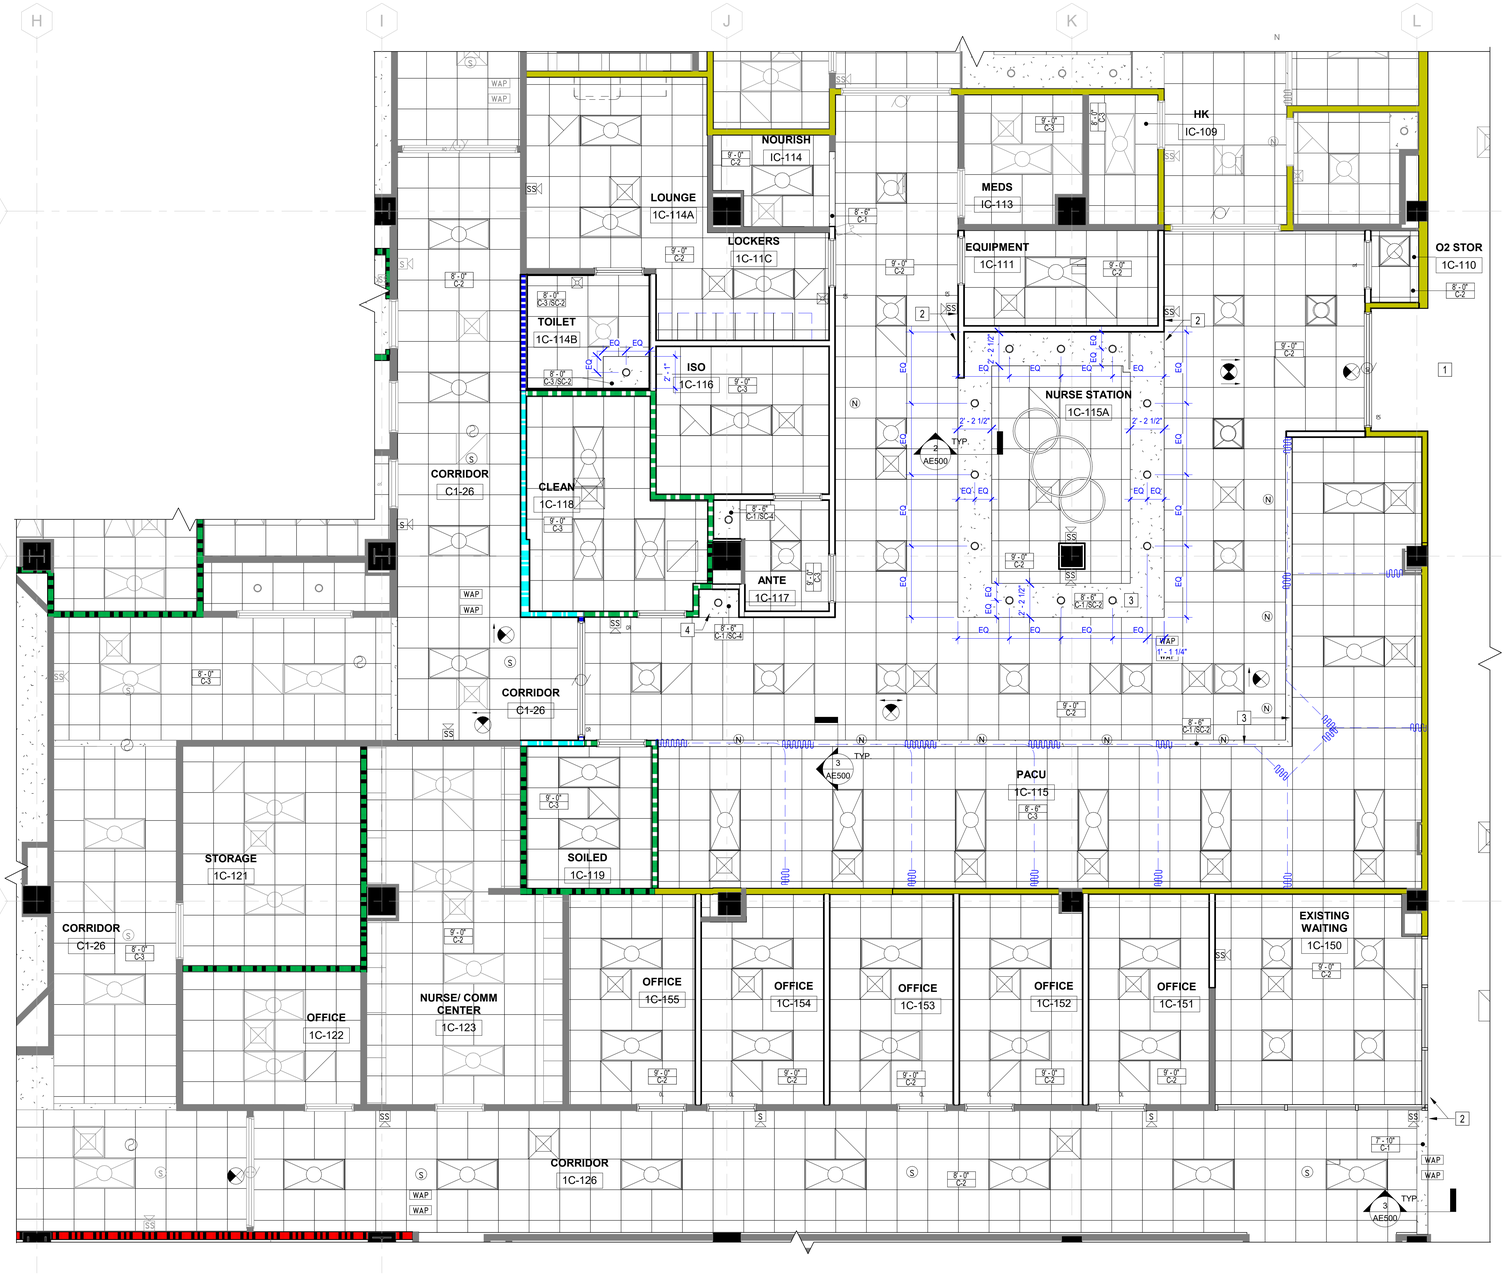

1 REFLECTED CEILING PLAN- PHASE 4

SCALE: 1/4" = 1'-0"

GENERAL CEILING NOTES

1	ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND ORDINANCES.
2	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED
3	EACH SUB-CONTRACTOR SHALL REVIEW THE CONSTRUCTION DOCUMENTS AND EVALUATE THE SCOPE OF WORK REQUIRED BY THEIR RESPECTIVE TRADE AND ANY CONFLICTS WITH OTHER TRADES. ANY CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	CONTRACTOR SHALL COORDINATE ALL REQUIRED CONDUIT, PIPING, AND CHASES FOR OFOI EQUIPMENT WITH THE OWNER.
6	CONTRACTOR SHALL COORDINATE WITH WORK BEING PERFORMED UNDER SEPARATE CONTRACT BY OWNER.
7	REFER TO LIFE SAFETY PLANS FOR FIRE WALL AND SMOKE PARTITION LOCATION, IF NOT INDICATED ON THIS SHEET.
8	ALL ABUTTING DISSIMILAR MATERIALS ARE TO BE SEALED. COLOR TO MATCH ADJACENT MATERIALS.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.
11	CEILING HEIGHTS ARE TAKEN FROM TOP OF FINISH FLOOR.

CEILING NEW WORK NOTES - PHASE 4

1	REWORK EXISTING ACT AND GRID AS REQUIRED FOR NEW WORK.
2	ACCESS PANELS, COORDINATE LOCATION WITH MEP SYSTEMS.
3	PAINT HORIZONTAL AND VERTICAL SURFACES OF GYP. SOFFIT.
4	PAINT HORIZONTAL SURFACES OF GYP. SOFFIT.

CEILING LEGEND

** ITEMS ON THIS SHEET ARE SHOWN FOR LOCATION ONLY. COORDINATE WITH MECHANICAL AND ELECTRICAL SHEETS. CONTRACTOR TO VERIFY HOUSING TO WORK WITH CEILING TYPE.**

- EXHAUST AIR DIFFUSER
- RETURN AIR DIFFUSER
- SUPPLY AIR DIFFUSER
- 2 X 2 INDIRECT LIGHT FIXTURE
- 2 X 4 INDIRECT LIGHT FIXTURE
- CEILING ACCESS PANELS
- RECESSED CEILING LIGHT
- EXIT SIGN
- 2'-0" x 2'-0" ACT SYSTEM
- GWB CEILING
- (N) NURSE CALL DEVICES
- (S) SPEAKER
- WAP WAP WIRELESS ACCESS POINT

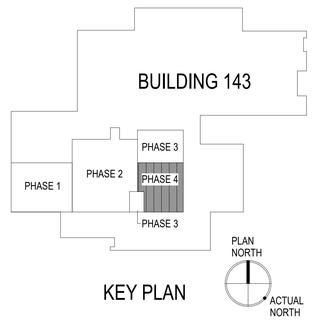

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO. 0459-0130

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL REFLECTED CEILING PLAN FIRST FLOOR - PHASE 4
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	SKC
Drawn	MAT
VA Drawing Number	2617
Building Number	143
Drawing Number	P4-AC100

12/29/2025 1:46:08 AM

VA FORM 08 - 6231

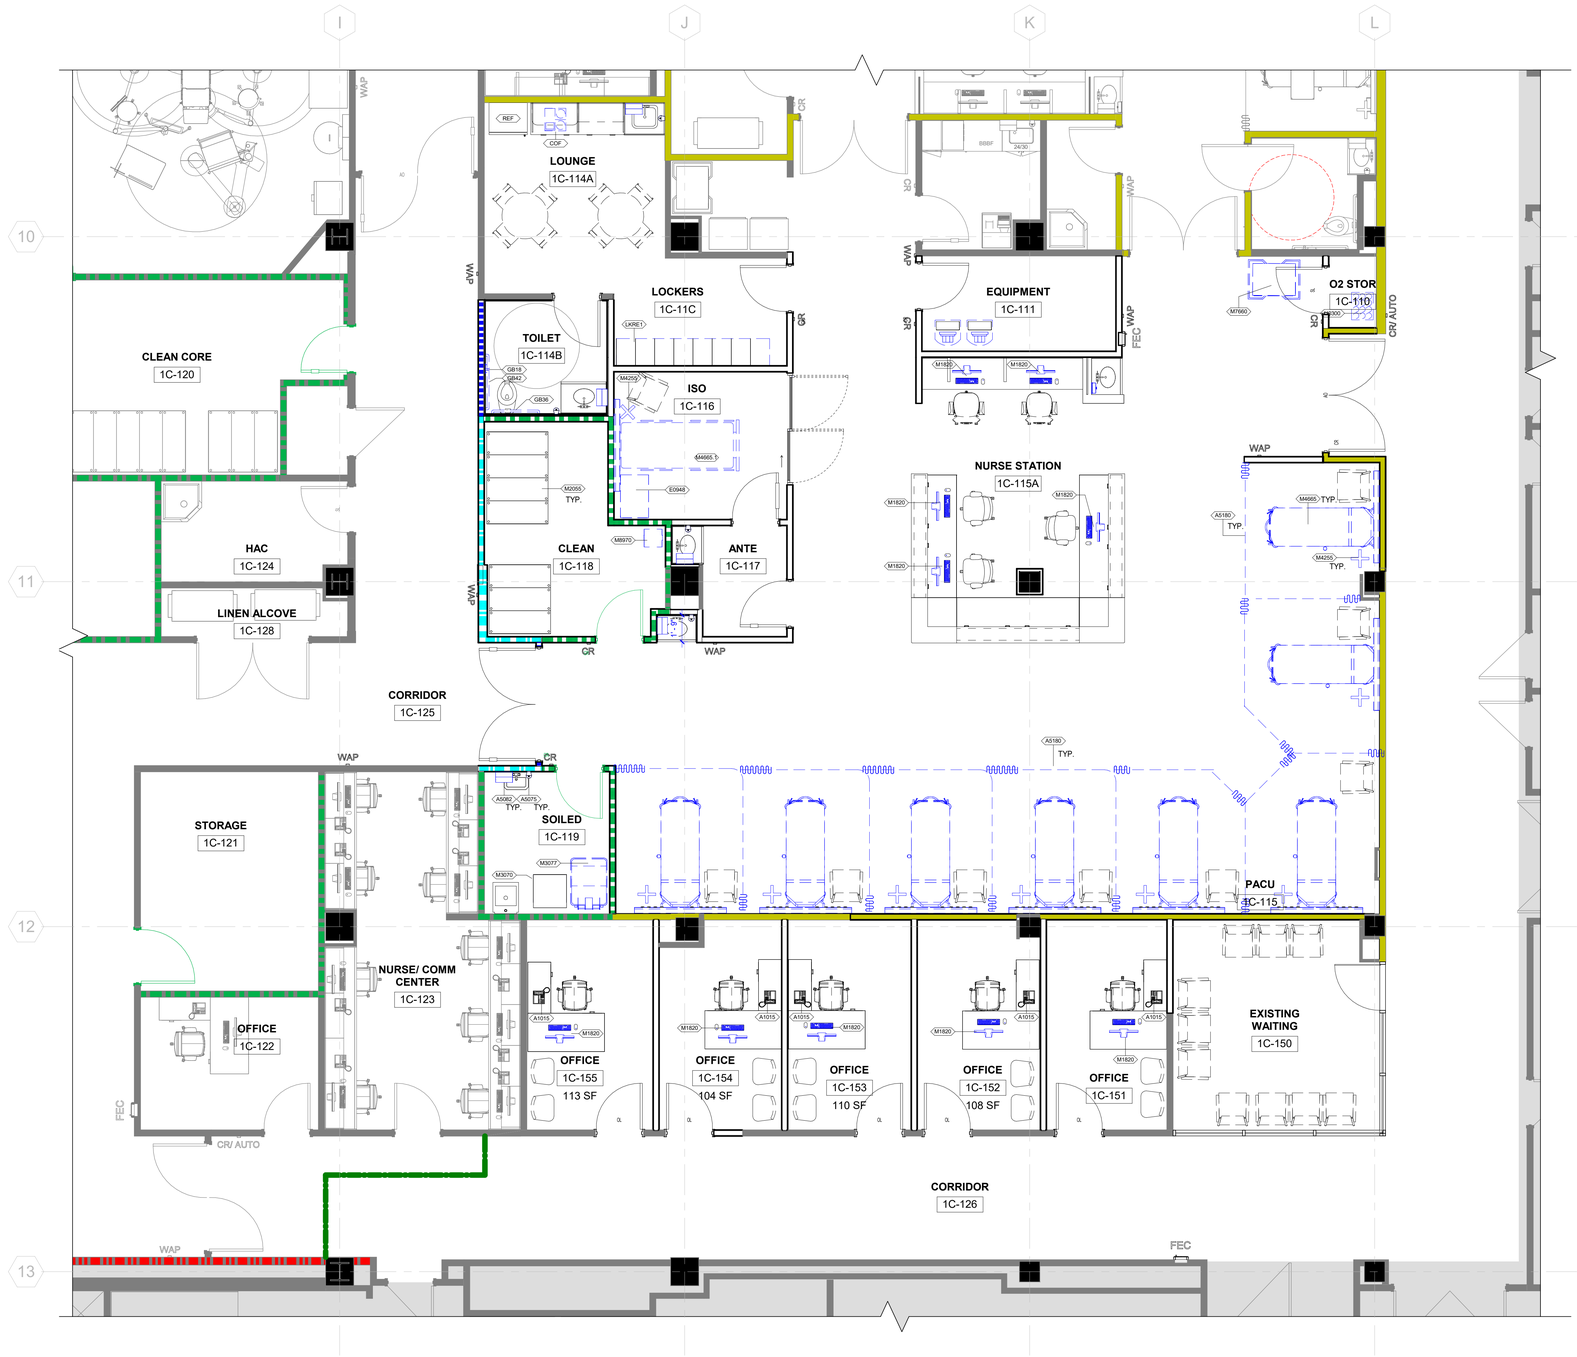

1 FIRST FLOOR EQUIPMENT PLAN - PHASE 4
SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE- PHASE 4					
MARK	DESCRIPTION	NEW EQUIPMENT VAFVAI	VAFCI	CFCI	COMMENTS
A1015	TELEPHONE, DESK, MULTIPLE LINE	***			PROVIDE POWER AND DATA
A5075	TORK ELEVATION SENSOR FOAM SOAP DISPENSER		***		-
A5082	DISPENSER PAPER TOWEL SURFACE MOUNT		***		-
A5180	SURFACE MOUNTED CUBICLE TRACK WITH CURTAIN			***	-
COF	COFFEE MAKER	***			PROVIDE POWER
E0948	CART, GENERAL STORAGE, MOBILE	***			PROVIDE EMERGENCY POWER
GB18	VERTICAL GRAB BAR		***		PROVIDE BLOCKING
GB36	HORIZONTAL GRAB BAR 36"		***		PROVIDE BLOCKING
GB42	HORIZONTAL GRAB BAR 42"		***		PROVIDE BLOCKING
HDWS	HEADWALL SYSTEM		***		PROVIDE POWER, DATA AND BLOCKING
LKRE1	LOCKERS			***	RELOCATED SALVAGED LOCKERS
M1820	COMPUTER WORK STATION	***			PROVIDE POWER AND DATA
M2055	STATIONARY SHELVING UNIT	***			-
M3070	HAMPER, LINEN MOBILE	***			-
M3077	BIOHAZARD BIN		***		-
M4255	IV STAND	***			-
M4665	STRETCHER	***			-
M4665.1	PATIENT BED, ISOLOTION ROOM	***			-
M7660	CRASH CART	***			PROVIDE EMERGENCY POWER
M8970	BLOOD WARMER, HIGH VOLUME	***			PROVIDE POWER AND DATA
MIC	MICROWAVE				PROVIDE POWER
MIR	STAINLESS STEEL MIRROR		***		-
REF	REFRIGERATOR	***			PROVIDE POWER
SD2	HORIZONTAL SOAP DISPENSER		***		MANUFACTURER: BOBRICK: MODEL #B-2112
TPD	TOILET PAPER DISPENSER		***		-
U0300	O2 RACK	***			-
WOW	MOBILE COMPUTER TRAY				PROVIDE POWER AND DATA

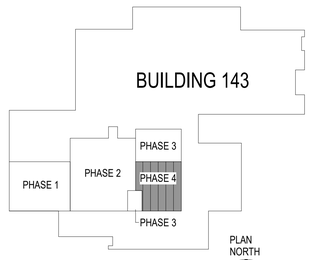

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL EQUIPMENT PLAN FIRST FLOOR - PHASE 4	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: P4-AQ100
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: MAT	

12/29/2025 1:46:20 AM

VA FORM 08 - 6231

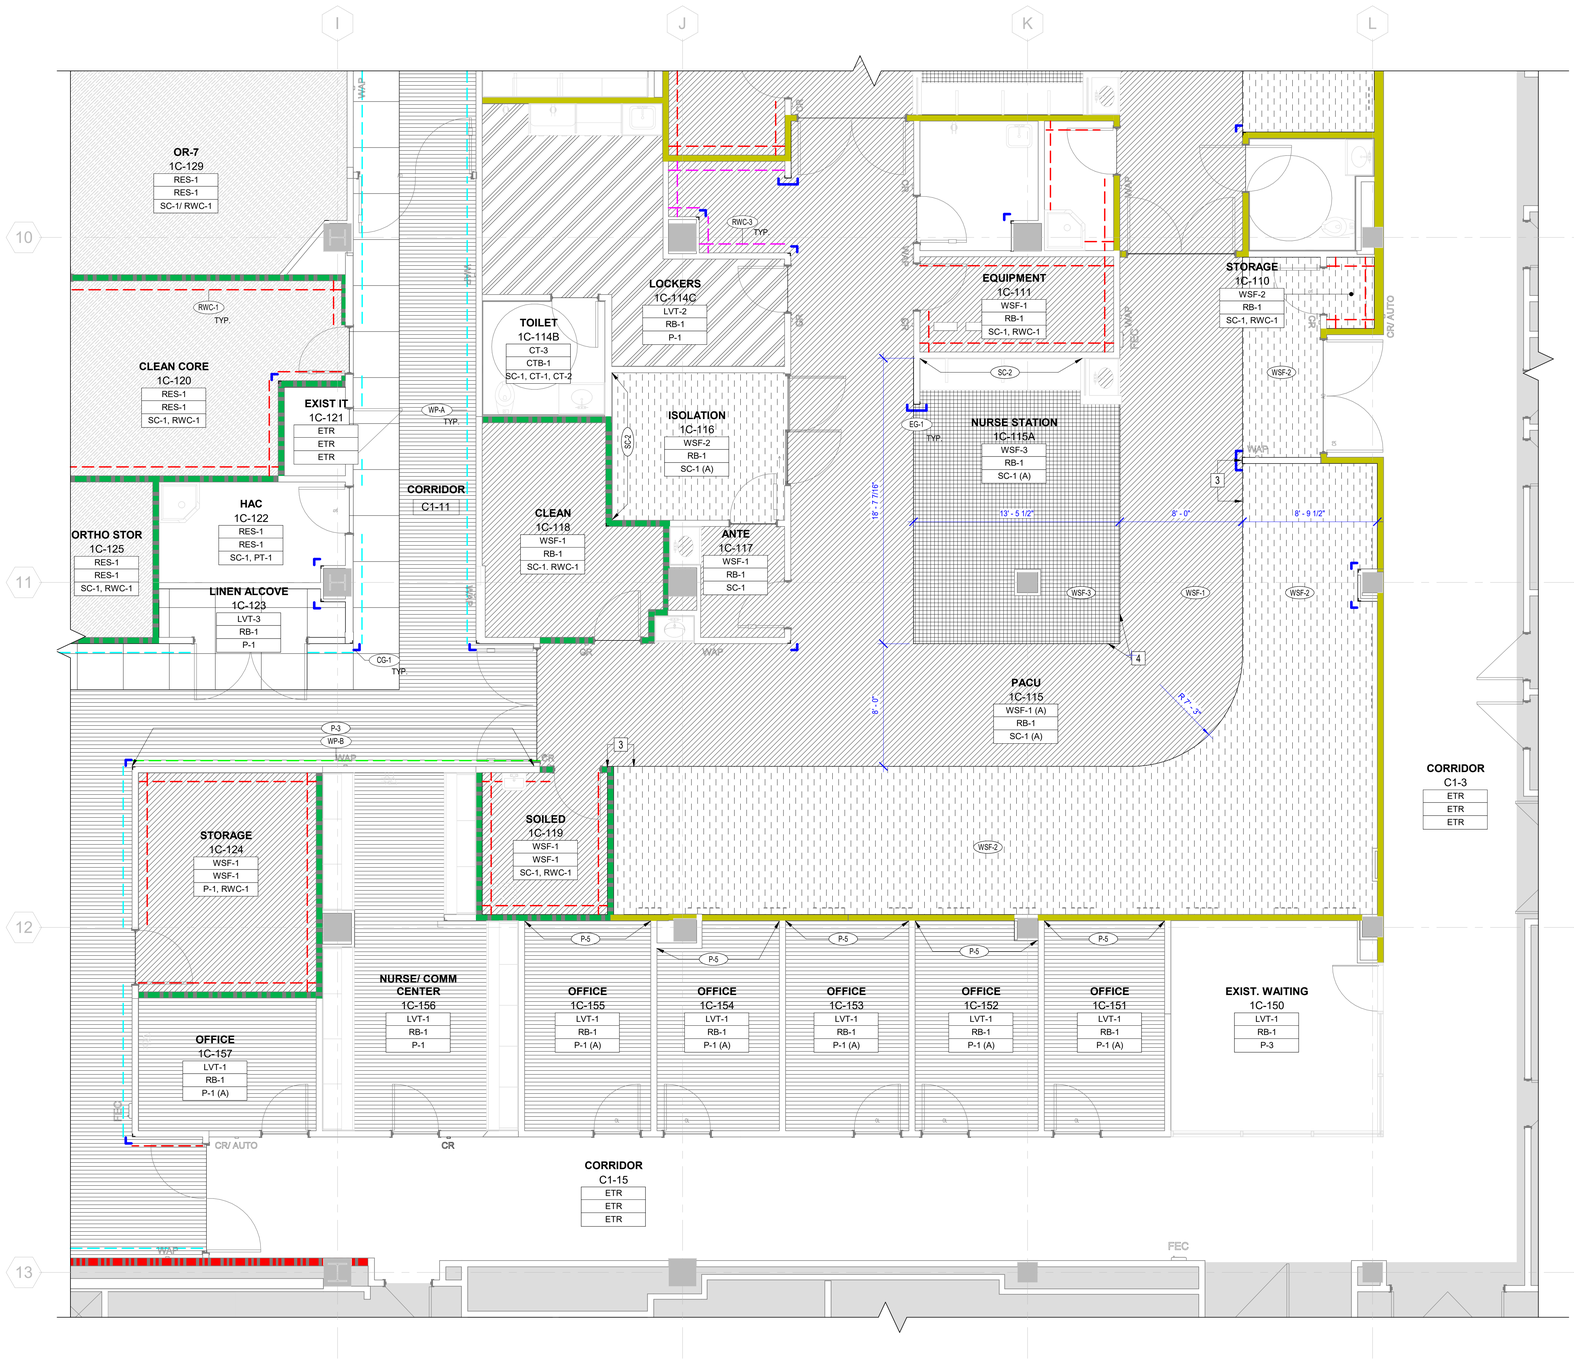

1 FIRST FLOOR FINISH PLAN - PHASE 4
SCALE: 1/4" = 1'-0"

GENERAL FINISH NOTES

1	PROVIDE VINYL TRANSITION STRIP AT ALL FLOOR FINISH TRANSITIONS. COLOR SHALL MATCH ADJACENT RESILIENT BASE.
2	ALL FLOOR FINISH TRANSISTIONS SHALL BE CONCEALED BY A CLOSED DOOR.
3	CONTRACTOR SHALL VERIFY SLAB LEVELNESS AND REPAIR EXISTING SLAB AS REQUIRED TO ACHIEVE A SMOOTH AND LEVEL FLOOR. PREPARE SLAB AS REQUIRED TO RECEIVE SCHEDULED FINISH. COORDINATE FINISH WITH FINISH PLAN AND FINISH COLORS. ADDITIONAL COST FOR PATCHING AND LEVELING WILL NOT BE CONSIDERED.
4	ALL VINYL TILE TO BE INSTALLED MONOLITHIC U.O.N. SEE FINISH COLORS AND FINISH PLAN FOR ADDITIONAL INFORMATION.
5	EXTEND FLOOR FINISH UNDER CASEWORK AS REQUIRED.
6	HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIONAL ONLY TO DISTINGUISH COLOR CHANGES U.O.N.
7	WALL BASE SHALL BE ROLL GOODS, U.O.N.
8	HEAT WELDS TO BE AT CENTERLINE OF ROOM.
9	PROVIDE FLOORING MANUFACTURERS RECOMMENDED ACCESSORIES. WELD RODS, COVE CAP ETC. IN MANUFACTURERS RECOMMENDED COLOR TO MATCH FIELD COLOR.
10	WHERE WALL PROTECTION PANELS ARE LESS THAN THE LENGTH OF WALL, JOINTS SHALL BE CENTERED.
11	ALL FINISHES LISTED ARE NEW U.O.N.
12	WHERE PAINTED GWB IS INDICATED, PAINTING INCLUDES ALL PREVIOUSLY PAINTED SURFACES AND TRIM.
13	WALLS TO BE PAINTED EGGSHELL U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
14	CEILINGS TO BE PAINTED FLAT U.O.N. SEE FINISH COLORS FOR ADDITIONAL INFORMATION.
15	WHERE WALLS ARE INDICATED TO RECEIVE CERAMIC/PORCELAIN TILE, INSTALL 5/8" CEMENTITIOUS TILE BACKERBOARD IN LIEU OF GWB.
16	CAULK DOOR FRAMES TO RESILIENT FLOORING. CAULK COLOR TO MATCH DOOR FRAME.
17	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER. MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

FINISH NOTES

1	PROVIDE SOLID SURFACE (SSP-1) WINDOW SILL.
2	PROVIDE WINDOW TREATMENTS (WT-1) AT ALL EXTERIOR WINDOWS TO MATCH HOSPITAL STANDARDS.
3	ALIGN FLOORING WITH EDGE OF WALL.
4	ALIGN THE FLOORING SEAMS AT THE SIDES AND THE FRONT OF THE NURSE STATION DESK WITH THE BOTTOM EDGE OF THE NURSE STATION DESK.

FLOOR PATTERN LEGEND

RES-1
RES-2
WSF-1
WSF-2
WSF-3
LVT-1
LVT-2
LVT-3

ROOM NAME
ROOM #
LVT-1 — FLOOR FINISH
RB-1 — BASE FINISH
P-1 — WALL FINISH

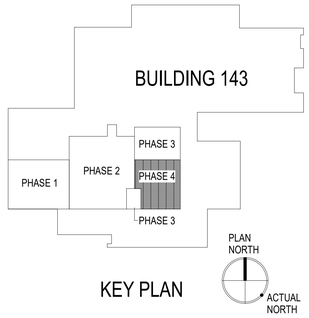

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO: 0459-0130

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 28443
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL FINISH PLAN FIRST FLOOR - PHASE 4	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: P4-AI100
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: HLJ	

12/29/2025 1:46:24 AM

VA FORM 08 - 6231

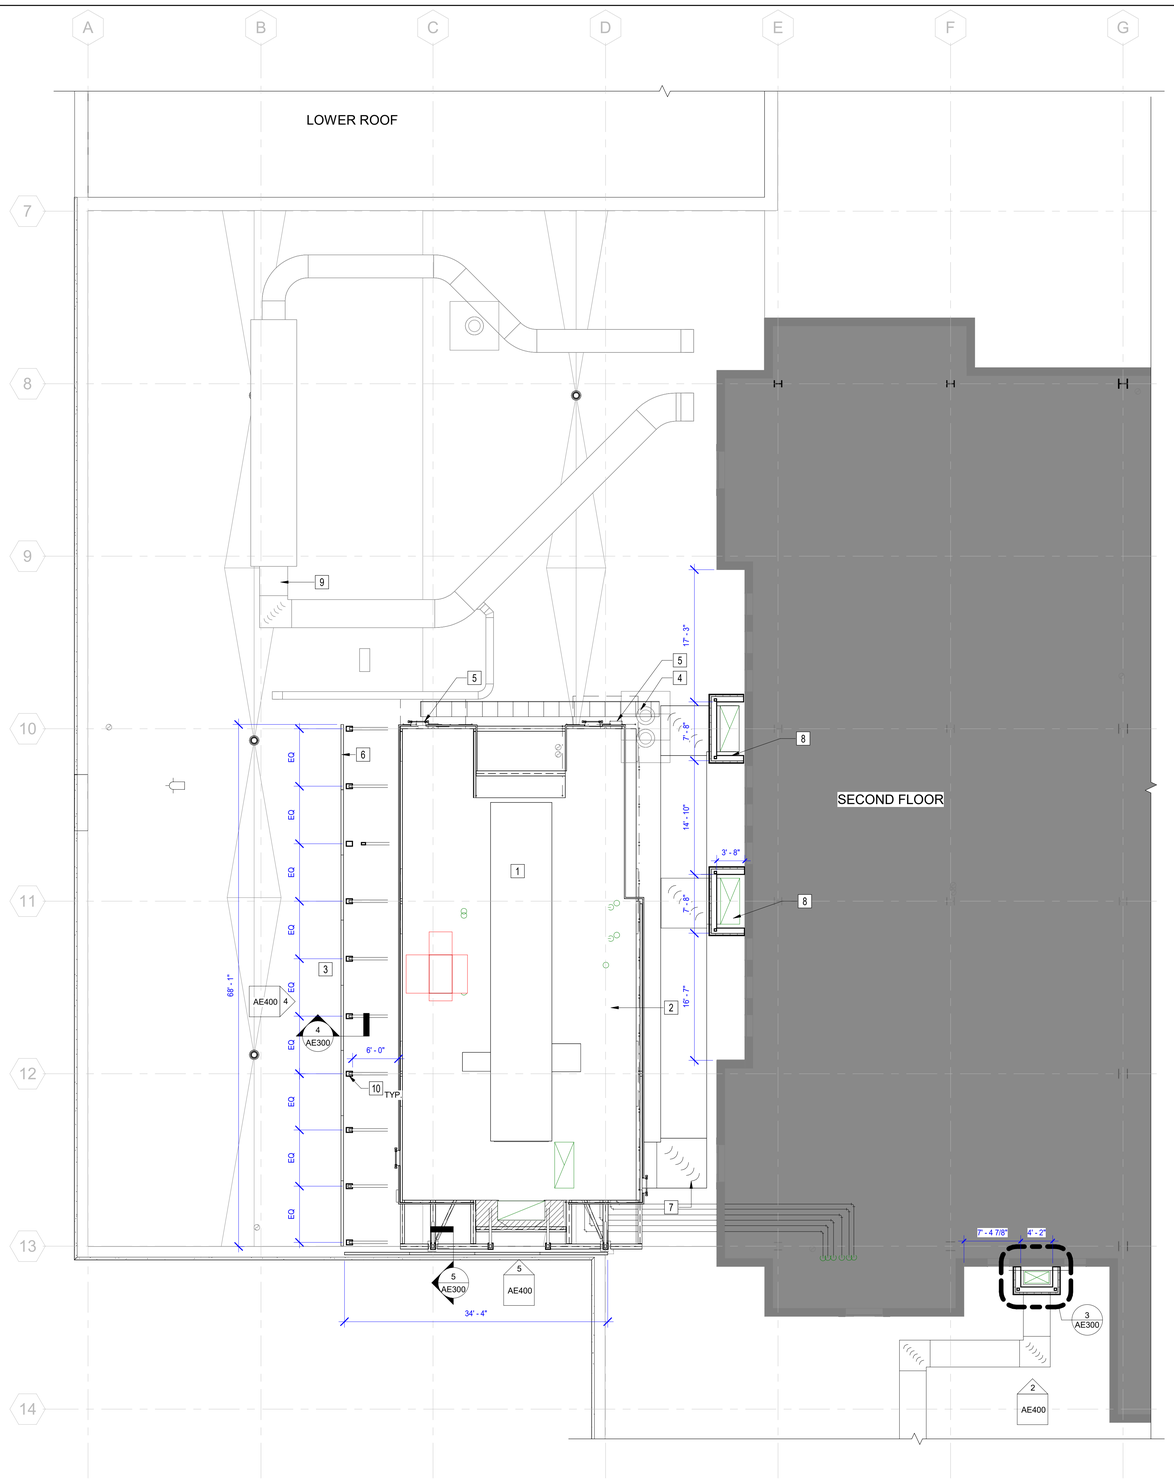

1 LOW ROOF PLAN - SECOND FLOOR - PHASE 1,2 &3
SCALE: 1/8" = 1'-0"

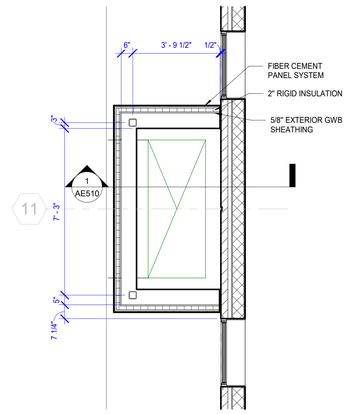

2 AE300 ENLARGED DUCT ENCLOSURE
3/8" = 1'-0"



3 AE300 ENLARGED DUCT ENCLOSURE - PHASE 3
3/8" = 1'-0"

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - ROOF

1	NEW AIR HANDLING UNIT, SEE MECHANICAL DRAWINGS
2	AHU SUPPORT AND RAISED ACCESS PLATFORM, SEE STRUCTURAL DRAWINGS.
3	PATCH AND REPAIR EXISTING MEMBRANE ROOFING TO RETAIN WARRANTY.
4	2X2 CONCRETE PAVER WALKWAY, MATCH EXISTING PAVERS. CONNECT NEW PATH TO EXISTING.
5	ACCESS LADDER, SEE STRUCTURAL
6	BLAST WALL
7	NEW DUCTWORK. SEE MECHANICAL DRAWINGS.
8	CONSTRUCT NEW SHAFT IN SEQUENCEWITH MECHANICAL PHASING.
9	EXISTING MECHANICAL EQUIPMENT AND DUCTWORK, TYP.
10	BLAST WALL STRUCTURE, TYP. SEE STRUCTURAL DRAWINGS.

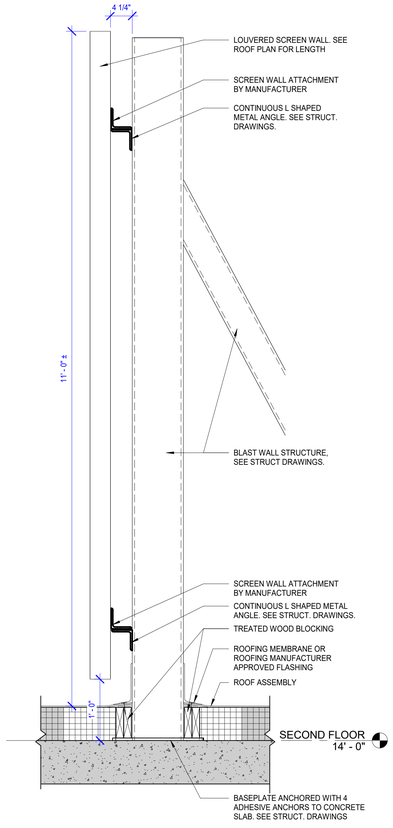

4 AE300 SCREEN WALL SECTION DETAIL
1" = 1'-0"

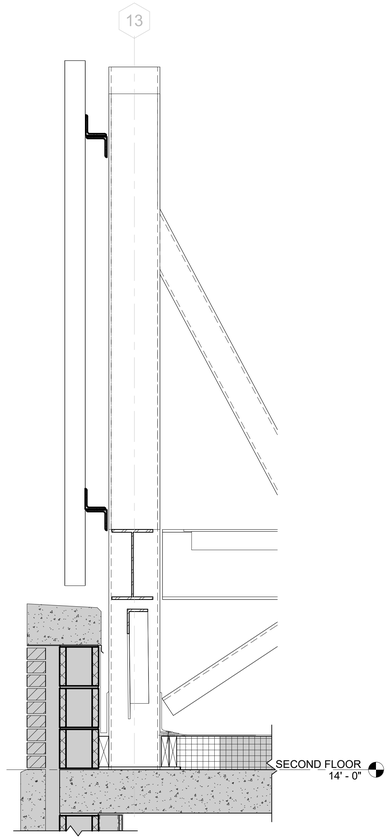

SEE DETAIL 4/AE-300 FOR INFORMATION

5 AE300 SCREEN WALL SECTION DETAIL @ PARAPET
1" = 1'-0"

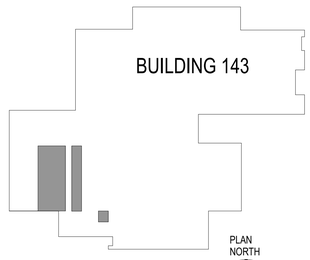

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ■ Miller-Remick.com
M-R PROJECT NO: 04159-0138

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH R. TROST
No. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL NEW WORK / ROOF PLAN SECOND FLOOR	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: AE300
		Issue Date: 2025-12-30 / Checked: SKC / Drawn: MAT	

12/29/2025 1:46:31 AM

VA FORM 08 - 6231

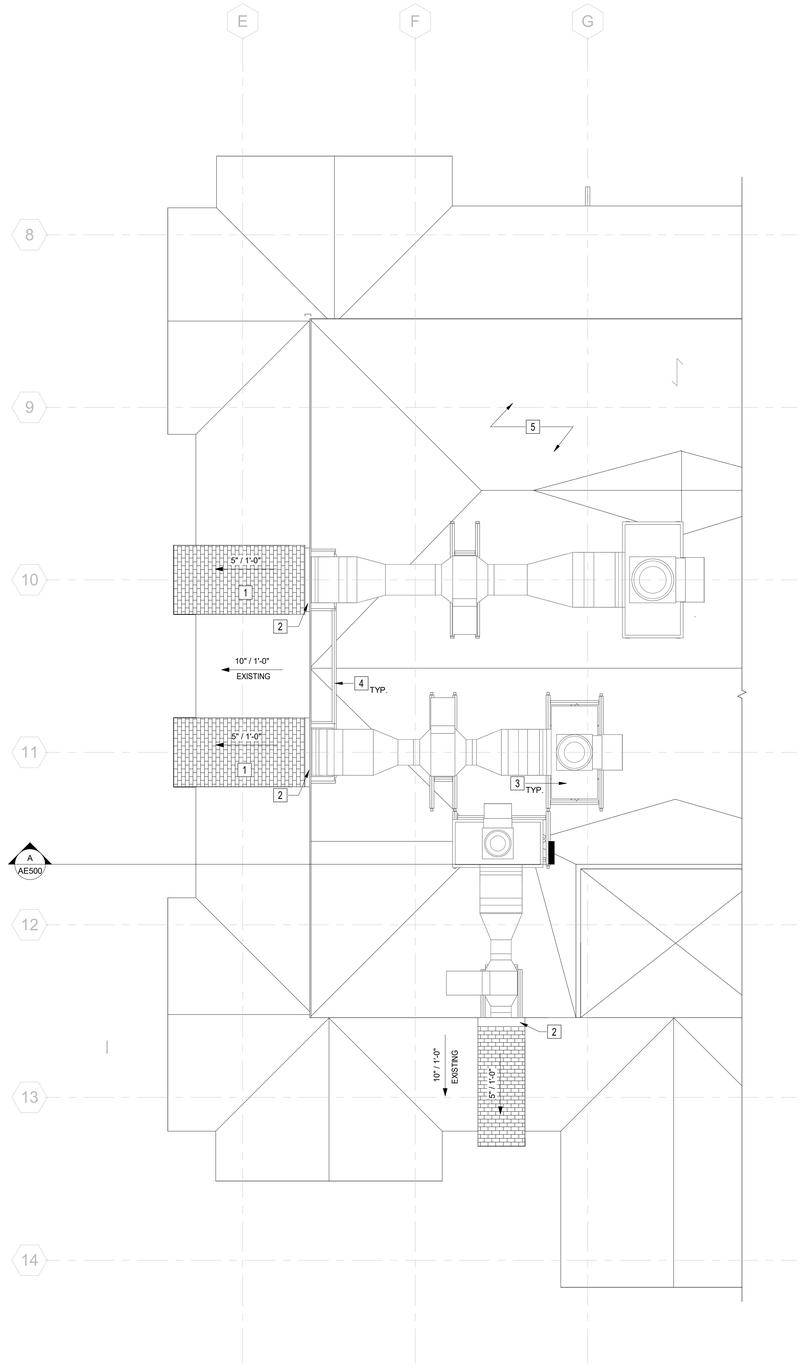

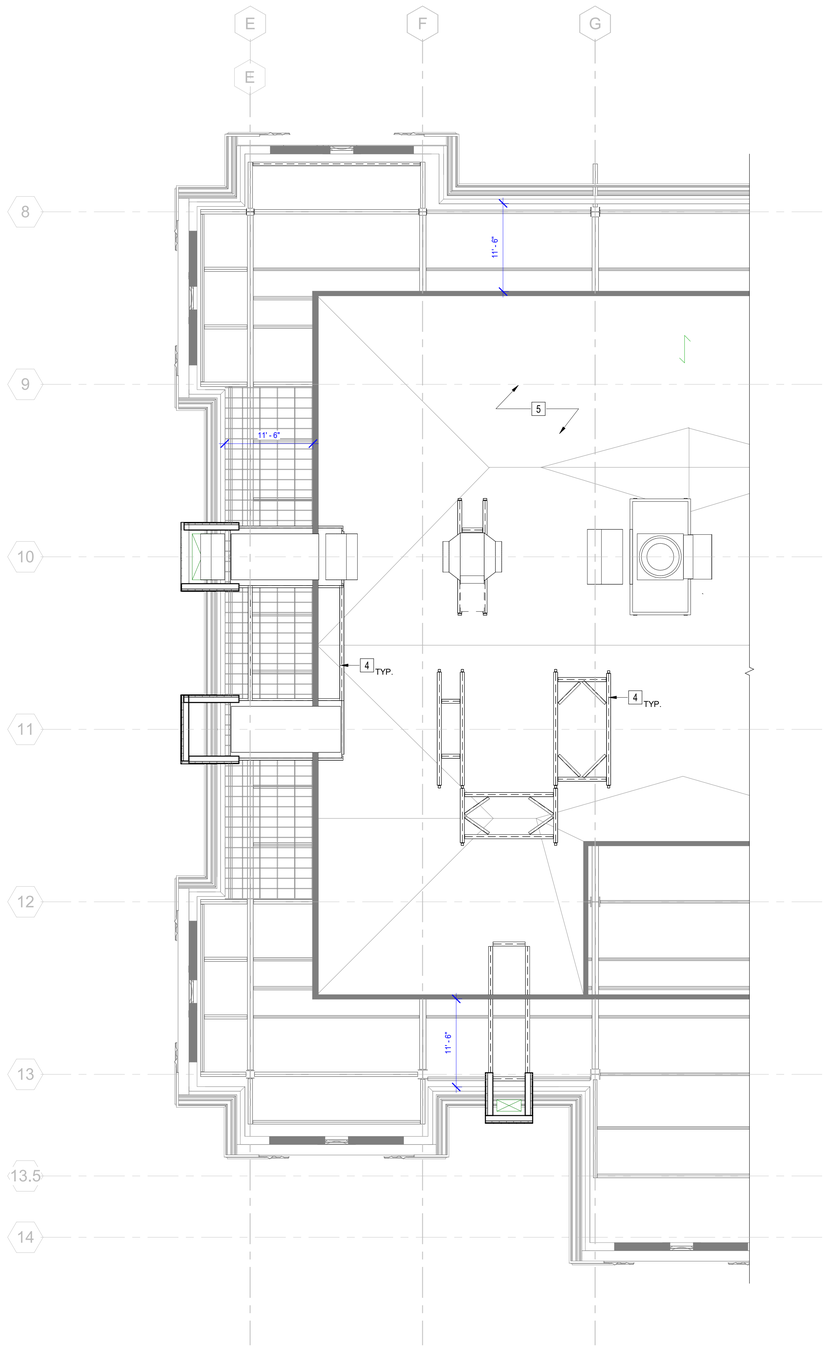

GENERAL NEW WORK NOTES

1	CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPENCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
2	ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION, UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
3	ALL DIMENSIONS INDICATED AS +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
4	PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH, AND TO INSTALL COMPLETE WITH ALL ACCESSORIES, PARTS, AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
5	WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING CONSTRUCTION.
6	THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD, REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS, AND TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
7	THE CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIER SHALL NOT INTERFERE WITH THE OWNER'S USE OF THE SITE.
8	THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
9	ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY, UNLESS OTHERWISE NOTED.
10	ALL CORRIDORS TO BE 8'-0" CLEAR MIN IN WIDTH UNLESS OTHERWISE NOTED.
11	THE CONTRACTOR SHALL COORDINATE WORK OUTSIDE THE AREA UNDER CONSTRUCTION WITH THE OWNER MATERIALS AND EQUIPMENT TO BE MOVED INTO AND OUT OF THE CONSTRUCTION AREA PRIOR TO 8:00 AM, OR DURING EVENINGS AND/OR WEEKENDS.

NEW WORK NOTES - HIGH ROOF

1	SYNTHETIC SLATE SHINGLES.
2	PREFINISHED ALUMINUM COPING.
3	MECHANICAL EQUIPMENT, TYP. SEE MECHANICAL DRAWINGS.
4	NEW STEEL STRUCTURE. SEE STRUCTURAL DRAWINGS.
5	EXISTING SINGLE PLY MEMBRANE ROOF.

1 HIGH ROOF PLAN - OVERALL

SCALE: 1/8" = 1'-0"

2 NEW WORK PLAN - PENTHOUSE FLOOR

SCALE: 1/8" = 1'-0"

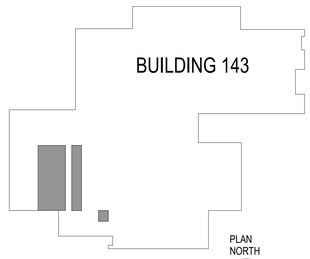

KEY PLAN

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
No. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL OVERALL ROOF & PENTHOUSE FLOOR PLAN	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
		Project Number 658-19-103	**Building Number** 143
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Location** SALEM VA MEDICAL CENTER	**Drawing Number** AE301
		Issue Date 2025-12-30 / **Checked** DJP / **Drawn** MAT	

12/29/2025 1:46:35 AM

VA FORM 08 - 6231

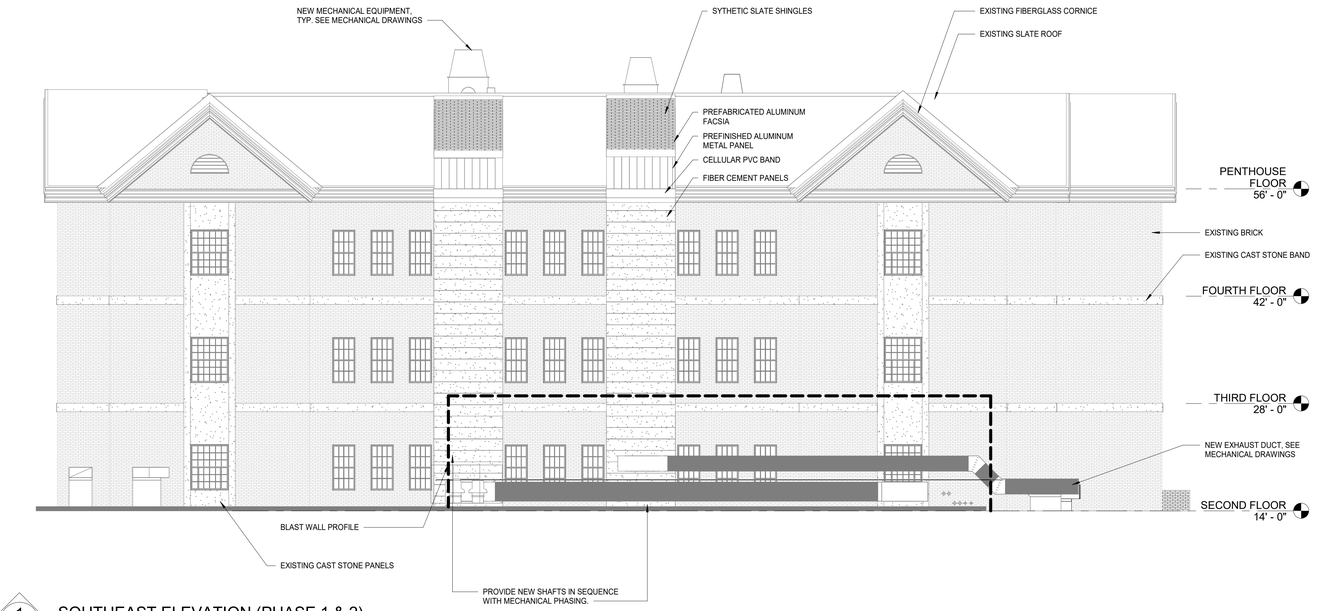

1 AE300 — SOUTHEAST ELEVATION (PHASE 1 & 2)
1/8" = 1'-0"

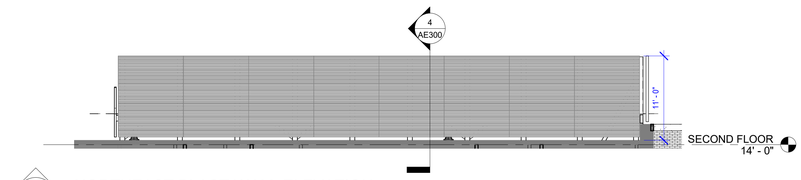

4 AE300 — NORTHEAST BLAST WALL ELEVATION
1/8" = 1'-0"

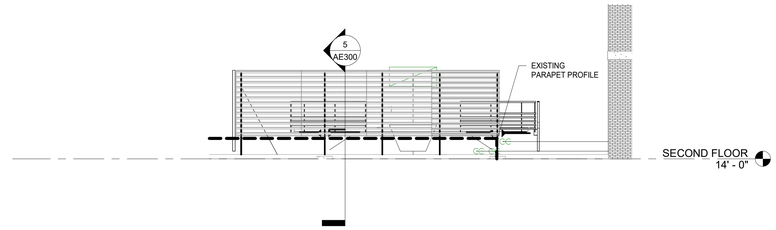

5 AE300 — SOUTHWEST BLAST WALL ELEVATION
1/8" = 1'-0"

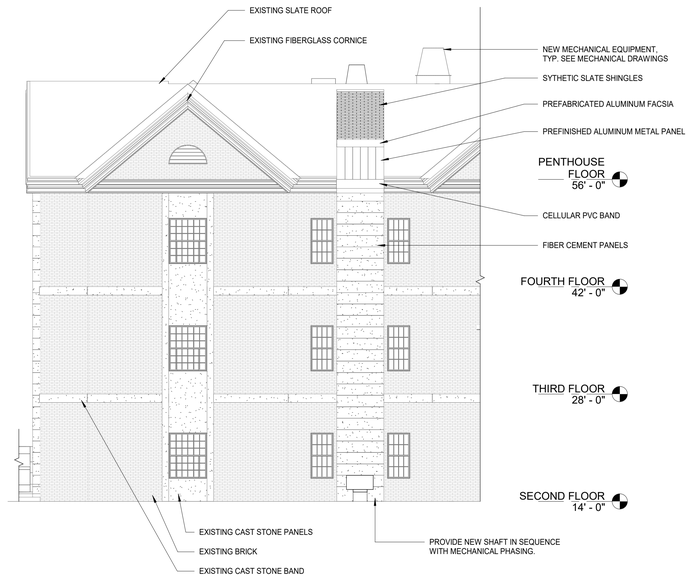

2 AE300 — NORTHEAST ELEVATION (PHASE 3)
1/8" = 1'-0"

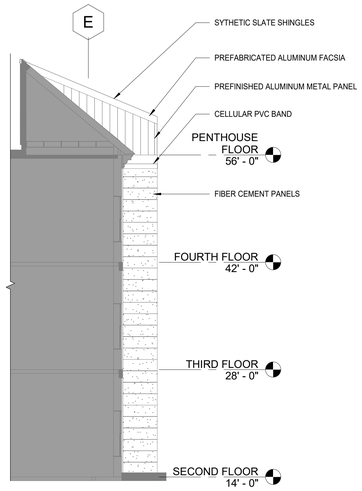

3 — TYPICAL SIDE ELEVATION
1/8" = 1'-0"

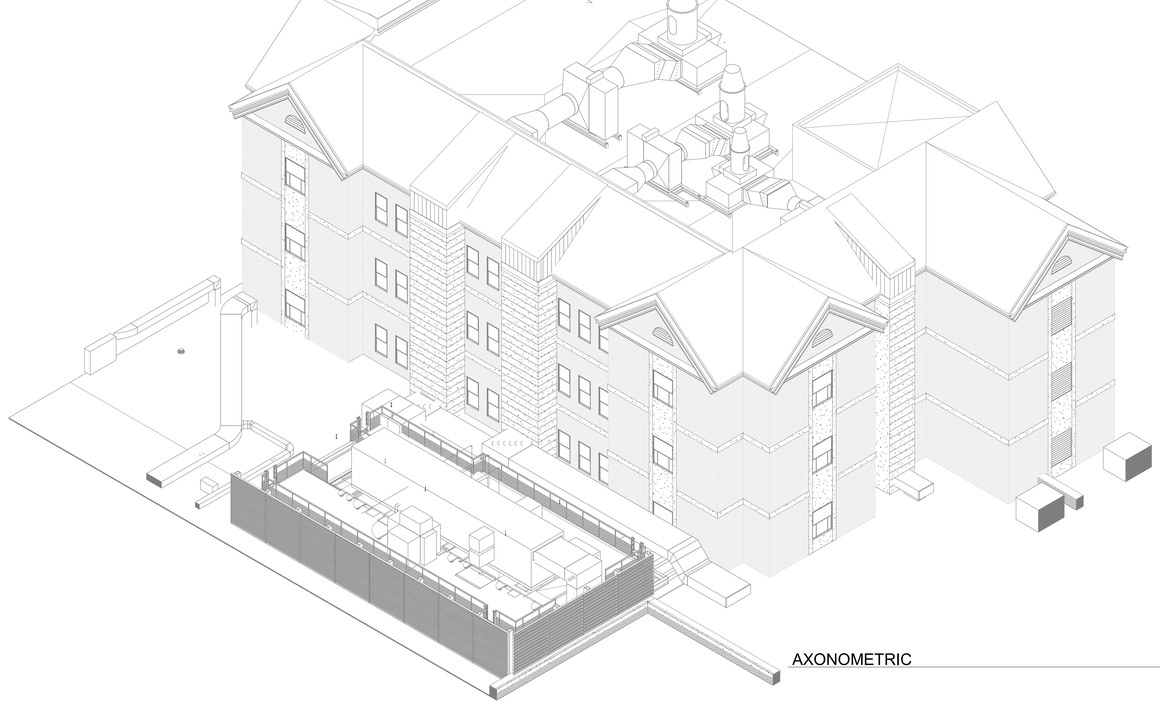

AXONOMETRIC

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title ARCHITECTURAL ELEVATIONS	**Phase** BID DOCUMENTS	**Project Title** RENOVATE SURGICAL SUITE PHASE II	**VA Drawing Number** 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	**Project Number** 658-19-103	**Building Number** 143
		Location SALEM VA MEDICAL CENTER	**Drawing Number** AE400
		Issue Date 2025-12-30 / **Checked** DJP / **Drawn** HLJ	

12/29/2025 1:55:39 AM

VA FORM 08 - 6231

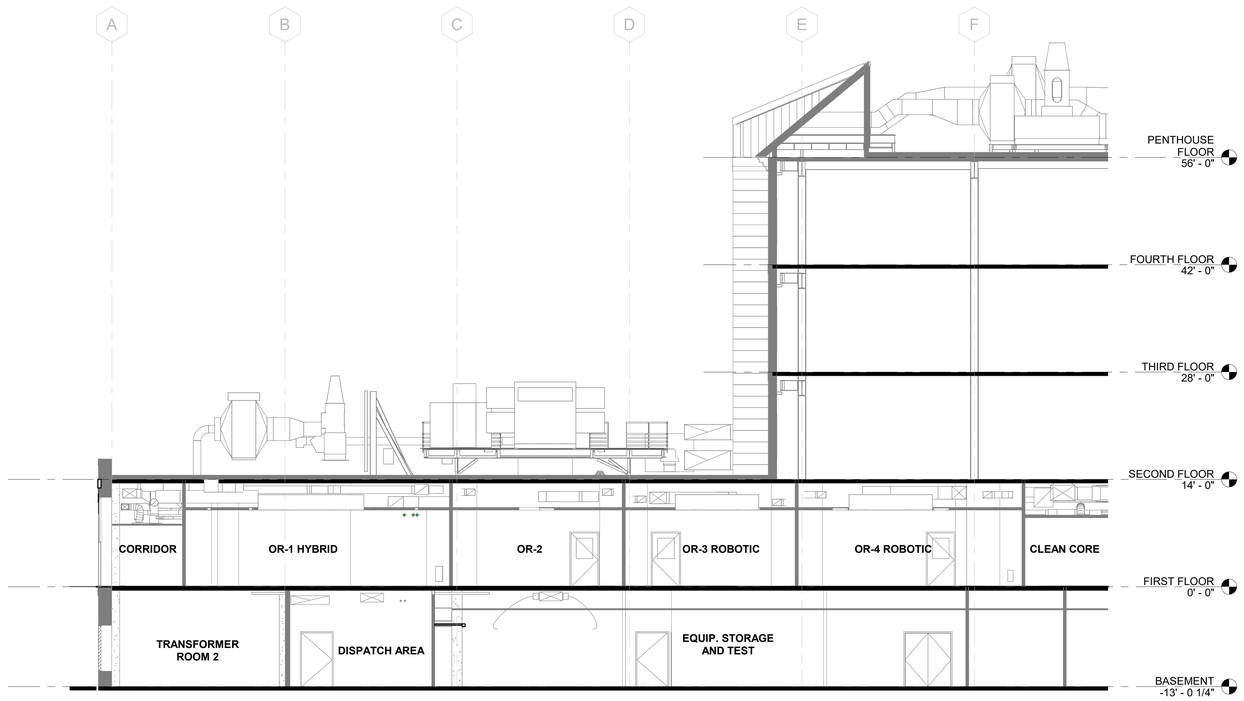

A AE500 PARTIAL BUILDING SECTION
1/8" = 1'-0"

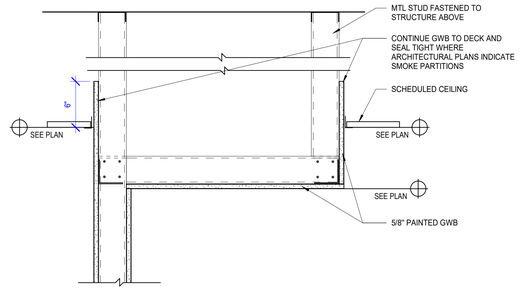

1 AE500 SOFFIT DETAIL
1 1/2" = 1'-0"

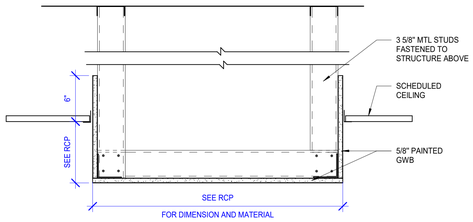

2 AE500 TYPICAL SOFFIT DETAIL
1 1/2" = 1'-0"

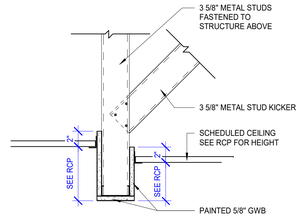

3 AE500 SOFFIT DETAIL TYP
1 1/2" = 1'-0"

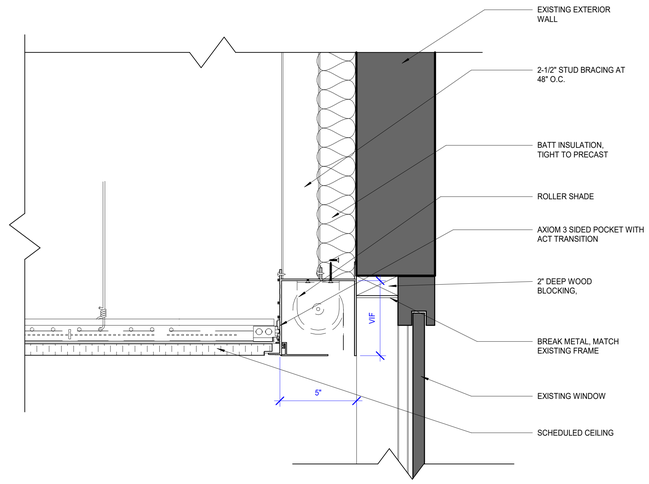

4 AE500 AXIOM SHADE POCKET
3" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL BUILDING SECTION & CEILING DETAILS
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT / SKC
VA Drawing Number	2617
Building Number	143
Drawing Number	AE500

12/29/2025 1:46:44 AM

VA FORM 08 - 6231

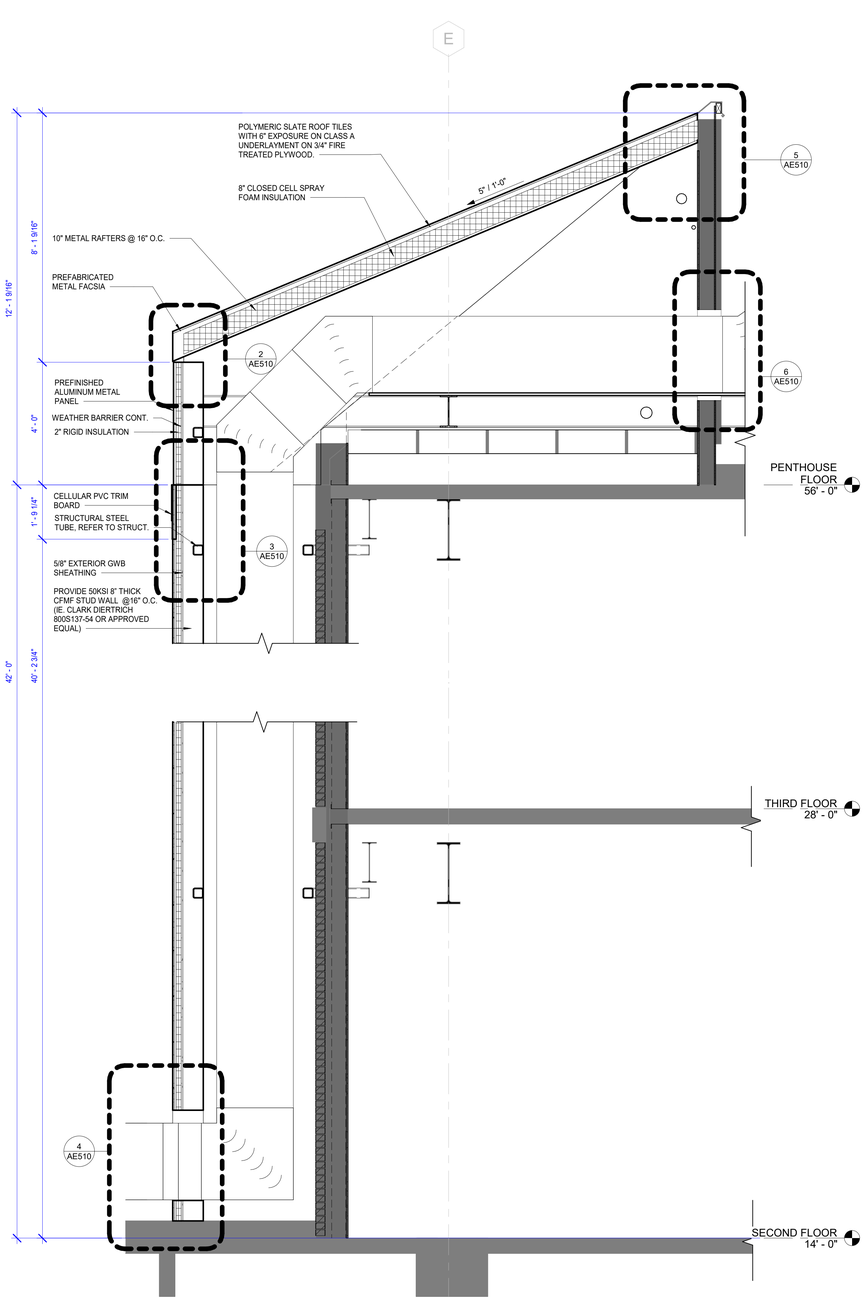

1 AE510 — WALL SECTION THRU DUCT ENCLOSURE - PHASE 1
1/2" = 1'-0"

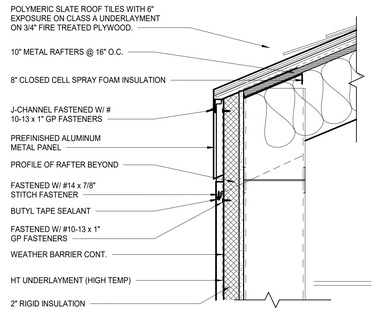

2 AE510 — WALL SECTION THRU DUCT ENCLOSURE
1 1/2" = 1'-0"

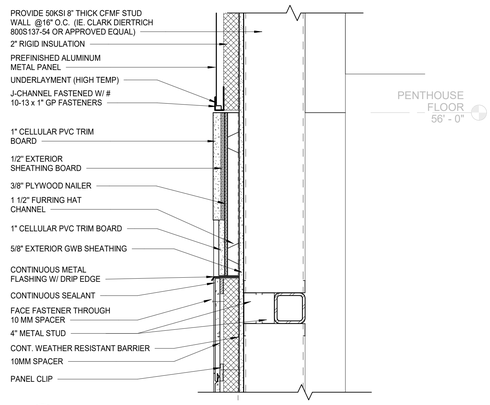

3 AE510 — WALL SECTION THRU DUCT ENCLOSURE
1 1/2" = 1'-0"

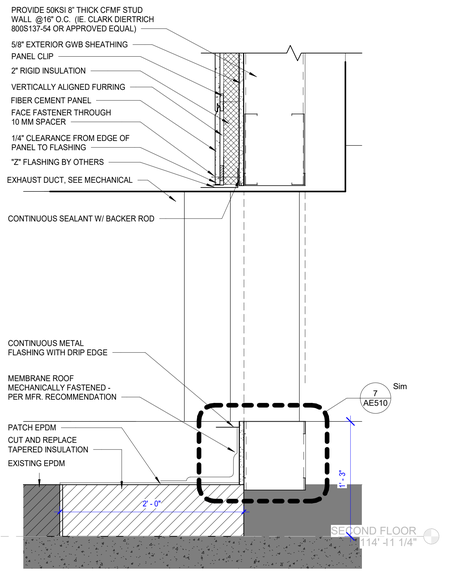

4 AE510 — WALL SECTION THRU DUCT ENCLOSURE
1 1/2" = 1'-0"

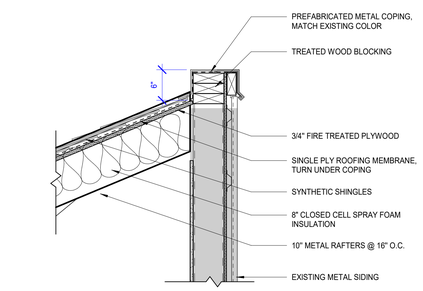

5 AE510 — COPING AT DUCT ENCLOSURE
1" = 1'-0"

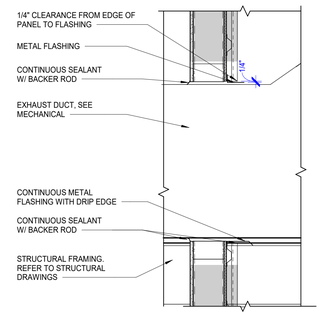

6 AE510 — DUCT PENETRATION AT EXISTING WALL
1" = 1'-0"

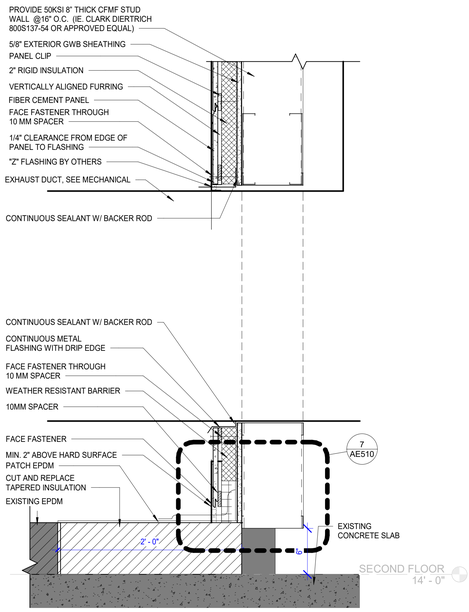

4.1 AE510 — WALL SECTION THRU HIGH DUCT ENCLOSURE
1 1/2" = 1'-0"

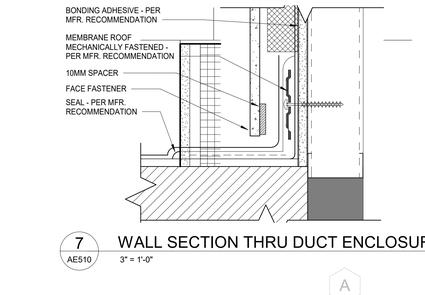

7 AE510 — WALL SECTION THRU DUCT ENCLOSURE
3" = 1'-0"

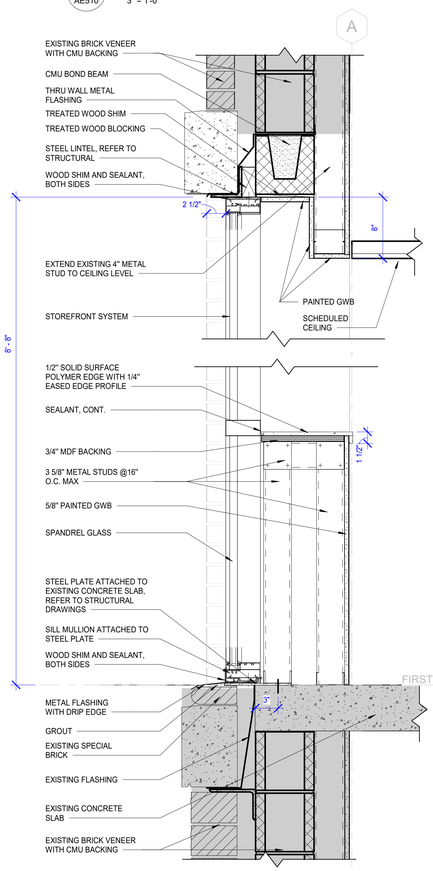

8 AE510 — STOREFRONT HEAD AND SILL DETAIL
1 1/2" = 1'-0"

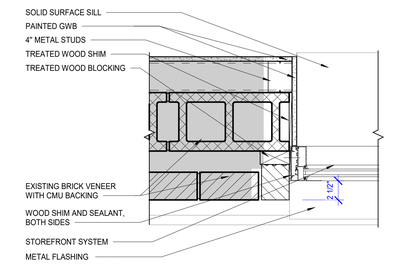

9 AE510 — JAMB DETAIL - EXTERIOR STOREFRONT
1 1/2" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO: 04559-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TRIST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL SECTIONS & DETAILS	Phase: BID DOCUMENTS
Approved by: Jon Manninen, COR	FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II		VA Drawing Number: 2617
Project Number: 658-19-103		Building Number: 143
Location: SALEM VA MEDICAL CENTER		Drawing Number: AE510
Issue Date: 2025-12-30	Checked: DJP	Drawn: MAT

2/28/2025 1:46:46 AM

VA FORM 08 - 6231

DOOR SCHEDULE - PHASE 1

MARK	DOOR TYPE	DOOR MATERIAL	DOOR WIDTH	DOOR CLEAR OPENING	DOOR HEIGHT	DOOR THICKNESS	FRAME TYPE	FRAME HEAD	FRAME JAMB	FRAME SILL	FIRE RATING	HARDWARE	REMARKS
1C-120	F	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-5B	
1D-120	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-SH-3D	CARD READER
1D-121	FD	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-9	CARD READER
1D-122A	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5F	
1D-123A	FVDU	SC	6' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-10H	LEAD LINED / AUTO / WAVE TO OPEN - BOTH SIDES
1D-123B	FHV	SCL	3' - 6"		7' - 0"	0' - 1 3/4"	1	3/ AE500	4/ AE500		3/4 HR	HW-4Q	LEAD LINED
1D-124A	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5F	
1D-124B	FNV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-4Q	LEAD LINED
1D-125A	FVDU	SC	6' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1D-125B	FHV	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-4P	
1D-126A	FVDU	SC	6' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1D-126B	FHV	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-4P	
1D-1027	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
C1-18.1	FD	SC	7' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		2 HR	HW-SH-10A	CARD READER/ AUTO/ WAVE TO OPEN
C1-18.2	FDE	SC	7' - 4"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500		1 1/2 HR	HW-SH-10A	CARD READER/ AUTO/ WAVE TO OPEN
B-8	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-1F	CARD READER

DOOR SCHEDULE - PHASE 2

MARK	DOOR TYPE	DOOR MATERIAL	DOOR WIDTH	DOOR CLEAR OPENING	DOOR HEIGHT	DOOR THICKNESS	FRAME TYPE	FRAME HEAD	FRAME JAMB	FRAME SILL	FIRE RATING	HARDWARE	REMARKS
1C-120B	FNV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-5F	
1C-122	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5D	
1C-123	FD	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-4B	
1C-125B	FNV	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-5F	
1C-126A	FDU	SC	6' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1C-126B	FNV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-4P	
1C-127A	FNV	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-SH-3	CARD READER
1C-127J	FDE	SC	7' - 0"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500		-	HW-12D	AUTO / WAVE TO OPEN - BOTH SIDES
1C-128A	FDU	SC	6' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1C-128B	FHV	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-4P	
1C-129A	FVDU	SCL	6' - 0"		7' - 0"	0' - 1 3/4"	1	3/ AE500	4/ AE500		-	HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1C-129B	FNV	SCL	3' - 6"		7' - 0"	0' - 1 3/4"	1	3/ AE500	4/ AE500		3/4 HR	HW-4P	
1C-130A	FVDU	SCL	6' - 0"		7' - 0"	0' - 1 3/4"	1	3/ AE500	4/ AE500		-	HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1C-130B	FHV	SCL	3' - 6"		7' - 0"	0' - 1 3/4"	1	3/ AE500	4/ AE500		3/4 HR	HW-4P	
1C-131	F	SC	4' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-SH-3D	CARD READER
1C-149	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-5B	
1C-150	F	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-SH-3D	CARD READER
1C-185	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5D	
C1-9A	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3D	CARD READER

DOOR SCHEDULE - PHASE 3

MARK	DOOR TYPE	DOOR MATERIAL	DOOR WIDTH	DOOR CLEAR OPENING	DOOR HEIGHT	DOOR THICKNESS	FRAME TYPE	FRAME HEAD	FRAME JAMB	FRAME SILL	FIRE RATING	HARDWARE	REMARKS
1C-105A	FD	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-10A	CARD READER/ AUTO/ WAVE TO OPEN
1C-105B	FD	SC	7' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-8E	AUTO / WAVE TO OPEN - BOTH SIDES
1C-105C	FD	SC	7' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-8E	AUTO / WAVE TO OPEN - BOTH SIDES
1C-107	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
1C-108	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5D	
1C-109	FER	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-2B	
1C-113	FNV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-SH-3	CARD READER
1C-124B	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-127C	F	SC	3' - 6"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-5B	
1C-127F	FD	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-10J	AUTO / WAVE TO OPEN - BOTH SIDES
1C-127G	FDE	SC	7' - 0"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500		-	HW-12D	HOLD OPEN TIED TO FIRE ALARM
1C-156	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
C1-9B	FDE	SC	7' - 0"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500			HW-12D	CARD READER/ AUTO/ WAVE TO OPEN
C1-12	FNVDE	SC	7' - 4"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500		-	HW-12D	CARD READER/ AUTO/ WAVE TO OPEN
C1-13	FDE	SC	7' - 0"		7' - 0"	0' - 1 3/4"	2	5/AE500	6/AE500		-	HW-SH-9	CARD READER/ AUTO/ WAVE TO OPEN
T-001	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-5	TEMPORARY

DOOR SCHEDULE - PHASE 4

MARK	DOOR TYPE	DOOR MATERIAL	DOOR WIDTH	DOOR CLEAR OPENING	DOOR HEIGHT	DOOR THICKNESS	FRAME TYPE	FRAME HEAD	FRAME JAMB	FRAME SILL	FIRE RATING	HARDWARE	REMARKS
1C-117B	FHV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-1E	
1C-117A	FNV	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		-	HW-1E	WITH CLOSER
1C-114B	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-2	
1C-152	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-155	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-154	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-153	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-151	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-3E	
1C-116	ICU-2	AL	7' - 0"		7' - 0"	0' - 1 3/4"	1	7/ AE500	8/ AE500		-	HW-ICU	
1C-114C	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
1C-110	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
1C-111A	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-3	CARD READER
1C-118	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-SH-3D	CARD READER
1C-119	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		3/4 HR	HW-SH-3D	CARD READER
1C-115B	FDNV	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-10A	AUTO / WAVE TO OPEN - BOTH SIDES
1C-115A	FD	SC	7' - 4"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500			HW-SH-10A	CARD READER/ AUTO/ WAVE TO OPEN

DOOR SCHEDULE - BID DEDUCT

MARK	DOOR TYPE	DOOR MATERIAL	DOOR WIDTH	DOOR CLEAR OPENING	DOOR HEIGHT	DOOR THICKNESS	FRAME TYPE	FRAME HEAD	FRAME JAMB	FIRE RATING	HW SET	REMARKS
1C-107	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-2C	CARD READER
1C-115	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-5F	
1C-124B	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-3G	
1C-125	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500	3/4 HR	HW-SH-3D	CARD READER
1C-153	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-3G	
1C-155	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-3G	
1C-156	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-3G	
1C-157	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500	3/4 HR	HW-SH-3C	CARD READER
1C-159	F	SC	3' - 0"		7' - 0"	0' - 1 3/4"	1	1/AE500	2/AE500		HW-5D	

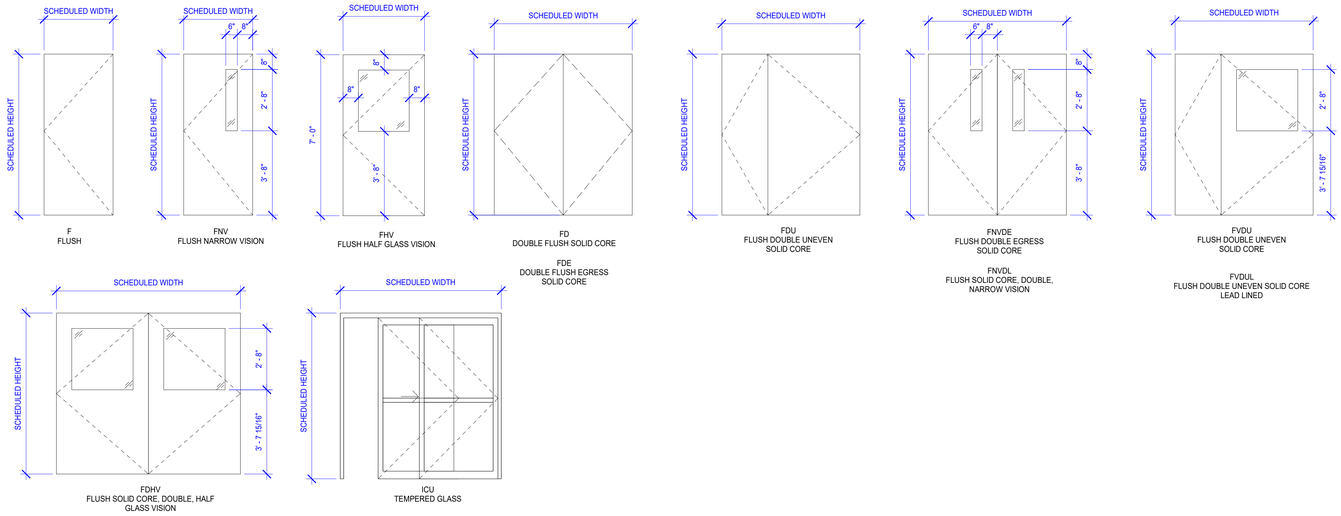

DOOR TYPES

3/8" = 1'-0"

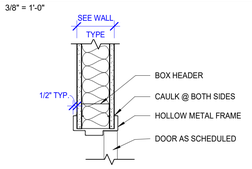

1 AE600 — HEAD DETAIL - GWB — 1 1/2" = 1'-0"



2 AE600 — JAMB DETAIL - GWB — 1 1/2" = 1'-0"



3 AE600 — HEAD DETAIL - LEAD LINED GWB — 1 1/2" = 1'-0"

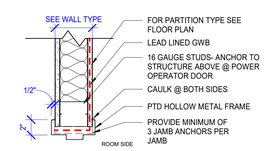

4 AE600 — JAMB DETAIL - LEAD LINED GWB — 1 1/2" = 1'-0"



5 AE600 — HEAD DETAIL - DOUBLE EGRESS — 1 1/2" = 1'-0"



6 AE600 — JAMB DETAIL - DOUBLE EGRESS — 1 1/2" = 1'-0"

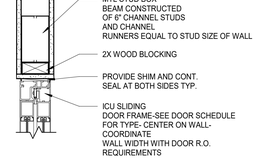

7 AE600 — ICU HEAD — 1 1/2" = 1'-0"

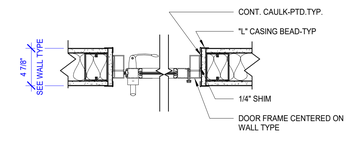

8 AE600 — ICU JAMB — 1 1/2" = 1'-0"

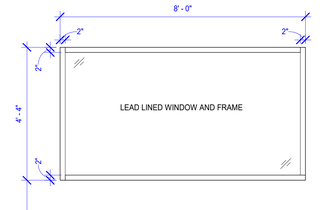

20 AE600 — WINDOW ELEVATION - TYPE A — 1/2" = 1'-0"

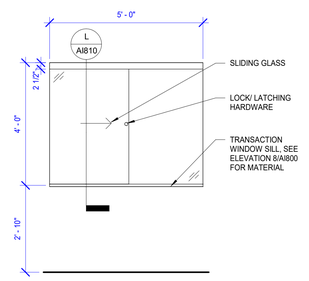

14 AE600 — WINDOW ELEVATION - TYPE B — 1/2" = 1'-0"

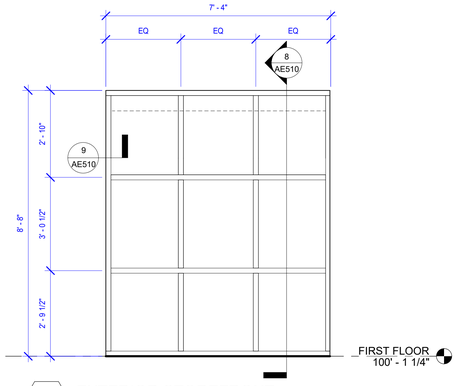

AA — EXTERIOR STOREFRONT — 1/2" = 1'-0"



1



2

DOOR MATERIALS LEGEND
SC - SOLID CORE SCL - SOLID CORE LEAD LINED AL - ALUMINUM

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions:	Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M-R PROJECT NO. 0459-0130

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 29443
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title	ARCHITECTURAL DOOR & WINDOW ELEVATIONS, DOOR SCHEDULES & DETAILS
Approved by:	Jon Manninen, COR
Phase	BID DOCUMENTS
	FULLY SPRINKLERED
Project Title	RENOVATE SURGICAL SUITE PHASE II
Project Number	658-19-103
Location	SALEM VA MEDICAL CENTER
Issue Date	2025-12-30
Checked	DJP
Drawn	MAT / SKC
VA Drawing Number	2617
Building Number	143
Drawing Number	AE600

12/29/2025 1:46:50 AM

VA FORM 08 - 6231

FINISH LEGEND

TAG	DESCRIPTION	MANUFACTURER	STYLE	COLOR	SIZE	NOTES
CASEWORK AND ACCESSORIES						
PL-1	[COUNTERTOP] PLASTIC LAMINATE	FORMICA	-	PALOMA POLAR	-	MATTE FINISH
PL-2	[VERTICAL SURFACES' PLASTIC LAMINATE	WILSONART	-	FRENCH PEAR	-	FINE VELVET TEXTURE
SSP-1	SOLID SURFACE POLYMER	FORMICA	-	TUMBLED GLASS	-	-
SSP-2	SOLID SURFACE POLYMER	WILSONART	-	DESIGNER WHITE	-	-
CEILING						
C-1	GYPSUM WALLBOARD	-	-	P-2, U.O.N.ON REFLECTED CEILING TILE	-	-
C-2	ACOUSTICAL CEILING TILE	ARMSTRONG	ULTIMA SQUARE LAY-IN	WHITE	24"X24"	SQUARE LAY-IN 15/16"
C-3	[SCRUBBABLE] ACOUSTICAL CEILING TILE	ARMSTRONG	ULTIMA HEALTH ZONE	WHITE	24"X24"	SQUARE LAY-IN 15/16"
CUBICLE CURTAIN AND TRACK						
CC-1	CUBICLE CURTAIN	INPRO	BRONZE FABRICS, BOARDWALK	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
CCT-1	CUBICLE CURTAIN TRACK	INPRO	WHISPER CUBE CUBICLE TRACK	WHITE	-	-
FLOOR						
CT-3	CERAMIC TILE	DALTILE	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
LVT-1	LUXURY VINYL TILE	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
LVT-2	LUXURY VINYL TILE	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
LVT-3	LUXURY VINYL TILE	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
RB-1	RESILIENT BASE	TARKETT/ JOHNSONITE	TYPE TV	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	4"H	-
RES-1	RESINOUS FLOORING	STONHARD	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	PROVIDE 6" INTEGRAL EPOXY BASE
RES-2	RESINOUS FLOORING	STONHARD	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	PROVIDE 6" INTEGRAL EPOXY BASE
WSF-1	HEAT WELDED SEAM SHEET FLOORING	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
WSF-2	HEAT WELDED SEAM SHEET FLOORING	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
WSF-3	HEAT WELDED SEAM SHEET FLOORING	TARKETT	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-
WALL						
CT-1	CERAMIC TILE	DALTILE	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	4"X16"	GROUT COLOR: MAPEI: "WHITE" #00
CT-2	CERAMIC TILE	DALTILE	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS		
CTB-1	CERAMIC TILE BASE	DALTILE	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS		
MT-1	METAL TRIM	SCHLUTER	QUADEC	ANODIZED ALUMINUM	-	METAL TRIM FOR ALL INSIDE, OUTSIDE, AND EXPOSED EDGES
MT-2	METAL TRIM	SCHLUTER	-	ANODIZED ALUMINUM	-	1/2" METAL REVEALS FOR HEADWALL WALL PROTECTION
P-1	[FIELD/ TRIM] PAINT	SHERWIN WILLIAMS	-	MODERNE WHITE #SW6168	-	EGGSHELL FINISH FOR WALLS AND SEMI-GLOSS FOR DOOR TRIM
P-2	[CEILING] PAINT	SHERWIN WILLIAMS	-	HIGH REFLECTIVE WHITE #SW7757	-	FLAT FINISH
P-3	[ACCENT] PAINT	SHERWIN WILLIAMS	-	INTERESTING AQUA #SW6220	-	EGGSHELL FINISH
P-4	[ACCENT] PAINT	SHERWIN WILLIAMS	-	JASPER STONE #SW9133	-	EGGSHELL FINISH
P-5	[ACCENT] PAINT	SHERWIN WILLIAMS	-	PEWTER TANKHARD #SW0023	-	EGGSHELL FINISH
RB-1	RESILIENT BASE	TARKETT/ JOHNSONITE	TYPE TV	STEEL	4"H	-
SC-1	[FIELD] SPECIALTY COATNG PAINT	SHERWIN WILLIAMS	-	MODERNE WHITE #SW6168	-	EGGSHELL FINISH
SC-2	[ACCENT] SPECIALTY COATING PAINT	SHERWIN WILLIAMS	-	INTERESTING AQUA #SW6220	-	EGGSHELL FINISH
SC-3	[ACCENT] SPECIALTY COATING PAINT	SHERWIN WILLIAMS	-	JASPER STONE #SW9133	-	EGGSHELL FINISH
SC-4	[CEILING] SPECIALTY COATING PAINT	SHERWIN WILLIAMS	-	HIGH REFLECTIVE WHITE #SW7757	-	FLAT FINISH
WALL PROTECTION						
BR-1	BUMPER RAIL	INPRO	1500 WALL GUARD	BRUSHED SILVER	3'-0" A.F.F.	-
CG-1	CORNER GUARD	INPRO	150 HIGH IMPACT CORNER GUARD	FEATHER #0238	FULL HEIGHT	-
CG-2	CORNER GUARD	INPRO	130 HIGH IMPACT CORNER GUARD	FEATHER #0238	FULL HEIGHT	-
CR-1	CRASH RAIL	INPRO	1800 WALL GUARD	BRUSHED SILVER	6" A.F.F.	-
EG-1	END WALL GUARD	INPRO	150D HIGH IMPACT END WALL GUARD	FEATHER #0238	FULL HEIGHT	-
RWC-1	RIGID WALL PROTECTION	INPRO	PALLADIUM RIGID SHEET	FEATHER #0238	4'-0" HIGH	-
RWC-2	RIGID WALL PROTECTION [BLUE]	INPRO	PALLADIUM RIGID SHEET	CUSTOM COLOR TO MATCH INTERESTING AQUA	FULL HEIGHT	-
RWC-3	RIGID WALL PROTECTION [BLUE]	INPRO	PALLADIUM RIGID SHEET	CUSTOM COLOR TO MATCH INTERESTING AQUA	4'-0" HIGH	-
RWC-4	RIGID WALL PROTECTION [WOOD-LOOK]	INPRO	PALLADIUM RIGID SHEET - RICOCHET	RAPID WOOD	SEE HEADWALL ELEVATIONS ON SHEET AI-800 AND AI-801	-
RWC-5	RIGID WALL PROTECTION [METALLIC-LOOK]	INPRO	PALLADIUM RIGID SHEET	BRUSHED SILVER	SEE HEADWALL ELEVATIONS ON SHEET AI-800 AND AI-801	-
RWC-6	RIGID WALL PROTECTION [METALLIC-LOOK]	INPRO	PALLADIUM RIGID SHEET	FEATHER #0238	SEE HEADWALL ELEVATIONS ON SHEET AI-800 AND AI-801	-
WINDOW TREATMENT						
WT-1	WINDOW TREATMENT	INPRO	TBD	COLOR TO BE SELECTED FROM MANUFACTURERS STANDARD COLORS	-	-

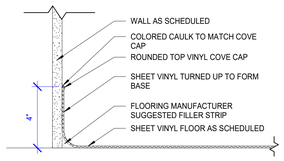

1 AE610 SV COVE BASE DETAIL

3" = 1'-0"



2 AE610 RESINOUS FLOORING COVE DETAIL

3" = 1'-0"

WALL PROTECTION LEGEND

CG = CORNER GUARD
CR = CRASH RAIL

RWC-# = RIGID SHEET WALL PROTECTION
WP-A & B = WALL PROTECTION SYSTEM

RWC-1

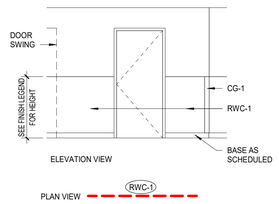

RWC-2

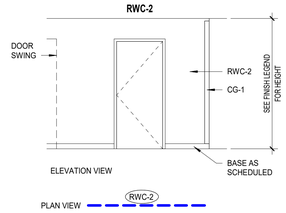

RWC-3

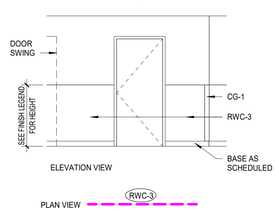

WP-A

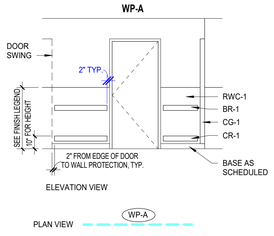

WP-B

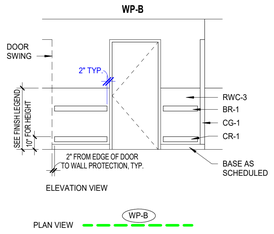

NOTES:

1. RUN SHEETS OF WALL PROTECTION HORIZONTALLY TO MINIMIZE SEAMS.
2. THE SECTION TAG INFORMATION SHOWN ON KEY ELEVATION ABOVE IS FOR ALL WALL PROTECTION UNLESS NOTED OTHERWISE
3. REFER TO FINISH SCHEDULE ON SHEETS A941 & A942 FOR FURTHER INFORMATION ON FINISH DESIGNATIONS

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ● Miller-Remick.com
M.R. PROJECT NO: 04599-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL FINISH LEGEND & INTERIOR DETAILS

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30
Checked: DJP
Drawn: HLJ

VA Drawing Number: 2617
Building Number: 143
Drawing Number: AE610

12/29/2025 1:46:30 AM

VA FORM 08 - 6231

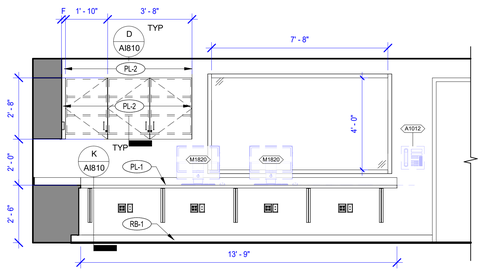

1 P1-AE100 — CONTROL ROOM - ID-124 — 3/8" = 1'-0"

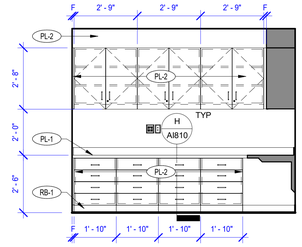

2 P1-AE100 — CONTROL ROOM - ID-124 — 3/8" = 1'-0"

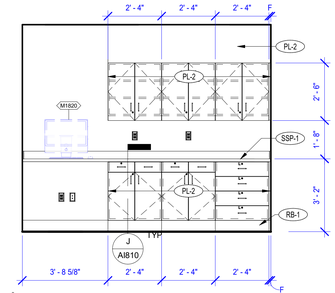

3 P2-AE100 — ANESTHESIA WORKROOM - IC-127 — 3/8" = 1'-0"

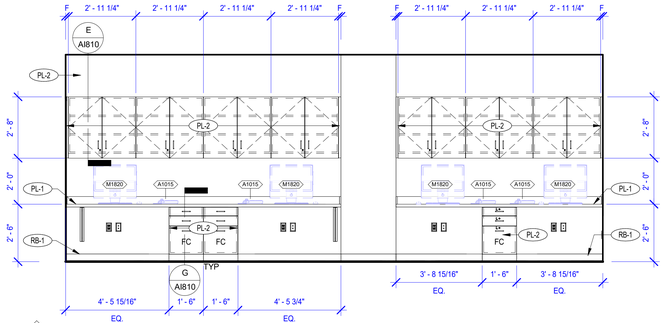

4 P3-AE100 — NURSE/ COMM CENTER - IC-156 — 3/8" = 1'-0"

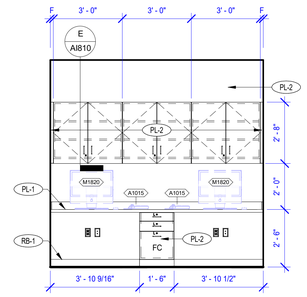

5 P3-AE100 — NURSE/ COMM CENTER - IC-156 — 3/8" = 1'-0"

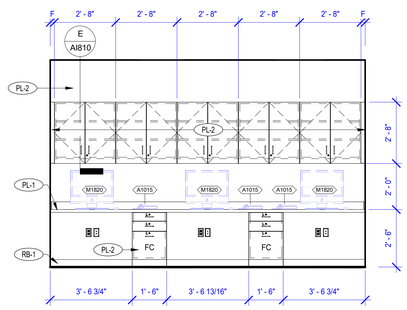

6 AE110 — NURSE/ COMM CENTER - IC-156 — 3/8" = 1'-0"

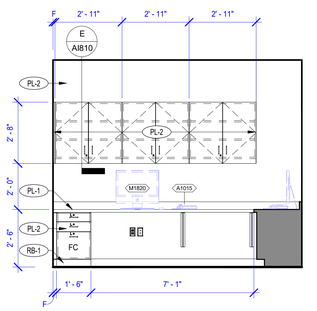

7 AE110 — COMM CTR - IC-106 — 3/8" = 1'-0"

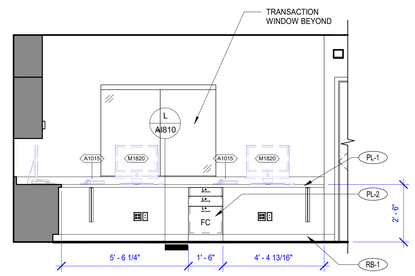

8 AE110 — COMM CTR - IC-106 — 3/8" = 1'-0"

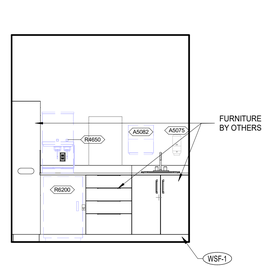

9 P4-AE100 — MEDS - IC-113 — 3/8" = 1'-0"

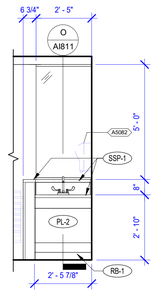

10 AE110 — PRE-OP - 1C-105 HW SINK — 3/8" = 1'-0"

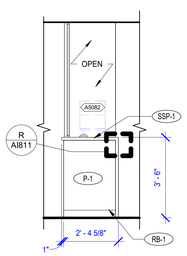

11 AE110 — PRE-OP - 1C-105 HW SINK — 3/8" = 1'-0"

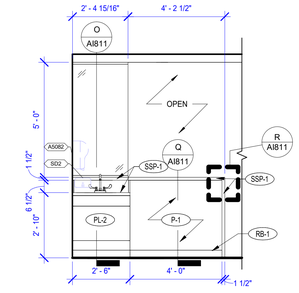

12 AE110 — PRE-OP - 1C-105 HW SINK — 3/8" = 1'-0"

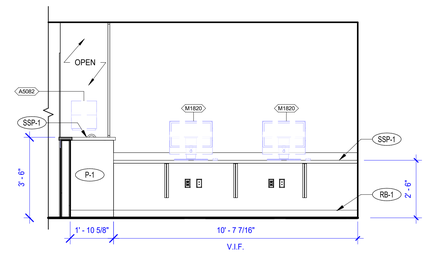

13 AE110 — NURSE STATION - 1C-105A — 3/8" = 1'-0"

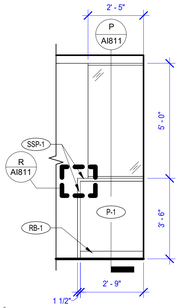

14 AE110 — NURSE STATION - 1C-105A — 3/8" = 1'-0"



15 P3-AE100 — PRE-OP - 1C-105 HW SINK — 3/8" = 1'-0"

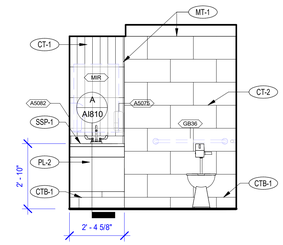

16 P3-AE100 — TOILET - 1C-109 — 3/8" = 1'-0"



17 P3-AE100 — TOILET - 1C-109 — 3/8" = 1'-0"

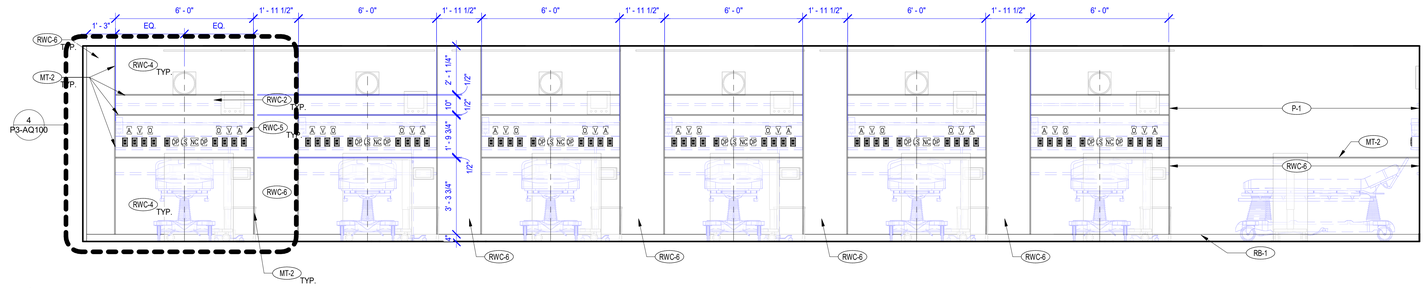

18 AE110 — PRE-OP - 1C-105 NORTH — 3/8" = 1'-0"

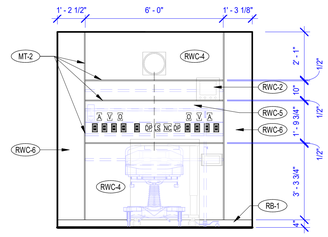

19 P3-AE100 — PRE-OP - 1C105 — 3/8" = 1'-0"

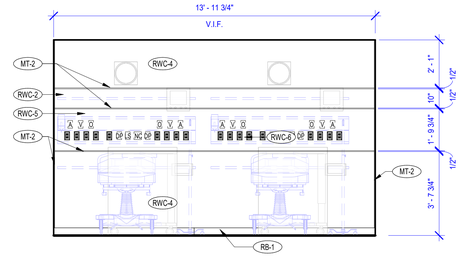

20 P3-AE100 — PRE-OP - 1C-105 EAST — 3/8" = 1'-0"

GENERAL CASEWORK NOTES

1	CASEWORK DIMENSIONS AND SITE CONDITIONS INCLUDING PME SHALL BE FIELD VERIFIED (DO NOT SCALE DRAWINGS). SUPPLY ARCHITECT WITH ACCURATE SHOP DRAWINGS PRIOR TO FABRICATION.
2	ALL CABINETS SHALL BE FLUSH OVERLAY TYPE, AWI PREMIUM GRADE U.O.N.
3	CABINET DOOR HARDWARE SHALL BE SOFT-CLOSING EUROPEAN HINGES.
4	CABINET DRAWER SLIDES SHALL BE FULL EXTENSION TYPE, 100 LB CAPACITY. PROVIDE 150 LB CAPACITY AT ALL DRAWERS MARKED "FC". SIDE MOUNTED WITH INTEGRAL STOP. PROVIDE SOFT CLOSING /STAY CLOSED TYPE. (if countertop overhang is > 1 1/2", drawer slide shall exceed full extension. coordinate with overhang depth for required extension)
5	PROVIDE RAKKS EH COUNTERTOP SUPPORT BRACKET IN THE COLOR OFF-WHITE AT CENTERLINE OF ALL UNSUPPORTED COUNTERTOPS OVER 4'-0" IN LENGTH.
6	PROVIDE MOCKETT EDP FLIP TOP SERIES, 2 1/2" DIAMETER COUNTERTOP GROMMETS WITH COLOR TO MATCH COUNTERTOP BEHIND ALL COMPUTER WORKSTATIONS AND PRINTERS.
7	PROVIDE CABINET LOCKS WHERE INDICATED ON ELEVATIONS.
8	DRAWER CONSTRUCTION SHALL BE DOVETAIL JOINTS.
9	PROVIDE 2" RADIUSED CORNERS AT ALL COUNTERTOPS, U.O.N.
10	FLOOR BASE SHALL WRAP AT ALL CASEWORK, INCLUDING END PANELS.
11	CABINET LOCKS SHALL BE KEYED ALIKE CYLINDER, PROVIDE TWO (2) KEYS PER LOCK.
12	CABINET DOOR AND DRAWER PULLS SHALL BE 4" WIRE PULLS WITH SATIN NICKLE FINISH. -TYPICAL PULLS SHALL MATCH EXISTING SUITE STANDARDS EXACTLY.
13	ADJUSTABLE SHELF SUPPORTS SHALL BE RECESSED SIDE MOUNTED METAL SHELF STANDARD WITH COORDINATED SHELF RESTS IN POLISHED CHROME FINISHED, WITH NOMINAL 1" SPACING ADJUSTMENTS.
14	PROVIDE 3MM EDGE BANDING TO MATCH LAMINATE ON EXPOSED EDGES.
15	INTEGRAL SINK SHALL BE CORIAN 8254 IN THE COLOR TBD.
16	ALL COUNTERTOPS WITH SINKS MUST HAVE MARINE GRADE SUBSTRATE.
17	FILLER PANELS SHALL BE PLAM ALL SIDED. NO MELAMINE PERMITTED.

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M.R PROJECT NO. 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TRUST, JR.
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL INTERIOR ELEVATIONS	Phase: BID DOCUMENTS	Project Title: RENOVATE SURGICAL SUITE PHASE II	VA Drawing Number: 2617
Approved by: Jon Manninen, COR	FULLY SPRINKLERED	Project Number: 658-19-103	Building Number: 143
		Location: SALEM VA MEDICAL CENTER	Drawing Number: AI800
		Issue Date: 2025-12-30 / Checked: DJP / Drawn: HLJ	

12/29/2025 1:47:01 AM

VA FORM 08 - 6231

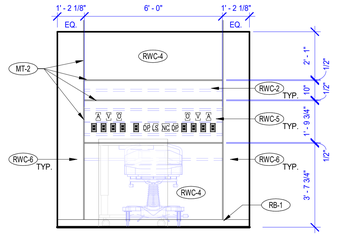

21 PRE-OP - 1C-105 WEST
P3-AE100 3/8" = 1'-0"

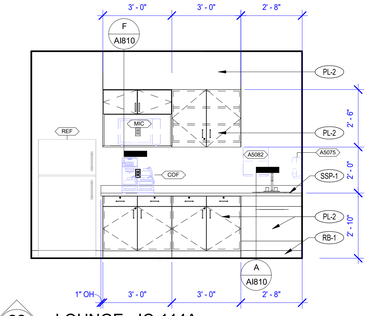

22 LOUNGE - IC-114A
P4-AE100 3/8" = 1'-0"

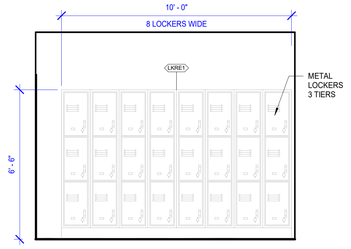

23 LOCKERS - IC-11C
P4-AE100 3/8" = 1'-0"

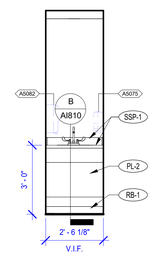

24 ANTE - 1C-117
P4-AE100 3/8" = 1'-0"

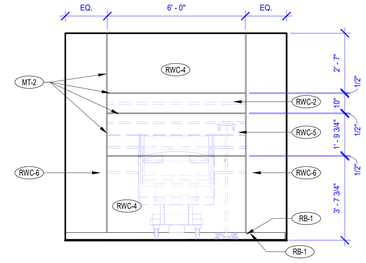

25 ISO - 1C-116
P4-AE100 3/8" = 1'-0"

GENERAL CASEWORK NOTES

1	CASEWORK DIMENSIONS AND SITE CONDITIONS INCLUDING PME SHALL BE FIELD VERIFIED (DO NOT SCALE DRAWINGS). SUPPLY ARCHITECT WITH ACCURATE SHOP DRAWINGS PRIOR TO FABRICATION.
2	ALL CABINETS SHALL BE FLUSH OVERLAY TYPE. AWI PREMIUM GRADE U.O.N.
3	CABINET DOOR HARDWARE SHALL BE SOFT-CLOSING EUROPEAN HINGES.
4	CABINET DRAWER SLIDES SHALL BE FULL EXTENSION TYPE, 100 LB CAPACITY. PROVIDE 150 LB CAPACITY AT ALL DRAWERS MARKED "FC". SIDE MOUNTED WITH INTEGRAL STOP. PROVIDE SOFT CLOSING /STAY CLOSED TYPE. (if countertop overhang is > 1 1/2", drawer slide shall exceed full extension. coordinate with overhang depth for required extension)
5	PROVIDE RAKKS EH COUNTERTOP SUPPORT BRACKET IN THE COLOR OFF-WHITE AT CENTERLINE OF ALL UNSUPPORTED COUNTERTOPS OVER 4'-0" IN LENGTH.
6	PROVIDE MOCKETT EDP FLIP TOP SERIES, 2 1/2" DIAMETER COUNTERTOP GROMMETS WITH COLOR TO MATCH COUNTERTOP BEHIND ALL COMPUTER WORKSTATIONS AND PRINTERS.
7	PROVIDE CABINET LOCKS WHERE INDICATED ON ELEVATIONS.
8	DRAWER CONSTRUCTION SHALL BE DOVETAIL JOINTS.
9	PROVIDE 2" RADIUSED CORNERS AT ALL COUNTERTOPS, U.O.N.
10	FLOOR BASE SHALL WRAP AT ALL CASEWORK, INCLUDING END PANELS.
11	CABINET LOCKS SHALL BE KEYED ALIKE CYLINDER, PROVIDE TWO (2) KEYS PER LOCK.
12	CABINET DOOR AND DRAWER PULLS SHALL BE 4" WIRE PULLS WITH SATIN NICKLE FINISH. -TYPICAL PULLS SHALL MATCH EXISTING SUITE STANDARDS EXACTLY.
13	ADJUSTABLE SHELF SUPPORTS SHALL BE RECESSED SIDE MOUNTED METAL SHELF STANDARD WITH COORDINATED SHELF RESTS IN POLISHED CHROME FINISHED, WITH NOMINAL 1" SPACING ADJUSTMENTS.
14	PROVIDE 3MM EDGE BANDING TO MATCH LAMINATE ON EXPOSED EDGES.
15	INTEGRAL SINK SHALL BE CORIAN 8254 IN THE COLOR TBD.
16	ALL COUNTERTOPS WITH SINKS MUST HAVE MARINE GRADE SUBSTRATE.
17	FILLER PANELS SHALL BE PLAM ALL SIDED. NO MELAMINE PERMITTED.

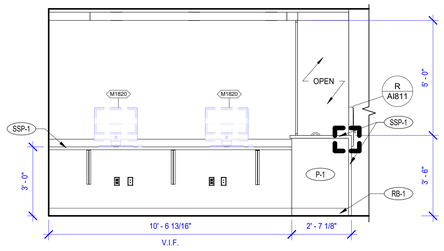

26 NURSE STATION - 1C-115A
P4-AE100 3/8" = 1'-0"

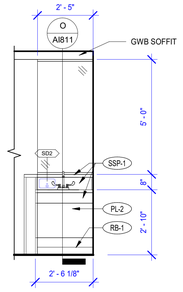

27 NURSE STATION SINK - 1C-115A
P4-AE100 3/8" = 1'-0"

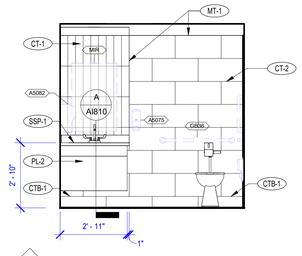

28 TOILET - 1C114B
P4-AE100 3/8" = 1'-0"



29 TOILET - 1C114B
P4-AE100 3/8" = 1'-0"

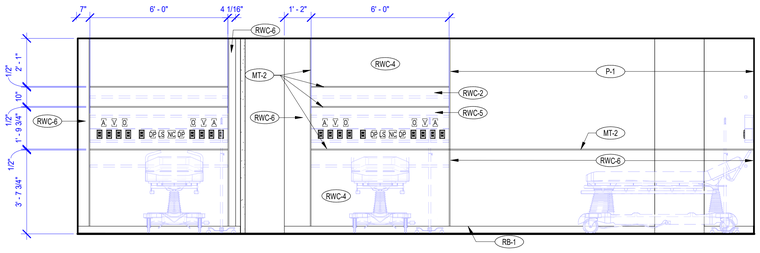

30 PACU - 1C-115
P4-AE100 3/8" = 1'-0"

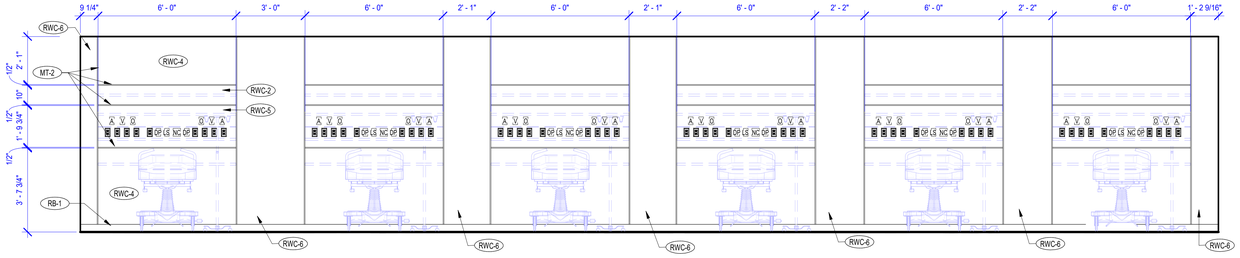

31 PACU - 1C-115
P4-AE100 3/8" = 1'-0"



32 HANDWASHING SINK
P4-AE100 3/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO. 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL INTERIOR ELEVATIONS

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30
Checked: DJP
Drawn: HLJ

VA Drawing Number: 2617
Building Number: 143
Drawing Number: AI801

12/29/2025 1:47:09 AM

VA FORM 08 - 6231

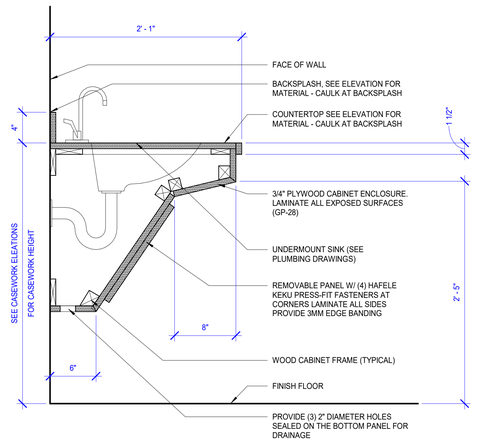

A AI810 SECTION @ ADA SINK AND COUNTERTOP

1 1/2" = 1'-0"

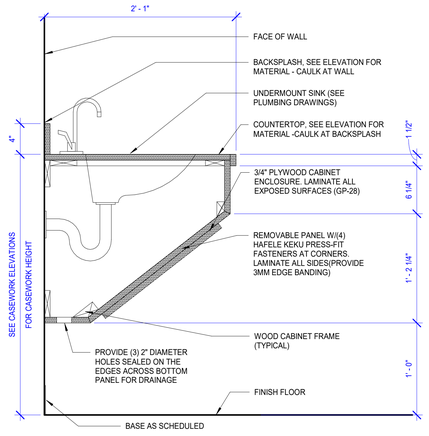

B AI810 SECTION @ SINK - FULL ENCLOSURE

1 1/2" = 1'-0"

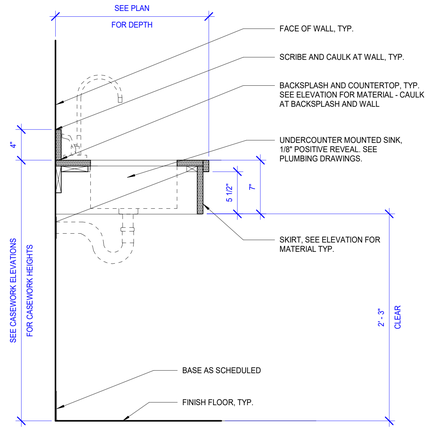

C AI810 SECTION @ SINK WITH SKIRT

1 1/2" = 1'-0"

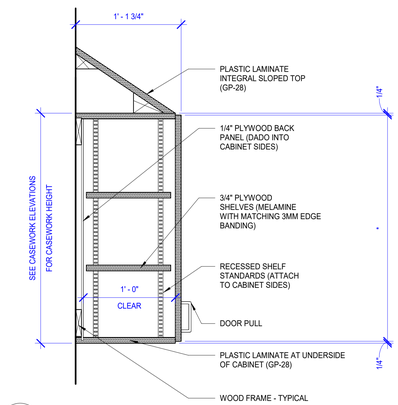

D AI810 SECTION @ WALL CABINET - 2 SHELVES

1 1/2" = 1'-0"

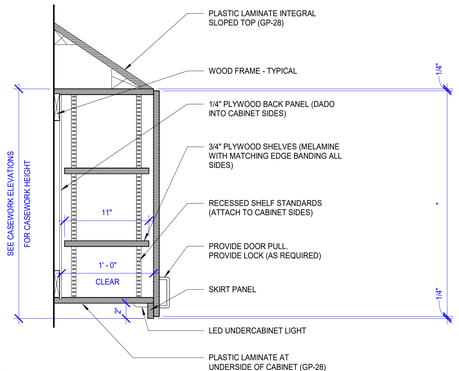

E AI810 SECTION @ WALL CABINETS - 2 SHELVES - LED SKIRT

1 1/2" = 1'-0"

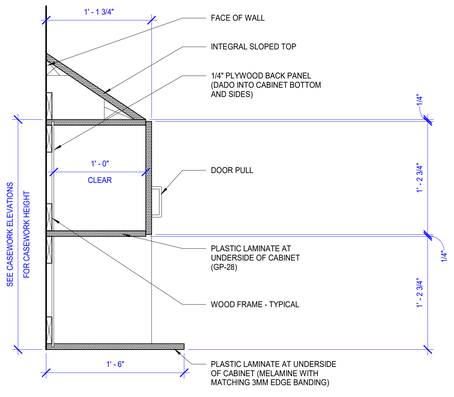

F AI810 SECTION @ WALL CABINET - MICROWAVE

1 1/2" = 1'-0"

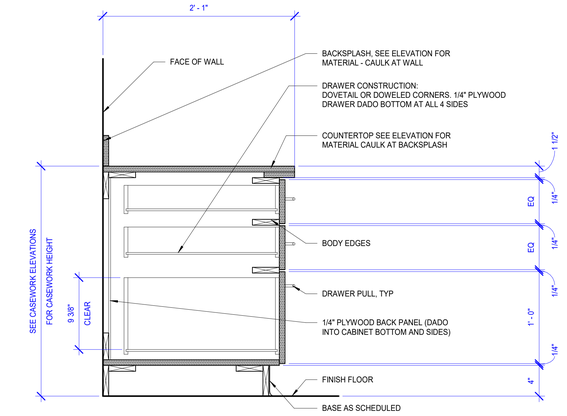

G AI810 SECTION @ BASE CABINET - DRAWER/DRAWER/FILE

1 1/2" = 1'-0"

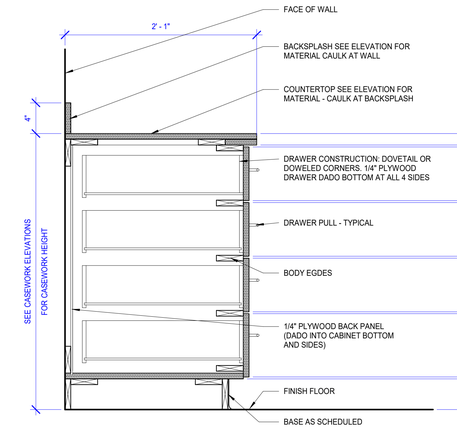

H AI810 SECTION @ BASE CABINETS - 3 EQUAL DRAWERS

1 1/2" = 1'-0"

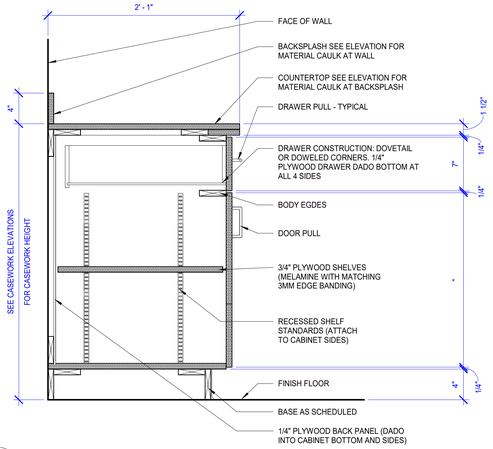

J AI810 SECTION @ BASE CABINET - DRAWER/CABINET

1 1/2" = 1'-0"

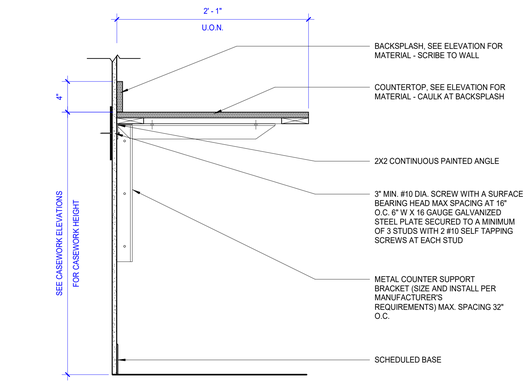

K AI810 SECTION @ BASE COUNTERTOP - SHELF SUPPORT

1 1/2" = 1'-0"

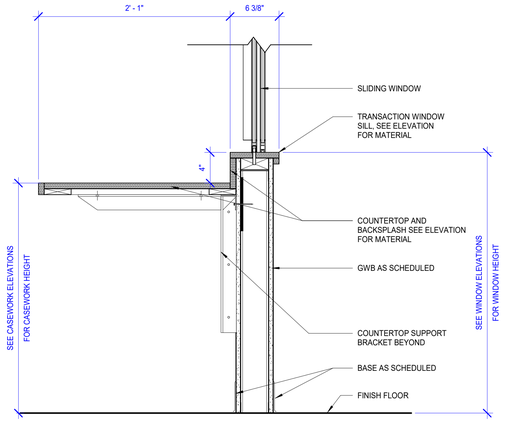

L AI810 SECTION @ TRANSACTION WINDOW

1 1/2" = 1'-0"

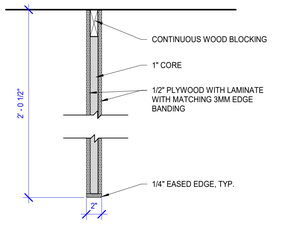

M AI810 SECTION @ END PANEL

1 1/2" = 1'-0"

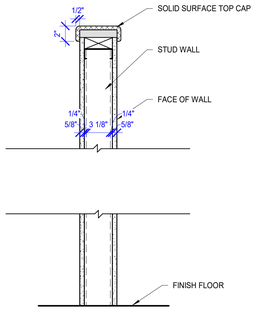

N AI810 SECTION @ SOLID SURFACE CAP

1 1/2" = 1'-0"

GENERAL CASEWORK NOTES

1	CASEWORK DIMENSIONS AND SITE CONDITIONS INCLUDING PME SHALL BE FIELD VERIFIED (DO NOT SCALE DRAWINGS). SUPPLY ARCHITECT WITH ACCURATE SHOP DRAWINGS PRIOR TO FABRICATION.
2	ALL CABINETS SHALL BE FLUSH OVERLAY TYPE, AWI PREMIUM GRADE U.O.N.
3	CABINET DOOR HARDWARE SHALL BE SOFT-CLOSING EUROPEAN HINGES.
4	CABINET DRAWER SLIDES SHALL BE FULL EXTENSION TYPE, 100 LB CAPACITY. PROVIDE 150 LB CAPACITY AT ALL DRAWERS MARKED "FC". SIDE MOUNTED WITH INTEGRAL STOP. PROVIDE SOFT CLOSING /STAY CLOSED TYPE. (if countertop overhang is > 1 1/2", drawer slide shall exceed full extension. coordinate with overhang depth for required extension)
5	PROVIDE RAKKS EH COUNTERTOP SUPPORT BRACKET IN THE COLOR OFF-WHITE AT CENTERLINE OF ALL UNSUPPORTED COUNTERTOPS OVER 4'-0" IN LENGTH.
6	PROVIDE MOCKETT EDP FLIP TOP SERIES, 2 1/2" DIAMETER COUNTERTOP GROMMETS WITH COLOR TO MATCH COUNTERTOP BEHIND ALL COMPUTER WORKSTATIONS AND PRINTERS.
7	PROVIDE CABINET LOCKS WHERE INDICATED ON ELEVATIONS.
8	DRAWER CONSTRUCTION SHALL BE DOVETAIL JOINTS.
9	PROVIDE 2" RADIUSED CORNERS AT ALL COUNTERTOPS, U.O.N.
10	FLOOR BASE SHALL WRAP AT ALL CASEWORK, INCLUDING END PANELS.
11	CABINET LOCKS SHALL BE KEYED ALIKE CYLINDER, PROVIDE TWO (2) KEYS PER LOCK.
12	CABINET DOOR AND DRAWER PULLS SHALL BE 4" WIRE PULLS WITH SATIN NICKLE FINISH. -TYPICAL PULLS SHALL MATCH EXISTING SUITE STANDARDS EXACTLY.
13	ADJUSTABLE SHELF SUPPORTS SHALL BE RECESSED SIDE MOUNTED METAL SHELF STANDARD WITH COORDINATED SHELF RESTS IN POLISHED CHROME FINISHED. WITH NOMINAL 1" SPACING ADJUSTMENTS.
14	PROVIDE 3MM EDGE BANDING TO MATCH LAMINATE ON EXPOSED EDGES.
15	INTEGRAL SINK SHALL BE CORIAN 8254 IN THE COLOR TBD.
16	ALL COUNTERTOPS WITH SINKS MUST HAVE MARINE GRADE SUBSTRATE.
17	FILLER PANELS SHALL BE PLAM ALL SIDED. NO MELAMINE PERMITTED.

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 • Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C.
REGISTERED ARCHITECT
COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL CASEWORK DETAILS

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II

Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30

Checked: DJP

Drawn: HLJ

VA Drawing Number: 2617

Building Number: 143

Drawing Number: AI810

12/29/2025 1:47:11 AM

VA FORM 08 - 6231

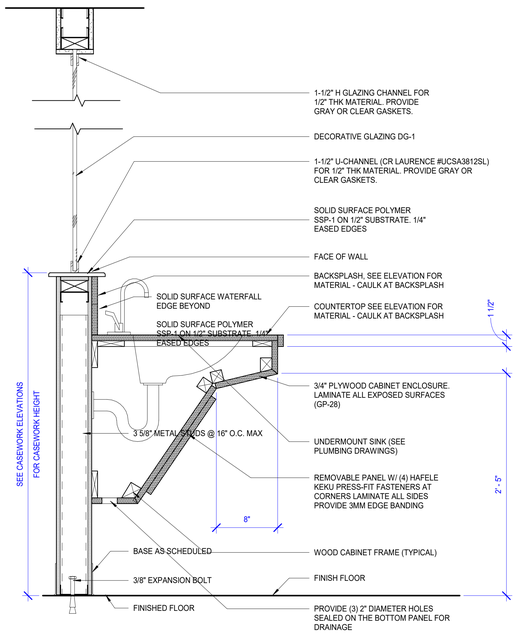

O AI811 SECTION @ HANDWASHING SINK
1 1/2" = 1'-0"

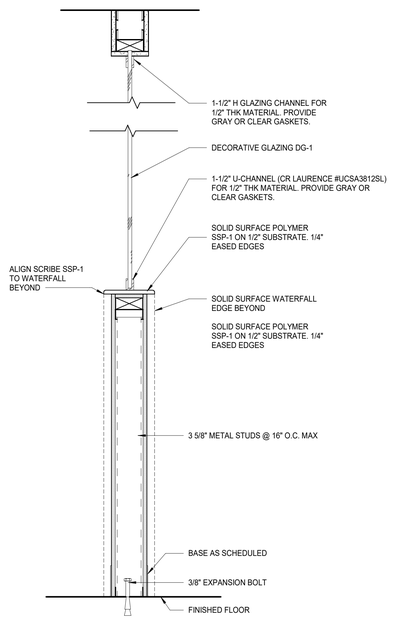

P AI811 SECTION @ HALF HEIGHT GLAZING WALL
1 1/2" = 1'-0"

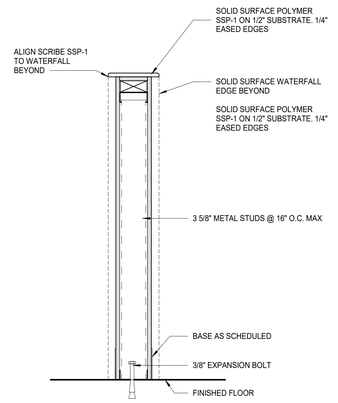

Q AI811 SECTION @ HALF HEIGHT WALL
1 1/2" = 1'-0"

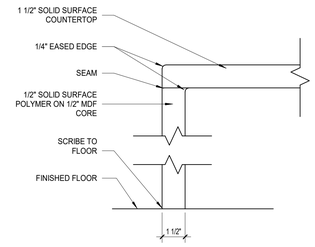

R AI811 SECTION @ WATERFALL EDGE
3" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER

Revisions: | Date:

CONSULTANT

Architecture:	Civil Engineering:	Fire Protection:
PF&A DESIGN, P.C.	LABELLA ASSOCIATES	STANTON ENGINEERING SERVICES, LLC

ENGINEER OF RECORD

MILLER•REMICK
A Service-Disabled Veteran-Owned Small Business
(856) 429-4000 ▪ Miller-Remick.com
M-R PROJECT NO: 0499-0136

PF&A DESIGN, P.C. REGISTERED ARCHITECT

COMMONWEALTH OF VIRGINIA
JOSEPH H. TROST
NO. 7843
2025-12-30
REGISTERED ARCHITECT

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ARCHITECTURAL CASEWORK DETAILS

Approved by: Jon Manninen, COR

Phase: BID DOCUMENTS

FULLY SPRINKLERED

Project Title: RENOVATE SURGICAL SUITE PHASE II
Project Number: 658-19-103

Location: SALEM VA MEDICAL CENTER

Issue Date: 2025-12-30 | **Checked:** DJP | **Drawn:** HLJ

VA Drawing Number: 2617
Building Number: 143
Drawing Number: AI811

12/29/2025 1:47:12 AM

VA FORM 08 - 6231