Questions and Answers

1. Contract Clauses

1. Can the Government confirm that FAR clauses 52.219-14, 52.219-33, and 52.222-54 (E-Verify) do not apply because their corresponding boxes are unchecked? As they are not checked they are not required and do not apply.

2. Refrigerant / Acceptable Equipment

2. The specifications call for R-410A equipment. Given industry transition to lower-GWP refrigerants, will the Government accept equipment utilizing R-454B or R-32 (or other approved equal refrigerants) if performance requirements are met?
   454B or R32 GWP refrigerants are acceptable

3. Will manufacturers other than those listed in the specifications (e.g., Goodman or other approved equals) be accepted if the equipment meets all required capacity, efficiency, and AHRI-matching requirements?
   Substitutions shall be reviewed for acceptance by COR

3. Schedule / Performance Period

4. Please clarify the expected start date and governing period of performance, as the solicitation references both Summer/Fall 2026 and November 16, 2026 – April 2, 2027. Additionally, when will any amendment extending the quotation due date be issued? Nov 16-April 2 was the timeline

5. If weather conditions prevent normal charging and commissioning during the performance period, will the Government accept manufacturer's cold-weather commissioning procedures and/or a follow-up verification visit when ambient conditions are suitable?
   The Contractor shall plan a follow up verification visit when ambient conditions are suitable to test the new AC unit

4. Bonding

6. Please confirm that no bid bond, payment bond, or performance bond is required.
   no bond is required for the government but the vendor must follow all applicable state and federal laws, as required

5. Site Visit and Access

7. Can an individual site visit be arranged prior to quote submission? Yes

8. Will the bunkhouse be occupied during construction, and are there any access restrictions, escort requirements, check-in procedures, work-hour limitations, or site-access constraints?
   No limitations to access during construction

6. Drawings and Missing Documents

9. Several specification sections reference drawings and capacities/characteristics, and Section 013300 (Submittals) appears to be missing. Will the Government provide the referenced drawings and missing specification section? If not, what information should contractors rely on when preparing quotes?
   A floor plan with locations of new AC unit, existing thermostats and furnaces and specifications will be provided prior to bid

10. If drawings are unavailable, can the Government provide photographs of the existing installation, including the condenser, evaporator coil, equipment labels, cabinet dimensions, and site conditions?
    Photos will be provided of the existing AC unit, coil and existing furnace

7. Capacity Reduction / System Design

11. The SOW requires replacing a 5-ton system with a 2.5-ton system. Please confirm that 2.5 tons is the intended capacity and explain the basis for this sizing (e.g., load calculations, building modifications, etc.).
    Install a 2.5 ton condenser and new coil. Transition the smaller new coil to the existing furnace

12. Will modifications to the existing ductwork, blower/air handler, furnace, refrigerant piping, electrical systems, or other supporting infrastructure be required to accommodate the reduced-capacity system, and should those modifications be included in Item 0001 pricing?
    The only modification will be to transition the new smaller coil to the existing large furnace

8. Existing HVAC Equipment Information

13. Please provide the make, model, serial number/asset tag, age, capacity, blower/CFM rating, mounting orientation (upflow/downflow/horizontal), and any other available information for the existing indoor and outdoor equipment.
    The serial number of the condenser is 1215E04857. MODEL NUMBER IS 116BNA0600000BAAA. Manufacturing date 2015

14. Please provide details regarding the existing thermostat and controls, including thermostat brand, available conductors, and whether the system interfaces with a Building Management System (BMS).
    Existing thermostat to remain and doesn't interface with BMS

9. Refrigerant Lines

15. Are existing refrigerant line sets required to be replaced, or may they be reused if properly flushed, pressure tested, and verified compatible with the new equipment?
    Install New coils and new refrigerant lines

16. Please provide the existing refrigerant line-set sizes and approximate line-set length.
    Please perform site visit to ascertain approx. length

10. Existing Refrigerant

17. What refrigerant is currently installed in the existing system (e.g., R-22 or R-410A)?
    R-410A

18. Is a refrigerant recovery/disposal certificate, manifest, or other documentation required as a contract deliverable, and if so, when and to whom must it be submitted?
    No documentation needed

11. Electrical Requirements

19. Please provide existing electrical service information, including voltage, phase, breaker size, disconnect type (fused/non-fused), fuse size (if applicable), conductor sizes, and any known electrical deficiencies.
    Please attend site visit to view electrical service information

20. Will replacement or downsizing of breakers, wiring, disconnects, whip assemblies, or related electrical components be required as part of this project?
    NO

12. Specification Applicability

21. Do the detailed specification requirements (shop drawings, refrigerant piping requirements, vacuum hold requirements, equipment base requirements, etc.) apply in full to this 2.5-ton split system, or will standard manufacturer installation practices and product submittals be acceptable?
    We did Not specify a Split system

13. Concrete Pad / Equipment Support

22. May the existing condenser pad be reused if it is structurally sound and level, or is a new pad required?
    Existing concrete pad to be reused

14. Condensate Drain

23. Will the existing condensate drain be reused, or is new condensate piping required? If new piping is required, where should it terminate?
    Please reuse existing condensate piping. Drains to existing floor drain in furnace room

15. Warranty

24. Beyond the manufacturer's warranty, is a contractor labor warranty required, and if so, for what duration?
    1 year warranty for contractors work after completion of contract


16. Solicitation Documents

25. Attachment 8 references solicitation number 1240LR27Q0001, while the RFQ appears to be 1240LR27Q0002. Please confirm which solicitation number governs and whether offerors may correct the number on submitted forms.
    The correct solicitation number is 1240LR27Q0002, if you need to correct them you can however if you submit a complete package with them they will only be associated with this contract if awarded

Pictures




AIRCO
F-3
bryant
Made in the USA
NOT FOR PRESSURE

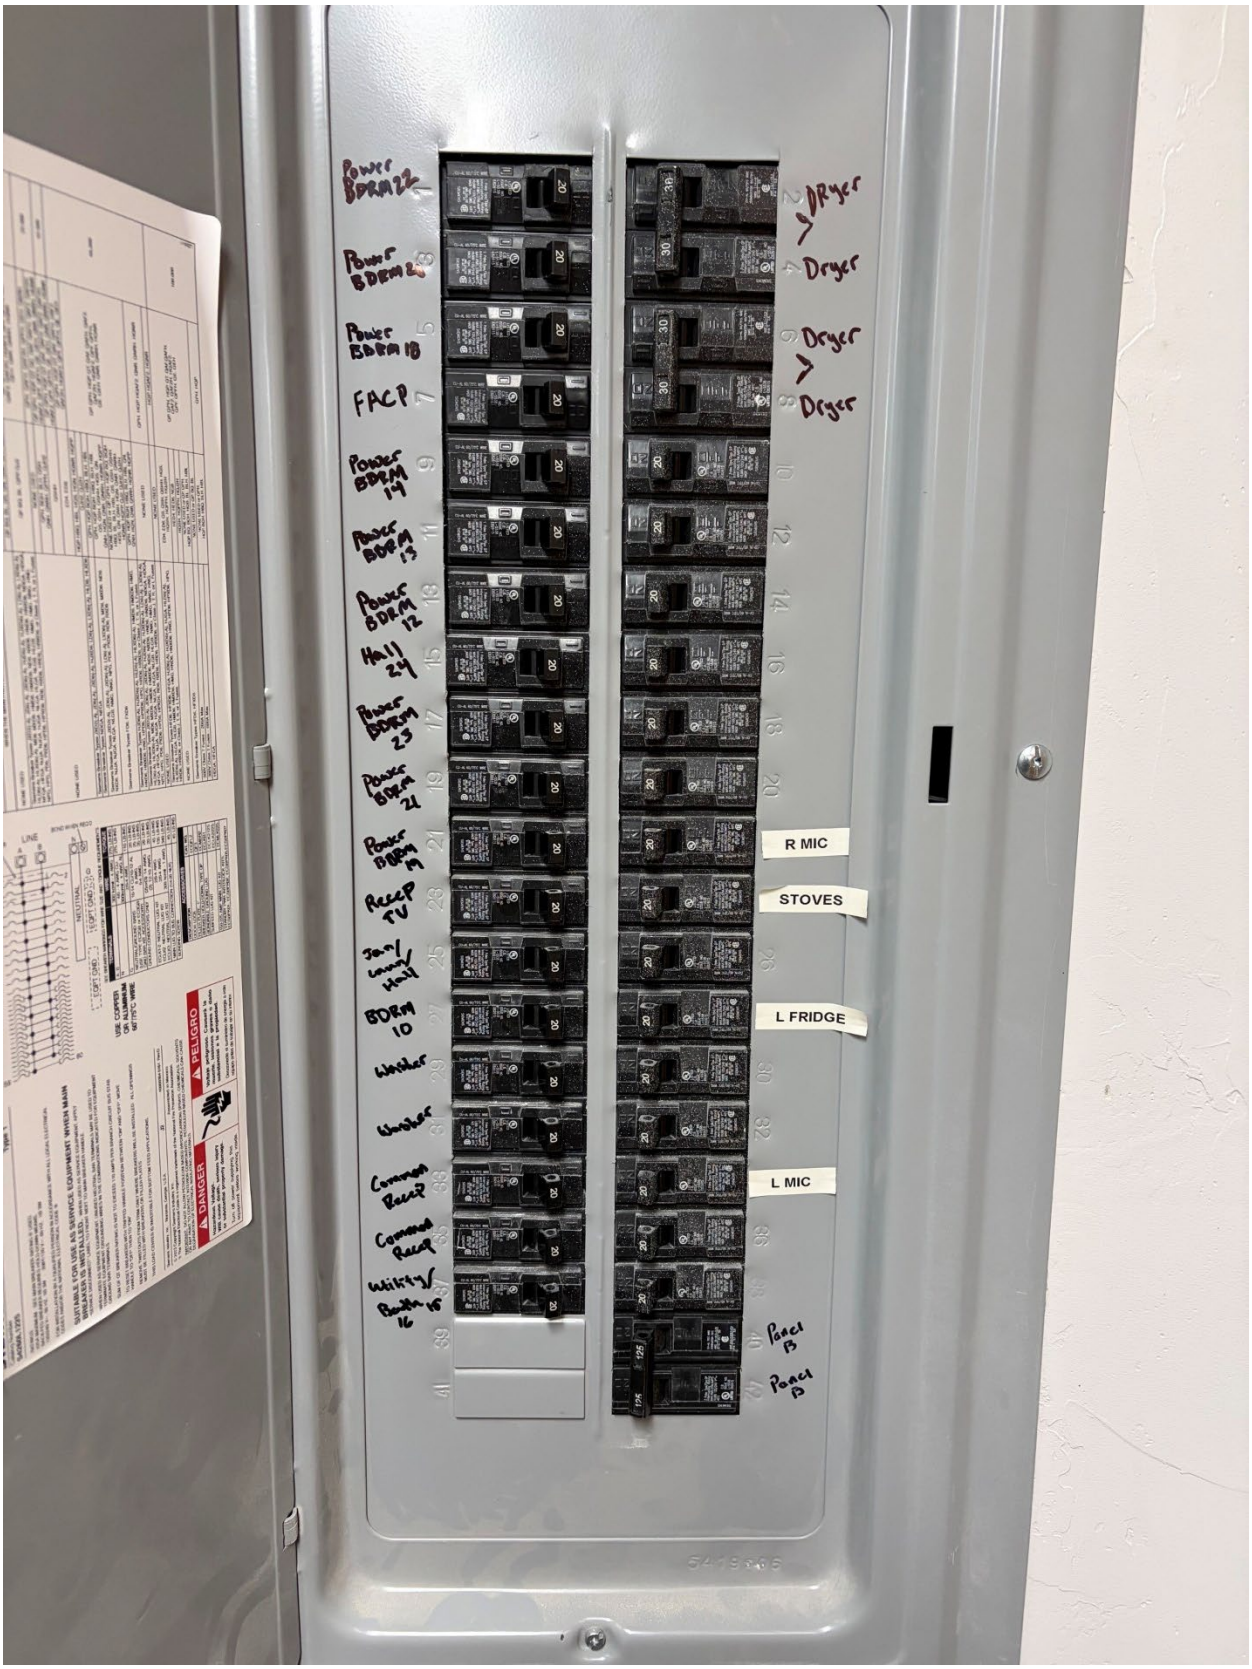
Power BDRM 22
Power BDRM 20
Power BDRM 18
FACP
Power BDRM 14
Power BDRM 13
Power BDRM 12
Hall 24
Power BDRM 23
Power BDRM 21
Power BDRM 9
Recep TV
Jan/ Linen/ Hall
BDRM 10
Washer
Washer
Common Recep
Common Recep
Wifi + Recep 16
Dryer
Dryer
Dryer
Dryer
R MIC
STOVES
L FRIDGE
L MIC
Panel B
Panel B
DANGER
PELIGRO





Installation Prohibited in Southwest


AIRCO
F-2
F-3
bryant
bryant
NOT FOR PRESSURE


bryant

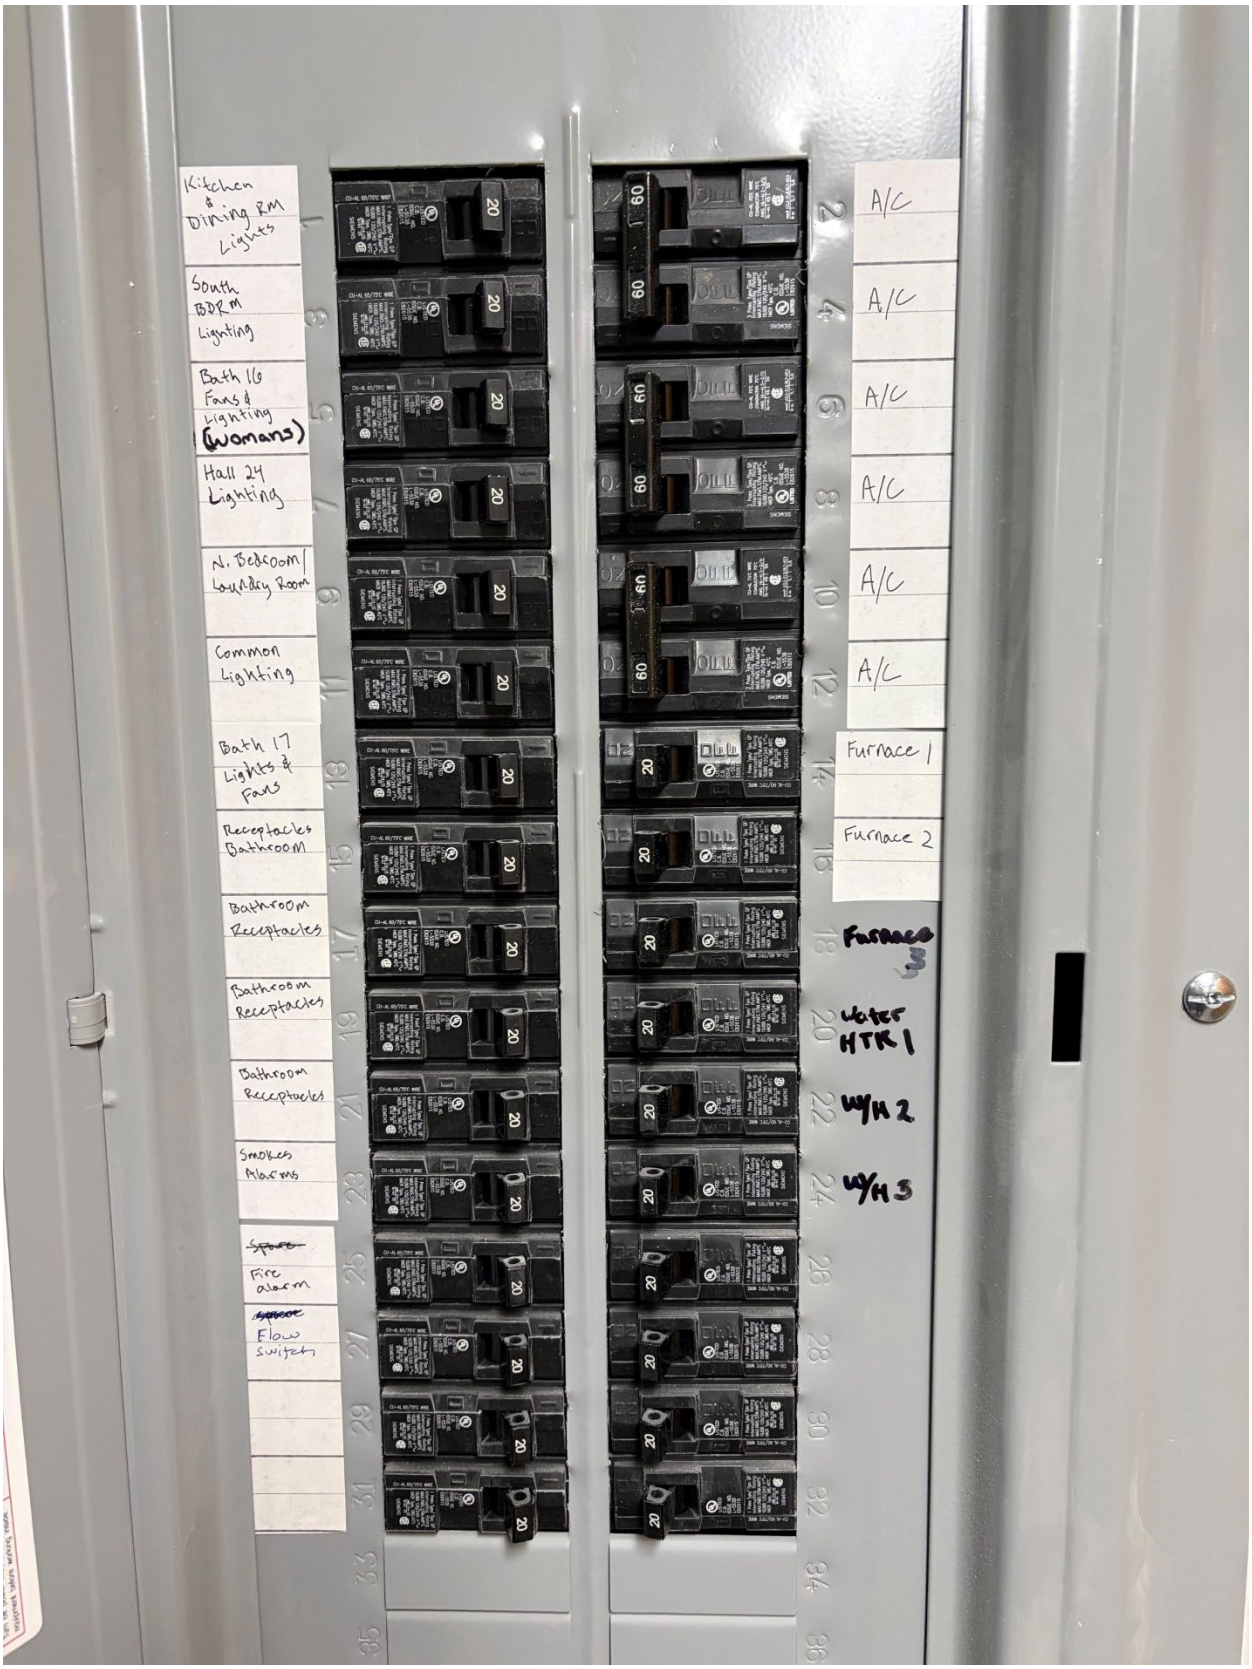


Kitchen & Dining RM Lights
South BDRM Lighting
Bath 16 Fans & Lighting (Womans)
Hall 24 Lighting
N. Bedroom/ Laundry Room
Common Lighting
Bath 17 Lights & Fans
Receptacles Bathroom
Bathroom Receptacles
Bathroom Receptacles
Bathroom Receptacles
Smokes Alarms
~~Spare~~
Fire alarm
~~Spare~~
Flow switch
A/C
A/C
A/C
A/C
A/C
A/C
Furnace 1
Furnace 2
Furnace
Water HTR 1
W/H 2
W/H 3


AIRCO
F-1
bryant
bryant