



CFL Construction Projects
OMAD

U.S. Department of Transportation
Federal Highway Administration






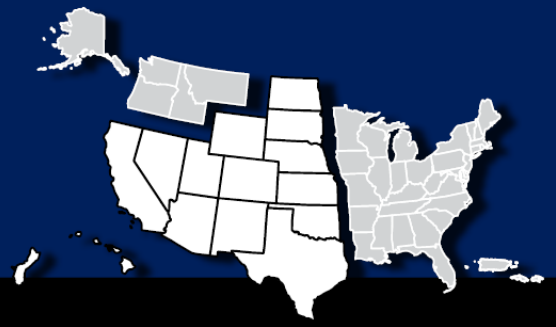

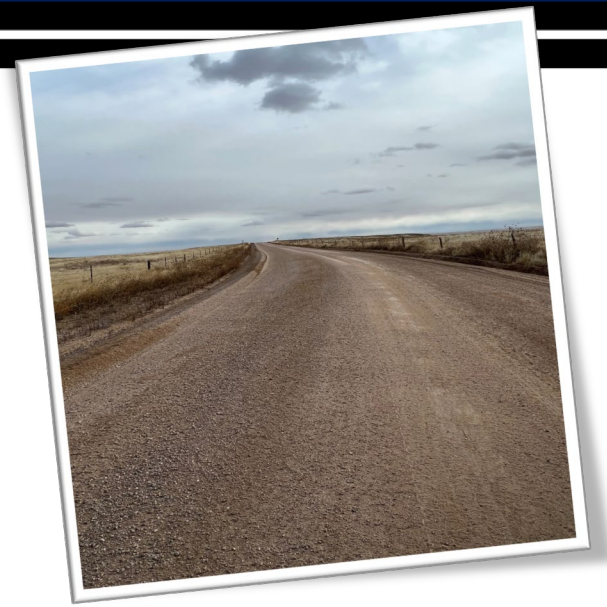



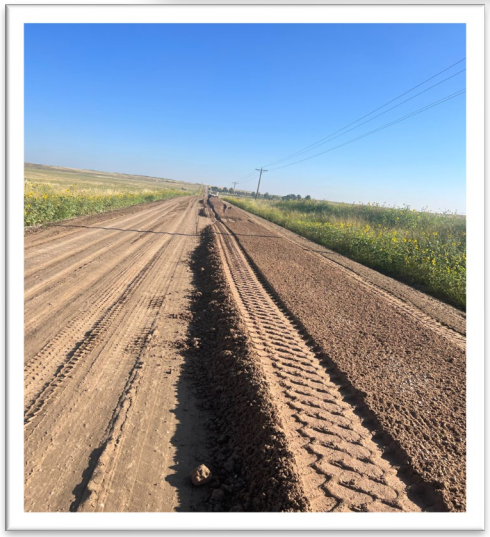







Introductions

U.S. Department of Transportation
Federal Highway Administration

- Nate Mascarenas, CFLHD Project Manager
- Leslie Karsten, CFLHD Contracting Officer
- Cody Burch, AtkinsRealis Project Manager
- CFL Partners: DAR, United States Air Force (FE Warren AFB, Minot AFB)



OMAD Program Overview

U.S. Department of Transportation
Federal Highway Administration

- OMAD - The Office of Missile Air Defense Program
- DAR - Defense Access Road (DAR) program used by the Department of Defense (DoD) to fund the annual maintenance and improvements on certified gravel roads.
- FHWA works with the Military Surface Deployment and Distribution Command (SDDC) to support the Air Force Intercontinental Ballistic Missile Program (Minuteman).



CFL Active Procurements

U.S. Department of Transportation
Federal Highway Administration

- **CO OMAD 300(71) Minuteman Missile Access Roads**
- Solicitation Number: 6982AF27B000010
- Competition: Total Small Business Set Aside
- A-i Pre-Bid information including ítems to submit with bid
- Technical Question Deadline: November 19, 2026
- Bid Opening: December 2, 2026, 2:00 pm Mountain Time
- Acknowledgement of Amendments – Failure to acknowledge amendments in item 19 of the SF1442 may result in rejection of your bid.



CFL Active Procurements

U.S. Department of Transportation
Federal Highway Administration


- **ND OMAD 2025(1) Minuteman Missile Access Roads**
- Solicitation Number: 6982AF27B000011
- Competition: Total Small Business Set Aside
- A-i Pre-Bid information including ítems to submit with bid
- Technical Question Deadline: November 19, 2026
- Bid Opening: December 2, 2026, 1:00 pm Mountain Time
- Acknowledgement of Amendments – Failure to acknowledge amendments in item 19 of the SF1442 may result in rejection of your bid.



CFL Construction Projects

U.S. Department of Transportation
Federal Highway Administration

- CO OMAD 300(71)– FY27
- ND OMAD 2025(1)– FY27

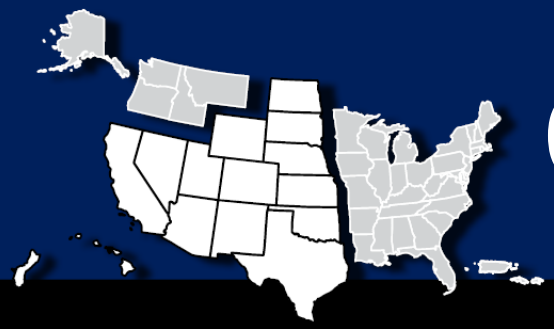


OMAD Scope of Work


U.S. Department of Transportation
Federal Highway Administration

- Roadway Reconditioning per FP-24, Section 303
- Adding 4-inches of new surface course aggregate AT 4% crown
- Repair/Replacement of culverts
- All work to stay on existing roadway bench

OMAD Typical Section

U.S. Department of Transportation
Federal Highway Administration

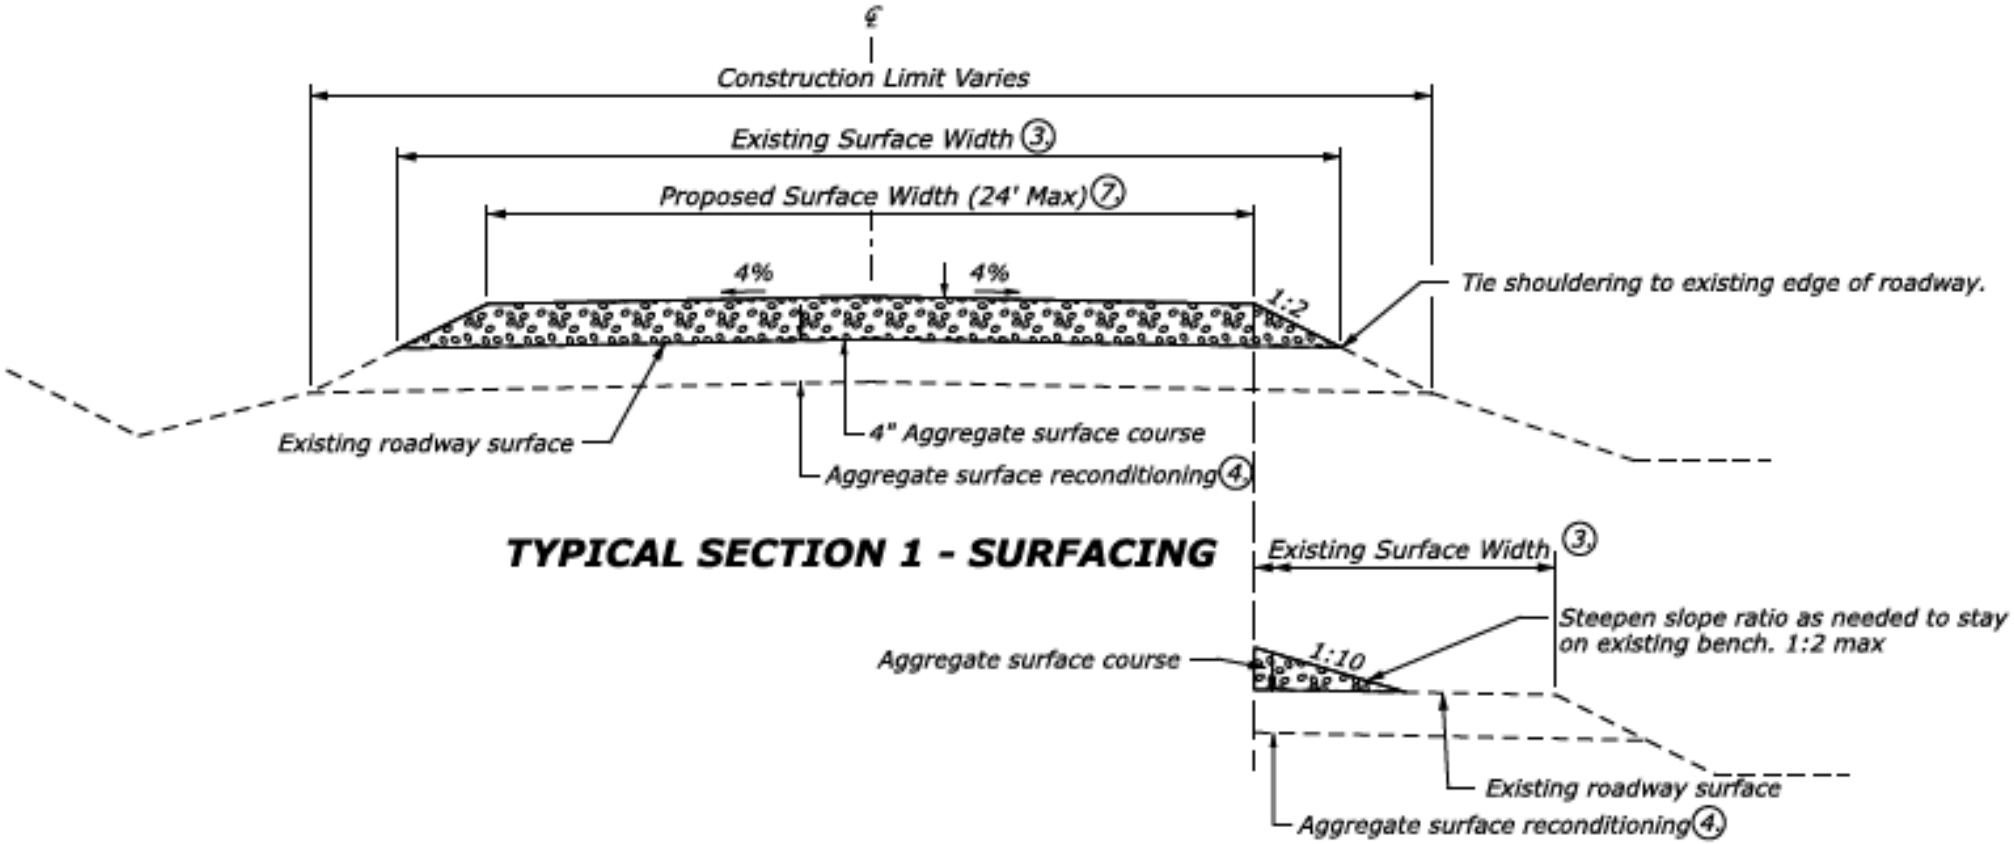

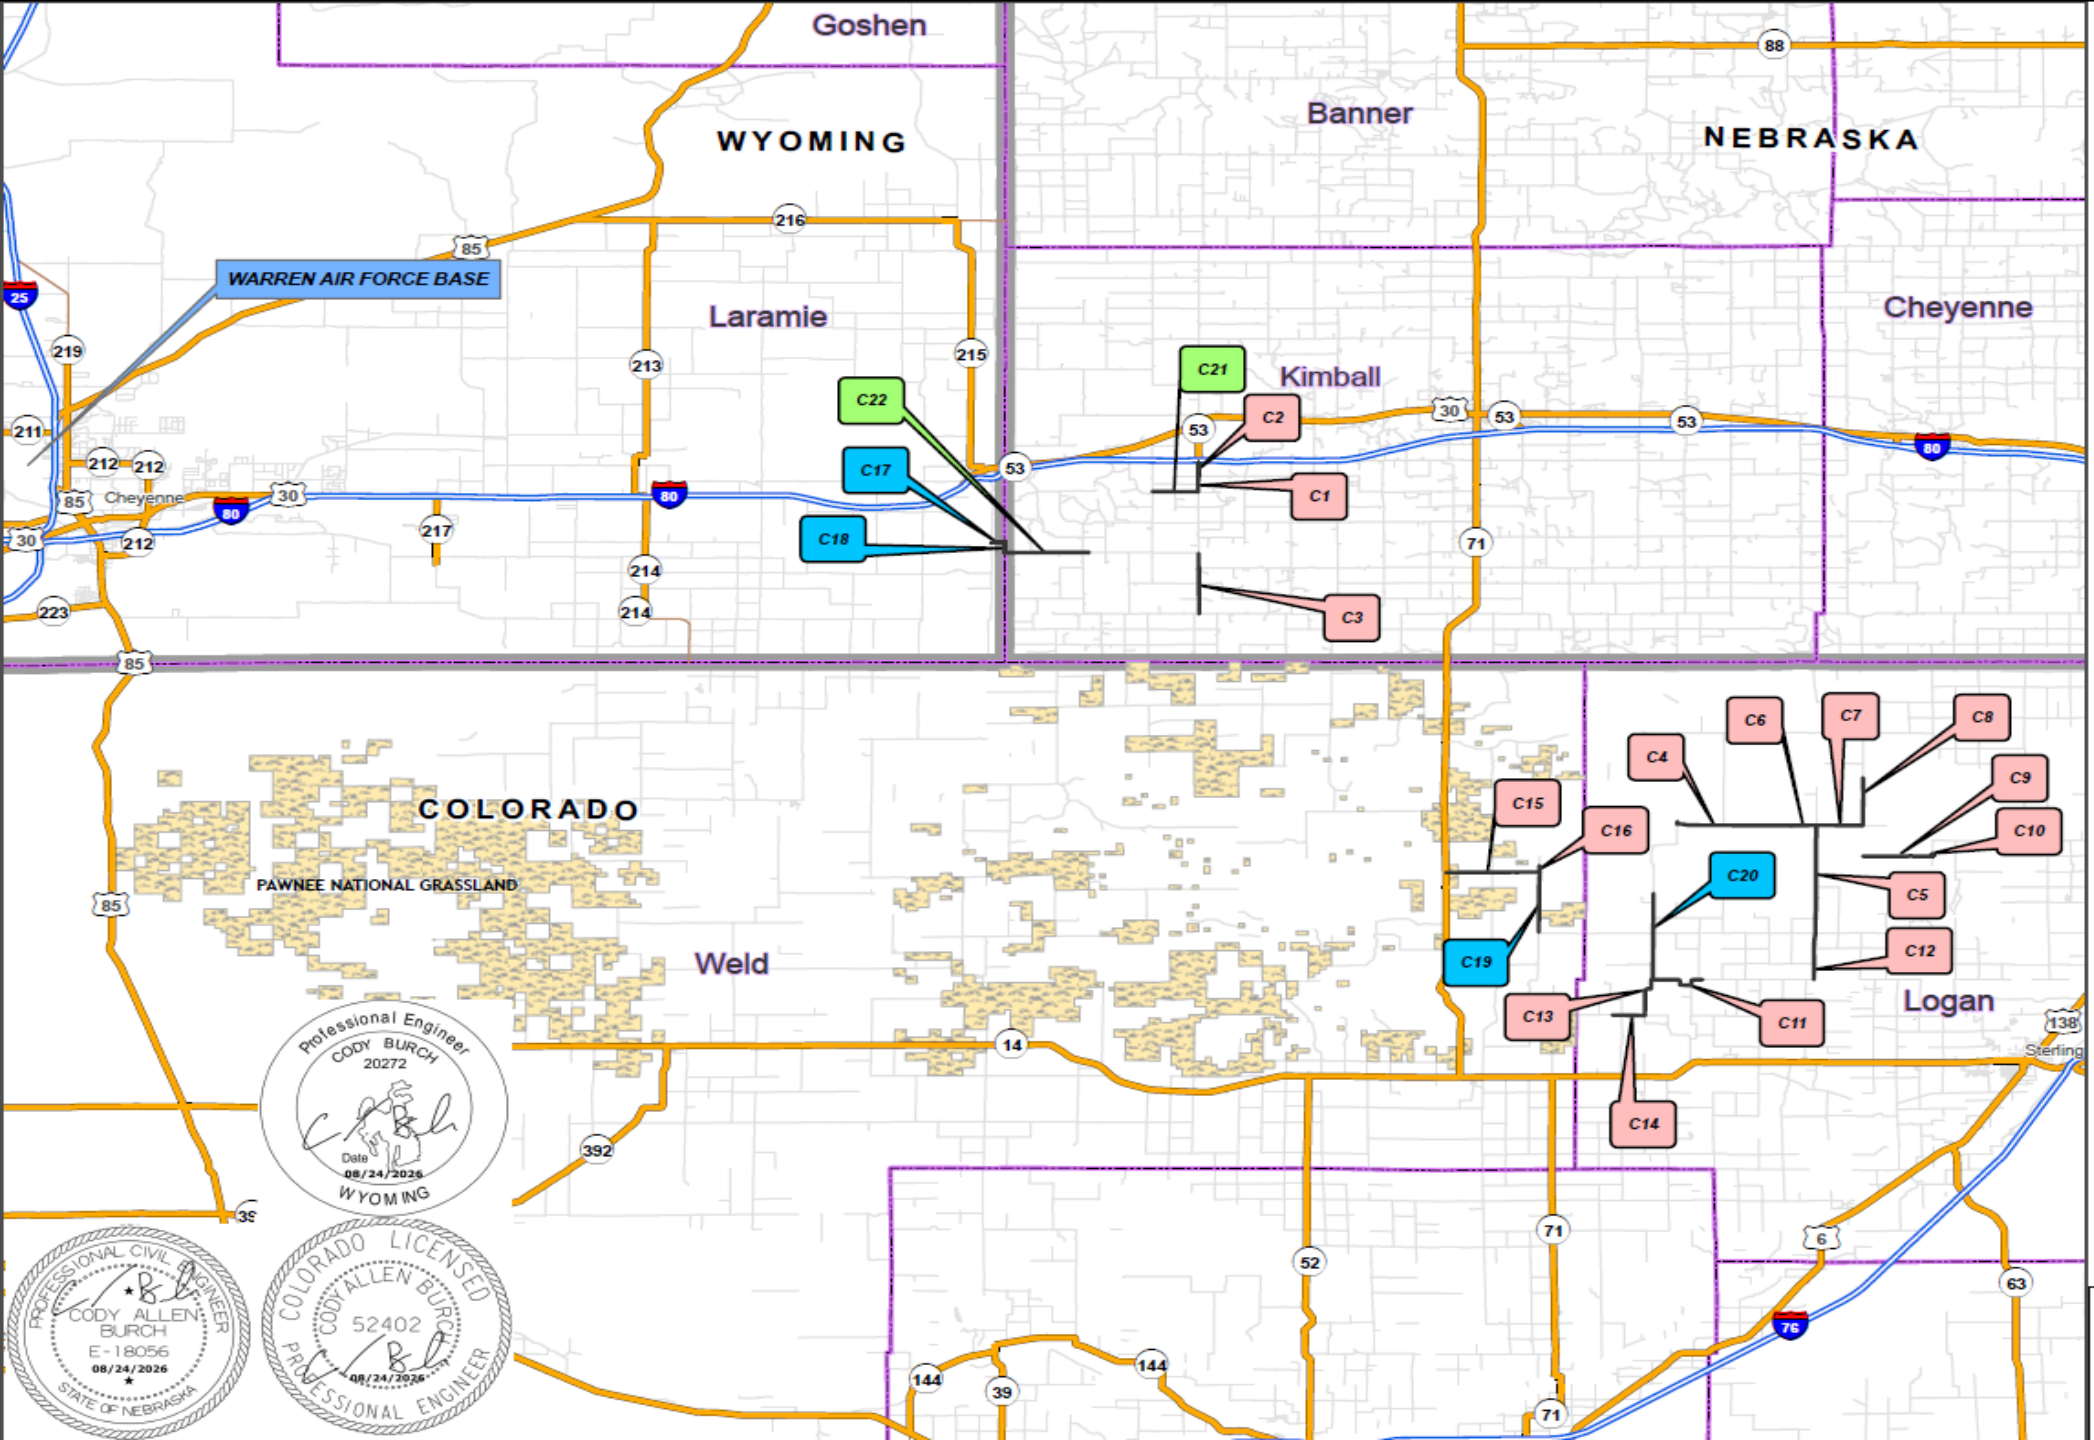

PROJECT	SHEET NUMBER
CO OMAD 300(71) MINUTEMAN MISSILE ACCESS ROADS	A4

LEGEND

- C# — Schedule A/B/C
- C# — Schedule B/C
- C# — Schedule C
- National Grassland Area
- County Boundary
- State Boundary

Transportation

- *Interstate*
- *Highways*
- *Local Road*


N

0 4.2 8.4 16.8 Miles

Coordinate System: GCS WGS 1984

KEY MAP

PROJECT	SHEET NUMBER
ND OMAD 2025(1) MINUTEMAN MISSILE ACCESS ROADS	A4

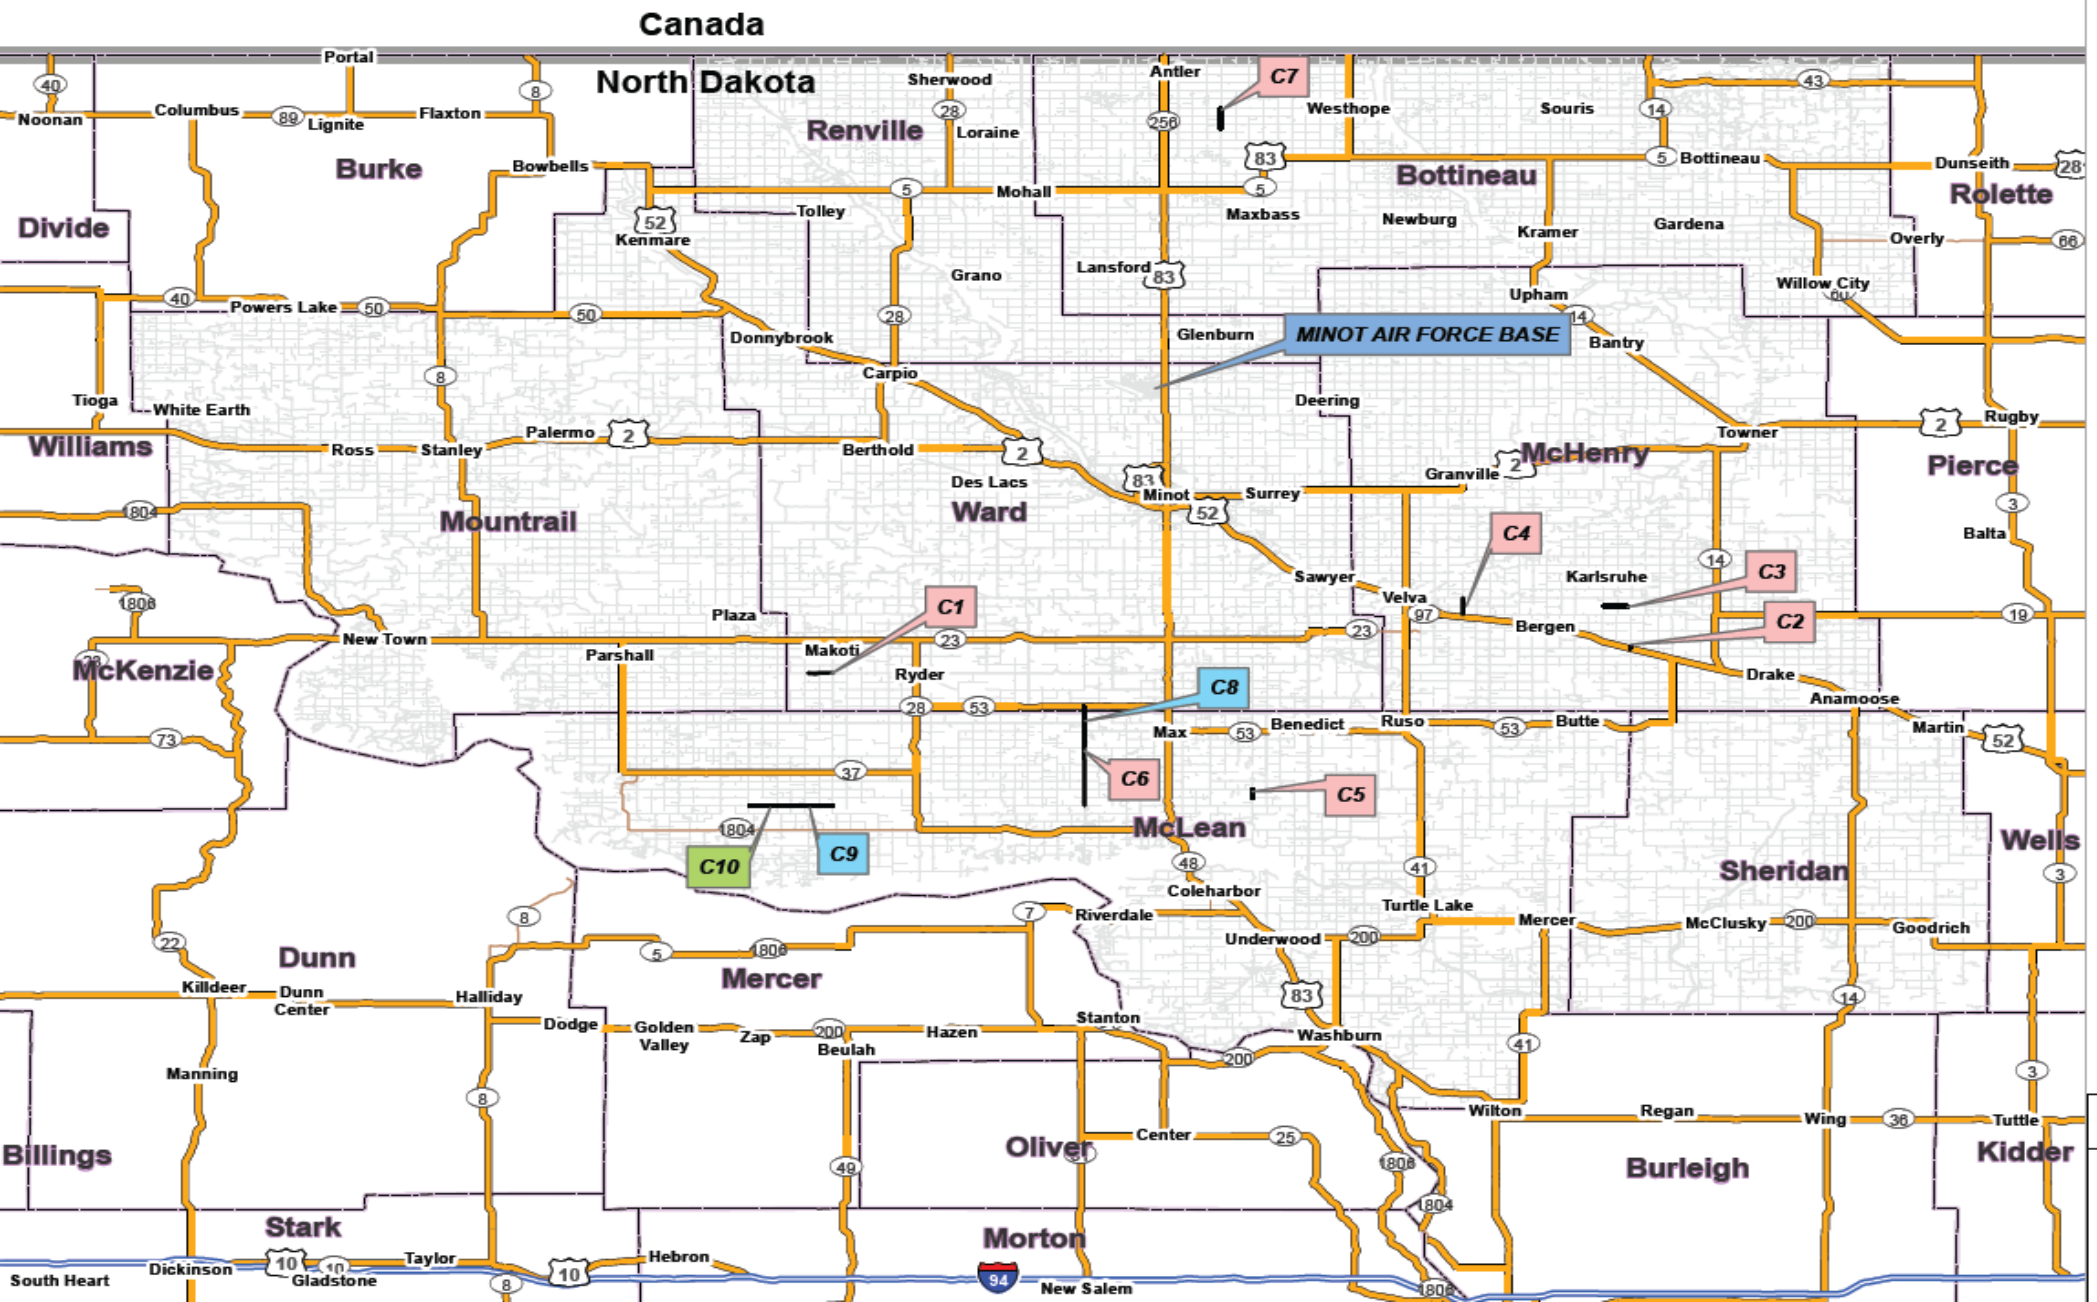

LEGEND

- C# Schedule A/B/C
- C# Schedule B/C
- C# Schedule C
- County Boundary
- State Boundary

Transportation

- Interstate
- Highways
- Local Road

REGISTERED PROFESSIONAL ENGINEER
CODY A. BURCH
PE-42098
DATE 08/27/2026
NORTH DAKOTA

N

0 5 10 20 Miles

Coordinate System: GCS WGS 1984

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
CENTRAL FEDERAL LANDS HIGHWAY DIVISION

KEY MAP

ROADWAY SURFACING SUMMARY

Schedule	Priority No.	Sheet No.	Route ID	Road	Begin	End	Segment Length (See Notes 1 & 2)	Average Existing Surface Width (See Note 3)	30110-0000 AGGREGATE SURFACE COURSE	30301-5000 AGGREGATE SURFACE RECONDITIONING	REMARKS
							MILE	FEET	TON	MILE	
SCHEDULE A											
A/B/C	1	C1	WAAB-E-02(a)	17	24	26	1.10	24'+	3,535	1.10	
A/B/C	2	C2	WAAB-E-03(a)	17	26	I-80	0.78	24'+	2,507	0.78	End work at gravel/asphalt transition.
A/B/C	3	C3	WAAB-E-06(a)	17	8	E-04 (Silo)	3.93	24'+	12,721	3.96	
A/B/C	5	C5	WAAB-M-02(a)	21	M-03 (Silo)	58	4.72	24'+	15,260	4.75	
A/B/C	6	C6	WAAB-M-02(b)	58	M-02 (Silo)	21	1.08	24'+	3,562	1.11	
A/B/C	8	C8	WAAB-J-06	25	58	J-06 (Silo)	3.10	22.6	9,518	3.13	
A/B/C	9	C9	WAAB-M-04(c)	54	25	31	3.01	24'+	9,673	3.01	
A/B/C	10	C10	WAAB-M-04(d)	31	54	M-04 (Silo)	0.09	20.8	334	0.12	
A/B/C	11	C11	WAAB-M-08(a)	38	7	M-01 (Silo)	2.75	24'+	8,929	2.78	
A/B/C	13	C13	WAAB-M-08(b)	7/38	34	7	2.58	24'+	8,291	2.58	Perform no work on existing concrete bridge deck near MP 2.2.
A/B/C	14	C14	WAAB-M-08(c)	34	M-08 (Silo)	7	1.40	24'+	4,590	1.43	
A/B/C	15	C15	WAAB-M-09(a)	112	HWY 71	153	4.05	24'+	13,015	4.05	Begin work at asphalt/gravel transition.
A/B/C	16	C16	WAAB-M-10	153	112	M-10 (Silo)	0.43	24'+	1,473	0.46	
SCHEDULE A TOTALS									**93,410**	**29.25**	
SCHEDULE B											
B/C	17	C17	WAAB-E-01(a)	208	164	1	0.55	24'+	1,768	0.55	Begin work at asphalt/gravel transition.
B/C	18	C18	WAAB-E-01(b)	1	16	208	0.63	24'+	2,025	0.63	
B/C	19	C19	WAAB-M-09(b)	153	M-09 (Silo)	112	3.92	24'+	12,689	3.95	
B/C	20	C20	WAAB-M-11	7	38	M-11 (Silo)	5.61	24'+	18,120	5.64	
SCHEDULE B TOTALS									**128,011**	**40.01**	
SCHEDULE C											
C	21	C21	WAAB-E-02(b)	24	13	17	1.97	24'+	6,018	1.97	
C	22	C22	WAAB-E-01(c)	16	1	E-01 (Silo)	3.66	22.7	11,853	3.69	
SCHEDULE C TOTALS									**145,882**	**45.67**	

VALUES USED FOR ESTIMATING PURPOSES
Aggregate Surface Course (Dry unit weight)----------139.0 lb/ft3

NOTE:

1. Per Note 1 on Sheet A5, extend resurfacing and reconditioning a minimum of 150 feet beyond the missile site's approach when road continues. Length is not included in the 'Segment Length' shown in the plans. Length included in Aggregate Surface Course and Aggregate Surfacing Reconditioning.
2. Segment Length shown is an approximate length measured along the route centerline and is to be used for information only. Perform required work to the begin and end locations as shown in this table and the C-sheets.
3. Existing surface widths are shown for information only. Proposed aggregate width is 24-feet maximum.
4. Shouldering wedges are included in aggregate quantities. See typical section on Sheet A5 for more information.

DRAINAGE SUMMARY

Schedule	Priority No.	Sheet No.	Route Segment ID	Culvert ID	SEGMENT MILEPOST	COUNTY	EXISTING CULVERT (See Note 2 and 3)			15215-3000 SURVEY AND STAKING, DRAINAGE STRUCTURE	20301-2000 REMOVAL OF PIPE END SECTION	20302-2100 REMOVAL OF PIPE CULVERT	20420-0000 EMBANKMENT CONSTRUCTION (See Note 9)	60201-0600 18-INCH PIPE CULVERT	60201-0700 21-INCH PIPE CULVERT	60201-0800 24-INCH PIPE CULVERT	60202-0400 24-INCH EQUIVALENT DIAMETER ARCH OR ELLIPTICAL PIPE CULVERT
							Type	Diameter	Length	EACH	EACH	LNFT	CUYD	LNFT	LNFT	LNFT	LNFT
SCHEDULE A																	
A/B/C	3	C3	WAAB-E-06(a)	C-0649	0.74	Kimball	CMP	Assumed 24" Equiv.	Assumed 35'				1				
A/B/C	3	C3	WAAB-E-06(a)	C-0647	2.59	Kimball	CMP	30" Equiv.	38.3'				1				
A/B/C	3	C3	WAAB-E-06(a)	C-0646	3.19	Kimball	CMP	4 - Assumed 30"	43.8'	1		175	1				
A/B/C	3	C3	WAAB-E-06(a)	C-0645	3.92	Kimball	CMP	18"	45.5'				1				
A/B/C	4	C4	WAAB-M-02	C-0202	4.52	Logan	CMP	24"	40'	1		10	1			8	
A/B/C	7	C7	WAAB-M-04(a)	C-0214	0.15	Logan	CMP	Assumed 18"	Assumed 40'	1		40	1				37
A/B/C	11	C11	WAAB-M-08(a)	C-0178	1.48	Logan	CMP	24"	46'	1	1	8	1			8	
A/B/C	11	C11	WAAB-M-08(a)	C-0179	1.60	Logan	CMP	18"	44'				1				
A/B/C	12	C12	WAAB-M-03	Null - MP 4.98	4.98	Logan	N/A	N/A	N/A	1			1				43
A/B/C	13	C13	WAAB-M-08(b)	C-0162	0.39	Logan	CMP	21"	42'	1		8	1		8		
A/B/C	13	C13	WAAB-M-08(b)	C-0163	2.08	Logan	CMP	48"	40'				1				
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 0.01	0.01	Weld	CMP	Assumed 24" Equiv.	32.7'				1				
A/B/C	15	C15	WAAB-M-09(a)	C-0106	2.78	Weld	CMP	24" Equiv.	Assumed 40'	1		2	1				7
A/B/C	15	C15	WAAB-M-09(a)	Null - MP 2.9	2.90	Weld	CMP	18"	Assumed 40'	1		2	1	7			
A/B/C	15	C15	WAAB-M-09(a)	C-0096	4.04	Weld	CMP	24" Equiv.	39'			39	1				
SCHEDULE A TOTALS										**8**	**1**	**284**	**15**	**7**	**8**	**16**	**87**
SCHEDULE B																	
B/C	19	C19	WAAB-M-09(b)	C-0100	2.91	Weld	CMP	24" Equiv.	Assumed 34'	1		34	1				38
B/C	19	C19	WAAB-M-09(b)	C-0101	3.36	Weld	CMP	24" Equiv.	Assumed 32'	1		32	1				36
B/C	19	C19	WAAB-M-09(b)	C-0102	3.79	Weld	CMP	24" Equiv.	Assumed 28'	1		28	1				31
B/C	19	C19	WAAB-M-09(b)	C-0103	3.85	Weld	CMP	24" Equiv.	Assumed 32'	1		2	1				12
SCHEDULE B TOTALS										**12**	**1**	**380**	**19**	**7**	**8**	**16**	**204**
SCHEDULE C																	
C	22	C22	WAAB-E-01(c)	Null - MP 0.16	0.16	Kimball	CMP	Assumed 24" Equiv.	Assumed 36'	1		36	1				40
C	22	C22	WAAB-E-01(c)	C-0896	0.28	Kimball	CMP	Assumed 24" Equiv.	47.7'	1		48	1				44
C	22	C22	WAAB-E-01(c)	C-0892	0.64	Kimball	CMP	Assumed 24" Equiv.	66'			4	1				
C	22	C22	WAAB-E-01(c)	C-0893	1.72	Kimball	CMP	30" Equiv.	55'	1		55	1				
C	22	C22	WAAB-E-01(c)	C-0629	2.37	Kimball	CBC	Assumed 3-10' X 8' Cells	N/A				1				
C	22	C22	WAAB-E-01(c)	C-0630	3.01	Kimball	CMP	2 - 60" Equiv.	53.1'	1			1				
SCHEDULE C TOTALS										**16**	**1**	**523**	**25**	**7**	**8**	**16**	**288**

NOTE:

1. All proposed culverts are corrugated metal pipes (CMP).
2. Assumed dimensions shown for culverts that could not be field verified.
3. Existing culvert information is for information only. Survey was not completed as part of this project.
4. Clearing and grubbing is included in the cost of the culvert work and not measured for payment. Clear the minimal amount necessary for culvert maintenance work.
5. Mileposts are measured from route begin locations as shown on C-sheets.
6. Object Marker and delineator installation includes the cost of removing conflicting signage. See Special 633-A.
7. Adjust culvert flowline elevations, as approved, to maintain adequate pipe cover material.
8. 15215-3000 Survey and Staking Drainage Structure is only shown for culverts requiring pipe plots in accordance with Section 152.
9. Embankment Construction quantity shown for use to backfill and grade eroded existing ground areas outside of the culvert limits. Use as approved to create positive drainage at the culvert inlet and outlet.

OMAD CONSTRUCTION PHOTOS

U.S. Department of Transportation
Federal Highway Administration





OMAD CONSTRUCTION PHOTOS

U.S. Department of Transportation
Federal Highway Administration







CO OMAD 300(71) – FY27

U.S. Department of Transportation
Federal Highway Administration







CO OMAD 300(71) – FY27

U.S. Department of Transportation
Federal Highway Administration





ND OMAD 2025(1) – FY27

U.S. Department of Transportation
Federal Highway Administration





ND OMAD 2025(1) – FY27

U.S. Department of Transportation
Federal Highway Administration





2026/2027 OMAD Program Bidding Methodology

Outline of proposed contracting method and bidding expectations

11.12.2026

AtkinsRéalis

Previous OMAD Contracting Methodology

Fixed-Price Variable-Scope

- All routes were in a single base bid (Schedule A)
- Bid on mileage able to complete with available funding
- Bid in order of route prioritization
- Proposed work only included aggregate reconditioning/resurfacing

Priority/ C-Sheet No.	Route Segment ID	State	County	Road	Begin	End	Segment Length (See Notes 5 and 6)
							MILE
1	WAAB-O-01(c)	CO	Weld	124	111	O-01 (Silo)	0.478
2	WAAB-O-02(a)	CO	Weld	111	128	134	3.015
3	WAAB-O-03(a)	CO	Weld	128	111	125	6.883
4	WAAB-O-05(b)	CO	Weld	116	127	133	3.224
5	WAAB-O-05(c)	CO	Weld	127	116	124	4.201
6	WAAB-O-05(d)	CO	Weld	133	116	O-05(Silo)	0.704
7	WAAB-O-06	CO	Weld	127	O-06 (Silo)	116	3.289
8	WAAB-O-07(a)	CO	Weld	107	112	O-09 (Silo)	1.598

Current Contracting Approach

CO OMAD

Multiple Schedules (A, B, & C)

- **Each Schedule is cumulative of previous Schedule**
- **Bidding Schedule B work includes all of Schedule A work**
- **Bidding Schedule C work includes all of Schedule A & B work**
- Example:
  - Schedule A: 29.02 miles
  - Schedule B: 39.73 miles
    - 29.02 miles (Schedule A) + 10.71 additional miles
  - Schedule C: 45.36 miles
    - 39.73 miles (Schedule B) + 5.63 additional miles)

    - **Only One Schedule will be awarded.**

Priority No.	Sheet No.	Route Segment ID	State	County	Road No.	Segment Length (Miles) (See Note 1)
SCHEDULE A						
1	C1	WAAB-E-02(a)	NE	Kimball	17	1.10
2	C2	WAAB-E-03(a)	NE	Kimball	17	0.78
3	C3	WAAB-E-06(a)	NE	Kimball	17	3.93
4	C4	WAAB-M-02	CO	Logan	9/58	N/A
5	C5	WAAB-M-02(a)	CO	Logan	21	4.72
6	C6	WAAB-M-02(b)	CO	Logan	58	1.08
7	C7	WAAB-M-04(a)	CO	Logan	58	N/A
8	C8	WAAB-J-06	CO	Logan	25	3.10
9	C9	WAAB-M-04(c)	CO	Logan	54	3.01
10	C10	WAAB-M-04(d)	CO	Logan	31	0.09
11	C11	WAAB-M-08(a)	CO	Logan	38	2.75
12	C12	WAAB-M-03	CO	Logan	21	N/A
13	C13	WAAB-M-08(b)	CO	Logan	7/38	2.58
14	C14	WAAB-M-08(c)	CO	Logan	34	1.40
15	C15	WAAB-M-09(a)	CO	Weld	112	4.05
16	C16	WAAB-M-10	CO	Weld	153	0.43
SCHEDULE A TOTALS						**29.02**
SCHEDULE B						
17	C17	WAAB-E-01(a)	WY	Laramie	208	0.55
18	C18	WAAB-E-01(b)	NE	Kimball	1	0.63
19	C19	WAAB-M-09(b)	CO	Weld	153	3.92
20	C20	WAAB-M-11	CO	Logan	7	5.61
SCHEDULE B TOTALS						**39.73**
SCHEDULE C						
21	C21	WAAB-E-02(b)	NE	Kimball	24	1.97
22	C22	WAAB-E-01(c)	NE	Kimball	16	3.66
SCHEDULE C TOTALS						**45.36**

Current Contracting Approach

ND OMAD

Multiple Schedules (A, B, & C)

- **Bidding Schedule B work includes all of Schedule A work**
- **Bidding Schedule C work includes all of Schedule A & B work**
- Example:
  - Schedule A: 9.31 miles
  - Schedule B: 15.52 miles
    - 9.31 miles (Schedule A) + 6.21 additional miles
  - Schedule C: 20.01 miles
    - 15.52 miles (Schedule B) + 4.49 additional miles

    - **Only One Schedule will be awarded.**

Priority No.	Sheet No.	Route Segment ID	State	County	Road No.	Segment Length (Miles)
SCHEDULE A						
1	C1	MIAB-F-09	ND	Ward	303rd Ave SW	1.72
2	C2	MIAB-A-01	ND	McHenry	Center Ave N	0.24
3	C3	MIAB-A-11	ND	McHenry	43rd St N	1.71
4	C4	MIAB-B-02S	ND	McHenry	12th Ave N	2.00
5	C5	MIAB-C-09N(b)	ND	McLean	27th Ave NW	1.08
6	C6	MIAB-D-08	ND	McLean	39th Ave NW	N/A
7	C7	MIAB-O-03	ND	Bottineau	23rd Ave NW	2.56
SCHEDULE A TOTALS						**9.31**
SCHEDULE B						
8	C8	MIAB-D-09	ND	McLean/Ward	39th Ave NW/ 86th St SW	4.80
9	C9	MIAB-E-08(b)	ND	McLean	19th St NW	1.41
SCHEDULE B TOTALS						**15.52**
SCHEDULE C						
10	C10	MIAB-E-09	ND	McLean	19th St NW	4.49
SCHEDULE C TOTALS						**20.01**

Current Contracting Approach

CO & ND OMAD

Multiple Types of Work in each Schedule

- Project includes aggregate reconditioning/surfacing as well as drainage and signage improvements
- Three potential scenarios

Priority No.	Sheet No.	Route Segment ID	State	County	Road No.	Segment Length (Miles) (See Note 1)	Proposed Work	Surfacing (See Sheet B5)	Drainage improvements and Signage (See Sheets B6 - B8)
SCHEDULE A									
1	C1	WAAB-E-02(a)	NE	Kimball	17	1.10	Surfacing	X	
2	C2	WAAB-E-03(a)	NE	Kimball	17	0.78	Surfacing	X	
3	C3	WAAB-E-06(a)	NE	Kimball	17	3.93	Drainage improvements, Surfacing, Signage	X	X
4	C4	WAAB-M-02	CO	Logan	9/58	N/A	Drainage improvements, Signage		X
5	C5	WAAB-M-02(a)	CO	Logan	21	4.72	Surfacing	X	
6	C6	WAAB-M-02(b)	CO	Logan	58	1.08	Surfacing	X	
7	C7	WAAB-M-04(a)	CO	Logan	58	N/A	Drainage improvements, Signage		X
8	C8	WAAB-J-06	CO	Logan	25	3.10	Surfacing	X	
9	C9	WAAB-M-04(c)	CO	Logan	54	3.01	Surfacing	X	
10	C10	WAAB-M-04(d)	CO	Logan	31	0.09	Surfacing	X	

Bidding/Award Approach

CO & ND OMAD

Bid Schedule Instructions – Included in "*Invitation for bid*"

- **Read bid instructions and Basis for Award in Solicitations**

- To be eligible for award of contract, the offeror shall submit prices for each item necessary to complete all contract work in Schedule A, Schedule B and Schedule C.
- The Government will evaluate the total of Schedule C first. If funds are not available for Schedule C at the time of award, the Government will evaluate Schedule B. If funds are not available for Schedule B at the time of award, the Government will evaluate Schedule A.
- Accordingly, award of contract, if made, will be made to the lowest responsive, responsible bidder, subject to funds availability.

QUESTIONS